



U.S. Department
of Transportation
**Federal Aviation
Administration**

April 3, 2014

Aeronautical

Information

Manual

Official Guide to
Basic Flight Information and ATC Procedures

An electronic version of this publication is on the internet at
<http://www.faa.gov/atpubs>

Record of Changes

[illegible]

Aeronautical Information Manual

Explanation of Changes

Effective: April 3, 2014

a. 1-1-3. VHF Omni-Directional Range (VOR)

This change reflects the fact that some VOR receivers are capable of identifying the VOR.

b. 1-1-18. Global Positioning System (GPS)

This change explains how pilots should use a Computer Navigation Fix (CNF) in Area Navigation (RNAV) system operations.

c. 1-1-18. Global Positioning System (GPS)

5-2-8. Instrument Departure Procedures (DP) – Obstacle Departure Procedures and Standard Instrument Departures (SID)

5-4-1. Standard Terminal Arrival(STAR), Area Navigation (RNAV) STAR, and Flight Management System Procedures (FMSP) for Arrivals

This change updates guidance on the impact of magnetic variation on RNAV systems.

d. 3-5-2. Military Training Routes

This change updates route charting guidance and publishing information.

e. 4-4-12. Speed Adjustments

5-5-9. Speed Adjustments

This change clarifies existing speed termination procedures, adds the phraseology “resume published speed,” and redefines the phraseology “resume normal speed.”

f. 5-1-8. Flight Plan (FAA Form 7233-1) – Domestic IFR Flights

5-3-4. Airways and Route Systems

This change implements revised air traffic control (ATC) surveillance requirements for Global Navigation Satellite System (GNSS)-equipped aircraft operating on RNAV ATS routes, random and on random (impromptu) single point-to-point RNAV routes in controlled airspace, excluding oceanic airspace.

g. 5-2-8. Instrument Departure Procedures (DP) – Obstacle Departure Procedures and Standard Instrument Departures (SID)

5-4-1. Standard Terminal Arrival(STAR), Area Navigation (RNAV) STAR, and Flight Management System Procedures (FMSP) for Arrivals

This change incorporates updated guidance on resumption of published altitude and speed restrictions, guidance on what is expected of aircrews when issued a “climb via” clearance, and clarifies the expectation that pilots will advise the receiving controller of the altitude being vacated and the altitude they are climbing to when changing frequencies.

h. 5-3-2. Position Reporting

This change clarifies guidance on reporting requirements in the Oceanic environment.

i. 5-4-5. Instrument Approach Procedure Charts

This change updates guidance to reflect the fact that the initial approach fix (IAF) waypoint is not an IAF, but an intermediate fix (IF). This change also updates guidance on descent below the minimum descent altitude (MDA).

j. 5-4-13. ILS/MLS Approaches to Parallel Runways

This change was made to clarify the distance requirements and make the definition apply to all applicable approach types, not just “ILS.”

k. 5-4-14. Parallel ILS/MLS Approaches (Dependent)

This change adds references to include RNAV and GNSS Landing System (GLS) approaches.

l. 5-4-15. Simultaneous Parallel ILS/MLS Approaches (Independent)

This change adds references to include RNAV and GLS approaches. The upper limit of 9,000 feet runway spacing for simultaneous parallel ILS/RNAV/GLS approaches was also added.

m. 5-4-16. Simultaneous Close Parallel ILS PRM and RNAV (GPS) PRM Approaches (Independent) and Simultaneous Offset Instrument Approaches (SOIA)

This change expands the use of ILS PRM and localizer type directional aid (LDA) PRM approaches to also mean RNAV PRM and GLS PRM approaches. Explanation of FMC coding of the SOIA offset approach is also added. Further, this change updates guidance regarding runway separation when high update PRM radar is required to conduct simultaneous close parallel approaches.

n. 5-4-15. Simultaneous Parallel ILS/MLS Approaches (Independent)

5-4-16. Simultaneous Close Parallel ILS PRM and RNAV (GPS) PRM Approaches (Independent) and Simultaneous Offset Instrument Approaches (SOIA)

5-4-17. Simultaneous Converging Instrument Approaches

Microwave Landing System (MLS) is no longer an approach option and was deleted.

o. 5-6-1. National Security

This change adds the Title 14 of the Code of Federal Regulations Section 99.7 (14 CFR 99.7) description of “Special Security Instructions” and the 14 CFR 99.3 definition of “Defense Area.” In addition, the Emergency Security Control of Air Traffic (ESCAT) overview has been retitled and moved under a new subparagraph.

**p. 7-1-3. Use of Aviation Weather Products
7-1-11. Flight Information Services (FIS)**

This change updates information and guidance to modify outdated information, reflect policy and terminology changes, and address changing technologies.

q. 7-1-1. National Weather Service Aviation Products

7-1-6. Inflight Aviation Weather Advisories

7-1-14. ATC Inflight Weather Avoidance Assistance

7-1-31. International Civil Aviation Organization (ICAO) Weather Formats

This change updates information and guidance at the request of the National Weather Service (NWS) as the information was outdated.

r. 7-1-14. ATC Inflight Weather Avoidance Assistance

This change was added to expand the meaning of the phrase “when able” when used in conjunction with a clearance to deviate around weather. The clearance to deviate is clarified to allow maneuvering within the lateral limits of the deviation clearance.

s. 7-1-29. Thunderstorm Flying

This change updates information and guidance to reflect new information in Advisory Circular 00-24C, Thunderstorms, published on February 19, 2013.

t. Entire publication.

Editorial/format changes were made where necessary. Revision bars were not used when changes are insignificant in nature.

Checklist of Pages

PAGE	DATE
Cover	4/3/14
Record of Changes	N/A
Exp of Chg-1	4/3/14
Exp of Chg-2	4/3/14
 Checklist of Pages	
CK-1	4/3/14
CK-2	4/3/14
CK-3	4/3/14
CK-4	4/3/14
CK-5	4/3/14
CK-6	4/3/14
Subscription Info	4/3/14
Comments/Corr	4/3/14
Comments/Corr	4/3/14
Basic Flight Info	4/3/14
Publication Policy	4/3/14
Reg & Advis Cir	4/3/14
 Table of Contents	
i	4/3/14
ii	4/3/14
iii	4/3/14
iv	4/3/14
v	4/3/14
vi	4/3/14
vii	4/3/14
viii	4/3/14
ix	4/3/14
x	4/3/14
xi	4/3/14
 Chapter 1. Air Navigation	
Section 1. Navigation Aids	
1-1-1	4/3/14
1-1-2	4/3/14
1-1-3	4/3/14
1-1-4	4/3/14
1-1-5	4/3/14
1-1-6	4/3/14
1-1-7	4/3/14
1-1-8	4/3/14
1-1-9	4/3/14
1-1-10	4/3/14
1-1-11	4/3/14

PAGE	DATE
1-1-12	4/3/14
1-1-13	4/3/14
1-1-14	4/3/14
1-1-15	4/3/14
1-1-16	4/3/14
1-1-17	4/3/14
1-1-18	4/3/14
1-1-19	4/3/14
1-1-20	4/3/14
1-1-21	4/3/14
1-1-22	4/3/14
1-1-23	4/3/14
1-1-24	4/3/14
1-1-25	4/3/14
1-1-26	4/3/14
1-1-27	4/3/14
1-1-28	4/3/14
1-1-29	4/3/14
1-1-30	4/3/14
1-1-31	4/3/14
1-1-32	4/3/14
1-1-33	4/3/14
1-1-34	4/3/14
1-1-35	4/3/14
1-1-36	4/3/14
1-1-37	4/3/14
 Section 2. Area Navigation (RNAV) and Required Navigation Performance (RNP)	
1-2-1	4/3/14
1-2-2	4/3/14
1-2-3	4/3/14
1-2-4	4/3/14
1-2-5	4/3/14
1-2-6	4/3/14
1-2-7	4/3/14

PAGE	DATE
 Chapter 2. Aeronautical Lighting and Other Airport Visual Aids	
Section 1. Airport Lighting Aids	
2-1-1	4/3/14
2-1-2	4/3/14
2-1-3	4/3/14
2-1-4	4/3/14
2-1-5	4/3/14
2-1-6	4/3/14
2-1-7	4/3/14
2-1-8	4/3/14
2-1-9	4/3/14
2-1-10	4/3/14
2-1-11	4/3/14
2-1-12	4/3/14
2-1-13	4/3/14
2-1-14	4/3/14
2-1-15	4/3/14
 Section 2. Air Navigation and Obstruction Lighting	
2-2-1	4/3/14
2-2-2	4/3/14
 Section 3. Airport Marking Aids and Signs	
2-3-1	4/3/14
2-3-2	4/3/14
2-3-3	4/3/14
2-3-4	4/3/14
2-3-5	4/3/14
2-3-6	4/3/14
2-3-7	4/3/14
2-3-8	4/3/14
2-3-9	4/3/14
2-3-10	4/3/14
2-3-11	4/3/14
2-3-12	4/3/14
2-3-13	4/3/14
2-3-14	4/3/14
2-3-15	4/3/14
2-3-16	4/3/14
2-3-17	4/3/14
2-3-18	4/3/14
2-3-19	4/3/14
2-3-20	4/3/14
2-3-21	4/3/14

Checklist of Pages

PAGE	DATE
2-3-22	4/3/14
2-3-23	4/3/14
2-3-24	4/3/14
2-3-25	4/3/14
2-3-26	4/3/14
2-3-27	4/3/14
2-3-28	4/3/14
2-3-29	4/3/14
2-3-30	4/3/14
2-3-31	4/3/14
Chapter 3. Airspace	
Section 1. General	
3-1-1	4/3/14
3-1-2	4/3/14
Section 2. Controlled Airspace	
3-2-1	4/3/14
3-2-2	4/3/14
3-2-3	4/3/14
3-2-4	4/3/14
3-2-5	4/3/14
3-2-6	4/3/14
3-2-7	4/3/14
3-2-8	4/3/14
3-2-9	4/3/14
Section 3. Class G Airspace	
3-3-1	4/3/14
Section 4. Special Use Airspace	
3-4-1	4/3/14
3-4-2	4/3/14
Section 5. Other Airspace Areas	
3-5-1	4/3/14
3-5-2	4/3/14
3-5-3	4/3/14
3-5-4	4/3/14
3-5-5	4/3/14
3-5-6	4/3/14
3-5-7	4/3/14
3-5-8	4/3/14
3-5-9	4/3/14

PAGE	DATE
Chapter 4. Air Traffic Control	
Section 1. Services Available to Pilots	
4-1-1	4/3/14
4-1-2	4/3/14
4-1-3	4/3/14
4-1-4	4/3/14
4-1-5	4/3/14
4-1-6	4/3/14
4-1-7	4/3/14
4-1-8	4/3/14
4-1-9	4/3/14
4-1-10	4/3/14
4-1-11	4/3/14
4-1-12	4/3/14
4-1-13	4/3/14
4-1-14	4/3/14
4-1-15	4/3/14
4-1-16	4/3/14
4-1-17	4/3/14
4-1-18	4/3/14
4-1-19	4/3/14
4-1-20	4/3/14
4-1-21	4/3/14
4-1-22	4/3/14
4-1-23	4/3/14
Section 2. Radio Communications Phraseology and Techniques	
4-2-1	4/3/14
4-2-2	4/3/14
4-2-3	4/3/14
4-2-4	4/3/14
4-2-5	4/3/14
4-2-6	4/3/14
4-2-7	4/3/14
4-2-8	4/3/14
Section 3. Airport Operations	
4-3-1	4/3/14
4-3-2	4/3/14
4-3-3	4/3/14
4-3-4	4/3/14
4-3-5	4/3/14
4-3-6	4/3/14
4-3-7	4/3/14
4-3-8	4/3/14

PAGE	DATE
4-3-9	4/3/14
4-3-10	4/3/14
4-3-11	4/3/14
4-3-13	4/3/14
4-3-14	4/3/14
4-3-15	4/3/14
4-3-16	4/3/14
4-3-17	4/3/14
4-3-18	4/3/14
4-3-19	4/3/14
4-3-20	4/3/14
4-3-21	4/3/14
4-3-22	4/3/14
4-3-23	4/3/14
4-3-24	4/3/14
4-3-25	4/3/14
4-3-26	4/3/14
4-3-27	4/3/14
4-3-28	4/3/14
Section 4. ATC Clearances and Aircraft Separation	
4-4-1	4/3/14
4-4-2	4/3/14
4-4-3	4/3/14
4-4-4	4/3/14
4-4-5	4/3/14
4-4-6	4/3/14
4-4-7	4/3/14
4-4-8	4/3/14
4-4-9	4/3/14
4-4-10	4/3/14
4-4-11	4/3/14
Section 5. Surveillance Systems	
4-5-1	4/3/14
4-5-2	4/3/14
4-5-3	4/3/14
4-5-4	4/3/14
4-5-5	4/3/14
4-5-6	4/3/14
4-5-7	4/3/14
4-5-8	4/3/14
4-5-9	4/3/14
4-5-10	4/3/14
4-5-11	4/3/14
4-5-12	4/3/14
4-5-13	4/3/14

Checklist of Pages

PAGE	DATE
4-5-14	4/3/14
4-5-15	4/3/14
4-5-16	4/3/14
4-5-17	4/3/14
4-5-18	4/3/14
4-5-19	4/3/14
4-5-20	4/3/14
Section 6. Operational Policy/ Procedures for Reduced Vertical Separation Minimum (RVSM) in the Domestic U.S., Alaska, Offshore Airspace and the San Juan FIR	
4-6-1	4/3/14
4-6-2	4/3/14
4-6-3	4/3/14
4-6-4	4/3/14
4-6-5	4/3/14
4-6-6	4/3/14
4-6-7	4/3/14
4-6-8	4/3/14
4-6-9	4/3/14
4-6-10	4/3/14
4-6-11	4/3/14
Section 7. Operational Policy/ Procedures for the Gulf of Mexico 50 NM Lateral Separation Initiative	
4-7-1	4/3/14
4-7-2	4/3/14
4-7-3	4/3/14
4-7-4	4/3/14
4-7-5	4/3/14
Chapter 5. Air Traffic Procedures	
Section 1. Preflight	
5-1-1	4/3/14
5-1-2	4/3/14
5-1-3	4/3/14
5-1-4	4/3/14
5-1-5	4/3/14
5-1-6	4/3/14
5-1-7	4/3/14
5-1-8	4/3/14
5-1-9	4/3/14
5-1-10	4/3/14
5-1-11	4/3/14
5-1-12	4/3/14

PAGE	DATE
5-1-13	4/3/14
5-1-14	4/3/14
5-1-15	4/3/14
5-1-16	4/3/14
5-1-17	4/3/14
5-1-18	4/3/14
5-1-19	4/3/14
5-1-20	4/3/14
5-1-21	4/3/14
5-1-22	4/3/14
5-1-23	4/3/14
5-1-24	4/3/14
5-1-25	4/3/14
5-1-26	4/3/14
5-1-27	4/3/14
5-1-28	4/3/14
5-1-29	4/3/14
5-1-30	4/3/14
5-1-31	4/3/14
Section 2. Departure Procedures	
5-2-1	4/3/14
5-2-2	4/3/14
5-2-3	4/3/14
5-2-4	4/3/14
5-2-5	4/3/14
5-2-6	4/3/14
5-2-7	4/3/14
5-2-8	4/3/14
5-2-9	4/3/14
5-2-10	4/3/14
5-2-11	4/3/14
Section 3. En Route Procedures	
5-3-1	4/3/14
5-3-2	4/3/14
5-3-3	4/3/14
5-3-4	4/3/14
5-3-5	4/3/14
5-3-6	4/3/14
5-3-7	4/3/14
5-3-8	4/3/14
5-3-9	4/3/14
5-3-10	4/3/14
5-3-11	4/3/14
5-3-12	4/3/14
5-3-13	4/3/14
5-3-14	4/3/14

PAGE	DATE
Section 4. Arrival Procedures	
5-4-1	4/3/14
5-4-2	4/3/14
5-4-3	4/3/14
5-4-4	4/3/14
5-4-5	4/3/14
5-4-6	4/3/14
5-4-7	4/3/14
5-4-8	4/3/14
5-4-9	4/3/14
5-4-10	4/3/14
5-4-11	4/3/14
5-4-12	4/3/14
5-4-13	4/3/14
5-4-14	4/3/14
5-4-15	4/3/14
5-4-16	4/3/14
5-4-17	4/3/14
5-4-18	4/3/14
5-4-19	4/3/14
5-4-20	4/3/14
5-4-21	4/3/14
5-4-22	4/3/14
5-4-23	4/3/14
5-4-24	4/3/14
5-4-25	4/3/14
5-4-26	4/3/14
5-4-27	4/3/14
5-4-28	4/3/14
5-4-29	4/3/14
5-4-30	4/3/14
5-4-31	4/3/14
5-4-32	4/3/14
5-4-33	4/3/14
5-4-34	4/3/14
5-4-35	4/3/14
5-4-36	4/3/14
5-4-37	4/3/14
5-4-38	4/3/14
5-4-39	4/3/14
5-4-40	4/3/14
5-4-41	4/3/14
5-4-42	4/3/14
5-4-43	4/3/14
5-4-44	4/3/14
5-4-45	4/3/14
5-4-46	4/3/14
5-4-47	4/3/14
5-4-48	4/3/14

Checklist of Pages

PAGE	DATE
5-4-49	4/3/14
5-4-50	4/3/14
5-4-51	4/3/14
5-4-52	4/3/14
5-4-53	4/3/14
5-4-54	4/3/14
5-4-55	4/3/14
5-4-56	4/3/14
5-4-57	4/3/14
5-4-58	4/3/14
5-4-59	4/3/14
5-4-60	4/3/14
5-4-61	4/3/14
5-4-62	4/3/14
Section 5. Pilot/Controller Roles and Responsibilities	
5-5-1	4/3/14
5-5-2	4/3/14
5-5-3	4/3/14
5-5-4	4/3/14
5-5-5	4/3/14
5-5-6	4/3/14
5-5-7	4/3/14
5-5-8	4/3/14
Section 6. National Security and Interception Procedures	
5-6-1	4/3/14
5-6-2	4/3/14
5-6-3	4/3/14
5-6-4	4/3/14
5-6-5	4/3/14
5-6-6	4/3/14
5-6-7	4/3/14
5-6-8	4/3/14
5-6-9	4/3/14
5-6-10	4/3/14
Chapter 6. Emergency Procedures	
Section 1. General	
6-1-1	4/3/14
Section 2. Emergency Services Available to Pilots	
6-2-1	4/3/14
6-2-2	4/3/14
6-2-3	4/3/14

PAGE	DATE
6-2-4	4/3/14
6-2-5	4/3/14
6-2-6	4/3/14
6-2-7	4/3/14
6-2-8	4/3/14
6-2-9	4/3/14
6-2-10	4/3/14
6-2-11	4/3/14
Section 3. Distress and Urgency Procedures	
6-3-1	4/3/14
6-3-2	4/3/14
6-3-3	4/3/14
6-3-4	4/3/14
6-3-5	4/3/14
6-3-6	4/3/14
6-3-7	4/3/14
Section 4. Two-way Radio Communications Failure	
6-4-1	4/3/14
6-4-2	4/3/14
Section 5. Aircraft Rescue and Fire Fighting Communications	
6-5-1	4/3/14
6-5-2	4/3/14
Chapter 7. Safety of Flight	
Section 1. Meteorology	
7-1-1	4/3/14
7-1-2	4/3/14
7-1-3	4/3/14
7-1-4	4/3/14
7-1-5	4/3/14
7-1-6	4/3/14
7-1-7	4/3/14
7-1-8	4/3/14
7-1-9	4/3/14
7-1-10	4/3/14
7-1-11	4/3/14
7-1-12	4/3/14
7-1-13	4/3/14
7-1-14	4/3/14
7-1-15	4/3/14

PAGE	DATE
7-1-16	4/3/14
7-1-17	4/3/14
7-1-18	4/3/14
7-1-19	4/3/14
7-1-20	4/3/14
7-1-21	4/3/14
7-1-22	4/3/14
7-1-23	4/3/14
7-1-24	4/3/14
7-1-25	4/3/14
7-1-26	4/3/14
7-1-27	4/3/14
7-1-28	4/3/14
7-1-29	4/3/14
7-1-30	4/3/14
7-1-31	4/3/14
7-1-32	4/3/14
7-1-33	4/3/14
7-1-34	4/3/14
7-1-35	4/3/14
7-1-36	4/3/14
7-1-37	4/3/14
7-1-38	4/3/14
7-1-39	4/3/14
7-1-40	4/3/14
7-1-41	4/3/14
7-1-42	4/3/14
7-1-43	4/3/14
7-1-44	4/3/14
7-1-45	4/3/14
7-1-46	4/3/14
7-1-47	4/3/14
7-1-48	4/3/14
7-1-49	4/3/14
7-1-50	4/3/14
7-1-51	4/3/14
7-1-52	4/3/14
7-1-53	4/3/14
7-1-54	4/3/14
7-1-55	4/3/14
7-1-56	4/3/14
7-1-57	4/3/14
7-1-58	4/3/14
7-1-59	4/3/14
7-1-60	4/3/14
7-1-61	4/3/14
7-1-62	4/3/14
7-1-63	4/3/14
7-1-64	4/3/14

Checklist of Pages

PAGE	DATE
7-1-65	4/3/14
7-1-66	4/3/14
7-1-67	4/3/14
7-1-68	4/3/14
7-1-69	4/3/14
7-1-70	4/3/14
7-1-71	4/3/14
7-1-72	4/3/14
Section 2. Altimeter Setting Procedures	
7-2-1	4/3/14
7-2-2	4/3/14
7-2-3	4/3/14
7-2-4	4/3/14
Section 3. Wake Turbulence	
7-3-1	4/3/14
7-3-2	4/3/14
7-3-3	4/3/14
7-3-4	4/3/14
7-3-5	4/3/14
7-3-6	4/3/14
7-3-7	4/3/14
7-3-8	4/3/14
Section 4. Bird Hazards and Flight Over National Refuges, Parks, and Forests	
7-4-1	4/3/14
7-4-2	4/3/14
Section 5. Potential Flight Hazards	
7-5-1	4/3/14
7-5-2	4/3/14
7-5-3	4/3/14
7-5-4	4/3/14
7-5-5	4/3/14
7-5-6	4/3/14
7-5-7	4/3/14
7-5-8	4/3/14
7-5-9	4/3/14
7-5-10	4/3/14
7-5-11	4/3/14
7-5-12	4/3/14
7-5-13	4/3/14
7-5-14	4/3/14

PAGE	DATE
Section 6. Safety, Accident, and Hazard Reports	
7-6-1	4/3/14
7-6-2	4/3/14
7-6-3	4/3/14
Chapter 8. Medical Facts for Pilots	
Section 1. Fitness for Flight	
8-1-1	4/3/14
8-1-2	4/3/14
8-1-3	4/3/14
8-1-4	4/3/14
8-1-5	4/3/14
8-1-6	4/3/14
8-1-7	4/3/14
8-1-8	4/3/14
8-1-9	4/3/14
Chapter 9. Aeronautical Charts and Related Publications	
Section 1. Types of Charts Available	
9-1-1	4/3/14
9-1-2	4/3/14
9-1-3	4/3/14
9-1-4	4/3/14
9-1-5	4/3/14
9-1-6	4/3/14
9-1-7	4/3/14
9-1-8	4/3/14
9-1-9	4/3/14
9-1-10	4/3/14
9-1-11	4/3/14
9-1-12	4/3/14
9-1-13	4/3/14
Chapter 10. Helicopter Operations	
Section 1. Helicopter IFR Operations	
10-1-1	4/3/14
10-1-2	4/3/14
10-1-3	4/3/14
10-1-4	4/3/14
10-1-5	4/3/14
10-1-6	4/3/14

PAGE	DATE
10-1-7	4/3/14
Section 2. Special Operations	
10-2-1	4/3/14
10-2-2	4/3/14
10-2-3	4/3/14
10-2-4	4/3/14
10-2-5	4/3/14
10-2-6	4/3/14
10-2-7	4/3/14
10-2-8	4/3/14
10-2-9	4/3/14
10-2-10	4/3/14
10-2-11	4/3/14
10-2-12	4/3/14
10-2-13	4/3/14
10-2-14	4/3/14
10-2-15	4/3/14
10-2-16	4/3/14
10-2-17	4/3/14
Appendices	
Appendix 1-1	4/3/14
Env	N/A
Appendix 2-1	4/3/14
Appendix 3-1	4/3/14
Appendix 3-2	4/3/14
Appendix 3-3	4/3/14
Appendix 3-4	4/3/14
Appendix 3-5	4/3/14
Pilot/Controller Glossary	
PCG-1	4/3/14
PCG A-1	4/3/14
PCG A-2	4/3/14
PCG A-3	4/3/14
PCG A-4	4/3/14
PCG A-5	4/3/14
PGC A-6	4/3/14
PCG A-7	4/3/14
PCG A-8	4/3/14
PCG A-9	4/3/14
PCG A-10	4/3/14
PCG A-11	4/3/14
PCG A-12	4/3/14
PCG A-13	4/3/14
PCG A-14	4/3/14

Checklist of Pages

PAGE	DATE
PCG A-15	4/3/14
PCG A-16	4/3/14
PCG B-1	4/3/14
PCG C-1	4/3/14
PCG C-2	4/3/14
PCG C-3	4/3/14
PCG C-4	4/3/14
PCG C-5	4/3/14
PCG C-6	4/3/14
PCG C-7	4/3/14
PCG C-8	4/3/14
PCG C-9	4/3/14
PCG C-10	4/3/14
PCG D-1	4/3/14
PCG D-2	4/3/14
PCG D-3	4/3/14
PCG D-4	4/3/14
PCG E-1	4/3/14
PCG E-2	4/3/14
PCG F-1	4/3/14
PCG F-2	4/3/14
PCG F-3	4/3/14
PCG F-4	4/3/14
PCG F-5	4/3/14
PCG F-6	4/3/14
PCG G-1	4/3/14
PCG G-2	4/3/14
PCG G-3	4/3/14
PCG H-1	4/3/14
PCG H-2	4/3/14
PCG H-3	4/3/14
PCG I-1	4/3/14
PCG I-2	4/3/14
PCG I-3	4/3/14
PCG I-4	4/3/14
PCG I-5	4/3/14
PCG I-6	4/3/14
PCG J-1	4/3/14
PCG K-1	4/3/14
PCG L-1	4/3/14

PAGE	DATE
PCG L-2	4/3/14
PCG L-3	4/3/14
PCG M-1	4/3/14
PCG M-2	4/3/14
PCG M-3	4/3/14
PCG M-4	4/3/14
PCG M-5	4/3/14
PCG M-6	4/3/14
PCG N-1	4/3/14
PCG N-2	4/3/14
PCG N-3	4/3/14
PCG N-4	4/3/14
PCG O-1	4/3/14
PCG O-2	4/3/14
PCG O-3	4/3/14
PCG O-4	4/3/14
PCG P-1	4/3/14
PCG P-2	4/3/14
PCG P-3	4/3/14
PCG P-4	4/3/14
PCG P-5	4/3/14
PCG Q-1	4/3/14
PCG R-1	4/3/14
PCG R-2	4/3/14
PCG R-3	4/3/14
PCG R-4	4/3/14
PCG R-5	4/3/14
PCG R-6	4/3/14
PCG R-7	4/3/14
PCG R-8	4/3/14
PCG S-1	4/3/14
PCG S-2	4/3/14
PCG S-3	4/3/14
PCG S-4	4/3/14
PCG S-5	4/3/14
PCG S-6	4/3/14
PCG S-7	4/3/14
PCG S-8	4/3/14
PCG T-1	4/3/14

PAGE	DATE
PCG T-2	4/3/14
PCG T-3	4/3/14
PCG T-4	4/3/14
PCG T-5	4/3/14
PCG T-6	4/3/14
PCG T-7	4/3/14
PCG T-8	4/3/14
PCG U-1	4/3/14
PCG V-1	4/3/14
PCG V-2	4/3/14
PCG V-3	4/3/14
PCG V-4	4/3/14
PCG W-1	4/3/14
PCG W-2	4/3/14
Index	
I-1	4/3/14
I-2	4/3/14
I-3	4/3/14
I-4	4/3/14
I-5	4/3/14
I-6	4/3/14
I-7	4/3/14
I-8	4/3/14
I-9	4/3/14
I-10	4/3/14
I-11	4/3/14
I-12	4/3/14
I-13	4/3/14
Back Cover	N/A

Subscription Information

***This and other selected Air Traffic publications are available online:
www.faa.gov/air_traffic/publications***

To Obtain Copies of this Publication		
General Public	Department of Defense and U.S. Coast Guard Organizations	Federal Aviation Administration (FAA) Employees
Contact: Superintendent of Documents U S Government Printing Office P O Box 979050 St Louis MO 63197-9000 Call: 202-512-1800 Online: http //bookstore gpo gov	Contact: National Geospatial-Intelligence Agency ATTN Safety of Navigation 3838 Vogel Road Arnold MO 63010	Contact: Appropriate Distribution Office listed belo
To amend publication quantity or cancel subscription please contact GPO	To amend publication quantity or cancel subscription please e-mail 9-AWA-ATPUBS@faa.gov	

Contact Information for FAA Distribution Offices

FAA Region/Center/Organization	3-Ltr ID	Phone Number
Alaskan Region	AAL	907-271-4020
Central Region	ACE	816-329-3013
Eastern Region	AEA	718-553-4593
Great Lakes Region	AGL	847-294-7646
William J Hughes Technical Center	AJP	609-485-6652
Aviation System Standards	AJW	405-954-6632
Mike Monroney Aeronautical Center	AMI	405-954-9920
New England Region	ANE	781-238-7652
North West Mountain Region	ANM	425-227-2885
Southern Region	ASO	404-305-5087
South West Region	ASW	817-222-4384
FAA Headquarters Washington DC	AWA	202 -267-5652
Western-Pacific Region	AWP	310- 725-7691

Comments/Corrections

Comments suggested changes or corrections concerning this publication may be submitted on this form and mailed to

Federal Aviation Administration
Mission Support Services
ATC Process and Publications AJV-8
Attn AIM Editor Room 636F
800 Independence Avenue SW
Washington DC 20591

To submit comments electronically please email 9-AWA-ATPUBS faa.gov

Notice to Editor

The following comments/corrections are submitted concerning the information contained in

Paragraph number _____ Title _____

Page _____ Dated _____

Name _____

Street _____

City _____ State _____ ip _____

Comments/Corrections

Comments suggested changes or corrections concerning this publication may be submitted on this form and mailed to

Federal Aviation Administration
Mission Support Services
ATC Process and Publications AJV-8
Attn AIM Editor Room 636F
800 Independence Avenue SW
Washington DC 20591

To submit comments electronically please email 9-AWA-ATPUBS faa.gov

Notice to Editor

The following comments/corrections are submitted concerning the information contained in

Paragraph number _____ Title _____

Page _____ Dated _____

Name _____

Street _____

City _____ State _____ ip _____

Federal Aviation Administration (FAA)

The Federal Aviation Administration is responsible for insuring the safe, efficient, and secure use of the Nation's airspace by military as well as civil aviation, for promoting safety in air commerce, for encouraging and developing civil aeronautics, including new aviation technology, and for supporting the requirements of national defense.

The activities required to carry out these responsibilities include safety regulations, airspace management

and the establishment, operation, and maintenance of a civil–military common system of air traffic control (ATC) and navigation facilities, research and development in support of the fostering of a national system of airports, promulgation of standards and specifications for civil airports, and administration of Federal grants-in-aid for developing public airports, various joint and cooperative activities with the Department of Defense, and technical assistance under State Department auspices to other countries.

Aeronautical Information Manual (AIM) Basic Flight Information and ATC Procedures

This manual is designed to provide the aviation community with basic flight information and ATC procedures for use in the National Airspace System (NAS) of the United States. An international version called the Aeronautical Information Publication contains parallel information, as well as specific information on the international airports for use by the international community.

This manual contains the fundamentals required in order to fly in the United States NAS. It also contains items of interest to pilots concerning health and medical facts, factors affecting flight safety, a pilot/controller glossary of terms used in the ATC System, and information on safety, accident, and hazard reporting.

This manual is complemented by other operational publications, which are available via separate subscriptions. These publications are:

- Notices to Airmen publication – A publication containing current Notices to Airmen (NOTAMs) which are considered essential to the safety of flight

- as well as supplemental data affecting the other operational publications listed here. It also includes current Flight Data Center NOTAMs, which are regulatory in nature, issued to establish restrictions to flight or to amend charts or published Instrument Approach Procedures. This publication is issued every four weeks and is available through subscription from the Superintendent of Documents.

- The Airport/Facility Directory, the Alaska Supplement, and the Pacific Chart Supplement – These publications contain information on airports, communications, navigation aids, instrument landing systems, VOR receiver check points, preferred routes, Flight Service Station/Weather Service telephone numbers, Air Route Traffic Control Center (ARTCC) frequencies, part–time surface areas, and various other pertinent special notices essential to air navigation. These publications are available upon subscription from the Aeronautical Navigation Products, AeroNav Logistics Group, Federal Aviation Administration, Glenn Dale, Maryland 20769.

Publication Schedule

Basic or Change	Cutoff Date for Submission	Effective Date of Publication
Basic Manual	8/22/13	4/3/14
Change 1	4/3/14	7/24/14
Change 2	7/24/14	3/5/15
Change 3	3/5/15	8/20/15
Basic Manual	8/20/15	2/4/16

Flight Information Publication Policy

The following is in essence the statement issued by the FAA Administrator and published in the December 10 1964 issue of the Federal Register concerning the FAA policy as pertaining to the type of information that will be published as NOTAMs and in the Aeronautical Information Manual

a. It is a pilot's inherent responsibility to be alert at all times for and in anticipation of all circumstances situations and conditions affecting the safe operation of the aircraft. For example a pilot should expect to find air traffic at any time or place. At or near both civil and military airports and in the vicinity of known training areas a pilot should expect concentrated air traffic and realistic concentrations of air traffic are not limited to these places.

b. It is the general practice of the agency to advertise by NOTAM or other flight information publications such information it may deem appropriate information which the agency may from time to time make available to pilots is solely for the purpose of assisting them in executing their regulatory responsibilities. Such information serves the aviation community as a whole and not pilots individually.

c. The fact that the agency under one particular situation or another may or may not furnish information does not serve as a precedent of the agency's responsibility to the aviation community neither does it give assurance that other information of the same or similar nature will be advertised nor does it guarantee that any and all information known to the agency will be advertised.

d. This publication while not regulatory provides information which reflects examples of operating techniques and procedures which may be requirements in other federal publications or regulations. It is made available solely to assist pilots in executing their responsibilities required by other publications.

Consistent with the foregoing it is the policy of the Federal Aviation Administration to furnish information only when in the opinion of the agency a unique situation should be advertised and not to furnish routine information such as concentrations of air traffic either civil or military. The Aeronautical Information Manual will not contain informative items concerning everyday circumstances that pilots should either by good practices or regulation expect to encounter or avoid.

Aeronautical Information Manual (AIM) Code of Federal Regulations and Advisory Circulars

Code of Federal Regulations The FAA publishes the Code of Federal Regulations CFRs to make readily available to the aviation community the regulatory requirements placed upon them. These regulations are sold as individual parts by the Superintendent of Documents.

The more frequently amended parts are sold on subscription service with subscribers receiving changes automatically as issued. Less active parts are sold on a single-sale basis. Changes to single sale parts will be sold separately as issued. Information concerning these changes will be furnished by the FAA through its Status of Federal Aviation Regulations AC 00-44.

Advisory Circulars The FAA issues Advisory Circulars ACs to inform the aviation public in a systematic way of nonregulatory material. Unless incorporated into a regulation by reference, the contents of an advisory circular are not binding on the public. Advisory Circulars are issued in a numbered subject system corresponding to the subject areas of the Code of Federal Regulations CFRs Title 14 Chapter 1 FAA.

AC 00-2 Advisory Circular Checklist and Status of Other FAA Publications contains advisory circulars that are for sale as well as those distributed free-of-charge by the FAA.

NOTE—

The above information relating to CFRs and ACs is extracted from AC 00-2. Many of the CFRs and ACs listed in AC 00-2 are cross-referenced in the AIM. These regulatory and nonregulatory references cover a wide range of subjects and are a source of detailed information of value to the aviation community. AC 00-2 is issued annually and can be obtained free-of-charge from:

*U.S. Department of Transportation
Subsequent Distribution Office
Ardmore East Business Center
3341 Q 75th Avenue
Landover, MD 20785
Telephone: 301-322-4961*

AC 00-2 may also be found at: <http://www.faa.gov> under Advisory Circulars.

External References All references to Advisory Circulars and other FAA publications in the Aeronautical Information Manual include the FAA Advisory Circular or Order identification numbers when available. However, due to varied publication dates, the basic publication letter is not included.

EXAMPLE—

FAAO JO 7110.65M, Air Traffic Control, is referenced as FAAO JO 7110.65.

Table of Contents

Chapter 1. Air Navigation

Section 1. Navigation Aids

Paragraph	Page
1-1-1. General	1-1-1
1-1-2. Nondirectional Radio Beacon (NDB)	1-1-1
1-1-3. VHF Omni-directional Range (VOR)	1-1-1
1-1-4. VOR Receiver Check	1-1-2
1-1-5. Tactical Air Navigation (TACAN)	1-1-3
1-1-6. VHF Omni-directional Range/Tactical Air Navigation (VORTAC)	1-1-3
1-1-7. Distance Measuring Equipment (DME)	1-1-3
1-1-8. Navigational Aid (NAVAID) Service Volumes	1-1-4
1-1-9. Instrument Landing System (ILS)	1-1-7
1-1-10. Simplified Directional Facility (SDF)	1-1-12
1-1-11. Microwave Landing System (MLS)	1-1-14
1-1-12. NAVAID Identifier Removal During Maintenance	1-1-16
1-1-13. NAVAIDs with Voice	1-1-17
1-1-14. User Reports Requested on NAVAID or Global Navigation Satellite System (GNSS) Performance or Interference	1-1-17
1-1-15. LORAN	1-1-17
1-1-16. Inertial Reference Unit (IRU), Inertial Navigation System (INS), and Attitude Heading Reference System (AHRS)	1-1-17
1-1-17. Doppler Radar	1-1-18
1-1-18. Global Positioning System (GPS)	1-1-18
1-1-19. Wide Area Augmentation System (WAAS)	1-1-31
1-1-20. Ground Based Augmentation System (GBAS) Landing System (GLS)	1-1-36
1-1-21. Precision Approach Systems other than ILS, GLS, and MLS	1-1-36

Section 2. Area Navigation (RNAV) and Required Navigation Performance (RNP)

1-2-1. Area Navigation (RNAV)	1-2-1
1-2-2. Required Navigation Performance (RNP)	1-2-4
1-2-3. Use of Suitable Area Navigation (RNAV) Systems on Conventional Procedures and Routes	1-2-5

Chapter 2. Aeronautical Lighting and Other Airport Visual Aids

Section 1. Airport Lighting Aids

2-1-1. Approach Light Systems (ALS)	2-1-1
2-1-2. Visual Glideslope Indicators	2-1-1
2-1-3. Runway End Identifier Lights (REIL)	2-1-6
2-1-4. Runway Edge Light Systems	2-1-6
2-1-5. In-runway Lighting	2-1-6
2-1-6. Runway Status Light (RWSL) System	2-1-7
2-1-7. Stand-Alone Final Approach Runway Occupancy Signal (FAROS)	2-1-10
2-1-8. Control of Lighting Systems	2-1-11

Paragraph	Page
2-1-9. Pilot Control of Airport Lighting	2-1-11
2-1-10. Airport/Heliport Beacons	2-1-14
2-1-11. Taxiway Lights	2-1-15

Section 2. Air Navigation and Obstruction Lighting

2-2-1. Aeronautical Light Beacons	2-2-1
2-2-2. Code Beacons and Course Lights	2-2-1
2-2-3. Obstruction Lights	2-2-1

Section 3. Airport Marking Aids and Signs

2-3-1. General	2-3-1
2-3-2. Airport Pavement Markings	2-3-1
2-3-3. Runway Markings	2-3-1
2-3-4. Taxiway Markings	2-3-7
2-3-5. Holding Position Markings	2-3-12
2-3-6. Other Markings	2-3-16
2-3-7. Airport Signs	2-3-19
2-3-8. Mandatory Instruction Signs	2-3-20
2-3-9. Location Signs	2-3-23
2-3-10. Direction Signs	2-3-25
2-3-11. Destination Signs	2-3-28
2-3-12. Information Signs	2-3-29
2-3-13. Runway Distance Remaining Signs	2-3-29
2-3-14. Aircraft Arresting Systems	2-3-30
2-3-15. Security Identifications Display Area (Airport Ramp Area)	2-3-31

Chapter 3. Airspace

Section 1. General

3-1-1. General	3-1-1
3-1-2. General Dimensions of Airspace Segments	3-1-1
3-1-3. Hierarchy of Overlapping Airspace Designations	3-1-1
3-1-4. Basic VFR Weather Minimums	3-1-1
3-1-5. VFR Cruising Altitudes and Flight Levels	3-1-2

Section 2. Controlled Airspace

3-2-1. General	3-2-1
3-2-2. Class A Airspace	3-2-2
3-2-3. Class B Airspace	3-2-2
3-2-4. Class C Airspace	3-2-4
3-2-5. Class D Airspace	3-2-8
3-2-6. Class E Airspace	3-2-9

Section 3. Class G Airspace

3-3-1. General	3-3-1
3-3-2. VFR Requirements	3-3-1
3-3-3. IFR Requirements	3-3-1

Section 4. Special Use Airspace

Paragraph	Page
3-4-1. General	3-4-1
3-4-2. Prohibited Areas	3-4-1
3-4-3. Restricted Areas	3-4-1
3-4-4. Warning Areas	3-4-1
3-4-5. Military Operations Areas	3-4-2
3-4-6. Alert Areas	3-4-2
3-4-7. Controlled Firing Areas	3-4-2
3-4-8. National Security Areas	3-4-2

Section 5. Other Airspace Areas

3-5-1. Airport Advisory/Information Services	3-5-1
3-5-2. Military Training Routes	3-5-1
3-5-3. Temporary Flight Restrictions	3-5-2
3-5-4. Parachute Jump Aircraft Operations	3-5-5
3-5-5. Published VFR Routes	3-5-5
3-5-6. Terminal Radar Service Area (TRSA)	3-5-9

Chapter 4. Air Traffic Control

Section 1. Services Available to Pilots

4-1-1. Air Route Traffic Control Centers	4-1-1
4-1-2. Control Towers	4-1-1
4-1-3. Flight Service Stations	4-1-1
4-1-4. Recording and Monitoring	4-1-1
4-1-5. Communications Release of IFR Aircraft Landing at an Airport Without an Operating Control Tower	4-1-1
4-1-6. Pilot Visits to Air Traffic Facilities	4-1-1
4-1-7. Operation Take-off and Operation Raincheck	4-1-2
4-1-8. Approach Control Service for VFR Arriving Aircraft	4-1-2
4-1-9. Traffic Advisory Practices at Airports Without Operating Control Towers	4-1-2
4-1-10. IFR Approaches/Ground Vehicle Operations	4-1-6
4-1-11. Designated UNICOM/MULTICOM Frequencies	4-1-6
4-1-12. Use of UNICOM for ATC Purposes	4-1-7
4-1-13. Automatic Terminal Information Service (ATIS)	4-1-7
4-1-14. Automatic Flight Information Service (AFIS) – Alaska FSSs Only	4-1-8
4-1-15. Radar Traffic Information Service	4-1-8
4-1-16. Safety Alert	4-1-10
4-1-17. Radar Assistance to VFR Aircraft	4-1-11
4-1-18. Terminal Radar Services for VFR Aircraft	4-1-12
4-1-19. Tower En Route Control (TEC)	4-1-14
4-1-20. Transponder Operation	4-1-15
4-1-21. Hazardous Area Reporting Service	4-1-18
4-1-22. Airport Reservation Operations and Special Traffic Management Programs .	4-1-21
4-1-23. Requests for Waivers and Authorizations from Title 14, Code of Federal Regulations (14 CFR)	4-1-23
4-1-24. Weather System Processor	4-1-23

Section 2. Radio Communications Phraseology and Techniques

Paragraph	Page
4-2-1. General	4-2-1
4-2-2. Radio Technique	4-2-1
4-2-3. Contact Procedures	4-2-1
4-2-4. Aircraft Call Signs	4-2-3
4-2-5. Description of Interchange or Leased Aircraft	4-2-4
4-2-6. Ground Station Call Signs	4-2-4
4-2-7. Phonetic Alphabet	4-2-5
4-2-8. Figures	4-2-6
4-2-9. Altitudes and Flight Levels	4-2-6
4-2-10. Directions	4-2-6
4-2-11. Speeds	4-2-6
4-2-12. Time	4-2-6
4-2-13. Communications with Tower when Aircraft Transmitter or Receiver or Both are Inoperative	4-2-7
4-2-14. Communications for VFR Flights	4-2-8

Section 3. Airport Operations

4-3-1. General	4-3-1
4-3-2. Airports with an Operating Control Tower	4-3-1
4-3-3. Traffic Patterns	4-3-2
4-3-4. Visual Indicators at Airports Without an Operating Control Tower	4-3-5
4-3-5. Unexpected Maneuvers in the Airport Traffic Pattern	4-3-6
4-3-6. Use of Runways/Declared Distances	4-3-6
4-3-7. Low Level Wind Shear/Microburst Detection Systems	4-3-11
4-3-8. Braking Action Reports and Advisories	4-3-11
4-3-9. Runway Friction Reports and Advisories	4-3-11
4-3-10. Intersection Takeoffs	4-3-12
4-3-11. Pilot Responsibilities When Conducting Land and Hold Short Operations (LAHSO)	4-3-13
4-3-12. Low Approach	4-3-15
4-3-13. Traffic Control Light Signals	4-3-15
4-3-14. Communications	4-3-16
4-3-15. Gate Holding Due to Departure Delays	4-3-17
4-3-16. VFR Flights in Terminal Areas	4-3-17
4-3-17. VFR Helicopter Operations at Controlled Airports	4-3-17
4-3-18. Taxiing	4-3-19
4-3-19. Taxi During Low Visibility	4-3-20
4-3-20. Exiting the Runway After Landing	4-3-21
4-3-21. Practice Instrument Approaches	4-3-21
4-3-22. Option Approach	4-3-23
4-3-23. Use of Aircraft Lights	4-3-23
4-3-24. Flight Inspection/'Flight Check' Aircraft in Terminal Areas	4-3-24
4-3-25. Hand Signals	4-3-24
4-3-26. Operations at Uncontrolled Airports With Automated Surface Observing System (ASOS)/Automated Weather Sensor System(AWSS)/Automated Weather Observing System (AWOS)	4-3-28

Section 4. ATC Clearances and Aircraft Separation

Paragraph	Page
4-4-1. Clearance	4-4-1
4-4-2. Clearance Prefix	4-4-1
4-4-3. Clearance Items	4-4-1
4-4-4. Amended Clearances	4-4-2
4-4-5. Coded Departure Route (CDR)	4-4-3
4-4-6. Special VFR Clearances	4-4-3
4-4-7. Pilot Responsibility upon Clearance Issuance	4-4-4
4-4-8. IFR Clearance VFR-on-top	4-4-4
4-4-9. VFR/IFR Flights	4-4-5
4-4-10. Adherence to Clearance	4-4-5
4-4-11. IFR Separation Standards	4-4-7
4-4-12. Speed Adjustments	4-4-7
4-4-13. Runway Separation	4-4-9
4-4-14. Visual Separation	4-4-10
4-4-15. Use of Visual Clearing Procedures	4-4-10
4-4-16. Traffic Alert and Collision Avoidance System (TCAS I & II)	4-4-11
4-4-17. Traffic Information Service (TIS)	4-4-11

Section 5. Surveillance Systems

4-5-1. Radar	4-5-1
4-5-2. Air Traffic Control Radar Beacon System (ATCRBS)	4-5-2
4-5-3. Surveillance Radar	4-5-7
4-5-4. Precision Approach Radar (PAR)	4-5-7
4-5-5. Airport Surface Detection Equipment – Model X (ASDE-X)	4-5-7
4-5-6. Traffic Information Service (TIS)	4-5-8
4-5-7. Automatic Dependent Surveillance–Broadcast (ADS-B) Services	4-5-14
4-5-8. Traffic Information Service– Broadcast (TIS-B)	4-5-17
4-5-9. Flight Information Service– Broadcast (FIS-B)	4-5-18
4-5-10. Automatic Dependent Surveillance–Rebroadcast (ADS-R)	4-5-20

Section 6. Operational Policy/Procedures for Reduced Vertical Separation Minimum (RVSM) in the Domestic U.S., Alaska, Offshore Airspace and the San Juan FIR

4-6-1. Applicability and RVSM Mandate (Date/Time and Area)	4-6-1
4-6-2. Flight Level Orientation Scheme	4-6-1
4-6-3. Aircraft and Operator Approval Policy/Procedures, RVSM Monitoring and Databases for Aircraft and Operator Approval	4-6-2
4-6-4. Flight Planning into RVSM Airspace	4-6-3
4-6-5. Pilot RVSM Operating Practices and Procedures	4-6-3
4-6-6. Guidance on Severe Turbulence and Mountain Wave Activity (MWA)	4-6-4
4-6-7. Guidance on Wake Turbulence	4-6-5
4-6-8. Pilot/Controller Phraseology	4-6-6
4-6-9. Contingency Actions: Weather Encounters and Aircraft System Failures	4-6-8
4-6-10. Procedures for Accommodation of Non-RVSM Aircraft	4-6-10
4-6-11. Non-RVSM Aircraft Requesting Climb to and Descent from Flight Levels Above RVSM Airspace Without Intermediate Level Off	4-6-11

Section 7. Operational Policy/Procedures for the Gulf of Mexico 50 NM Lateral Separation Initiative

Paragraph	Page
4-7-1. Introduction and Background	4-7-1
4-7-2. Gulf of Mexico 50 NM Lateral Separation Initiative Web Page: Policy, Procedures and Guidance for Operators and Regulators	4-7-1
4-7-3. Lateral Separation Minima Applied	4-7-1
4-7-4. Operation on Routes on the periphery of the Gulf of Mexico CTAs	4-7-2
4-7-5. Provisions for Accommodation of NonRNP10 Aircraft (Aircraft Not Authorized RNP 10 or RNP 4)	4-7-2
4-7-6. Operator Action	4-7-2
4-7-7. RNP 10 or RNP 4 Authorization: Policy and Procedures for Aircraft and Operators	4-7-2
4-7-8. Flight Planning Requirements	4-7-4
4-7-9. Pilot and Dispatcher Procedures: Basic and In-flight Contingency Procedures ..	4-7-5

Chapter 5. Air Traffic Procedures

Section 1. Preflight

5-1-1. Preflight Preparation	5-1-1
5-1-2. Follow IFR Procedures Even When Operating VFR	5-1-2
5-1-3. Notice to Airmen (NOTAM) System	5-1-2
5-1-4. Flight Plan – VFR Flights	5-1-7
5-1-5. Operational Information System (OIS)	5-1-10
5-1-6. Flight Plan– Defense VFR (DVFR) Flights	5-1-10
5-1-7. Composite Flight Plan (VFR/IFR Flights)	5-1-11
5-1-8. Flight Plan (FAA Form 7233-1)– Domestic IFR Flights	5-1-11
5-1-9. International Flight Plan (FAA Form 7233-4)– IFR Flights (For Domestic or International Flights)	5-1-17
5-1-10. IFR Operations to High Altitude Destinations	5-1-27
5-1-11. Flights Outside the U.S. and U.S. Territories	5-1-28
5-1-12. Change in Flight Plan	5-1-30
5-1-13. Change in Proposed Departure Time	5-1-30
5-1-14. Closing VFR/DVFR Flight Plans	5-1-30
5-1-15. Canceling IFR Flight Plan	5-1-30
5-1-16. RNAV and RNP Operations	5-1-30

Section 2. Departure Procedures

5-2-1. Pre-taxi Clearance Procedures	5-2-1
5-2-2. Pre-departure Clearance Procedures	5-2-1
5-2-3. Taxi Clearance	5-2-1
5-2-4. Line Up and Wait (LUAW)	5-2-1
5-2-5. Abbreviated IFR Departure Clearance (Cleared . .as Filed) Procedures	5-2-2
5-2-6. Departure Restrictions, Clearance Void Times, Hold for Release, and Release Times	5-2-4
5-2-7. Departure Control	5-2-5
5-2-8. Instrument Departure Procedures (DP) – Obstacle Departure Procedures (ODP) and Standard Instrument Departures (SID)	5-2-5

Section 3. En Route Procedures

Paragraph	Page
5-3-1. ARTCC Communications	5-3-1
5-3-2. Position Reporting	5-3-3
5-3-3. Additional Reports	5-3-4
5-3-4. Airways and Route Systems	5-3-5
5-3-5. Airway or Route Course Changes	5-3-7
5-3-6. Changeover Points (COPs)	5-3-8
5-3-7. Minimum Turning Altitude (MTA)	5-3-8
5-3-8. Holding	5-3-8

Section 4. Arrival Procedures

5-4-1. Standard Terminal Arrival (STAR) Procedure	5-4-1
5-4-2. Local Flow Traffic Management Program	5-4-3
5-4-3. Approach Control	5-4-3
5-4-4. Advance Information on Instrument Approach	5-4-4
5-4-5. Instrument Approach Procedure Charts	5-4-5
5-4-6. Approach Clearance	5-4-26
5-4-7. Instrument Approach Procedures	5-4-28
5-4-8. Special Instrument Approach Procedures	5-4-29
5-4-9. Procedure Turn and Hold-in-lieu of Procedure Turn	5-4-30
5-4-10. Timed Approaches from a Holding Fix	5-4-33
5-4-11. Radar Approaches	5-4-36
5-4-12. Radar Monitoring of Instrument Approaches	5-4-37
5-4-13. ILS/MLS Approaches to Parallel Runways	5-4-38
5-4-14. Parallel ILS/MLS Approaches (Dependent) (See FIG 5-4-20.)	5-4-40
5-4-15. Simultaneous Parallel ILS/RNAV/GLS Approaches (Independent) (See FIG 5-4-21.)	5-4-42
5-4-16. Simultaneous Close Parallel ILS/RNAV/GLS PRM Approaches (Independent) and Simultaneous Offset Instrument Approaches (SOIA) (See FIG 5-4-22.)	5-4-44
5-4-17. Simultaneous Converging Instrument Approaches	5-4-50
5-4-18. RNP AR Instrument Approach Procedures	5-4-50
5-4-19. Side-step Maneuver	5-4-53
5-4-20. Approach and Landing Minimums	5-4-53
5-4-21. Missed Approach	5-4-56
5-4-22. Use of Enhanced Flight Vision Systems (EFVS) on Instrument Approaches .	5-4-59
5-4-23. Visual Approach	5-4-61
5-4-24. Charted Visual Flight Procedure (CVFP)	5-4-62
5-4-25. Contact Approach	5-4-63
5-4-26. Landing Priority	5-4-63
5-4-27. Overhead Approach Maneuver	5-4-63

Section 5. Pilot/Controller Roles and Responsibilities

5-5-1. General	5-5-1
5-5-2. Air Traffic Clearance	5-5-1
5-5-3. Contact Approach	5-5-2
5-5-4. Instrument Approach	5-5-2
5-5-5. Missed Approach	5-5-2
5-5-6. Radar Vectors	5-5-3
5-5-7. Safety Alert	5-5-3

Paragraph	Page
5-5-8. See and Avoid	5-5-4
5-5-9. Speed Adjustments	5-5-4
5-5-10. Traffic Advisories (Traffic Information)	5-5-4
5-5-11. Visual Approach	5-5-5
5-5-12. Visual Separation	5-5-5
5-5-13. VFR-on-top	5-5-6
5-5-14. Instrument Departures	5-5-6
5-5-15. Minimum Fuel Advisory	5-5-7
5-5-16. RNAV and RNP Operations	5-5-7

Section 6. National Security and Interception Procedures

5-6-1. National Security	5-6-1
5-6-2. Interception Procedures	5-6-2
5-6-3. Law Enforcement Operations by Civil and Military Organizations	5-6-6
5-6-4. Interception Signals	5-6-7
5-6-5. ADIZ Boundaries and Designated Mountainous Areas (See FIG 5-6-3.) ...	5-6-9
5-6-6. Visual Warning System (VWS)	5-6-10

Chapter 6. Emergency Procedures

Section 1. General

6-1-1. Pilot Responsibility and Authority	6-1-1
6-1-2. Emergency Condition— Request Assistance Immediately	6-1-1

Section 2. Emergency Services Available to Pilots

6-2-1. Radar Service for VFR Aircraft in Difficulty	6-2-1
6-2-2. Transponder Emergency Operation	6-2-1
6-2-3. Intercept and Escort	6-2-1
6-2-4. Emergency Locator Transmitter (ELT)	6-2-2
6-2-5. FAA K-9 Explosives Detection Team Program	6-2-3
6-2-6. Search and Rescue	6-2-4

Section 3. Distress and Urgency Procedures

6-3-1. Distress and Urgency Communications	6-3-1
6-3-2. Obtaining Emergency Assistance	6-3-2
6-3-3. Ditching Procedures	6-3-3
6-3-4. Special Emergency (Air Piracy)	6-3-6
6-3-5. Fuel Dumping	6-3-7

Section 4. Two-way Radio Communications Failure

6-4-1. Two-way Radio Communications Failure	6-4-1
6-4-2. Transponder Operation During Two-way Communications Failure	6-4-2
6-4-3. Reestablishing Radio Contact	6-4-2

Section 5. Aircraft Rescue and Fire Fighting Communications

6-5-1. Discrete Emergency Frequency	6-5-1
6-5-2. Radio Call Signs	6-5-1
6-5-3. ARFF Emergency Hand Signals	6-5-1

Chapter 7. Safety of Flight

Section 1. Meteorology

Paragraph	Page
7-1-1. National Weather Service Aviation Products	7-1-1
7-1-2. FAA Weather Services	7-1-1
7-1-3. Use of Aviation Weather Products	7-1-3
7-1-4. Preflight Briefing	7-1-5
7-1-5. En Route Flight Advisory Service (EFAS)	7-1-7
7-1-6. Inflight Aviation Weather Advisories	7-1-8
7-1-7. Categorical Outlooks	7-1-18
7-1-8. Telephone Information Briefing Service (TIBS)	7-1-19
7-1-9. Transcribed Weather Broadcast (TWEB) (Alaska Only)	7-1-19
7-1-10. Inflight Weather Broadcasts	7-1-19
7-1-11. Flight Information Services (FIS)	7-1-22
7-1-12. Weather Observing Programs	7-1-26
7-1-13. Weather Radar Services	7-1-34
7-1-14. ATC Inflight Weather Avoidance Assistance	7-1-38
7-1-15. Runway Visual Range (RVR)	7-1-40
7-1-16. Reporting of Cloud Heights	7-1-42
7-1-17. Reporting Prevailing Visibility	7-1-42
7-1-18. Estimating Intensity of Rain and Ice Pellets	7-1-42
7-1-19. Estimating Intensity of Snow or Drizzle (Based on Visibility)	7-1-43
7-1-20. Pilot Weather Reports (PIREPs)	7-1-43
7-1-21. PIREPs Relating to Airframe Icing	7-1-44
7-1-22. Definitions of Inflight Icing Terms	7-1-45
7-1-23. PIREPs Relating to Turbulence	7-1-47
7-1-24. Wind Shear PIREPs	7-1-48
7-1-25. Clear Air Turbulence (CAT) PIREPs	7-1-48
7-1-26. Microbursts	7-1-48
7-1-27. PIREPs Relating to Volcanic Ash Activity	7-1-58
7-1-28. Thunderstorms	7-1-58
7-1-29. Thunderstorm Flying	7-1-59
7-1-30. Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR)	7-1-61
7-1-31. International Civil Aviation Organization (ICAO) Weather Formats	7-1-63

Section 2. Altimeter Setting Procedures

7-2-1. General	7-2-1
7-2-2. Procedures	7-2-1
7-2-3. Altimeter Errors	7-2-3
7-2-4. High Barometric Pressure	7-2-4
7-2-5. Low Barometric Pressure	7-2-4

Section 3. Wake Turbulence

7-3-1. General	7-3-1
7-3-2. Vortex Generation	7-3-1
7-3-3. Vortex Strength	7-3-1
7-3-4. Vortex Behavior	7-3-2
7-3-5. Operations Problem Areas	7-3-5

Paragraph	Page
7-3-6. Vortex Avoidance Procedures	7-3-5
7-3-7. Helicopters	7-3-6
7-3-8. Pilot Responsibility	7-3-6
7-3-9. Air Traffic Wake Turbulence Separations	7-3-7

Section 4. Bird Hazards and Flight Over National Refuges, Parks, and Forests

7-4-1. Migratory Bird Activity	7-4-1
7-4-2. Reducing Bird Strike Risks	7-4-1
7-4-3. Reporting Bird Strikes	7-4-1
7-4-4. Reporting Bird and Other Wildlife Activities	7-4-1
7-4-5. Pilot Advisories on Bird and Other Wildlife Hazards	7-4-2
7-4-6. Flights Over Charted U.S. Wildlife Refuges, Parks, and Forest Service Areas ..	7-4-2

Section 5. Potential Flight Hazards

7-5-1. Accident Cause Factors	7-5-1
7-5-2. VFR in Congested Areas	7-5-1
7-5-3. Obstructions To Flight	7-5-1
7-5-4. Avoid Flight Beneath Unmanned Balloons	7-5-2
7-5-5. Unmanned Aircraft Systems	7-5-2
7-5-6. Mountain Flying	7-5-3
7-5-7. Use of Runway Half-way Signs at Unimproved Airports	7-5-5
7-5-8. Seaplane Safety	7-5-6
7-5-9. Flight Operations in Volcanic Ash	7-5-7
7-5-10. Emergency Airborne Inspection of Other Aircraft	7-5-8
7-5-11. Precipitation Static	7-5-9
7-5-12. Light Amplification by Stimulated Emission of Radiation (Laser) Operations and Reporting Illumination of Aircraft	7-5-10
7-5-13. Flying in Flat Light and White Out Conditions	7-5-11
7-5-14. Operations in Ground Icing Conditions	7-5-12
7-5-15. Avoid Flight in the Vicinity of Thermal Plumes (Smoke Stacks and Cooling Towers)	7-5-13

Section 6. Safety, Accident, and Hazard Reports

7-6-1. Aviation Safety Reporting Program	7-6-1
7-6-2. Aircraft Accident and Incident Reporting	7-6-1
7-6-3. Near Midair Collision Reporting	7-6-2
7-6-4. Unidentified Flying Object (UFO) Reports	7-6-3
7-6-5. Safety Alerts For Operators (SAFO) and Information For Operators (InFO) ..	7-6-3

Chapter 8. Medical Facts for Pilots

Section 1. Fitness for Flight

8-1-1. Fitness For Flight	8-1-1
8-1-2. Effects of Altitude	8-1-3
8-1-3. Hyperventilation in Flight	8-1-5
8-1-4. Carbon Monoxide Poisoning in Flight	8-1-5
8-1-5. Illusions in Flight	8-1-5
8-1-6. Vision in Flight	8-1-6

Paragraph	Page
8-1-7. Aerobatic Flight	8-1-8
8-1-8. Judgment Aspects of Collision Avoidance	8-1-8

Chapter 9. Aeronautical Charts and Related Publications

Section 1. Types of Charts Available

9-1-1. General	9-1-1
9-1-2. Obtaining Aeronautical Charts	9-1-1
9-1-3. Selected Charts and Products Available	9-1-1
9-1-4. General Description of each Chart Series	9-1-1
9-1-5. Where and How to Get Charts of Foreign Areas	9-1-12

Chapter 10. Helicopter Operations

Section 1. Helicopter IFR Operations

10-1-1. Helicopter Flight Control Systems	10-1-1
10-1-2. Helicopter Instrument Approaches	10-1-3
10-1-3. Helicopter Approach Procedures to VFR Heliports	10-1-5
10-1-4. The Gulf of Mexico Grid System	10-1-6

Section 2. Special Operations

10-2-1. Offshore Helicopter Operations	10-2-1
10-2-2. Helicopter Night VFR Operations	10-2-7
10-2-3. Landing Zone Safety	10-2-10
10-2-4. Emergency Medical Service (EMS) Multiple Helicopter Operations	10-2-16

Appendices

Appendix 1. Bird/Other Wildlife Strike Report	Appendix 1-1
Appendix 2. Volcanic Activity Reporting Form (VAR)	Appendix 2-1
Appendix 3. Abbreviations/Acronyms	Appendix 3-1
PILOT/CONTROLLER GLOSSARY	PCG-1
INDEX	I-1

Chapter 1. Air Navigation

Section 1. Navigation Aids

1-1-1. General

a. Various types of air navigation aids are in use today each serving a special purpose. These aids have varied owners and operators, namely, the Federal Aviation Administration (FAA), the military services, private organizations, individual states, and foreign governments. The FAA has the statutory authority to establish, operate, maintain, air navigation facilities and to prescribe standards for the operation of any of these aids which are used for instrument flight in federally controlled airspace. These aids are tabulated in the Airport/Facility Directory (A/FD).

b. Pilots should be aware of the possibility of momentary erroneous indications on cockpit displays when the primary signal generator for a ground-based navigational transmitter, for example, a glideslope (VOR) or nondirectional beacon, is inoperative. Pilots should disregard any navigation indication regardless of its apparent validity if the particular transmitter is identified by NOTAM or otherwise as unusable or inoperative.

1-1-2. Nondirectional Radio Beacon (NDB)

a. A low or medium frequency radio beacon transmits nondirectional signals whereby the pilot of an aircraft properly equipped can determine bearings and home on the station. These facilities normally operate in a frequency band of 190 to 535 kilohertz (kHz). According to ICAO Annex 10, the frequency range for NDBs is between 190 and 1750 kHz and transmit a continuous carrier with either 400 or 1020 hertz (Hz) modulation. All radio beacons except the compass locators transmit a continuous three-letter identification in code except during voice transmissions.

b. When a radio beacon is used in conjunction with the Instrument Landing System (ILS) markers, it is called a Compass Locator.

c. Voice transmissions are made on radio beacons unless the letter 'W' without voice is included in the class designator. (HW)

d. Radio beacons are subject to disturbances that may result in erroneous bearing information. Such disturbances result from such factors as lightning, precipitation static, etc. At night, radio beacons are vulnerable to interference from distant stations. Nearly all disturbances which affect the Automatic Direction Finder (ADF) bearing also affect the facility's identification. Noisy identification usually occurs when the ADF needle is erratic. Voice, music, or erroneous identification may be heard when a steady false bearing is being displayed. Since ADF receivers do not have a flag to warn the pilot when erroneous bearing information is being displayed, the pilot should continuously monitor the NDB's identification.

1-1-3. VHF Omni-directional Range (VOR)

a. VORs operate within the 108.0 to 117.95 MHz frequency band and have a power output necessary to provide coverage within their assigned operational service volume. They are subject to line-of-sight restrictions, and the range varies proportionally to the altitude of the receiving equipment.

NOTE—

Normal service ranges for the various classes of VORs are given in Navigational Aid (NAVAID) Service Volumes, Paragraph 1-1-8.

b. Most VORs are equipped for voice transmission on the VOR frequency. VORs without voice capability are indicated by the letter 'W' without voice included in the class designator (VORW).

c. The only positive method of identifying a VOR is by its Morse Code identification or by the recorded automatic voice identification which is always indicated by use of the word VOR following the range's name. Reliance on determining the identification of an omnirange should never be placed on listening to voice transmissions by the Flight Service Station (FSS) or approach control facility involved. Many FSSs remotely operate several omniranges with different names. In some cases, none of the VORs have the name of the parent FSS. During periods of maintenance, the facility may radiate a T-E-S-T code — ● ● ● ● — or the code may be

removed. Some VOR receivers are capable of identifying the VOR and will display the identifier of the VOR if it has successfully done so. However, it is still the pilot's responsibility to verify the identity of the VOR by conventional methods.

d. Voice identification has been added to numerous VORs. The transmission consists of a voice announcement, AIRVILLE VOR, alternating with the usual Morse Code identification.

e. The effectiveness of the VOR depends upon proper use and adjustment of both ground and airborne equipment.

1. Accuracy. The accuracy of course alignment of the VOR is excellent, being generally plus or minus 1 degree.

2. Roughness. On some VORs, minor course roughness may be observed, evidenced by course needle or brief flag alarm activity; some receivers are more susceptible to these irregularities than others. At a few stations, usually in mountainous terrain, the pilot may occasionally observe a brief course needle oscillation, similar to the indication of approaching station. Pilots flying over unfamiliar routes are cautioned to be on the alert for these vagaries, and in particular to use the to/from indicator to determine positive station passage.

(a) Certain propeller revolutions per minute (RPM) settings or helicopter rotor speeds can cause the VOR Course Deviation Indicator to fluctuate as much as plus or minus six degrees. Slight changes to the RPM setting will normally smooth out this roughness. Pilots are urged to check for this modulation phenomenon prior to reporting a VOR station or aircraft equipment for unsatisfactory operation.

1-1-4. VOR Receiver Check

a. The FAA VOR test facility (VOT) transmits a test signal which provides users a convenient means to determine the operational status and accuracy of a VOR receiver while on the ground. Here a VOT is located. The airborne use of VOT is permitted, however, its use is strictly limited to those areas/altitudes specifically authorized in the A/FD or appropriate supplement.

b. To use the VOT service, tune in the VOT frequency on your VOR receiver. With the Course

Deviation Indicator (CDI) centered, the omni-bearing selector should read 0 degrees with the to/from indication showing from, or the omni-bearing selector should read 180 degrees with the to/from indication showing to. Should the VOR receiver operate an RMI (Radio Magnetic Indicator), it will indicate 180 degrees on any omni-bearing selector. OBS setting. Two means of identification are used. One is a series of dots and the other is a continuous tone. Information concerning an individual test signal can be obtained from the local FSS.

c. Periodic VOR receiver calibration is most important. If a receiver's Automatic Gain Control or modulation circuit deteriorates, it is possible for it to display acceptable accuracy and sensitivity close into the VOR or VOT and display out-of-tolerance readings when located at greater distances. Where weaker signal areas exist, the likelihood of this deterioration varies between receivers and is generally considered a function of time. The best assurance of having an accurate receiver is periodic calibration. Early intervals are recommended. At a later time, an authorized repair facility should recalibrate the receiver to the manufacturer's specifications.

d. Federal Aviation Regulations 14 CFR Section 91.171 provides for certain VOR equipment accuracy checks prior to flight under instrument flight rules. To comply with this requirement and to ensure satisfactory operation of the airborne system, the FAA has provided pilots with the following means of checking VOR receiver accuracy:

1. VOT or a radiated test signal from an appropriately rated radio repair station.

2. Certified airborne check points.

3. Certified check points on the airport surface.

e. A radiated VOT from an appropriately rated radio repair station serves the same purpose as an FAA VOR signal and the check is made in much the same manner as a VOT, with the following differences:

1. The frequency normally approved by the Federal Communications Commission is 108.0 MHz.

2. Repair stations are not permitted to radiate the VOR test signal continuously; consequently, the owner or operator must make arrangements with the repair station to have the test signal transmitted. This

service is not provided by all radio repair stations. The aircraft owner or operator must determine which repair station in the local area provides this service. A representative of the repair station must make an entry into the aircraft logbook or other permanent record certifying to the radial accuracy and the date of transmission. The owner, operator, or representative of the repair station may accomplish the necessary checks in the aircraft and make a logbook entry stating the results. It is necessary to verify which test radial is being transmitted and whether you should get a to or from indication.

f. Airborne and ground check points consist of certified radials that should be received at specific points on the airport surface or over specific landmarks while airborne in the immediate vicinity of the airport.

1. Should an error in excess of plus or minus 4 degrees be indicated through use of a ground check or plus or minus 6 degrees using the airborne check. Instrument Flight Rules (IFR) flight must not be attempted without first correcting the source of the error.

CAUTION—

No correction other than the correction card figures supplied by the manufacturer should be applied in making these VOR receiver checks.

2. Locations of airborne check points, ground check points, and VOTs are published in the A/FD.

3. If a dual system VOR units independent of each other except for the antenna is installed in the aircraft, one system may be checked against the other. Turn both systems to the same VOR ground facility and note the indicated bearing to that station. The maximum permissible variations between the two indicated bearings is 4 degrees.

1-1-5. Tactical Air Navigation (TACAN)

a. For reasons peculiar to military or naval operations—unusual siting conditions, the pitching and rolling of a naval vessel, etc.—the civil VOR/Distance Measuring Equipment (DME) system of air navigation was considered unsuitable for military or naval use. A new navigational system, TACAN, was therefore developed by the military and naval forces to more readily lend itself to military and naval requirements. As a result, the FAA has integrated TACAN facilities with the civil VOR/

DME program. Although the theoretical or technical principles of operation of TACAN equipment are quite different from those of VOR/DME facilities, the end result, as far as the navigating pilot is concerned, is the same. These integrated facilities are called VORTACs.

b. TACAN ground equipment consists of either a fixed or mobile transmitting unit. The airborne unit in conjunction with the ground unit reduces the transmitted signal to a visual presentation of both aimuth and distance information. TACAN is a pulse system and operates in the Ultrahigh Frequency (UHF) band of frequencies. Its use requires TACAN airborne equipment and does not operate through conventional VOR equipment.

1-1-6. VHF Omni-directional Range/Tactical Air Navigation (VORTAC)

a. A VORTAC is a facility consisting of two components, VOR and TACAN, which provides three individual services: VOR aimuth, TACAN aimuth, and TACAN distance (DME) at one site. Although consisting of more than one component incorporating more than one operating frequency and using more than one antenna system, a VORTAC is considered to be a unified navigational aid. Both components of a VORTAC are envisioned as operating simultaneously and providing the three services at all times.

b. Transmitted signals of VOR and TACAN are each identified by three-letter code transmission and are interlocked so that pilots using VOR aimuth with TACAN distance can be assured that both signals being received are definitely from the same ground station. The frequency channels of the VOR and the TACAN at each VORTAC facility are paired in accordance with a national plan to simplify airborne operation.

1-1-7. Distance Measuring Equipment (DME)

a. In the operation of DME, paired pulses at a specific spacing are sent out from the aircraft; this is the interrogation, and are received at the ground station. The ground station transponder then transmits paired pulses back to the aircraft at the same pulse spacing but on a different frequency. The time required for the round trip of this signal exchange is

measured in the airborne DME unit and is translated into distance in nautical miles from the aircraft to the ground station

b. Operating on the line-of-sight principle DME furnishes distance information with a very high degree of accuracy. Reliable signals may be received at distances up to 199 NM at line-of-sight altitude with an accuracy of better than $\frac{1}{2}$ mile or 3 percent of the distance, whichever is greater. Distance information received from DME equipment is SLANT RANGE distance and not actual horizontal distance.

c. Operating frequency range of a DME according to ICAO Annex 10 is from 960 MHz to 1215 MHz. Aircraft equipped with TACAN equipment will receive distance information from a VORTAC automatically. While aircraft equipped with VOR must have a separate DME airborne unit.

d. Aircraft equipped with slaved compass systems may be susceptible to heading errors caused by exposure to magnetic field disturbances. Flux fields found in materials that are commonly located on the surface or buried under taxiways and ramps. These materials generate a magnetic flux field that can be sensed by the aircraft's compass system flux detector or gate, which can cause the aircraft's system to align with the material's magnetic field rather than the earth's natural magnetic field. The system's erroneous heading may not self-correct. Prior to take off, pilots should be aware that a heading misalignment may have occurred during taxi. Pilots are encouraged to follow the manufacturer's or other appropriate procedures to correct possible heading misalignment before take off is commenced.

e. VOR/DME, VORTAC, Instrument Landing System (ILS)/DME, and localizer (LOC)/DME navigation facilities established by the FAA provide course and distance information from collocated components under a frequency pairing plan. Aircraft receiving equipment which provides for automatic DME selection assures reception of aimuth and distance information from a common source when designated VOR/DME, VORTAC, ILS/DME, and LOC/DME are selected.

f. Due to the limited number of available frequencies, assignment of paired frequencies is required for certain military noncollocated VOR and TACAN facilities which serve the same area but

which may be separated by distances up to a few miles.

g. VOR/DME, VORTAC, ILS/DME, and LOC/DME facilities are identified by synchronized identifications which are transmitted on a time share basis. The VOR or localizer portion of the facility is identified by a coded tone modulated at 1020 Hz or a combination of code and voice. The TACAN or DME is identified by a coded tone modulated at 1350 Hz. The DME or TACAN coded identification is transmitted one time for each three or four times that the VOR or localizer coded identification is transmitted. When either the VOR or the DME is inoperative, it is important to recognize which identifier is retained for the operative facility. A single coded identification with a repetition interval of approximately 30 seconds indicates that the DME is operative.

h. Aircraft equipment which provides for automatic DME selection assures reception of aimuth and distance information from a common source when designated VOR/DME, VORTAC, and ILS/DME navigation facilities are selected. Pilots are cautioned to disregard any distance displays from automatically selected DME equipment when VOR or ILS facilities which do not have the DME feature installed are being used for position determination.

1-1-8. Navigational Aid (NAVAID) Service Volumes

a. Most air navigation radio aids which provide positive course guidance have a designated standard service volume (SSV). The SSV defines the reception limits of unrestricted NAVAIDs which are usable for random/unpublished route navigation.

b. A NAVAID will be classified as restricted if it does not conform to flight inspection signal strength and course quality standards throughout the published SSV. However, the NAVAID should not be considered usable at altitudes below that which could be flown while operating under random route IFR conditions. 14 CFR Section 91.177, even though these altitudes may lie within the designated SSV. Service volume restrictions are first published in Notices to Airmen (NOTAMs) and then with the alphabetical listing of the NAVAIDs in the A/FD.

c. Standard Service Volume limitations do not apply to published IFR routes or procedures.

d. VOR/DME/TACAN Standard Service Volumes SSV

1. Standard service volumes SSVs are graphically shown in FIG 1-1-1 FIG 1-1-2 FIG 1-1-3 FIG 1-1-4 and FIG 1-1-5. The SSV of a station is indicated by using the class designator as a prefix to the station type designation.

EXAMPLE—

TVOR, LDME, and HVORTAC.

FIG 1-1-1

Standard High Altitude Service Volume

See FIG 1-1-5 for altitudes below 1 000 feet

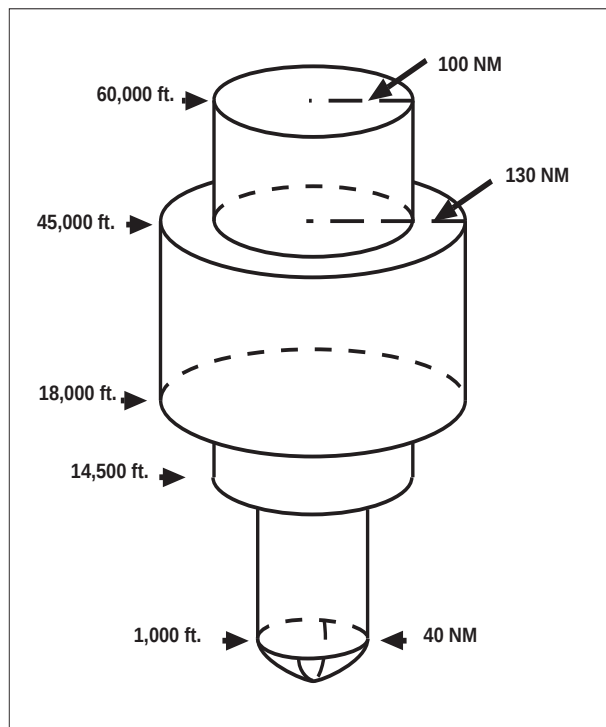


FIG 1-1-2

Standard Low Altitude Service Volume

See FIG 1-1-5 for altitudes below 1 000 feet


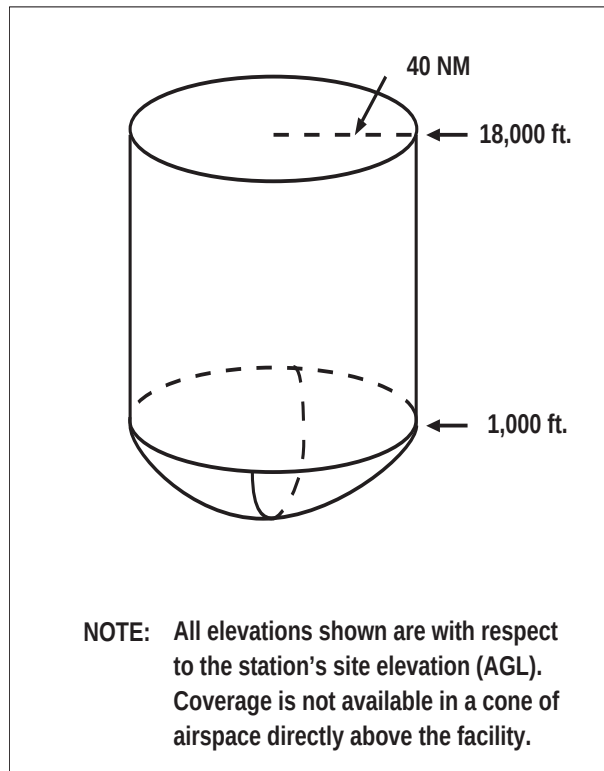


FIG 1-1-3
Standard Terminal Service Volume
 See FIG 1-1-4 for altitudes below 1 000 feet

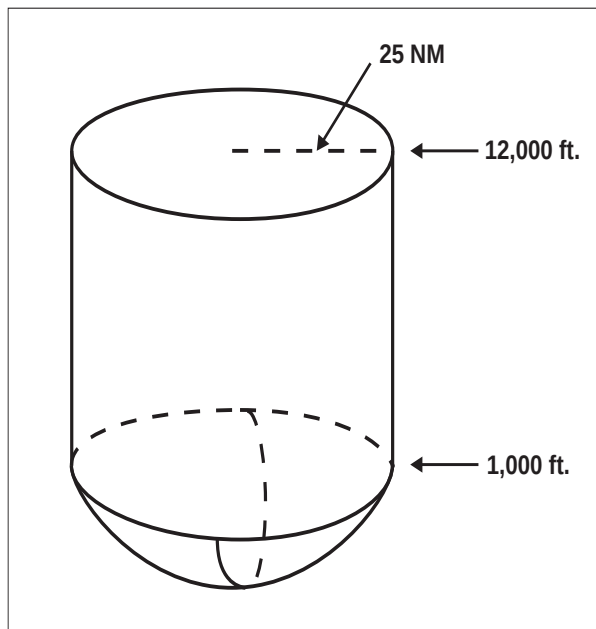

2. Within 25 NM the bottom of the T service volume is defined by the curve in FIG 1-1-4. Within 40 NM the bottoms of the L and H service volumes are defined by the curve in FIG 1-1-5. See TBL 1-1-1.

e. Nondirectional Radio Beacon (NDB)

1. NDBs are classified according to their intended use.

2. The ranges of NDB service volumes are shown in TBL 1-1-2. The distances (radius) are the same at all altitudes.

TBL 1-1-1
VOR/DME/TACAN Standard Service Volumes

SSV Class Designator	Altitude and Range Boundaries
T Terminal	From 1 000 feet above ground level (AGL) up to and including 12 000 feet AGL at radial distances out to 25 NM
L Low Altitude	From 1 000 feet AGL up to and including 18 000 feet AGL at radial distances out to 40 NM
H High Altitude	From 1 000 feet AGL up to and including 14 500 feet AGL at radial distances out to 40 NM. From 14 500 AGL up to and including 60 000 feet at radial distances out to 100 NM. From 18 000 feet AGL up to and including 45 000 feet AGL at radial distances out to 130 NM

TBL 1-1-2
NDB Service Volumes

Class	Distance (Radius)
Compass Locator	15 NM
MH	25 NM
H	50 NM
HH	75 NM
*Service ranges of individual facilities may be less than 50 nautical miles (NM). Restrictions to service volumes are first published as a Notice to Airmen and then with the alphabetical listing of the NAVAID in the A/FD.	

FIG 1-1-4
Service Volume Lower Edge Terminal


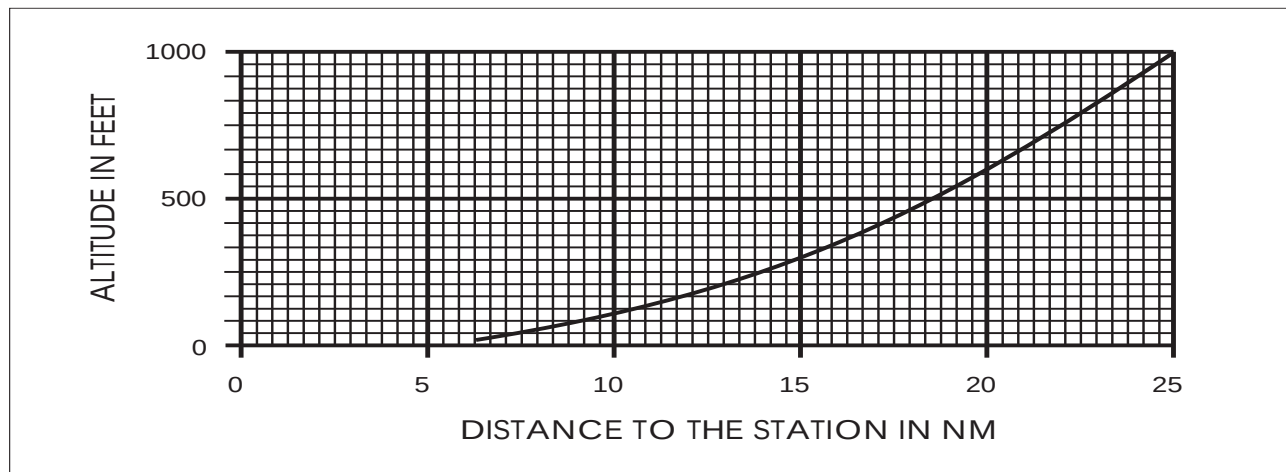


FIG 1-1-5
Service Volume Lower Edge
Standard High and Low

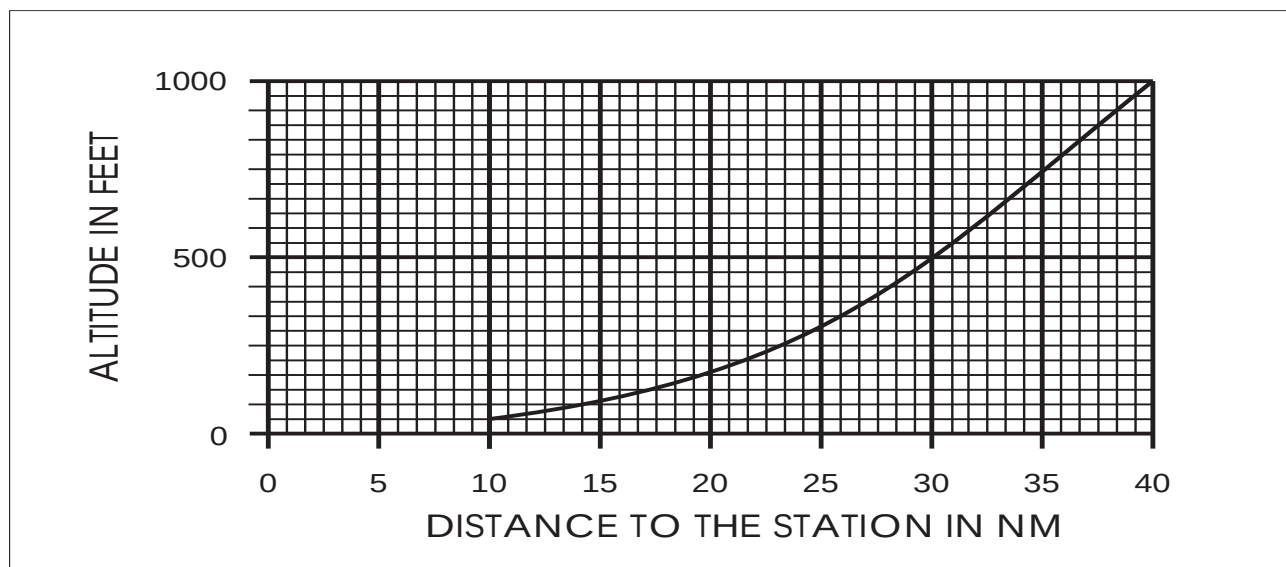

1-1-9. Instrument Landing System (ILS)

a. General

1. The ILS is designed to provide an approach path for exact alignment and descent of an aircraft on final approach to a runway.

2. The ground equipment consists of two highly directional transmitting systems and, along the approach, three or fewer marker beacons. The directional transmitters are known as the localizer and glide slope transmitters.

3. The system may be divided functionally into three parts:

(a) **Guidance information:** localizer, glide slope

(b) **Range information:** marker beacon, DME, and

(c) **Visual information:** approach lights, touchdown and centerline lights, runway lights

4. Precision radar or compass locators located at the Outer Marker (OM) or Middle Marker (MM) may be substituted for marker beacons. DME, when

specified in the procedure may be substituted for the OM

5. Where a complete ILS system is installed on each end of a runway i.e. the approach end of Runway 4 and the approach end of Runway 22 the ILS systems are not in service simultaneously

b. Localizer

1. The localizer transmitter operates on one of 40 ILS channels within the frequency range of 108.10 to 111.95 MHz. Signals provide the pilot with course guidance to the runway centerline.

2. The approach course of the localizer is called the front course and is used with other functional parts e.g. glide slope marker beacons etc. The localizer signal is transmitted at the far end of the runway. It is adjusted for a course width of full scale fly-left to a full scale fly-right of 700 feet at the runway threshold.

3. The course line along the extended centerline of a runway in the opposite direction to the front course is called the back course.

CAUTION—

Unless the aircraft's ILS equipment includes reverse sensing capability, when flying inbound on the back course it is necessary to steer the aircraft in the direction opposite the needle deflection when making corrections from off-course to on-course. This "flying away from the needle" is also required when flying outbound on the front course of the localizer. Do not use back course signals for approach unless a back course approach procedure is published for that particular runway and the approach is authorized by ATC.

4. Identification is in International Morse Code and consists of a three-letter identifier preceded by the letter I ●● transmitted on the localizer frequency.


EXAMPLE— I-DIA

5. The localizer provides course guidance throughout the descent path to the runway threshold from a distance of 18 NM from the antenna between an altitude of 1 000 feet above the highest terrain along the course line and 4 500 feet above the elevation of the antenna site. Proper off-course indications are provided throughout the following angular areas of the operational service volume:

(a) To 10 degrees either side of the course along a radius of 18 NM from the antenna and

(b) From 10 to 35 degrees either side of the course along a radius of 10 NM. See FIG 1-1-6.

FIG 1-1-6
Limits of Localizer Coverage

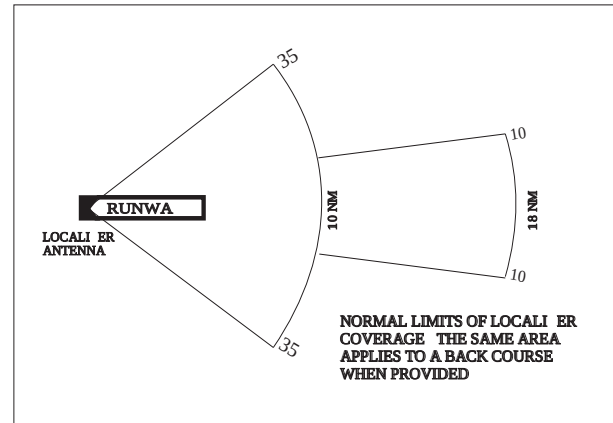

6. Unreliable signals may be received outside these areas.

c. Localizer Type Directional Aid (LDA)

1. The LDA is of comparable use and accuracy to a localizer but is not part of a complete ILS. The LDA course usually provides a more precise approach course than the similar Simplified Directional Facility (SDF) installation, which may have a course width of 6 or 12 degrees.

2. The LDA is not aligned with the runway. Straight-in minimums may be published where alignment does not exceed 30 degrees between the course and runway. Circling minimums only are published where this alignment exceeds 30 degrees.

3. A very limited number of LDA approaches also incorporate a glideslope. These are annotated in the plan view of the instrument approach chart with a note 'LDA/Glideslope'. These procedures fall under a newly defined category of approaches called Approach with Vertical Guidance (APV), described in paragraph 5-4-5 Instrument Approach Procedure Charts subparagraph a7 b Approach with Vertical Guidance (APV). LDA minima for with and without glideslope is provided and annotated on the minima lines of the approach chart as S-LDA/GS and S-LDA. Because the final approach course is not aligned with the runway centerline, additional maneuvering will be required compared to an ILS approach.

d. Glide Slope/Glide Path

1. The UHF glide slope transmitter operating on one of the 40 ILS channels within the frequency range 329.15 MHz to 335.00 MHz radiates its signals in the direction of the localizer front course. The term "glide path" means that portion of the glide slope that intersects the localizer.

CAUTION—

False glide slope signals may exist in the area of the localizer back course approach which can cause the glide slope flag alarm to disappear and present unreliable glide slope information. Disregard all glide slope signal indications when making a localizer back course approach unless a glide slope is specified on the approach and landing chart.

2. The glide slope transmitter is located between 750 feet and 1,250 feet from the approach end of the runway down the runway and offset 250 to 650 feet from the runway centerline. It transmits a glide path beam 1.4 degrees wide vertically. The signal provides descent information for navigation down to the lowest authorized decision height (DH) specified in the approved ILS approach procedure. The glidepath may not be suitable for navigation below the lowest authorized DH and any reference to glidepath indications below that height must be supplemented by visual reference to the runway environment. Glidepaths with no published DH are usable to runway threshold.

3. The glide path projection angle is normally adjusted to 3 degrees above horizontal so that it intersects the MM at about 200 feet and the OM at about 1,400 feet above the runway elevation. The glide slope is normally usable to the distance of 10 NM. However, at some locations the glide slope has been certified for an extended service volume which exceeds 10 NM.

4. Pilots must be alert when approaching the glidepath interception. False courses and reverse sensing will occur at angles considerably greater than the published path.

5. Make every effort to remain on the indicated glide path.

CAUTION—

Avoid flying below the glide path to assure obstacle/terrain clearance is maintained.

6. The published glide slope threshold crossing height (TCH) DOES NOT represent the height of the

actual glide path on-course indication above the runway threshold. It is used as a reference for planning purposes which represents the height above the runway threshold that an aircraft's glide slope antenna should be if that aircraft remains on a trajectory formed by the four-mile-to-middle marker glidepath segment.

7. Pilots must be aware of the vertical height between the aircraft's glide slope antenna and the main gear in the landing configuration and at the DH plan to adjust the descent angle accordingly if the published TCH indicates the wheel crossing height over the runway threshold may not be satisfactory. Tests indicate a comfortable wheel crossing height is approximately 20 to 30 feet depending on the type of aircraft.

NOTE—

The TCH for a runway is established based on several factors including the largest aircraft category that normally uses the runway, how airport layout effects the glide slope antenna placement, and terrain. A higher than optimum TCH, with the same glide path angle, may cause the aircraft to touch down further from the threshold if the trajectory of the approach is maintained until the flare. Pilots should consider the effect of a high TCH on the runway available for stopping the aircraft.

e. Distance Measuring Equipment (DME)

1. When installed with the ILS and specified in the approach procedure, DME may be used:

- (a) In lieu of the OM
- (b) As a back course (BC) final approach fix (FAF) and
- (c) To establish other fixes on the localizer course

2. In some cases, DME from a separate facility may be used within Terminal Instrument Procedures (TERPS) limitations:

- (a) To provide ARC initial approach segments
- (b) As a FAF for BC approaches and
- (c) As a substitute for the OM

f. Marker Beacon

1. ILS marker beacons have a rated power output of 3 watts or less and an antenna array designed to produce an elliptical pattern with dimensions at 1,000 feet above the antenna of approximately 2,400 feet in width and 4,200 feet in

length. Airborne marker beacon receivers with a selective sensitivity feature should always be operated in the low sensitivity position for proper reception of ILS marker beacons.

2. Ordinarily, there are two marker beacons associated with an ILS: the OM and MM. Locations with a Category II ILS also have an Inner Marker (IM). When an aircraft passes over a marker, the pilot will receive the indications shown in TBL 1-1-3.

(a) The OM normally indicates a position at which an aircraft at the appropriate altitude on the localizer course will intercept the ILS glide path.

(b) The MM indicates a position approximately 3,500 feet from the landing threshold. This is also the position where an aircraft on the glide path will be at an altitude of approximately 200 feet above the elevation of the touchdown zone.

(c) The IM will indicate a point at which an aircraft is at a designated decision height (DH) on the glide path between the MM and landing threshold.

**TBL 1-1-3
Marker Passage Indications**

Marker	Code	Light
OM	— — —	BLUE
MM	• — • —	AMBER
IM	• • • •	WHITE
BC	• • • •	WHITE

3. A back course marker normally indicates the ILS back course final approach fix where approach descent is commenced.

g. Compass Locator

1. Compass locator transmitters are often situated at the MM and OM sites. The transmitters have a power of less than 25 watts, a range of at least 15 miles, and operate between 190 and 535 kHz. At some locations, higher powered radio beacons (up to 400 watts) are used as OM compass locators. These generally carry Transcribed Weather Broadcast (TWEB) information.

2. Compass locators transmit two-letter identification groups. The outer locator transmits the first two letters of the localizer identification group, and the middle locator transmits the last two letters of the localizer identification group.

h. ILS Frequency See TBL 1-1-4

**TBL 1-1-4
Frequency Pairs Allocated for ILS**

Localizer MHz	Glide Slope
108.10	334.70
108.15	334.55
108.3	334.10
108.35	333.95
108.5	329.90
108.55	329.75
108.7	330.50
108.75	330.35
108.9	329.30
108.95	329.15
109.1	331.40
109.15	331.25
109.3	332.00
109.35	331.85
109.50	332.60
109.55	332.45
109.70	333.20
109.75	333.05
109.90	333.80
109.95	333.65
110.1	334.40
110.15	334.25
110.3	335.00
110.35	334.85
110.5	329.60
110.55	329.45
Localizer MHz	Glide Slope
110.70	330.20
110.75	330.05
110.90	330.80
110.95	330.65
111.10	331.70
111.15	331.55
111.30	332.30
111.35	332.15
111.50	332.9
111.55	332.75
111.70	333.5
111.75	333.35
111.90	331.1
111.95	330.95

i. ILS Minimums

1. The lowest authorized ILS minimums with all required ground and airborne systems components operative are:

(a) Category I. Decision Height DH 200 feet and Run way Visual Range RVR 2 400 feet with touchdown and centerline lighting RVR 1 800 feet or with Autopilot or FD or HUD RVR 1 800 feet

(b) Special Authorization Category I. DH 150 feet and Run way Visual Range RVR 1 400 feet HUD to DH

(c) Category II. DH 100 feet and RVR 1 200 feet with autoland or HUD to touchdown and noted on authorization RVR 1 000 feet

(d) Special Authorization Category II with Reduced Lighting. DH 100 feet and RVR 1 200 feet with autoland or HUD to touchdown and noted on authorization touchdown and centerline lighting and ALSF-2 are not required

(e) Category IIIa. No DH or DH below 100 feet and RVR not less than 700 feet

(f) Category IIIb. No DH or DH below 50 feet and RVR less than 700 feet but not less than 150 feet and

(g) Category IIIc. No DH and no RVR limitation

NOTE—

Special authorization and equipment required for Categories II and III.

j. Inoperative ILS Components

1. Inoperative localizer. When the localizer fails an ILS approach is not authorized

2. Inoperative glide slope. When the glide slope fails the ILS reverts to a nonprecision localizer approach

REFERENCE—

See the inoperative component table in the U.S. Government Terminal Procedures Publication (TPP), for adjustments to minimums due to inoperative airborne or ground system equipment.

k. ILS Course Distortion

1. All pilots should be aware that disturbances to ILS localizer and glide slope courses may occur when surface vehicles or aircraft are operated near the localizer or glide slope antennas. Most ILS installations are subject to signal interference by either surface vehicles, aircraft or both. ILS CRITICAL AREAS are established near each localizer and glide slope antenna.

2. ATC issues control instructions to avoid interfering operations within ILS critical areas at controlled airports during the hours the Airport Traffic Control Tower (ATCT) is in operation as follows:

(a) Weather Conditions. Less than ceiling 800 feet and/or visibility 2 miles

(1) Localizer Critical Area. Except for aircraft that land, exit a runway, depart or miss approach, vehicles and aircraft are not authorized in or over the critical area when an arriving aircraft is between the ILS final approach fix and the airport. Additionally, when the ceiling is less than 200 feet and/or the visibility is RVR 2 000 or less, vehicle and aircraft operations in or over the area are not authorized when an arriving aircraft is inside the ILS MM.

(2) Glide Slope Critical Area. Vehicles and aircraft are not authorized in the area when an arriving aircraft is between the ILS final approach fix and the airport unless the aircraft has reported the airport in sight and is circling or side stepping to land on a runway other than the ILS runway.

(b) Weather Conditions. At or above ceiling 800 feet and/or visibility 2 miles

(1) No critical area protective action is provided under these conditions

(2) A flight crew under these conditions should advise the tower that it will conduct an AUTOLAND or COUPLED approach to ensure that the ILS critical areas are protected when the aircraft is inside the ILS MM.

EXAMPLE—

Glide slope signal not protected.

3. Aircraft holding below 5 000 feet between the outer marker and the airport may cause localizer signal variations for aircraft conducting the ILS approach. Accordingly, such holding is not authorized when weather or visibility conditions are less than ceiling 800 feet and/or visibility 2 miles.

4. Pilots are cautioned that vehicular traffic not subject to ATC may cause momentary deviation to ILS course or glide slope signals. Also, critical areas are not protected at uncontrolled airports or at airports without an operating control tower when weather or visibility conditions are above those requiring protective measures. Aircraft conducting coupled or autoland operations should be especially alert in

monitoring automatic flight control systems

See FIG 1-1-7

NOTE—

Unless otherwise coordinated through Flight Standards, ILS signals to Category I runways are not flight inspected below 100 feet AGL. Guidance signal anomalies may be encountered below this altitude.

1-1-10. Simplified Directional Facility (SDF)

a. The SDF provides a final approach course similar to that of the ILS localizer. It does not provide glide slope information. A clear understanding of the ILS localizer and the additional factors listed below completely describe the operational characteristics and use of the SDF.

b. The SDF transmits signals within the range of 108.10 to 111.95 MHz.


c. The approach techniques and procedures used in an SDF instrument approach are essentially the

same as those employed in executing a standard localizer approach except the SDF course may not be aligned with the runway and the course may be wider resulting in less precision.

d. Usable off-course indications are limited to 35 degrees either side of the course centerline. Instrument indications received beyond 35 degrees should be disregarded.

e. The SDF antenna may be offset from the runway centerline. Because of this, the angle of convergence between the final approach course and the runway bearing should be determined by reference to the instrument approach procedure chart. This angle is generally not more than 3 degrees. However, it should be noted that inasmuch as the approach course originates at the antenna site, an approach which is continued beyond the runway threshold will lead the aircraft to the SDF offset position rather than along the runway centerline.

FIG 1-1-7
FAA Instrument Landing Systems

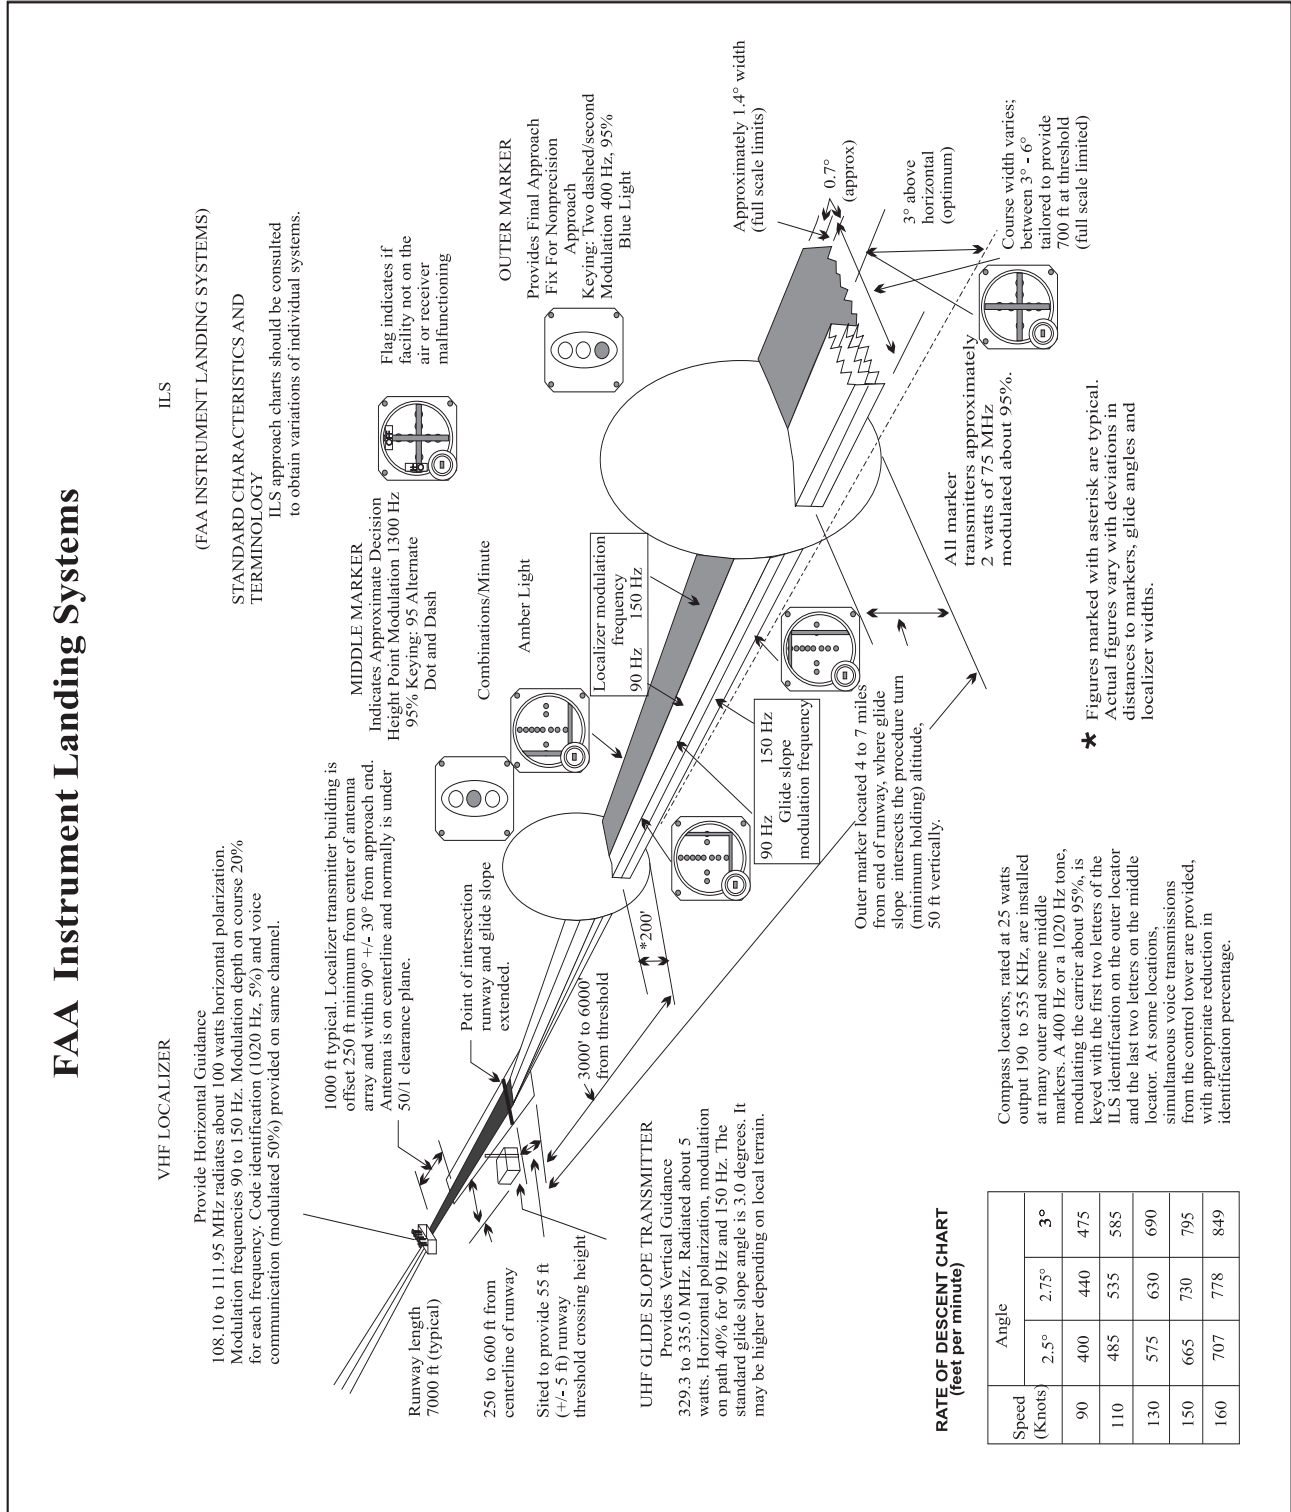

f. The SDF signal is fixed at either 6 degrees or 12 degrees as necessary to provide maximum flyability and optimum course quality

g. Identification consists of a three-letter identifier transmitted in Morse Code on the SDF frequency. The appropriate instrument approach chart will indicate the identifier used at a particular airport.

1-1-11. Microwave Landing System (MLS)

a. General

1. The MLS provides precision navigation guidance for exact alignment and descent of aircraft on approach to a runway. It provides azimuth, elevation, and distance.

2. Both lateral and vertical guidance may be displayed on conventional course deviation indicators or incorporated into multipurpose cockpit displays. Range information can be displayed by conventional DME indicators and also incorporated into multipurpose displays.

3. The MLS supplements the ILS as the standard landing system in the U.S. for civil, military, and international civil aviation. At international airports, ILS service is protected to 2010.

4. The system may be divided into five functions:

- (a)** Approach azimuth
- (b)** Back azimuth
- (c)** Approach elevation
- (d)** Range and
- (e)** Data communications

5. The standard configuration of MLS ground equipment includes:

(a) An azimuth station to perform functions a and e above. In addition to providing azimuth navigation guidance, the station transmits basic data which consists of information associated directly with the operation of the landing system, as well as

advisory data on the performance of the ground equipment.

(b) An elevation station to perform function c.

(c) Distance Measuring Equipment (DME) to perform range guidance, both standard DME (DME/N) and precision DME (DME/P).

6. MLS Expansion Capabilities. The standard configuration can be expanded by adding one or more of the following functions or characteristics:

(a) Back azimuth. Provides lateral guidance for missed approach and departure navigation.

(b) Auxiliary data transmissions. Provides additional data, including refined airborne positioning, meteorological information, runway status, and other supplementary information.

(c) Expanded Service Volume (ESV) proportional guidance to 60 degrees.

7. MLS identification is a four-letter designation starting with the letter M. It is transmitted in International Morse Code at least six times per minute by the approach azimuth and back azimuth ground equipment.

b. Approach Azimuth Guidance

1. The azimuth station transmits MLS angle and data on one of 200 channels within the frequency range of 5031 to 5091 MHz.

2. The equipment is normally located about 1,000 feet beyond the stop end of the runway, but there is considerable flexibility in selecting sites. For example, for heliport operations, the azimuth transmitter can be collocated with the elevation transmitter.


3. The azimuth coverage extends:
See FIG 1-1-8

(a) Laterally, at least 40 degrees on either side of the runway centerline in a standard configuration.

(b) In elevation, up to an angle of 15 degrees and to at least 20,000 feet and

(c) In range, to at least 20 NM.

**FIG 1-1-8
Coverage Volume
Azimuth**

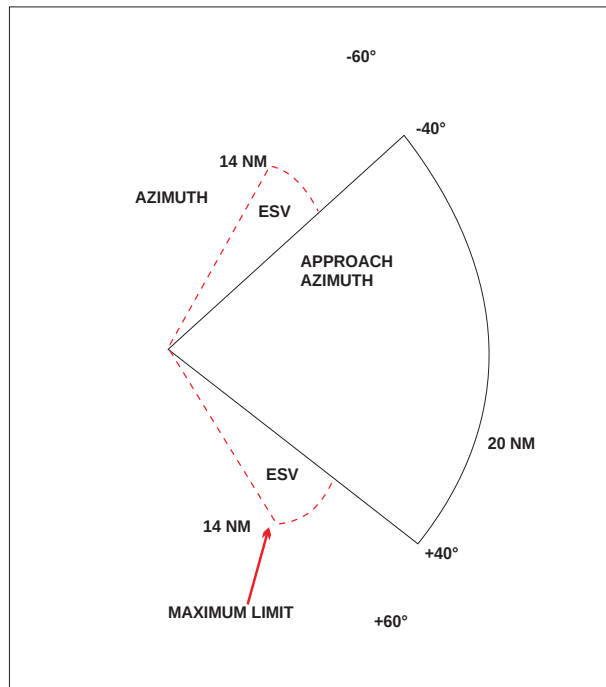

c. Elevation Guidance

1. The elevation station transmits signals on the same frequency as the azimuth station. A single frequency is time-shared between angle and data functions.

2. The elevation transmitter is normally located about 400 feet from the side of the runway between runway threshold and the touchdown zone.


3. Elevation coverage is provided in the same airspace as the azimuth guidance signals.

(a) In elevation to at least 15 degrees

(b) Laterally to fill the azimuth lateral coverage and

(c) In range to at least 20 NM
See FIG 1-1-9

**FIG 1-1-9
Coverage Volumes
Elevation**

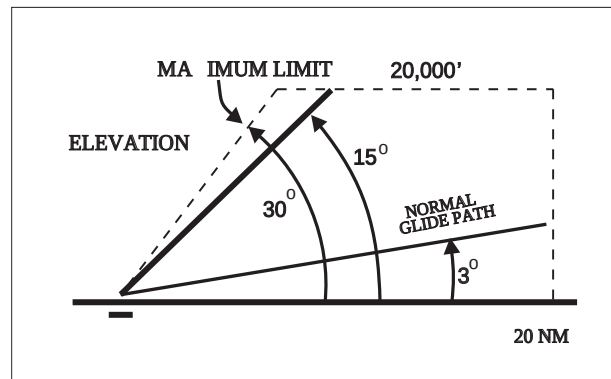

1. The MLS Precision Distance Measuring Equipment (DME/P) functions the same as the navigation DME described in paragraph 1-1-7. Distance Measuring Equipment (DME) but there are some technical differences. The beacon transponder operates in the frequency band 962 to 1105 MHz and responds to an aircraft interrogator. The MLS DME/P accuracy is improved to be consistent with the accuracy provided by the MLS azimuth and elevation stations.

2. A DME/P channel is paired with the azimuth and elevation channel. A complete listing of the 200 paired channels of the DME/P with the angle functions is contained in FAA Standard 022, MLS Interoperability and Performance Requirements.

3. The DME/N or DME/P is an integral part of the MLS and is installed at all MLS facilities unless a waiver is obtained. This occurs infrequently and only at outlying low density airports where marker beacons or compass locators are already in place.

e. Data Communications

1. The data transmission can include both the basic and auxiliary data words. All MLS facilities transmit basic data. Where needed, auxiliary data can be transmitted.

2. **Coverage limits.** MLS data are transmitted throughout the azimuth and back azimuth when provided coverage sectors.

3. **Basic data content.** Representative data include

(a) Station identification

(b) Exact locations of azimuth, elevation, and DME/P stations for MLS receiver processing functions

(c) Ground equipment performance level and

(d) DME/P channel and status

4. Auxiliary data content: Representative data include

(a) 3-D locations of MLS equipment

(b) Waypoint coordinates

(c) Runway conditions and

(d) Weather (e.g., RVR, ceiling, altimeter setting, wind, wake vortex, and shear)

f. Operational Flexibility

1. The MLS has the capability to fulfill a variety of needs in the approach, landing, missed approach, and departure phases of flight. For example,

(a) Curved and segmented approaches

(b) Selectable glide path angles

(c) Accurate 3-D positioning of the aircraft in space and

(d) The establishment of boundaries to ensure clearance from obstructions in the terminal area


2. While many of these capabilities are available to any MLS-equipped aircraft, the more sophisticated capabilities, such as curved and segmented approaches, are dependent upon the particular capabilities of the airborne equipment.

g. Summary

1. Accuracy. The MLS provides precision three-dimensional navigation guidance accurate enough for all approach and landing maneuvers.

2. Coverage. Accuracy is consistent throughout the coverage volumes. See FIG 1-1-10.

FIG 1-1-10
Coverage Volumes
3-D Representation

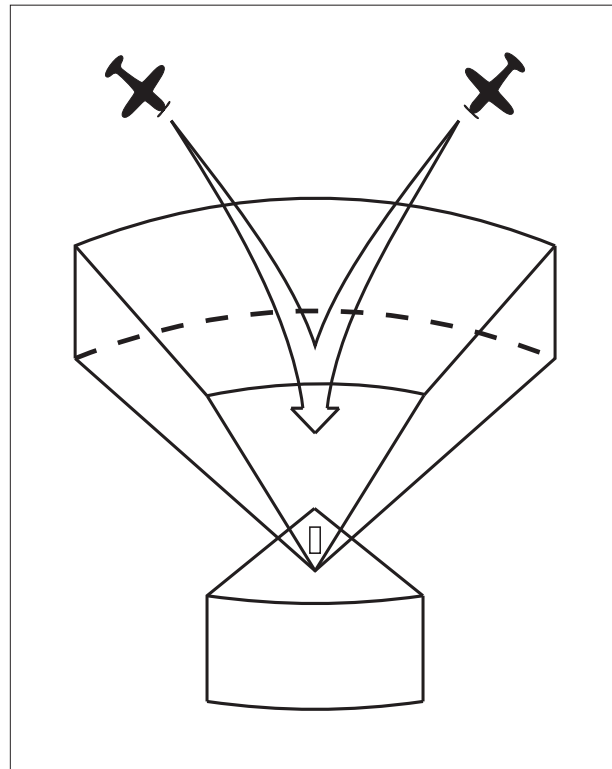

3. Environment. The system has low susceptibility to interference from weather conditions and airport ground traffic.

4. Channels. MLS has 200 channels—enough for any foreseeable need.

5. Data. The MLS transmits ground-air data messages associated with the system's operation.

6. Range information. Continuous range information is provided with an accuracy of about 100 feet.

1-1-12. NAVAID Identifier Removal During Maintenance

During periods of routine or emergency maintenance, coded identification (or code and voice, where applicable) is removed from certain FAA NAVAIDs. Removal of identification serves as a warning to pilots that the facility is officially off the air for tune-up or repair and may be unreliable even though intermittent or constant signals are received.

NOTE—

During periods of maintenance VHF ranges may radiate a T-E-S-T code (— ● ● ● —).

NOTE–

DO NOT attempt to fly a procedure that is NOTAMed out of service even if the identification is present. In certain cases, the identification may be transmitted for short periods as part of the testing.

1–1–13. NAVAIDs with Voice

a. Voice equipped en route radio navigational aids are under the operational control of either a Flight Service Station (FSS) or an approach control facility. The voice communication is available on some facilities. Hazardous Inflight Weather Advisory Service (HIWAS) broadcast capability is available on selected VOR sites throughout the conterminous U.S. and does not provide two-way voice communication. The availability of two-way voice communication and HIWAS is indicated in the A/FD and aeronautical charts.

b. Unless otherwise noted on the chart, all radio navigation aids operate continuously except during shutdowns for maintenance. Hours of operation of facilities not operating continuously are annotated on charts and in the A/FD.

1–1–14. User Reports Requested on NAVAID or Global Navigation Satellite System (GNSS) Performance or Interference

a. Users of the National Airspace System (NAS) can render valuable assistance in the early correction of NAVAID malfunctions or GNSS problems and are encouraged to report their observations of undesirable performance. Although NAVAIDs are monitored by electronic detectors, adverse effects of electronic interference, obstructions or changes in terrain near the NAVAID can exist without detection by the ground monitors. Some of the characteristics of malfunction or deteriorating performance which should be reported are erratic course or bearing indications, intermittent or full flag alarm, garbled, missing or obviously improper coded identification, poor quality communications reception, or in the case of frequency interference, an audible hum or tone accompanying radio communications or NAVAID identification. GNSS problems are often characterized by navigation degradation or service loss indications.

b. Reporters should identify the NAVAID, for example, VOR malfunction or GNSS problem,

location of the aircraft, i.e., latitude, longitude or bearing/distance from a NAVAID, altitude, date and time of the observation, type of aircraft and description of the condition observed, and the type of receivers in use, i.e., make/model/software revision. Reports can be made in any of the following ways:

1. Immediately by radio communication to the controlling Air Route Traffic Control Center (ARTCC), Control Tower or FSS.

2. By telephone to the nearest FAA facility.

3. By FAA Form 8740–5, Safety Improvement Report, a postage-paid card designed for this purpose. These cards may be obtained at FAA FSSs, Flight Standards District Offices, and General Aviation Fixed Base Operations.

c. In aircraft that have more than one receiver, there are many combinations of possible interference between units. This can cause either erroneous navigation indications or complete or partial blanking out of the communications. Pilots should be familiar enough with the radio installation of the particular airplanes they fly to recognize this type of interference.

1–1–15. LORAN**NOTE–**

In accordance with the 2010 DHS Appropriations Act, the U.S. Coast Guard (USCG) terminated the transmission of all U.S. LORAN–C signals on 08 Feb 2010. The USCG also terminated the transmission of the Russian American signals on 01 Aug 2010, and the Canadian LORAN–C signals on 03 Aug 2010. For more information, visit <http://www.navcen.uscg.gov>. Operators should also note that TSO–C60b, AIRBORNE AREA NAVIGATION EQUIPMENT USING LORAN–C INPUTS, has been canceled by the FAA.

1–1–16. Inertial Reference Unit (IRU), Inertial Navigation System (INS), and Attitude Heading Reference System (AHRS)

a. IRUs are self-contained systems comprised of gyros and accelerometers that provide aircraft attitude, pitch, roll and heading, position and velocity information in response to signals resulting from inertial effects on system components. Once aligned with a known position, IRUs continuously calculate position and velocity. IRU position accuracy decays with time. This degradation is known as drift.

b. INSS combine the components of an IRU with an internal navigation computer. By programming a series of waypoints, these systems will navigate along a predetermined track.

c. AHRs are electronic devices that provide attitude information to aircraft systems such as weather radar and autopilot, but do not directly compute position information.

1-1-17. Doppler Radar

Doppler Radar is a semiautomatic self-contained dead reckoning navigation system: radar sensor plus computer. It is not continuously dependent on information derived from ground-based or external aids. The system employs radar signals to detect and measure ground speed and drift angle, using the aircraft compass system as its directional reference. Doppler is less accurate than INS, however, and the use of an external reference is required for periodic updates if acceptable position accuracy is to be achieved on long range flights.

1-1-18. Global Positioning System (GPS)

a. System Overview

1. System Description The Global Positioning System is a satellite-based radio navigation system which broadcasts a signal that is used by receivers to determine precise position anywhere in the world. The receiver tracks multiple satellites and determines a pseudorange measurement that is then used to determine the user location. A minimum of four satellites is necessary to establish an accurate three-dimensional position. The Department of Defense (DOD) is responsible for operating the GPS satellite constellation and monitors the GPS satellites to ensure proper operation. Every satellite's orbital parameters, ephemeris data, are sent to each satellite for broadcast as part of the data message embedded in the GPS signal. The GPS coordinate system is the Cartesian earth-centered earth-fixed coordinates as specified in the World Geodetic System 1984 (WGS-84).

2. System Availability and Reliability

(a) The status of GPS satellites is broadcast as part of the data message transmitted by the GPS satellites. GPS status information is also available by means of the U.S. Coast Guard navigation

information service 703 313-5907. Internet <http://www.navcen.uscg.gov/>. Additionally, satellite status is available through the Notice to Airmen (NOTAM) system.

(b) The operational status of GNSS operations depends upon the type of equipment being used. For GPS-only equipment (TSO-C129a), the operational status of nonprecision approach capability for flight planning purposes is provided through a prediction program that is embedded in the receiver or provided separately.

3. Receiver Autonomous Integrity Monitoring (RAIM) When GNSS equipment is not using integrity information from WAAS or LAAS, the GPS navigation receiver using RAIM provides GPS signal integrity monitoring. RAIM is necessary since delays of up to two hours can occur before an erroneous satellite transmission can be detected and corrected by the satellite control segment. The RAIM function is also referred to as fault detection. Another capability, fault exclusion, refers to the ability of the receiver to exclude a failed satellite from the position solution and is provided by some GPS receivers and by WAAS receivers.

4. The GPS receiver verifies the integrity usability of the signals received from the GPS constellation through receiver autonomous integrity monitoring (RAIM) to determine if a satellite is providing corrupted information. At least one satellite, in addition to those required for navigation, must be in view for the receiver to perform the RAIM function; thus, RAIM needs a minimum of 5 satellites in view or 4 satellites and a barometric altimeter (baro-aiding) to detect an integrity anomaly. Baro-aiding satisfies the RAIM requirement in lieu of a fifth satellite. For receivers capable of doing so, RAIM needs 6 satellites in view or 5 satellites with baro-aiding to isolate the corrupt satellite signal and remove it from the navigation solution. Baro-aiding is a method of augmenting the GPS integrity solution by using a nonsatellite input source. GPS-derived altitude should not be relied upon to determine aircraft altitude since the vertical error can be quite large and no integrity is provided. To ensure that baro-aiding is available, the current altimeter setting must be entered into the receiver as described in the operating manual.

5. RAIM messages vary somewhat between receivers, however, generally there are two types. One type indicates that there are not enough satellites

available to provide RAIM integrity monitoring and another type indicates that the RAIM integrity monitor has detected a potential error that exceeds the limit for the current phase of flight. Without RAIM capability, the pilot has no assurance of the accuracy of the GPS position.

6. Selective Availability Selective Availability

SA is a method by which the accuracy of GPS is intentionally degraded. This feature is designed to deny hostile use of precise GPS positioning data. SA was discontinued on May 1, 2000, but many GPS receivers are designed to assume that SA is still active. No receivers may take advantage of the discontinuance of SA based on the performance values in ICAO Annex 10 and do not need to be designed to operate outside of that performance.

7. The GPS constellation of 24 satellites is designed so that a minimum of five is always observable by a user anywhere on earth. The receiver uses data from a minimum of four satellites above the mask angle, the lowest angle above the horizon at which it can use a satellite.

8. The DOD declared initial operational capability (IOC) of the U.S. GPS on December 8, 1993. The FAA has granted approval for U.S. civil operators to use properly certified GPS equipment as a primary means of navigation in oceanic airspace and certain remote areas. Properly certified GPS equipment may be used as a supplemental means of IFR navigation for domestic en route, terminal operations, and certain instrument approach procedures (IAPs). This approval permits the use of GPS in a manner that is consistent with current navigation requirements as well as approved air carrier operations specifications.

b. VFR Use of GPS

1. GPS navigation has become a great asset to VFR pilots, providing increased navigation capability and enhanced situational awareness while reducing operating costs due to greater ease in flying direct routes. While GPS has many benefits to the VFR pilot, care must be exercised to ensure that system capabilities are not exceeded.

2. Types of receivers used for GPS navigation under VFR are varied, from a full IFR installation being used to support a VFR flight to a VFR-only installation in either a VFR or IFR-capable aircraft to a hand-held receiver. The limitations of each type of receiver installation or use must be understood by

the pilot to avoid misusing navigation information.

See TBL 1-1-6. In all cases, VFR pilots should never rely solely on one system of navigation. GPS navigation must be integrated with other forms of electronic navigation, when possible, as well as pilotage and dead reckoning. Only through the integration of these techniques can the VFR pilot ensure accuracy in navigation.

3. Some critical concerns in VFR use of GPS include RAIM capability, database currency, and antenna location.

(a) RAIM Capability Many VFR GPS receivers and all hand-held units have no RAIM alerting capability. Loss of the required number of satellites in view or the detection of a position error cannot be displayed to the pilot by such receivers. In receivers with no RAIM capability, no alert could be provided to the pilot that the navigation solution had deteriorated, and an undetected navigation error could occur. A systematic cross-check with other navigation techniques could identify this failure and prevent a serious deviation. See subparagraphs a4 and a5 for more information on RAIM.

(b) Database Currency

(1) In many receivers, an up-to-date database is used for navigation fixes, airports, and instrument procedures. These databases must be maintained to the current update for IFR operation, but no such requirement exists for VFR use.

(2) However, in many cases, the database drives a moving map display, which indicates Special Use Airspace and the various classes of airspace, in addition to other operational information. Without a current database, the moving map display may be outdated and offer erroneous information to VFR pilots wishing to fly around critical airspace areas, such as a Restricted Area or a Class B airspace segment. Numerous pilots have ventured into airspace they were trying to avoid by using an outdated database. If you don't have a current database in the receiver, disregard the moving map display for critical navigation decisions.

(3) In addition, waypoints are added, removed, relocated, or re-named as required to meet operational needs. When using GPS to navigate relative to a named fix, a current database must be used to properly locate a named waypoint. Without the update, it is the pilot's responsibility to verify the waypoint location, referencing to an official current

source such as the Airport/Facility Directory Sectional Chart or En Route Chart

(c) Antenna Location

(1) In many VFR installations of GPS receivers antenna location is more a matter of convenience than performance. In IFR installations care is exercised to ensure that an adequate clear view is provided for the antenna to see satellites. If an alternate location is used, some portion of the aircraft may block the view of the antenna, causing a greater opportunity to lose navigation signal.

(2) This is especially true in the case of hand-helds. The use of hand-held receivers for VFR operations is a growing trend, especially among rental pilots. Typically suction cups are used to place the GPS antennas on the inside of cockpit windows. While this method has great utility, the antenna location is limited to the cockpit or cabin only and is rarely optimized to provide a clear view of available satellites. Consequently, signal losses may occur in certain situations of aircraft-satellite geometry, causing a loss of navigation signal. These losses, coupled with a lack of RAIM capability, could present erroneous position and navigation information with no warning to the pilot.

(3) While the use of a hand-held GPS for VFR operations is not limited by regulation, modification of the aircraft, such as installing a panel- or yoke-mounted holder, is governed by 14 CFR Part 43. Consult with your mechanic to ensure compliance with the regulation and a safe installation.

4. As a result of these and other concerns, here are some tips for using GPS for VFR operations:

(a) Always check to see if your unit has RAIM capability. If no RAIM capability exists, be suspicious of your GPS position when any disagreement exists with the position derived from other radio navigation systems, pilotage, or dead reckoning.

(b) Check the currency of the database if any. If expired, update the database using the current revision. If an update of an expired database is not possible, disregard any moving map display of airspace for critical navigation decisions. Be aware that named waypoints may no longer exist or may have been relocated since the database expired. At a

minimum, the waypoints planned to be used should be checked against a current official source, such as the Airport/Facility Directory or a Sectional Aeronautical Chart.

(c) While hand-helds can provide excellent navigation capability to VFR pilots, be prepared for intermittent loss of navigation signal, possibly with no RAIM warning to the pilot. If mounting the receiver in the aircraft, be sure to comply with 14 CFR Part 43.

(d) Plan flights carefully before taking off. If you wish to navigate to user-defined waypoints, enter them before flight, not on-the-fly. Verify your planned flight against a current source, such as a current sectional chart. There have been cases in which one pilot used waypoints created by another pilot that were not where the pilot flying was expecting. This generally resulted in a navigation error. Minimize head-down time in the aircraft and keep a sharp lookout for traffic, terrain, and obstacles. Just a few minutes of preparation and planning on the ground will make a great difference in the air.

(e) Another way to minimize head-down time is to become very familiar with your receiver's operation. Most receivers are not intuitive. The pilot must take the time to learn the various keystrokes, knob functions, and displays that are used in the operation of the receiver. Some manufacturers provide computer-based tutorials or simulations of their receivers. Take the time to learn about your particular unit before you try to use it in flight.

5. In summary, be careful not to rely on GPS to solve all your VFR navigational problems. Unless an IFR receiver is installed in accordance with IFR requirements, no standard of accuracy or integrity has been assured. While the practicality of GPS is compelling, the fact remains that only the pilot can navigate the aircraft, and GPS is just one of the pilot's tools to do the job.

c. VFR Waypoints

1. VFR waypoints provide VFR pilots with a supplementary tool to assist with positional awareness while navigating visually in aircraft equipped with area navigation receivers. VFR waypoints should be used as a tool to supplement current navigation procedures. The uses of VFR waypoints include providing navigational aids for pilots unfamiliar with an area, a waypoint definition of existing reporting points, enhanced navigation in and around Class B

and Class C airspace and enhanced navigation around Special Use Airspace. VFR pilots should rely on appropriate and current aeronautical charts published specifically for visual navigation. If operating in a terminal area, pilots should take advantage of the Terminal Area Chart available for that area, if published. The use of VFR waypoints does not relieve the pilot of any responsibility to comply with the operational requirements of 14 CFR Part 91.

2. VFR waypoint names for computer-entry and flight plans consist of five letters beginning with the letters VP and are retrievable from navigation databases. The VFR waypoint names are not intended to be pronounceable and they are not for use in ATC communications. On VFR charts, stand-alone VFR waypoints will be portrayed using the same four-point star symbol used for IFR waypoints. VFR waypoints collocated with visual check points on the chart will be identified by small magenta flag symbols. VFR waypoints collocated with visual check points will be pronounceable based on the name of the visual check point and may be used for ATC communications. Each VFR waypoint name will appear in parentheses adjacent to the geographic location on the chart. Latitude/longitude data for all established VFR waypoints may be found in the appropriate regional Airport/Facility Directory A/FD.

3. VFR waypoints must not be used to plan flights under IFR. VFR waypoints will not be recognized by the IFR system and will be rejected for IFR routing purposes.

4. When filing VFR flight plans, pilots may use the five letter identifier as a waypoint in the route of flight section if there is an intended course change at that point or if used to describe the planned route of flight. This VFR filing could be similar to how a VOR could be used in a route of flight. Pilots must use the VFR waypoints only when operating under VFR conditions.

5. Any VFR waypoints intended for use during a flight should be loaded into the receiver while on the ground and prior to departure. Once airborne, pilots should avoid programming routes or VFR waypoint chains into their receivers.

6. Pilots should be especially vigilant for other traffic while operating near VFR waypoints. The

same effort to see and avoid other aircraft near VFR waypoints will be necessary as in the case with VORs and NDBs in the past. In fact, the increased accuracy of navigation through the use of GPS will demand even greater vigilance, as off-course deviations among different pilots and receivers will be less. When operating near a VFR waypoint, use whatever ATC services are available, even if outside a class of airspace, where communications are required. Regardless of the class of airspace, monitor the available ATC frequency closely for information on other aircraft operating in the vicinity. It is also a good idea to turn on your landing lights when operating near a VFR waypoint to make your aircraft more conspicuous to other pilots, especially when visibility is reduced. See paragraph 7-5-2, VFR in Congested Areas, for more information.

d. General Requirements

1. Authorization to conduct any GPS operation under IFR requires that:

(a) GPS navigation equipment used must be approved in accordance with the requirements specified in Technical Standard Order (TSO) TSO-C129 as revised, TSO C196 as revised, TSO C145 as revised, or TSO C146 as revised, and the installation must be done in accordance with Advisory Circular AC 20-138, Airworthiness Approval of Positioning and Navigation Systems. Equipment approved in accordance with TSO-C115a does not meet the requirements of TSO-C129. Visual flight rules (VFR) and hand-held GPS systems are not authorized for IFR navigation instrument approaches or as a principal instrument flight reference. During IFR operations, they may be considered only as an aid to situational awareness.

(b) Aircraft using GPS, TSO C129 as revised, or TSO C196 as revised, navigation equipment under IFR must be equipped with an approved and operational alternate means of navigation appropriate to the flight. Active monitoring of alternative navigation equipment is not required if the GPS receiver uses RAIM for integrity monitoring. Active monitoring of an alternate means of navigation is required when the RAIM capability of the GPS equipment is lost.

(c) Procedures must be established for use in the event that the loss of RAIM capability is predicted to occur. In situations where this is encountered, the

flight must rely on other approved equipment delay departure or cancel the flight

(d) The GPS operation must be conducted in accordance with the FAA-approved aircraft flight manual AFM or flight manual supplement. Flight crew members must be thoroughly familiar with the particular GPS equipment installed in the aircraft, the receiver operation manual, and the AFM or flight manual supplement. Unlike ILS and VOR, the basic operation, receiver presentation to the pilot, and some capabilities of the equipment can vary greatly. Due to these differences, operation of different brands or even models of the same brand of GPS receiver under IFR should not be attempted without thorough study of the operation of that particular receiver and installation. Most receivers have a built-in simulator mode which will allow the pilot to become familiar with operation prior to attempting operation in the aircraft. Using the equipment in flight under VFR conditions prior to attempting IFR operation will allow further familiarization.

(e) Aircraft navigating by IFR approved GPS are considered to be area navigation (RNAV) aircraft and have special equipment suffixes. File the appropriate equipment suffix in accordance with TBL 5-1-3 on the ATC flight plan. If GPS avionics become inoperative, the pilot should advise ATC and amend the equipment suffix.

(f) Prior to any GPS IFR operation, the pilot must review appropriate NOTAMs and aeronautical information. See GPS NOTAMs/Aeronautical Information.

(g) Air carrier and commercial operators must meet the appropriate provisions of their approved operations specifications.

(1) During domestic operations for commerce or for hire, operators must have a second navigation system capable of reversion or contingency operations.

(2) Operators must have two independent navigation systems appropriate to the route to be flown or one system that is suitable and a second independent backup capability that allows the operator to proceed safely and land at a different airport, and the aircraft must have sufficient fuel. reference 14 CFR 121.349, 125.203, 129.17, and 135.165. These rules ensure the safety of the operation by preventing a single point of failure.

NOTE—

An aircraft approved for multi-sensor navigation and equipped with a single FMS must maintain an ability to navigate or proceed safely in the event that any one component of the navigation system fails, including the flight management system (FMS). Retaining a FMS-independent VOR capability would satisfy this requirement.

(3) The requirements for a second system apply to the entire set of equipment needed to achieve the navigation capability, not just the individual components of the system, such as the radio navigation receiver. For example, to use two RNAV systems, e.g., GPS and DME/DME/IRU, to comply with the requirements, the aircraft must be equipped with two independent radio navigation receivers and two independent navigation computers, e.g., flight management systems (FMS). Alternatively, to comply with the requirements using a single RNAV system with an installed and operable VOR capability, the VOR capability must be independent of the FMS.

(4) To satisfy the requirement for two independent navigation systems, if the primary navigation system is GPS based, the second system must be independent of GPS, for example, VOR or DME/DME/IRU. This allows continued navigation in case of failure of the GPS or WAAS services. Recognizing that GPS interference and test events resulting in the loss of GPS services have become more common, the FAA requires operators conducting IFR operations under 14 CFR 121.349, 125.203, 129.17, and 135.65 to retain a non-GPS navigation capability consisting of either DME/DME/IRU or VOR for en route and terminal operations, and VOR and ILS for final approach. Since this system is to be used as a reversionary capability, single equipment is sufficient.

e. Use of GPS for IFR Oceanic, Domestic En Route, Terminal Area, and Approach Operations

1. GPS IFR operations in oceanic areas can be conducted as soon as the proper avionics systems are installed, provided all general requirements are met. A GPS installation with TSO-C129, as revised, authorization in class A1, A2, B1, B2, C1, or C2, or TSO C196, as revised, may be used to replace one of the other approved means of long-range navigation, such as dual INS. See TBL 1-1-5 and TBL 1-1-6. A single TSO C129 GPS installation meeting the

certification requirements in AC 20-138C Appendix 1 may be used on oceanic routes as the only means of long range navigation TSO C196 as revised equipment is inherently capable of supporting oceanic operation if the operator obtains a Fault Detection and Exclusion (FDE) Prediction Program as outlined in AC 20-138C Appendix 1. A single GPS/WAAS receiver TSO C145 as revised or TSO C146 as revised is inherently capable of supporting oceanic operation if the operator obtains a FDE Prediction Program as outlined in AC 20-138C Appendix 1.

2. GPS TSO C129 as revised or TSO C196 as revised domestic en route and terminal IFR operations can be conducted as soon as proper avionics systems are installed provided all general requirements are met. For required backup navigation the avionics necessary to receive all of the ground-based facilities appropriate for the flight to the destination airport and any required alternate airport must be installed and operational. Ground-based facilities necessary for en route and terminal operations must also be in service.

(a) A single GPS/WAAS receiver TSO C145 as revised or TSO C146 as revised may also be used for these domestic en route and terminal IFR operations. Though not required operators may consider retaining backup navigation equipment in their aircraft to guard against potential outages or interference.

(b) In Alaska GPS en route IFR RNAV operations may be conducted outside the operational service volume of ground based navigation aids when a GPS/WAAS TSO-C145 as revised or TSO-C146 as revised system is installed and operating. Ground based navigation equipment is not required to be installed and operating. Though not required operators may consider retaining backup navigation equipment in their aircraft to guard against potential outages or interference.

(1) Aircraft may operate on GNSS Q routes with GPS TSO C129 as revised or TSO C196 as revised or GPS/WAAS equipment while the aircraft remains in Air Traffic Control radar surveillance.

(2) Aircraft may operate on GNSS T routes with GPS/WAAS TSO C145 as revised or TSO C146 as revised equipment.

3. Authorization to fly approaches under IFR using GPS or GPS/WAAS avionics systems requires that a pilot use avionics with

(a) GPS TSO-C129 as revised authorization in class A1, B1, B3, C1, or C3.

(b) GPS TSO C196 as revised authorization or

(c) GPS/WAAS TSO C145 as revised or TSO C146 as revised authorization.

TBL 1-1-5
GPS IFR Equipment Classes/Categories

TSO-C129						
Equipment Class	RAIM	Int. Nav. Sys. to Prov. RAIM Equiv.	Oceanic	En Route	Terminal	Nonprecision Approach Capable
Class A – GPS sensor and navigation capability						
A1	yes		yes	yes	yes	yes
A2	yes		yes	yes	yes	no
Class B – GPS sensor data to an integrated navigation system i.e. FMS multi-sensor navigation system etc						
B1	yes		yes	yes	yes	yes
B2	yes		yes	yes	yes	no
B3		yes	yes	yes	yes	yes
B4		yes	yes	yes	yes	no
Class C – GPS sensor data to an integrated navigation system as in Class B which provides enhanced guidance to an autopilot or flight director to reduce flight tech errors Limited to 14 CFR Part 121 or equivalent criteria						
C1	yes		yes	yes	yes	yes
C2	yes		yes	yes	yes	no
C3		yes	yes	yes	yes	yes
C4		yes	yes	yes	yes	no

TBL 1-1-6
GPS Approval Required/Authorized Use

Equipment Type¹	Installation Approval Required	Operational Approval Required	IFR En Route²	IFR Terminal²	IFR Approach³	Oceanic Remote	In Lieu of ADF and/or DME³
Hand held ⁴	5						
VFR Panel Mount ⁴							
IFR En Route and Terminal							
IFR Oceanic/Remote							
IFR En Route Terminal and Approach							

NOTE–

¹To determine equipment approvals and limitations, refer to the AFM, AFM supplements, or pilot guides.

²Requires verification of data for correctness if database is expired.

³Requires current database or verification that the procedure has not been amended since the expiration of the database.

⁴VFR and hand-held GPS systems are not authorized for IFR navigation, instrument approaches, or as a primary instrument flight reference. During IFR operations they may be considered only an aid to situational awareness.

⁵Hand-held receivers require no approval. However, any aircraft modification to support the hand-held receiver; i.e., installation of an external antenna or a permanent mounting bracket, does require approval.

4. As the production of stand alone GPS approaches has progressed many of the original overlay approaches have been replaced with stand alone procedures specifically designed for use

by GPS systems. A GPS approach overlay allows pilots to use GPS avionics under IFR for flying designated nonprecision instrument approach procedures except LOC LDA and simplified

directional facility SDF procedures These procedures are identified by the name of the procedure and or GPS for example VOR/DME or GPS RW 15 Other previous types of overlays have either been converted to this format or replaced with stand alone procedures Only approaches contained in the current onboard navigation database are authorized The navigation database may contain information about non overlay approach procedures that is intended to be used to enhance position orientation generally by providing a map while flying these approaches using conventional NAVAIDs This approach information should not be confused with a GPS overlay approach See the receiver operating manual AFM or AFM Supplement for details on how to identify these approaches in the navigation database

f. General Database Requirements

1. The onboard navigation data must be current and appropriate for the region of intended operation and should include the navigation aids waypoints and relevant coded terminal airspace procedures for the departure arrival and alternate airfields

(a) Further database guidance for terminal and en route requirements may be found in AC 90 100 U.S. Terminal and En Route Area Navigation RNAV Operations

(b) Further database guidance on Required Navigation Performance (RNP) instrument approach operations RNP terminal and RNP en route requirements may be found in AC 90 105 Approval Guidance for RNP Operations and Barometric Vertical Navigation in the U.S. National Airspace System

(c) All approach procedures to be flown must be retrievable from the current airborne navigation database supplied by the equipment manufacturer or other FAA approved source The system must be able to retrieve the procedure by name from the aircraft navigation database not just as a manually entered series of waypoints Manual entry of waypoints using latitude/longitude or place/bearing is not permitted for approach procedures

(d) Prior to using a procedure or waypoint retrieved from the airborne navigation database the pilot should verify the validity of the database This verification should include the following preflight and inflight steps

(1) Preflight:

[a] Determine the date of database issuance and verify that the date/time of proposed use is before the expiration date/time

[b] Verify that the database provider has not published a notice limiting the use of the specific waypoint or procedure

(2) Inflight:

[a] Determine that the waypoints and transition names coincide with names found on the procedure chart Do not use waypoints which do not exactly match the spelling shown on published procedure charts

[b] Determine that the waypoints are generally logical in location in the correct order and that their orientation to each other is as found on the procedure chart both laterally and vertically

NOTE–

There is no specific requirement to check each waypoint latitude and longitude, type of waypoint and/or altitude constraint, only the general relationship of waypoints in the procedure, or the logic of an individual waypoint's location.

[c] If the cursory check of procedure logic or individual waypoint location specified in b above indicates a potential error do not use the retrieved procedure or waypoint until a verification of latitude and longitude waypoint type and altitude constraints indicate full conformity with the published data

g. GPS Approach Procedures

As the production of stand-alone GPS approaches has progressed many of the original overlay approaches have been replaced with stand-alone procedures specifically designed for use by GPS systems The title of the remaining GPS overlay procedures has been revised on the approach chart to or GPS e.g. VOR or GPS RW 24 Therefore all the approaches that can be used by GPS now contain GPS in the title e.g. VOR or GPS RW 24 GPS RW 24 or RNAV GPS RW 24 During these GPS approaches underlying ground-based NAVAIDs are not required to be operational and associated aircraft avionics need not be installed operational turned on or monitored monitoring of the underlying approach is suggested when equipment is available and functional Existing overlay approaches may be requested using the GPS title

such as GPS RW 24 for the VOR or GPS RW 24

1. For flight planning purposes TSO C129 and TSO C196 equipped users GPS users whose navigation systems have fault detection and exclusion FDE capability who perform a preflight RAIM prediction at the airport where the RNAV GPS approach will be flown and have proper knowledge and any required training and/or approval to conduct a GPS based IAP may file based on a GPS based IAP at either the destination or the alternate airport but not at both locations At the alternate airport pilots may plan for applicable alternate airport weather minimums using

(a) Lateral navigation LNAV or circling minimum descent altitude MDA

(b) LNAV/vertical navigation LNAV/VNAV DA if equipped with and using approved barometric vertical navigation baro VNAV equipment

(c) RNP 0.3 DA on an RNAV RNP IAP if they are specifically authorized users using approved baro VNAV equipment and the pilot has verified required navigation performance RNP availability through an approved prediction program

2. If the above conditions cannot be met any required alternate airport must have an approved instrument approach procedure other than GPS that is anticipated to be operational and available at the estimated time of arrival and which the aircraft is equipped to fly

h. GPS NOTAMs/Aeronautical Information

1. GPS satellite outages are issued as GPS NOTAMs both domestically and internationally However the effect of an outage on the intended operation cannot be determined unless the pilot has a RAIM availability prediction program which allows excluding a satellite which is predicted to be out of service based on the NOTAM information

2. The term UNRELIABLE is used in conjunction with GPS NOTAMs The term UNRELIABLE is an advisory to pilots indicating the expected level of service may not be available UNRELIABLE does not mean there is a problem with GPS signal integrity If GPS service is available pilots may continue operations If the LNAV or LNAV/VNAV service is available pilots may use the displayed level of

service to fly the approach GPS operation may be NOTAMed UNRELIABLE due to testing or anomalies Pilots are encouraged to report GPS anomalies including degraded operation and/or loss of service as soon as possible reference paragraph 1-1-14 Air Traffic Control will advise pilots requesting a GPS or RNAV GPS approach of GPS UNRELIABLE for

(a) NOTAMs not contained in the ATIS broadcast

(b) Pilot reports of GPS anomalies received within the preceding 15 minutes

3. Civilian pilots may obtain GPS RAIM availability information for nonprecision approach procedures by specifically requesting GPS aeronautical information from a Flight Service Station during preflight briefings GPS RAIM aeronautical information can be obtained for a period of 3 hours for example if you are scheduled to arrive at 1215 hours then the GPS RAIM information is available from 1100 to 1400 hours or a 24 hour time frame at a particular airport FAA briefers will provide RAIM information for a period of 1 hour before to 1 hour after the ETA hour unless a specific time frame is requested by the pilot If flying a published GPS departure a RAIM prediction should also be requested for the departure airport

4. The military provides airfield specific GPS RAIM NOTAMs for nonprecision approach procedures at military airfields The RAIM outages are issued as M-series NOTAMs and may be obtained for up to 24 hours from the time of request

5. Receiver manufacturers and/or database suppliers may supply NOTAM type information concerning database errors Pilots should check these sources when available to ensure that they have the most current information concerning their electronic database

i. Receiver Autonomous Integrity Monitoring (RAIM)

1. RAIM outages may occur due to an insufficient number of satellites or due to unsuitable satellite geometry which causes the error in the position solution to become too large Loss of satellite reception and RAIM warnings may occur due to aircraft dynamics changes in pitch or bank angle Antenna location on the aircraft satellite position relative to the horizon and aircraft attitude may affect

reception of one or more satellites. Since the relative positions of the satellites are constantly changing, prior experience with the airport does not guarantee reception at all times, and RAIM availability should always be checked.

2. If RAIM is not available, another type of navigation and approach system must be used, another destination selected, or the trip delayed until RAIM is predicted to be available on arrival. On longer flights, pilots should consider rechecking the RAIM prediction for the destination during the flight. This may provide early indications that an unscheduled satellite outage has occurred since takeoff.

3. If a RAIM failure/status annunciation occurs prior to the final approach waypoint (FAWP), the approach should not be completed since GPS may no longer provide the required accuracy. The receiver performs a RAIM prediction by 2 NM prior to the FAWP to ensure that RAIM is available at the FAWP as a condition for entering the approach mode. **The pilot should ensure that the receiver has sequenced from “Armed” to “Approach” prior to the FAWP.** normally occurs 2 NM prior. Failure to sequence may be an indication of the detection of a satellite anomaly, failure to arm the receiver, if required, or other problems which preclude completing the approach.

4. If the receiver does not sequence into the approach mode or a RAIM failure/status annunciation occurs prior to the FAWP, the pilot should not descend to Minimum Descent Altitude (MDA) but should proceed to the missed approach point (MAP) via the FAWP, perform a missed approach, and contact ATC as soon as practical. Refer to the receiver operating manual for specific indications and instructions associated with loss of RAIM prior to the FAF.

5. If a RAIM failure occurs after the FAWP, the receiver is allowed to continue operating without an annunciation for up to 5 minutes to allow completion of the approach, see receiver operating manual. **If the RAIM flag/status annunciation appears after the FAWP, the missed approach should be executed immediately.**

j. Waypoints

1. GPS receivers navigate from one defined point to another retrieved from the aircraft's on-board

navigational database. These points are waypoints, 5-letter pronounceable names, existing VHF intersections, DME fixes, with 5-letter pronounceable names and 3-letter NAVAID IDs. Each waypoint is a geographical location defined by a latitude/longitude geographic coordinate. These 5-letter waypoints, VHF intersections, 5-letter pronounceable DME fixes, and 3-letter NAVAID IDs are published on various FAA aeronautical navigation products: IFR Enroute Charts, VFR Charts, Terminal Procedures Publications, etc.

2. A Computer Navigation Fix (CNF) is also a point defined by a latitude/longitude coordinate and is required to support area navigation (RNAV) system operations. The GPS receiver uses CNFs in conjunction with waypoints to navigate from point to point. However, CNFs are not recognized by Air Traffic Control (ATC). ATC does not maintain CNFs in their database and they do not use CNFs for any air traffic control purpose. CNFs may or may not be charted on FAA aeronautical navigation products, are listed in the chart legends, and are for advisory purposes only. Pilots are not to use CNFs for point-to-point navigation, proceed direct filing a flight plan, or in aircraft/ATC communications. CNFs that do appear on aeronautical charts allow pilots increased situational awareness by identifying points in the aircraft database, route of flight, with points on the aeronautical chart. CNFs are random five-letter identifiers, not pronounceable like waypoints, and placed in parenthesis. Eventually, all CNFs will begin with the letters CF, followed by three consonants, for example, CFWBG. This five-letter identifier will be found next to an X on enroute charts and possibly on an approach chart. On instrument approach procedures charts, in the terminal procedures publication, CNFs may represent unnamed DME fixes, beginning and ending points of DME arcs, and sensor ground-based signal, i.e., VOR, NDB, ILS, final approach fixes, on GPS overlay approaches. These CNFs provide the GPS, with points on the procedure that allow the overlay approach to mirror the ground-based sensor approach. These points should only be used by the GPS system for navigation and should not be used by pilots for any other purpose on the approach. The CNF concept has not been adopted or recognized by the International Civil Aviation Organization (ICAO).

3. GPS approaches use fly-over and fly-by waypoints to join route segments on an approach.

Fly-by waypoints connect the two segments by allowing the aircraft to turn prior to the current waypoint in order to roll out on course to the next waypoint. This is known as turn anticipation and is compensated for in the airspace and terrain clearances. The MAWP and the missed approach holding waypoint MAHWP are normally the only two waypoints on the approach that are not fly-by waypoints. Fly-over waypoints are used when the aircraft must overfly the waypoint prior to starting a turn to the new course. The symbol for a fly over waypoint is a circled waypoint. Some waypoints may have dual use for example as a fly by waypoint when used as an IF for a NoPT route and as a fly over waypoint when the same waypoint is also used as an IAF/IF hold in lieu of PT. When this occurs the less restrictive fly by symbology will be charted. Overlay approach charts and some early stand alone GPS approach charts may not reflect this convention.

4. Unnamed waypoints for each airport will be uniquely identified in the database. Although the identifier may be used at different airports for example RW36 will be the identifier at each airport with a runway 36 the actual point at each airport is defined by a specific latitude/longitude coordinate.

5. The runway threshold waypoint normally the MAWP may have a five-letter identifier for example SNEE or be coded as RW for example RW36 RW36L. MAWPs located at the runway threshold are being changed to the RW identifier while MAWPs not located at the threshold will have a five-letter identifier. This may cause the approach chart to differ from the aircraft database until all changes are complete. The runway threshold waypoint is also used as the center of the Minimum Safe Altitude MSA on most GPS approaches.

k. Position Orientation

As with most RNAV systems pilots should pay particular attention to position orientation while using GPS. Distance and track information are provided to the next active waypoint not to a fixed navigation aid. Receivers may sense when the pilot is not flying along an active route such as when being vectored or deviating for either due to the proximity to another waypoint in the route. This can be prevented by placing the receiver in the nonsequencing mode. When the receiver is in the nonsequencing mode bearing and distance are provided to the selected waypoint and the receiver

will not sequence to the next waypoint in the route until placed back in the auto sequence mode or the pilot selects a different waypoint. On overlay approaches the pilot may have to compute the along-track distance to stepdown fixes and other points due to the receiver showing along-track distance to the next waypoint rather than DME to the VOR or ILS ground station.

l. Impact of Magnetic Variation on RNAV Systems

1. Differences may exist between charted magnetic courses on ground based navigational aid NAVAID instrument flight procedures IFP area navigation RNAV procedures and RNAV systems on enroute charts approach charts and Standard Instrument Departure/Standard Terminal Arrival SID/STAR charts. These differences are due to the magnetic variance used to calculate the magnetic course. Every leg of an instrument procedure is first computed along a desired ground track with reference to true north. A magnetic variation correction is then applied to the true course in order to calculate a magnetic course for publication. The type of procedure will determine what magnetic variation value is added to the true course. A ground based NAVAID IFP applies the facility magnetic variation of record to the true course to get the charted magnetic course. Magnetic courses on RNAV procedures are calculated to different ways. SID/STAR procedures use the airport magnetic variation of record while IFR enroute charts use magnetic reference bearing. RNAV systems make a correction to true north by adding a magnetic variation calculated with an algorithm based on aircraft position or by adding the magnetic variation coded in their navigational database. This may result in the RNAV system and the procedure designer using a different magnetic variation which causes the magnetic course **displayed** by the RNAV system and the magnetic course **charted** on the IFP plate to be different. It is important to understand however that RNAV systems with the exception of VOR/DME RNAV equipment navigate by reference to true north and display magnetic course only for pilot reference. As such a **properly functioning** RNAV system containing a **current and accurate navigational database** should still fly the correct ground track for any loaded instrument procedure despite any differences in magnetic course that may be attributed to magnetic variation application. Should significant

differences between the approach chart and the RNAV system avionics application of the navigation database arise the published approach chart supplemented by NOTAMs holds precedence

2. The course into a waypoint may not always be 180 degrees different from the course leaving the previous waypoint due to the RNAV system avionics computation of geodesic paths distance between waypoints and differences in magnetic variation application Variations in distances may also occur since RNAV system distance-to-waypoint values are along-track distances ATD computed to the next waypoint and the DME values published on underlying procedures are slant-range distances measured to the station This difference increases with aircraft altitude and proximity to the NAVAID

m. Departures and Instrument Departure Procedures (DPs)

The GPS receiver must be set to terminal ± 1 NM CDI sensitivity and the navigation routes contained in the database in order to fly published IFR charted departures and DPs Terminal RAIM should be automatically provided by the receiver Terminal RAIM for departure may not be available unless the waypoints are part of the active flight plan rather than proceeding direct to the first destination Certain segments of a DP may require some manual intervention by the pilot especially when radar vectored to a course or required to intercept a specific course to a waypoint The database may not contain all of the transitions or departures from all runways and some GPS receivers do not contain DPs in the database It is necessary that helicopter procedures be flown at 70 knots or less since helicopter departure procedures and missed approaches use a 20:1 obstacle clearance surface OCS which is double the fixed-wing OCS and turning areas are based on this speed as well

n. Flying GPS Approaches

1. Determining which area of the TAA the aircraft will enter when flying a T with a TAA must be accomplished using the bearing and distance to the IF IAF This is most critical when entering the TAA in the vicinity of the extended runway centerline and determining whether you will be entering the right or left base area Once inside the TAA all sectors and stepdowns are based on the bearing and distance to the IAF for that area which the aircraft should be

proceeding direct to at that time unless on vectors See FIG 5-4-3 and FIG 5-4-4

2. Pilots should fly the full approach from an Initial Approach Waypoint IAWP or feeder fix unless specifically cleared otherwise Randomly joining an approach at an intermediate fix does not assure terrain clearance

3. When an approach has been loaded in the flight plan GPS receivers will give an arm annunciation 30 NM straight line distance from the airport/heliport reference point Pilots should arm the approach mode at this time if it has not already been armed some receivers arm automatically Without arming the receiver will not change from en route CDI and RAIM sensitivity of ± 5 NM either side of centerline to ± 1 NM terminal sensitivity Where the IAWP is inside this 30 mile point a CDI sensitivity change will occur once the approach mode is armed and the aircraft is inside 30 NM Where the IAWP is beyond 30 NM from the airport/heliport reference point CDI sensitivity will not change until the aircraft is within 30 miles of the airport/heliport reference point even if the approach is armed earlier Feeder route obstacle clearance is predicated on the receiver being in terminal ± 1 NM CDI sensitivity and RAIM within 30 NM of the airport/heliport reference point therefore the receiver should always be armed if required not later than the 30 NM annunciation

4. The pilot must be aware of what bank angle/turn rate the particular receiver uses to compute turn anticipation and whether wind and airspeed are included in the receiver's calculations This information should be in the receiver operating manual Over or under banking the turn onto the final approach course may significantly delay getting on course and may result in high descent rates to achieve the next segment altitude

5. When within 2 NM of the FAWP with the approach mode armed the approach mode will switch to active which results in RAIM changing to approach sensitivity and a change in CDI sensitivity Beginning 2 NM prior to the FAWP the full scale CDI sensitivity will smoothly change from ± 1 NM to ± 0.3 NM at the FAWP As sensitivity changes from ± 1 NM to ± 0.3 NM approaching the FAWP with the CDI not centered the corresponding increase in CDI displacement may give the impression that the aircraft is moving further away from the intended

course even though it is on an acceptable intercept heading. Referencing the digital track displacement information (cross track error) if it is available in the approach mode may help the pilot remain position oriented in this situation. Being established on the final approach course prior to the beginning of the sensitivity change at 2 NM will help prevent problems in interpreting the CDI display during ramp down. Therefore, re-esting or accepting vectors which will cause the aircraft to intercept the final approach course within 2 NM of the FAWP is not recommended.

6. When receiving vectors to final, most receiver operating manuals suggest placing the receiver in the nonseuencing mode on the FAWP and manually setting the course. This provides an extended final approach course in cases where the aircraft is vectored onto the final approach course outside of any existing segment which is aligned with the runway. Assigned altitudes must be maintained until established on a published segment of the approach. Required altitudes at waypoints outside the FAWP or stepdown fixes must be considered. Calculating the distance to the FAWP may be required in order to descend at the proper location.

7. Overriding an automatically selected sensitivity during an approach will cancel the approach mode annunciation. If the approach mode is not armed by 2 NM prior to the FAWP, the approach mode will not become active at 2 NM prior to the FAWP and the equipment will flag. In these conditions, the RAIM and CDI sensitivity will not ramp down and the pilot should not descend to MDA but fly to the MAWP and execute a missed approach. The approach active annunciator and/or the receiver should be checked to ensure the approach mode is active prior to the FAWP.

8. Do not attempt to fly an approach unless the procedure in the on-board database is current and identified as GPS on the approach chart. The navigation database may contain information about nonoverlay approach procedures that is intended to be used to enhance position orientation, generally by providing a map while flying these approaches using conventional NAVAIDs. This approach information should not be confused with a GPS overlay approach (see the receiver operating manual AFM or AFM Supplement for details on how to identify these procedures in the navigation database). Flying point

to point on the approach does not assure compliance with the published approach procedure. The proper RAIM sensitivity will not be available and the CDI sensitivity will not automatically change to ± 0.3 NM. Manually setting CDI sensitivity does not automatically change the RAIM sensitivity on some receivers. Some existing nonprecision approach procedures cannot be coded for use with GPS and will not be available as overlays.

9. Pilots should pay particular attention to the exact operation of their GPS receivers for performing holding patterns and in the case of overlay approaches, operations such as procedure turns. These procedures may require manual intervention by the pilot to stop the sequencing of waypoints by the receiver and to resume automatic GPS navigation sequencing once the maneuver is complete. The same waypoint may appear in the route of flight more than once consecutively, e.g., IAWP FAWP MAHPW on a procedure turn. Care must be exercised to ensure that the receiver is sequenced to the appropriate waypoint for the segment of the procedure being flown, especially if one or more fly-overs are skipped, e.g., FAWP rather than IAWP if the procedure turn is not flown. The pilot may have to sequence past one or more fly-overs of the same waypoint in order to start GPS automatic sequencing at the proper place in the sequence of waypoints.

10. Incorrect inputs into the GPS receiver are especially critical during approaches. In some cases, an incorrect entry can cause the receiver to leave the approach mode.

11. A fix on an overlay approach identified by a DME fix will not be in the waypoint sequence on the GPS receiver unless there is a published name assigned to it. When a name is assigned, the along track to the waypoint may be zero rather than the DME stated on the approach chart. The pilot should be alert for this on any overlay procedure where the original approach used DME.

12. If a visual descent point (VDP) is published, it will not be included in the sequence of waypoints. Pilots are expected to use normal piloting techniques for beginning the visual descent, such as ATD.

13. Unnamed stepdown fixes in the final approach segment will not be coded in the waypoint sequence of the aircraft's navigation database and must be identified using ATD. Stepdown fixes in the final approach segment of RNAV GPS approaches

are being named in addition to being identified by ATD. However, since most GPS avionics do not accommodate waypoints between the FAF and MAP, even when the waypoint is named, the waypoints for these stepdown fixes may not appear in the sequence of waypoints in the navigation database. Pilots must continue to identify these stepdown fixes using ATD.

o. Missed Approach

1. A GPS missed approach requires pilot action to sequence the receiver past the MAWP to the missed approach portion of the procedure. The pilot must be thoroughly familiar with the activation procedure for the particular GPS receiver installed in the aircraft and must **initiate appropriate action after the MAWP**. Activating the missed approach prior to the MAWP will cause CDI sensitivity to immediately change to terminal $\pm 1\text{NM}$ sensitivity and the receiver will continue to navigate to the MAWP. The receiver will not sequence past the MAWP. Turns should not begin prior to the MAWP. If the missed approach is not activated, the GPS receiver will display an extension of the inbound final approach course and the ATD will increase from the MAWP until it is manually sequenced after crossing the MAWP.

2. Missed approach routings in which the first track is via a course rather than direct to the next waypoint **require additional action by the pilot** to set the course. Being familiar with all of the inputs required is especially critical during this phase of flight.

p. GPS Familiarization

Pilots should practice GPS approaches under visual meteorological conditions (VMC) until thoroughly proficient with all aspects of their equipment, receiver, and installation prior to attempting flight by IFR in instrument meteorological conditions (IMC). Some of the areas in which the pilot should practice are:

- 1. Utilizing the receiver autonomous integrity monitoring (RAIM) prediction function**
- 2. Inserting a DP into the flight plan**, including setting terminal CDI sensitivity if required and the conditions under which terminal RAIM is available for departure (some receivers are not DP or STAR capable)
- 3. Programming the destination airport**

4. Programming and flying the overlay approach, especially procedure turns and arcs

5. Changing to another approach after selecting an approach

6. Programming and flying direct missed approaches

7. Programming and flying routed missed approaches

8. Entering flying and exiting holding patterns, particularly on overlay approaches with a second waypoint in the holding pattern

9. Programming and flying a route from a holding pattern

10. Programming and flying an approach with radar vectors to the intermediate segment

11. Indication of the actions required for RAIM failure both before and after the FAWP and

12. Programming a radial and distance from a VOR, often used in departure instructions

1-1-19. Wide Area Augmentation System (WAAS)

a. General

1. The FAA developed the Wide Area Augmentation System (WAAS) to improve the accuracy, integrity, and availability of GPS signals. WAAS will allow GPS to be used as the aviation navigation system from takeoff through Category I precision approach when it is complete. WAAS is a critical component of the FAA's strategic objective for a seamless satellite navigation system for civil aviation, improving capacity and safety.

2. The International Civil Aviation Organization (ICAO) has defined Standards and Recommended Practices (SARPs) for satellite-based augmentation systems (SBAS) such as WAAS. Japan and Europe are building similar systems that are planned to be interoperable with WAAS. EGNOS, the European Geostationary Navigation Overlay System, and MSAS, the Japan Multifunctional Transport Satellite (MTSAT) Satellite-based Augmentation System. The merging of these systems will create a worldwide seamless navigation capability similar to GPS but with greater accuracy, availability, and integrity.

3. Unlike traditional ground-based navigation aids, WAAS will cover a more extensive service area.

Precisely surveyed wide-area ground reference stations (WRS) are linked to form the U.S. WAAS network. Signals from the GPS satellites are monitored by these WRSs to determine satellite clock and ephemeris corrections and to model the propagation effects of the ionosphere. Each station in the network relays the data to a wide-area master station (WMS) where the correction information is computed. A correction message is prepared and uplinked to a geostationary satellite (GEO) via a ground uplink station (GUS). The message is then broadcast on the same frequency as GPS L1 (1575.42 MHz) to WAAS receivers within the broadcast coverage area of the WAAS GEO.

4. In addition to providing the correction signal, the WAAS GEO provides an additional pseudorange measurement to the aircraft receiver, improving the availability of GPS by providing, in effect, an additional GPS satellite in view. The integrity of GPS is improved through real-time monitoring, and the accuracy is improved by providing differential corrections to reduce errors. The performance improvement is sufficient to enable approach procedures with GPS/WAAS glide paths, vertical guidance.

5. The FAA has completed installation of 25 WRSs, 2 WMSs, 4 GUSs, and the required terrestrial communications to support the WAAS network. Prior to the commissioning of the WAAS for public use, the FAA has been conducting a series of test and validation activities. Enhancements to the initial phase of WAAS will include additional master and reference stations, communication satellites, and transmission frequencies as needed.

6. GNSS navigation, including GPS and WAAS, is referenced to the WGS-84 coordinate system. It should only be used where the Aeronautical Information Publications, including electronic data and aeronautical charts, conform to WGS-84 or equivalent. Other countries' civil aviation authorities may impose additional limitations on the use of their SBAS systems.

b. Instrument Approach Capabilities

1. A new class of approach procedures, which provide vertical guidance but which do not meet the ICAO Annex 10 requirements for precision approaches, has been developed to support satellite

navigation use for aviation applications worldwide. These new procedures, called Approach with Vertical Guidance (APV), are defined in ICAO Annex 6 and include approaches such as the LNAV/VNAV procedures presently being flown with barometric vertical navigation (Baro-VNAV). These approaches provide vertical guidance but do not meet the more stringent standards of a precision approach. Properly certified WAAS receivers will be able to fly these LNAV/VNAV procedures using a WAAS electronic glide path, which eliminates the errors that can be introduced by using Barometric altimetry.

2. A new type of APV approach procedure, in addition to LNAV/VNAV, is being implemented to take advantage of the high accuracy guidance and increased integrity provided by WAAS. This WAAS-generated angular guidance allows the use of the same TERPS approach criteria used for ILS approaches. The resulting approach procedure minima, titled LPV (localizer performance with vertical guidance), may have a decision altitude as low as 200 feet height above touchdown with visibility minimums as low as 1/2 mile when the terrain and airport infrastructure support the lowest minima. LPV minima is published on the RNAV GPS approach charts (see paragraph 5-4-5, Instrument Approach Procedure Charts).

3. A new nonprecision WAAS approach called Localizer Performance LP is being added in locations where the terrain or obstructions do not allow publication of vertically guided LPV procedures. This new approach takes advantage of the angular lateral guidance and smaller position errors provided by WAAS to provide a lateral-only procedure similar to an ILS Localizer LP procedure. LP may provide lower minima than a LNAV procedure due to the narrower obstacle clearance surface.

NOTE—

WAAS receivers certified prior to TSO-C145b and TSO-C146b, even if they have LPV capability, do not contain LP capability unless the receiver has been upgraded. Receivers capable of flying LP procedures must contain a statement in the Flight Manual Supplement or Approved Supplemental Flight Manual stating that the receiver has LP capability, as well as the capability for the other WAAS and GPS approach procedure types.

4. WAAS provides a level of service that supports all phases of flight, including RNAV GPS approaches to LNAV LP, LNAV/VNAV, and LPV lines of minima within system coverage. Some

locations close to the edge of the coverage may have a lower availability of vertical guidance

c. General Requirements

1. WAAS avionics must be certified in accordance with Technical Standard Order TSO TSO-C145a Airborne Navigation Sensors Using the GPS Augmented by the Wide Area Augmentation System WAAS or TSO-C146a Stand-Alone Airborne Navigation Equipment Using the Global Positioning System GPS Augmented by the Wide Area Augmentation System WAAS and installed in accordance with Advisory Circular AC 20-130A Airworthiness Approval of Navigation or Flight Management Systems Integrating Multiple Navigation Sensors or AC 20-138A Airworthiness Approval of Global Positioning System GPS Navigation Equipment for Use as a VFR and IFR Navigation System

2. GPS/WAAS operation must be conducted in accordance with the FAA-approved aircraft flight manual AFM and flight manual supplements Flight manual supplements will state the level of approach procedure that the receiver supports IFR approved WAAS receivers support all GPS only operations as long as lateral capability at the appropriate level is functional WAAS monitors both GPS and WAAS satellites and provides integrity

3. GPS/WAAS equipment is inherently capable of supporting oceanic and remote operations if the operator obtains a fault detection and exclusion FDE prediction program

4. Air carrier and commercial operators must meet the appropriate provisions of their approved operations specifications

5. Prior to GPS/WAAS IFR operation the pilot must review appropriate Notices to Airmen NOTAMS and aeronautical information This information is available on request from a Flight Service Station The FAA will provide NOTAMS to advise pilots of the status of the WAAS and level of service available

(a) The term UNRELIABLE is used in conjunction with GPS and WAAS NOTAMS The term UNRELIABLE is an advisory to pilots indicating the expected level of WAAS service LNAV/VNAV LPV may not be available e.g. **!BOS BOS WAAS LPV AND LNAV/VNAV**

MNM UNREL WEF 0305231700 – 0305231815
WAAS UNRELIABLE NOTAMS are predictive in nature and published for flight planning purposes Upon commencing an approach at locations NOTAMED WAAS UNRELIABLE if the WAAS avionics indicate LNAV/VNAV or LPV service is available then vertical guidance may be used to complete the approach using the displayed level of service Should an outage occur during the approach reversion to LNAV minima may be required

(1) Area-wide WAAS UNAVAILABLE NOTAMS indicate loss or malfunction of the WAAS system In flight Air Traffic Control will advise pilots requesting a GPS or RNAV GPS approach of WAAS UNAVAILABLE NOTAMS if not contained in the ATIS broadcast

(2) Site-specific WAAS UNRELIABLE NOTAMS indicate an expected level of service e.g. LNAV/VNAV or LPV may not be available Pilots must request site-specific WAAS NOTAMS during flight planning In flight Air Traffic Control will not advise pilots of WAAS UNRELIABLE NOTAMS

(3) When the approach chart is annotated with the **W** symbol site-specific WAAS UNRELIABLE NOTAMS or Air Traffic advisories are not provided for outages in WAAS LNAV/VNAV and LPV vertical service Vertical outages may occur daily at these locations due to being close to the edge of WAAS system coverage Use LNAV or circling minima for flight planning at these locations whether as a destination or alternate For flight operations at these locations when the WAAS avionics indicate that LNAV/VNAV or LPV service is available then the vertical guidance may be used to complete the approach using the displayed level of service Should an outage occur during the procedure reversion to LNAV minima may be required

NOTE–

*Area-wide WAAS UNAVAILABLE NOTAMS apply to all airports in the WAAS UNAVAILABLE area designated in the NOTAM, including approaches at airports where an approach chart is annotated with the **W** symbol.*

6. GPS/WAAS as developed to be used within SBAS GEO coverage WAAS or other interoperable system without the need for other radio navigation equipment appropriate to the route of flight to be flown Outside the SBAS coverage or in the event of a WAAS failure GPS/WAAS equipment reverts to

GPS-only operation and satisfies the requirements for basic GPS equipment

7. Unlike TSO-C129 avionics which are certified as a supplement to other means of navigation WAAS avionics are evaluated without reliance on other navigation systems. As such installation of WAAS avionics does not require the aircraft to have other equipment appropriate to the route to be flown.

(a) Pilots with WAAS receivers may flight plan to use any instrument approach procedure authorized for use with their WAAS avionics as the planned approach at a required alternate with the following restrictions. When using WAAS at an alternate airport flight planning must be based on flying the RNAV GPS LNAV or circling minima line or minima on a GPS approach procedure or conventional approach procedure with or GPS in the title. Code of Federal Regulation CFR Part 91 nonprecision weather requirements must be used for planning. Upon arrival at an alternate when the WAAS navigation system indicates that LNAV/VNAV or LPV service is available then vertical guidance may be used to complete the approach using the displayed level of service. The FAA has begun removing the **▲ NA** Alternate Minimums Not Authorized symbol from select RNAV GPS and GPS approach procedures so they may be used by approach approved WAAS receivers at alternate airports. Some approach procedures will still require the **▲ NA** for other reasons such as no weather reporting so it cannot be removed from all procedures. Since every procedure must be individually evaluated removal of the **▲ NA** from RNAV GPS and GPS procedures will take some time.

NOTE—

Properly trained and approved, as required, TSO-C145() and TSO-C146() equipped users (WAAS users) with and using approved baro-VNAV equipment may plan for LNAV/VNAV DA at an alternate airport. Specifically authorized WAAS users with and using approved baro-VNAV equipment may also plan for RNP 0.3 DA at the alternate airport as long as the pilot has verified RNP availability through an approved prediction program.

d. Flying Procedures with WAAS

1. WAAS receivers support all basic GPS approach functions and provide additional capabilities. One of the major improvements is the ability to generate glide path guidance independent of ground

equipment or barometric aiding. This eliminates several problems such as hot and cold temperature effects, incorrect altimeter setting or lack of a local altimeter source. It also allows approach procedures to be built without the cost of installing ground stations at each airport or runway. Some approach certified receivers may only generate a glide path with performance similar to Baro-VNAV and are only approved to fly the LNAV/VNAV line of minima on the RNAV GPS approach charts. Receivers with additional capability including faster update rates and smaller integrity limits are approved to fly the LPV line of minima. The lateral integrity changes dramatically from the 0.3 NM/556 meter limit for GPS LNAV and LNAV/VNAV approach mode to 40 meters for LPV. It also provides vertical integrity monitoring which bounds the vertical error to 50 meters for LNAV/VNAV and LPVs with minima of 250 or above and bounds the vertical error to 35 meters for LPVs with minima below 250.

2. When an approach procedure is selected and active the receiver will notify the pilot of the most accurate level of service supported by the combination of the WAAS signal, the receiver, and the selected approach using the naming conventions on the minima lines of the selected approach procedure. For example, if an approach is published with LPV minima and the receiver is only certified for LNAV/VNAV the equipment could indicate LNAV/VNAV available even though the WAAS signal could support LPV. If flying an existing LNAV/VNAV procedure with no LPV minima the receiver will notify the pilot LNAV/VNAV available even if the receiver is certified for LPV and the signal supports LPV. If the signal does not support vertical guidance on procedures with LPV and/or LNAV/VNAV minima the receiver annunciation will read LNAV available. On lateral only procedures with LP and LNAV minima the receiver will indicate LP available or LNAV available based on the level of lateral service available. Once the level of service notification has been given the receiver will operate in this mode for the duration of the approach procedure unless that level of service becomes unavailable. The receiver cannot change back to a more accurate level of service until the next time an approach is activated.

NOTE—

Receivers do not “fail down” to lower levels of service once the approach has been activated. If only the

vertical off flag appears, the pilot may elect to use the LNAV minima if the rules under which the flight is operating allow changing the type of approach being flown after commencing the procedure. If the lateral integrity limit is exceeded on an LP approach, a missed approach will be necessary since there is no way to reset the lateral alarm limit while the approach is active.

3. Another additional feature of WAAS receivers is the ability to exclude a bad GPS signal and continue operating normally. This is normally accomplished by the WAAS correction information. Outside WAAS coverage or when WAAS is not available, it is accomplished through a receiver algorithm called FDE. In most cases this operation will be invisible to the pilot since the receiver will continue to operate with other available satellites after excluding the bad signal. This capability increases the reliability of navigation.

4. Both lateral and vertical scaling for the LNAV/VNAV and LPV approach procedures are different than the linear scaling of basic GPS. When the complete published procedure is flown ± 1 NM linear scaling is provided until ± 2 NM prior to the FAF. Here the sensitivity increases to be similar to the angular scaling of an ILS. There are two differences in the WAAS scaling and ILS. First, on long final approach segments the initial scaling will be ± 0.3 NM to achieve equivalent performance to GPS and better than ILS, which is less sensitive far from the runway. Second, close to the runway threshold the scaling changes to linear instead of continuing to become more sensitive. The width of the final approach course is tailored so that the total width is usually 700 feet at the runway threshold. Since the origin point of the lateral splay for the angular portion of the final is not fixed due to antenna placement like localizer, the splay angle can remain fixed, making a consistent width of final for aircraft being vectored onto the final approach course on different length runways. When the complete published procedure is not flown and instead the aircraft needs to capture the extended final approach course similar to ILS, the vector to final (VTF) mode is used. Under VTF the scaling is linear at ± 1 NM until the point where the ILS angular splay reaches a width of ± 1 NM regardless of the distance from the FAWP.

5. The WAAS scaling is also different than GPS TSO-C129 in the initial portion of the missed approach. Two differences occur here. First, the

scaling abruptly changes from the approach scaling to the missed approach scaling at approximately the departure end of the runway or when the pilot requests missed approach guidance rather than ramping as GPS does. Second, when the first leg of the missed approach is a Track to Fix (TF) leg aligned within 3 degrees of the inbound course, the receiver will change to 0.3 NM linear sensitivity until the turn initiation point for the first waypoint in the missed approach procedure. At which time it will abruptly change to terminal ± 1 NM sensitivity. This allows the elimination of close in obstacles in the early part of the missed approach that may cause the DA to be raised.

6. A new method has been added for selecting the final approach segment of an instrument approach. Along with the current method used by most receivers using menus, here the pilot selects the airport, the runway, the specific approach procedure, and finally the IAF. There is also a channel number selection method. The pilot enters a unique 5-digit number provided on the approach chart, and the receiver recalls the matching final approach segment from the aircraft database. A list of information including the available IAFs is displayed, and the pilot selects the appropriate IAF. The pilot should confirm that the correct final approach segment was loaded by cross checking the Approach ID, which is also provided on the approach chart.

7. The Along-Track Distance (ATD) during the final approach segment of an LNAV procedure with a minimum descent altitude will be to the MAWP. On LNAV/VNAV and LPV approaches to a decision altitude, there is no missed approach waypoint, so the along-track distance is displayed to a point normally located at the runway threshold. In most cases the MAWP for the LNAV approach is located on the runway threshold at the centerline, so these distances will be the same. This distance will always vary slightly from any ILS DME that may be present, since the ILS DME is located further down the runway. Initiation of the missed approach on the LNAV/VNAV and LPV approaches is still based on reaching the decision altitude without any of the items listed in 14 CFR Section 91.175 being visible, and must not be delayed until the ATD reaches zero. The WAAS receiver, unlike a GPS receiver, will automatically sequence past the MAWP if the missed approach procedure has been designed for RNAV. The pilot

may also select missed approach prior to the MAWP. However, navigation will continue to the MAWP prior to any point sequencing taking place.

1-1-20. Ground Based Augmentation System (GBAS) Landing System (GLS)

a. General

1. The GLS provides precision navigation guidance for exact alignment and descent of aircraft on approach to a runway. It provides differential augmentation to the Global Navigation Satellite System (GNSS).

NOTE—

GBAS is the ICAO term for Local Area Augmentation System (LAAS).

2. LAAS was developed as an ILS look-alike system from the pilot perspective. LAAS is based on GPS signals augmented by ground equipment and has been developed to provide GLS precision approaches similar to ILS at airfields.

3. GLS provides guidance similar to ILS approaches for the final approach segment. Portions of the GLS approach prior to and after the final approach segment will be based on Area Navigation (RNAV) or Required Navigation Performance (RNP).

4. The equipment consists of a GBAS Ground Facility (GGF) four reference stations, a VHF Data Broadcast (VDB) uplink antenna, and an aircraft GBAS receiver.

b. Procedure

1. Pilots will select the five digit GBAS channel number of the associated approach within the Flight Management System (FMS) menu or manually select the five digits system dependent. Selection of the GBAS channel number also tunes the VDB.

2. Following procedure selection, confirmation that the correct LAAS procedure is loaded can be accomplished by cross checking the charted Reference Path Indicator (RPI) or approach ID with the cockpit displayed RPI or audio identification of the RPI with Morse Code for some systems.

3. The pilot will fly the GLS approach using the same techniques as an ILS once selected and identified.

1-1-21. Precision Approach Systems other than ILS, GLS, and MLS

a. General

Approval and use of precision approach systems other than ILS, GLS, and MLS require the issuance of special instrument approach procedures.

b. Special Instrument Approach Procedure

1. Special instrument approach procedures must be issued to the aircraft operator if pilot training, aircraft equipment, and/or aircraft performance is different than published procedures. Special instrument approach procedures are not distributed for general public use. These procedures are issued to an aircraft operator when the conditions for operations approval are satisfied.

2. General aviation operators requesting approval for special procedures should contact the local Flight Standards District Office to obtain a letter of authorization. Air carrier operators requesting approval for use of special procedures should contact their Certificate Holding District Office for authorization through their Operations Specification.

c. Transponder Landing System (TLS)

1. The TLS is designed to provide approach guidance utilizing existing airborne ILS localizer, glide slope, and transponder equipment.

2. Ground equipment consists of a transponder interrogator, sensor arrays to detect lateral and vertical position, and ILS frequency transmitters. The TLS detects the aircraft's position by interrogating its transponder. It then broadcasts ILS frequency signals to guide the aircraft along the desired approach path.

3. TLS instrument approach procedures are designated Special Instrument Approach Procedures. Special aircraft training is required. TLS ground equipment provides approach guidance for only one aircraft at a time. Even though the TLS signal is received using the ILS receiver, no fixed course or glidepath is generated. The concept of operation is very similar to an air traffic controller providing radar vectors and, just as with radar vectors, the guidance is valid only for the intended aircraft. The TLS ground equipment tracks one aircraft based on its transponder code and provides correction signals to course and glidepath based on the position of the tracked aircraft. Flying the TLS corrections computed for another aircraft will not provide guidance.

relative to the approach therefore aircrafts must not use the TLS signal for navigation unless they have received approach clearance and completed the required coordination with the TLS ground equipment operator. Navigation fixes based on conventional NAVAIDs or GPS are provided in the special instrument approach procedure to allow aircrafts to verify the TLS guidance.

d. Special Category I Differential GPS (SCAT-I DGPS)

1. The SCAT-I DGPS is designed to provide approach guidance by broadcasting differential correction to GPS.

2. SCAT-I DGPS procedures require aircraft equipment and pilot training.

3. Ground equipment consists of GPS receivers and a VHF digital radio transmitter. The SCAT-I DGPS detects the position of GPS satellites relative to GPS receiver equipment and broadcasts differential corrections over the VHF digital radio.

4. Category I Ground Based Augmentation System (GBAS) will displace SCAT-I DGPS as the public use service.

REFERENCE—

AIM, Para 5-4-7, *Instrument Approach Procedures*.

Section 2. Area Navigation (RNAV) and Required Navigation Performance (RNP)

1-2-1. Area Navigation (RNAV)

a. General. RNAV is a method of navigation that permits aircraft operation on any desired flight path within the coverage of ground or space based navigation aids or within the limits of the capability of self-contained aids or a combination of these. In the future there will be an increased dependence on the use of RNAV in lieu of routes defined by ground-based navigation aids.

RNAV routes and terminal procedures including departure procedures (DPs) and standard terminal arrivals (STARs) are designed with RNAV systems in mind. There are several potential advantages of RNAV routes and procedures:

1. Time and fuel savings
2. Reduced dependence on radar vectoring altitude and speed assignments allowing a reduction in required ATC radio transmissions and
3. More efficient use of airspace

In addition to information found in this manual guidance for domestic RNAV DPs, STARs, and routes may also be found in Advisory Circular 90-100A, U.S. Terminal and En Route Area Navigation RNAV Operations.

b. RNAV Operations. RNAV procedures such as DPs and STARs demand strict pilot awareness and maintenance of the procedure centerline. Pilots should possess a working knowledge of their aircraft navigation system to ensure RNAV procedures are flown in an appropriate manner. In addition, pilots should have an understanding of the various waypoint and leg types used in RNAV procedures; these are discussed in more detail below.

1. Waypoints. A waypoint is a predetermined geographical position that is defined in terms of latitude/longitude coordinates. Waypoints may be a simple named point in space or associated with existing navaids, intersections, or fixes. A waypoint is most often used to indicate a change in direction, speed, or altitude along the desired path. RNAV procedures make use of both fly-over and fly-by waypoints.


(a) Fly-by waypoints. Fly-by waypoints are used when an aircraft should begin a turn to the next course prior to reaching the waypoint separating the two route segments. This is known as turn anticipation.

(b) Fly-over waypoints. Fly-over waypoints are used when the aircraft must fly over the point prior to starting a turn.

NOTE—

FIG 1-2-1 illustrates several differences between a fly-by and a fly-over waypoint.

FIG 1-2-1
Fly-by and Fly-over Waypoints

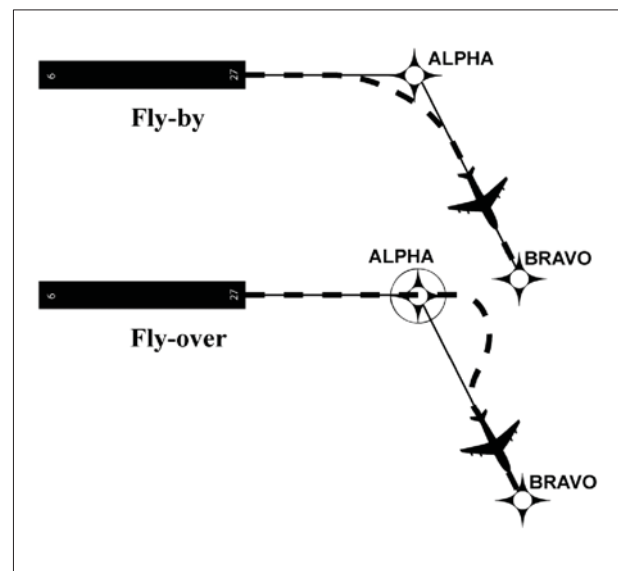

2. RNAV Leg Types. A leg type describes the desired path proceeding following or between waypoints on an RNAV procedure. Leg types are identified by a two-letter code that describes the path (e.g., heading, course, track, etc.) and the termination point (e.g., the path terminates at an altitude, distance, fix, etc.). Leg types used for procedure design are included in the aircraft navigation database but are not normally provided on the procedure chart. The narrative depiction of the RNAV chart describes how a procedure is flown. The path and terminator concept defines that every leg of a procedure has a termination point and some kind of path into that termination point. Some of the available leg types are described below.

(a) Track to Fix. A Track to Fix (TF) leg is intercepted and acquired as the flight track to the following waypoint. Track to a Fix legs are sometimes called point-to-point legs for this reason. **Narrative:** “on track 087 to CHEZZ WP.” See FIG 1-2-2

(b) Direct to Fix. A Direct to Fix (DF) leg is a path described by an aircraft's track from an initial area direct to the next waypoint. **Narrative:** “left turn direct BARGN WP.” See FIG 1-2-3

FIG 1-2-2
Track to Fix Leg Type



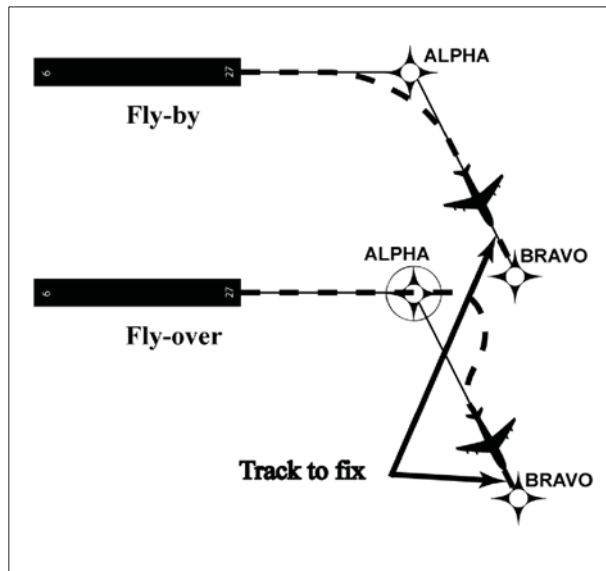


FIG 1-2-3
Direct to Fix Leg Type

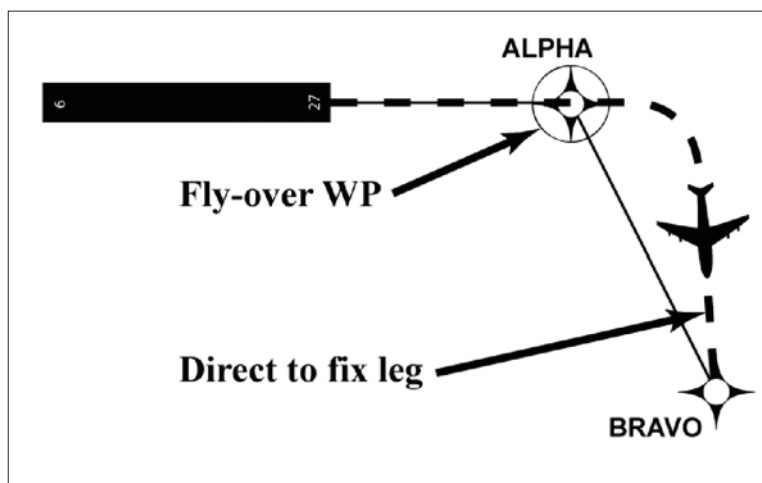


(c) **Course to Fix.** A Course to Fix CF leg is a path that terminates at a fix with a specified course at that fix **Narrative:** “on course 078 to PRIMY WP.” See FIG 1–2–4

FIG 1–2–4
Course to Fix Leg Type

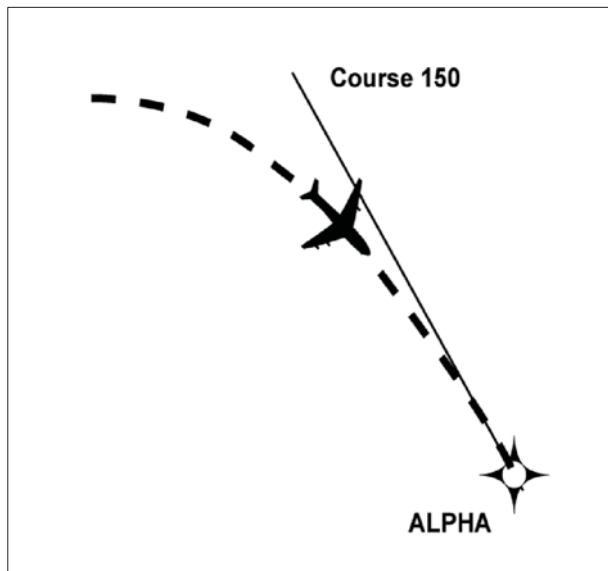

(d) **Radius to Fix.** A Radius to Fix RF leg is defined as a constant radius circular path around a defined turn center that terminates at a fix. See FIG 1–2–5

FIG 1–2–5
Radius to Fix Leg Type

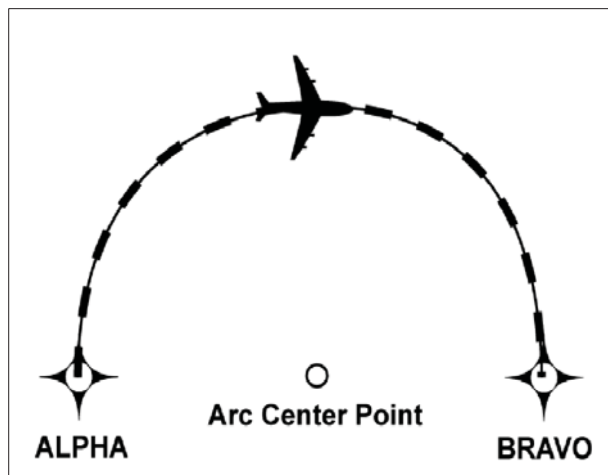

(e) **Heading.** A Heading leg may be defined as but not limited to a Heading to Altitude VA, Heading to DME range VD, and Heading to Manual Termination i.e. Vector VM **Narrative:** “climb heading 350 to 1500”, “heading 265, at 9 DME west

of PXR VORTAC, right turn heading 360”, “fly heading 090, expect radar vectors to DRYHT INT.”

3. Navigation Issues. Pilots should be aware of their navigation system inputs, alerts, and annunciations in order to make better-informed decisions. In addition, the availability and suitability of particular sensors/systems should be considered.

(a) **GPS.** Operators using TSO–C129 systems should ensure departure and arrival airports are entered to ensure proper RAIM availability and CDI sensitivity.

(b) **DME/DME.** Operators should be aware that DME/DME position updating is dependent on FMS logic and DME facility proximity, availability, geometry, and signal masking.

(c) **VOR/DME.** Unique VOR characteristics may result in less accurate values from VOR/DME position updating than from GPS or DME/DME position updating.

(d) **Inertial Navigation.** Inertial reference units and inertial navigation systems are often coupled with other types of navigation inputs, e.g., DME/DME or GPS, to improve overall navigation system performance.

NOTE–

Specific inertial position updating requirements may apply.

4. Flight Management System (FMS). An FMS is an integrated suite of sensors, receivers, and computers coupled with a navigation database. These systems generally provide performance and RNAV guidance to displays and automatic flight control systems.

Inputs can be accepted from multiple sources such as GPS, DME, VOR, LOC, and IRU. These inputs may be applied to a navigation solution one at a time or in combination. Some FMSs provide for the detection and isolation of faulty navigation information.

When appropriate navigation signals are available, FMSs will normally rely on GPS and/or DME/DME—that is, the use of distance information from two or more DME stations—for position updates. Other inputs may also be incorporated based on FMS system architecture and navigation source geometry.

NOTE–

DME/DME inputs coupled with one or more IRU(s) are often abbreviated as DME/DME/IRU or D/D/I.

1-2-2. Required Navigation Performance (RNP)

a. General. RNP is RNAV with on-board navigation monitoring and alerting. RNP is also a statement of navigation performance necessary for operation within a defined airspace. A critical component of RNP is the *ability of the aircraft navigation system to monitor its achieved navigation performance, and to identify for the pilot whether the operational requirement is, or is not being met during an operation.* This on-board performance monitoring and alerting capability therefore allows a lessened reliance on air traffic control intervention via radar monitoring, automatic dependent surveillance, ADS, multilateration, communications, and/or route separation to achieve the overall safety of the operation. RNP capability of the aircraft is a major component in determining the separation criteria to ensure that the overall containment of the operation is met.

The RNP capability of an aircraft will vary depending upon the aircraft equipment and the navigation infrastructure. For example, an aircraft may be equipped and certified for RNP 1.0 but may not be capable of RNP 1.0 operations due to limited navigational coverage.

b. RNP Operations.

1. RNP Levels. An RNP level or type is applicable to a selected airspace route or procedure. As defined in the Pilot/Controller Glossary, the RNP Level or Type is a value typically expressed as a distance in nautical miles from the intended centerline of a procedure route or path. RNP applications also account for potential errors at some multiple of RNP level, e.g., twice the RNP level.

(a) Standard RNP Levels. U.S. standard values supporting typical RNP airspace are as specified in TBL 1-2-1 below. Other RNP levels as identified by ICAO, other states, and the FAA may also be used.

(b) Application of Standard RNP Levels. U.S. standard levels of RNP typically used for various routes and procedures supporting RNAV operations may be based on use of a specific navigational system or sensor such as GPS, or on multi-sensor RNAV systems having suitable performance.

(c) Depiction of Standard RNP Levels. The applicable RNP level will be depicted on affected charts and procedures.

**TBL 1-2-1
U.S. Standard RNP Levels**

RNP Level	Typical Application	Primary Route Width (NM) – Centerline to Boundary
0.1 to 1.0	RNP AR Approach Segments	0.1 to 1.0
0.3 to 1.0	RNP Approach Segments	0.3 to 1.0
1	Terminal and En Route	1.0
2	En Route	2.0

NOTE–

1. The “performance” of navigation in RNP refers not only to the level of accuracy of a particular sensor or aircraft navigation system, but also to the degree of precision with which the aircraft will be flown.

2. Specific required flight procedures may vary for different RNP levels.

TBL 1-2-2

RNP Levels Supported for International Operations

RNP Level	Typical Application
4	Protected for oceanic/remote areas where 30 NM horizontal separation is applied
10	Oceanic/remote areas where 50 NM lateral separation is applied

c. Other RNP Applications Outside the U.S. The FAA and ICAO member states have led initiatives in implementing the RNP concept to oceanic operations. For example, RNP-10 routes have been established in the northern Pacific NOPAC which has increased capacity and efficiency by reducing the distance between tracks to 50 NM. See TBL 1-2-2.

d. Aircraft and Airborne Equipment Eligibility for RNP Operations. Aircraft meeting RNP criteria will have an appropriate entry including special conditions and limitations in its Aircraft Flight Manual (AFM) or supplement. Operators of aircraft not having specific AFM-RNP certification may be issued operational approval including special conditions and limitations for specific RNP levels.

NOTE-

Some airborne systems use Estimated Position Uncertainty (EPU) as a measure of the current estimated navigational performance. EPU may also be referred to as Actual Navigation Performance (ANP) or Estimated Position Error (EPE).

1-2-3. Use of Suitable Area Navigation (RNAV) Systems on Conventional Procedures and Routes

a. Discussion. This paragraph sets forth policy while providing operational and airworthiness guidance regarding the suitability and use of RNAV systems when operating on or transitioning to conventional non-RNAV routes and procedures within the U.S. National Airspace System (NAS).

1. Use of a suitable RNAV system as a Substitute Means of Navigation when a Very-High Frequency VHF Omni-directional Range (VOR) Distance Measuring Equipment (DME) Tactical Air Navigation (TACAN) VOR/TACAN VORTAC VOR/DME Non-directional Beacon (NDB) or compass locator facility including locator outer marker and locator middle marker is out-of-service that is the navigation aid (NAVAID) information is

not available an aircraft is not equipped with an Automatic Direction Finder (ADF) or DME or the installed ADF or DME on an aircraft is not operational. For example, if equipped with a suitable RNAV system, a pilot may hold over an out-of-service NDB.

2. Use of a suitable RNAV system as an Alternate Means of Navigation when a VOR/DME VORTAC VOR/DME TACAN NDB or compass locator facility including locator outer marker and locator middle marker is operational and the respective aircraft is equipped with operational navigation equipment that is compatible with conventional navaids. For example, if equipped with a suitable RNAV system, a pilot may fly a procedure or route based on operational VOR using that RNAV system without monitoring the VOR.

NOTE-

1. Additional information and associated requirements are available in Advisory Circular 90-108 titled "Use of Suitable RNAV Systems on Conventional Routes and Procedures."

2. Good planning and knowledge of your RNAV system are critical for safe and successful operations.

3. Pilots planning to use their RNAV system as a substitute means of navigation guidance in lieu of an out-of-service NAVAID may need to advise ATC of this intent and capability.

4. The navigation database should be current for the duration of the flight. If the AIRAC cycle will change during flight, operators and pilots should establish procedures to ensure the accuracy of navigation data, including suitability of navigation facilities used to define the routes and procedures for flight. To facilitate validating database currency, the FAA has developed procedures for publishing the amendment date that instrument approach procedures were last revised. The amendment date follows the amendment number, e.g., Amdt 4 14Jan10. Currency of graphic departure procedures and STARs may be ascertained by the numerical designation in the procedure title. If an amended chart is published for the procedure, or the procedure amendment date shown on the chart is on or

after the expiration date of the database, the operator must not use the database to conduct the operation.

b. Types of RNAV Systems that Qualify as a Suitable RNAV System. When installed in accordance with appropriate airworthiness installation requirements and operated in accordance with applicable operational guidance (e.g., aircraft flight manual and Advisory Circular material), the following systems qualify as a suitable RNAV system:

1. An RNAV system with TSO-C129/-C145/-C146 equipment installed in accordance with AC 20-138 Airworthiness Approval of Global Positioning System GPS Navigation Equipment for Use as a VFR and IFR Supplemental Navigation System or AC 20-130A Airworthiness Approval of Navigation or Flight Management Systems Integrating Multiple Navigation Sensors and authorized for instrument flight rules IFR en route and terminal operations, including those systems previously qualified for GPS in lieu of ADF or DME operations, or

2. An RNAV system with DME/DME/IRU inputs that is compliant with the equipment provisions of AC 90-100A U.S. Terminal and En Route Area Navigation RNAV Operations for RNAV routes. A table of compliant equipment is available at the following website:

http://www.faa.gov/about/office_org/headquarters_offices/avs/offices/afs/afs400/afs470/policy_guidance/

NOTE—

Approved RNAV systems using DME/DME/IRU, without GPS/WAAS position input, may only be used as a substitute means of navigation when specifically authorized by a Notice to Airmen (NOTAM) or other FAA guidance for a specific procedure. The NOTAM or other FAA guidance authorizing the use of DME/DME/IRU systems will also identify any required DME facilities based on an FAA assessment of the DME navigation infrastructure.

c. Uses of Suitable RNAV Systems. Subject to the operating requirements, operators may use a suitable RNAV system in the following ways:

1. Determine aircraft position relative to or distance from a VOR (see NOTE 5 below), TACAN, NDB, compass locator, DME fix, or a named fix defined by a VOR radial, TACAN course, NDB bearing, or compass locator bearing intersecting a VOR or localizer course.

2. Navigate to or from a VOR, TACAN, NDB, or compass locator.

3. Hold over a VOR, TACAN, NDB, compass locator, or DME fix.

4. Fly an arc based upon DME.

NOTE—

1. The allowances described in this section apply even when a facility is identified as required on a procedure (for example, “Note ADF required”).

2. These operations do not include lateral navigation on localizer-based courses (including localizer back-course guidance) without reference to raw localizer data.

3. Unless otherwise specified, a suitable RNAV system cannot be used for navigation on procedures that are identified as not authorized (“NA”) without exception by a NOTAM. For example, an operator may not use a RNAV system to navigate on a procedure affected by an expired or unsatisfactory flight inspection, or a procedure that is based upon a recently decommissioned NAVAID.

4. Pilots may not substitute for the NAVAID (for example, a VOR or NDB) providing lateral guidance for the final approach segment. This restriction does not refer to instrument approach procedures with “or GPS” in the title when using GPS or WAAS. These allowances do not apply to procedures that are identified as not authorized (NA) without exception by a NOTAM, as other conditions may still exist and result in a procedure not being available. For example, these allowances do not apply to a procedure associated with an expired or unsatisfactory flight inspection, or is based upon a recently decommissioned NAVAID.

5. For the purpose of paragraph c, “VOR” includes VOR, VOR/DME, and VORTAC facilities and “compass locator” includes locator outer marker and locator middle marker.

d. Alternate Airport Considerations. For the purposes of flight planning any required alternate airport must have an available instrument approach procedure that does not require the use of GPS. This restriction includes conducting a conventional approach at the alternate airport using a substitute means of navigation that is based upon the use of GPS. For example, these restrictions could apply when planning to use GPS equipment as a substitute means of navigation for an out-of-service VOR that supports an ILS missed approach procedure at an alternate airport. In this case, some other approach not reliant upon the use of GPS must be available. This restriction does not apply to RNAV systems using TSO-C145/-C146 WAAS equipment. For further WAAS guidance see AIM 1-1-19.

1. For flight planning purposes, TSO C129 and TSO C196 equipped users (GPS users whose navigation systems have fault detection and exclusion (FDE) capability) who perform a preflight RAIM prediction at the airport where the RNAV GPS approach will be flown and have proper knowledge and any required training and/or approval to conduct a GPS based IAP may file based on a GPS based IAP at either the destination or the

alternate airport but not at both locations. At the alternate airport, pilots may plan for applicable alternate airport weather minimums using:

(a) Lateral navigation (LNAV) or circling minimum descent altitude (MDA)

(b) LNAV/vertical navigation (LNAV/VNAV) DA if equipped with and using approved barometric vertical navigation (baro VNAV) equipment

(c) RNP 0.3 DA on an RNAV RNP IAP if they are specifically authorized users using approved baro VNAV equipment and the pilot has verified required navigation performance (RNP) availability through an approved prediction program

2. If the above conditions cannot be met, any required alternate airport must have an approved instrument approach procedure other than GPS that is anticipated to be operational and available at the estimated time of arrival and which the aircraft is equipped to fly.

3. This restriction does not apply to TSO C145 and TSO C146 equipped users (WAAS users). For further WAAS guidance see AIM 1-1-19.

Chapter 2. Aeronautical Lighting and Other Airport Visual Aids

Section 1. Airport Lighting Aids

2-1-1. Approach Light Systems (ALS)

a. ALS provide the basic means to transition from instrument flight to visual flight for landing. Operational requirements dictate the sophistication and configuration of the approach light system for a particular runway.

b. ALS are a configuration of signal lights starting at the landing threshold and extending into the approach area a distance of 2400–3000 feet for precision instrument runways and 1400–1500 feet for nonprecision instrument runways. Some systems include sequenced flashing lights which appear to the pilot as a ball of light traveling towards the runway at high speed twice a second. See FIG 2-1-1.

2-1-2. Visual Glideslope Indicators

a. Visual Approach Slope Indicator (VASI)

1. VASI installations may consist of either 2, 4, 6, 12, or 16 light units arranged in bars referred to as near, middle, and far bars. Most VASI installations consist of 2 bars, near and far, and may consist of 2, 4, or 12 light units. Some VASIs consist of three bars, near, middle, and far, which provide an additional visual glide path to accommodate high cockpit aircraft. This installation may consist of either 6 or 16 light units. VASI installations consisting of 2, 4, or 6 light units are located on one side of the runway, usually the left. Where the installation consists of 12 or 16 light units, the units are located on both sides of the runway.


2. Two-bar VASI installations provide one visual glide path which is normally set at 3 degrees. Three-bar VASI installations provide two visual glide paths. The lower glide path is provided by the

near and middle bars and is normally set at 3 degrees. The upper glide path provided by the middle and far bars is normally $1\frac{1}{4}$ degree higher. This higher glide path is intended for use only by high cockpit aircraft to provide a sufficient threshold crossing height. Although normal glide path angles are three degrees, angles at some locations may be as high as 4.5 degrees to give proper obstacle clearance. Pilots of high performance aircraft are cautioned that use of VASI angles in excess of 3.5 degrees may cause an increase in runway length required for landing and rollout.

3. The basic principle of the VASI is that of color differentiation between red and white. Each light unit projects a beam of light having a white segment in the upper part of the beam and red segment in the lower part of the beam. The light units are arranged so that the pilot using the VASIs during an approach will see the combination of lights shown below.

4. The VASI is a system of lights so arranged to provide visual descent guidance information during the approach to a runway. These lights are visible from 3–5 miles during the day and up to 20 miles or more at night. The visual glide path of the VASI provides safe obstruction clearance within plus or minus 10 degrees of the extended runway centerline and to 4 NM from the runway threshold. Descent using the VASI should not be initiated until the aircraft is visually aligned with the runway. Lateral course guidance is provided by the runway or runway lights. In certain circumstances, the safe obstruction clearance area may be reduced due to local limitations, or the VASI may be offset from the extended runway centerline. This will be noted in the Airport/Facility Directory.


FIG 2-1-1
Precision & Nonprecision Configurations

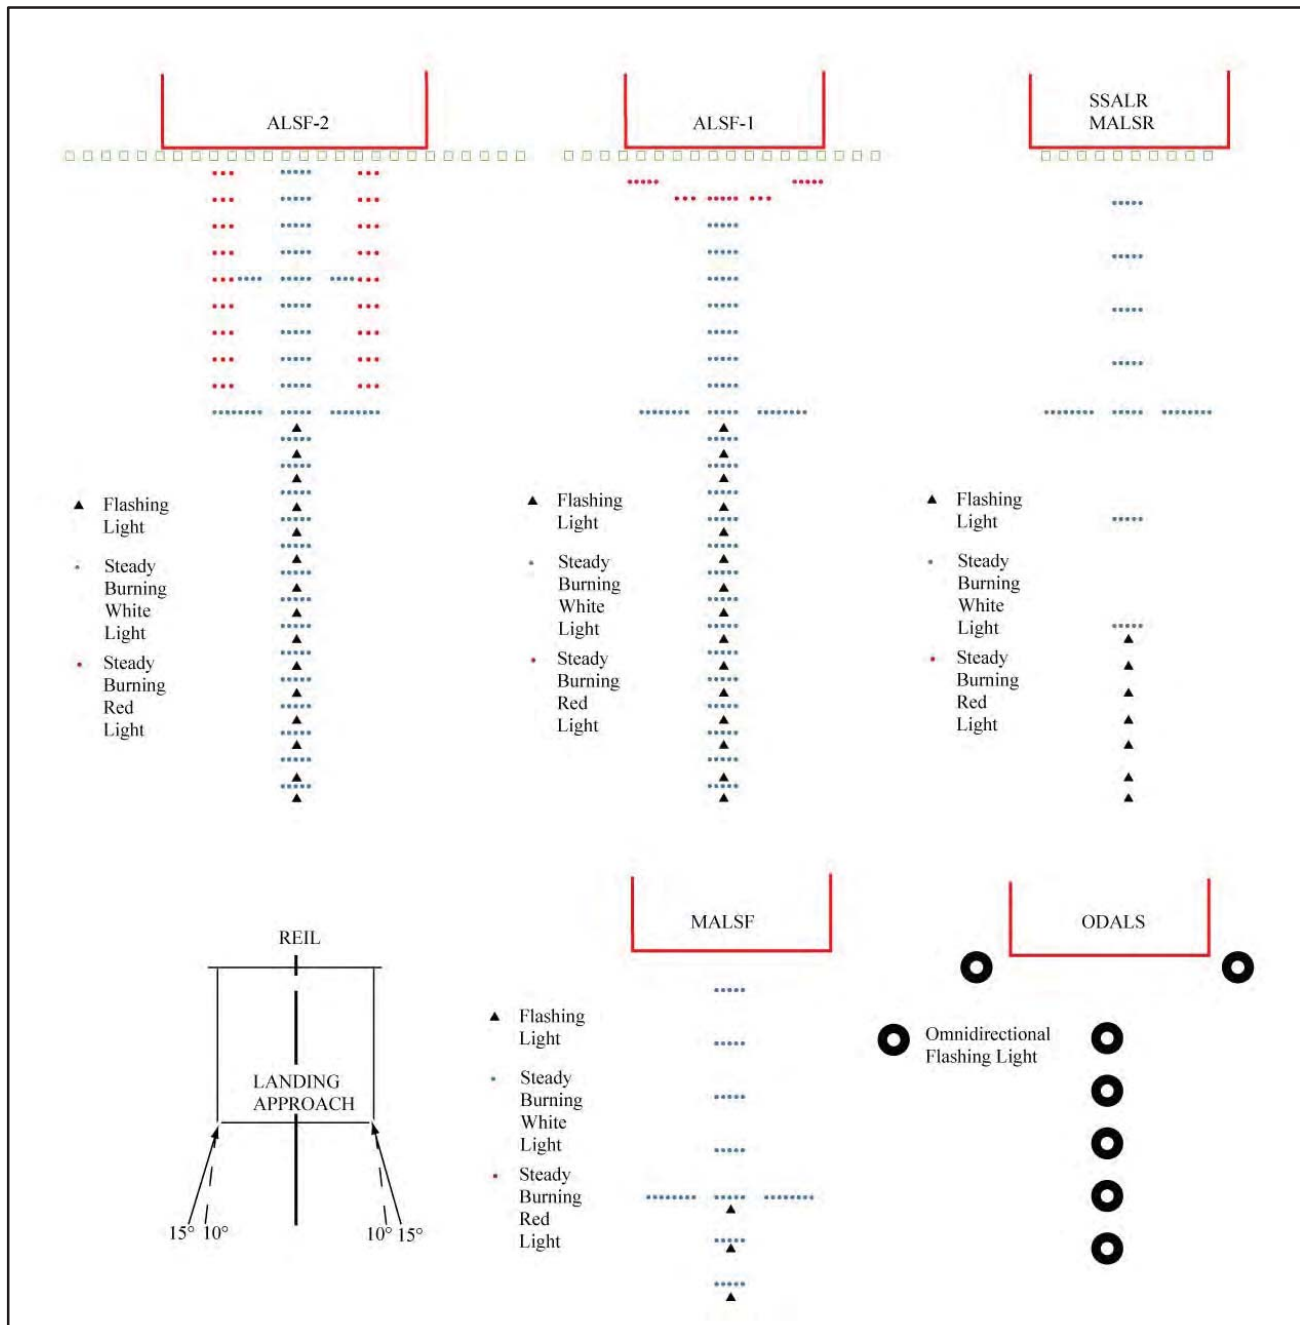

NOTE—
Civil ALSF-2 may be operated as SSALR during favorable weather conditions.


5. For 2-bar VASI 4 light units see FIG 2-1-2

FIG 2-1-2
2-Bar VASI

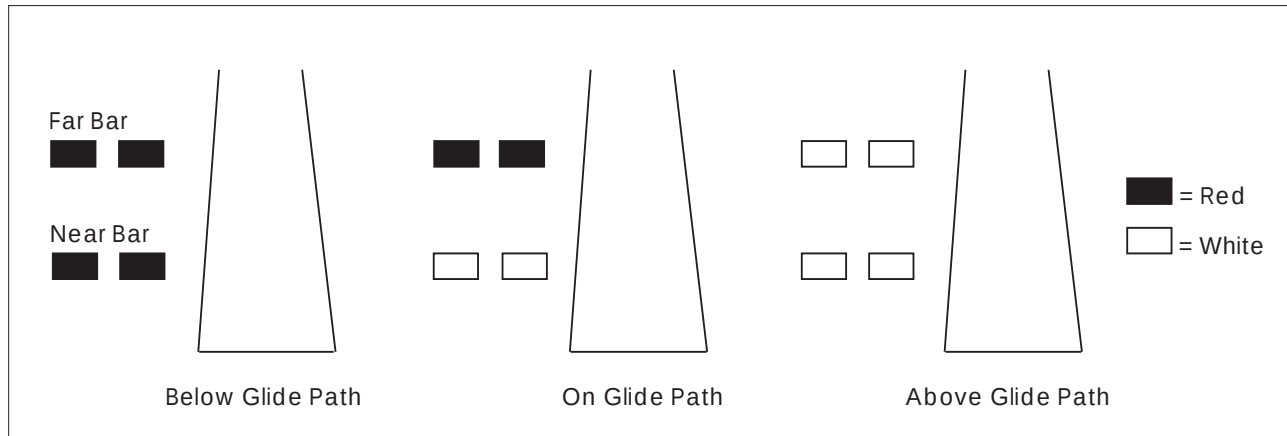


6. For 3-bar VASI 6 light units see FIG 2-1-3

FIG 2-1-3
3-Bar VASI

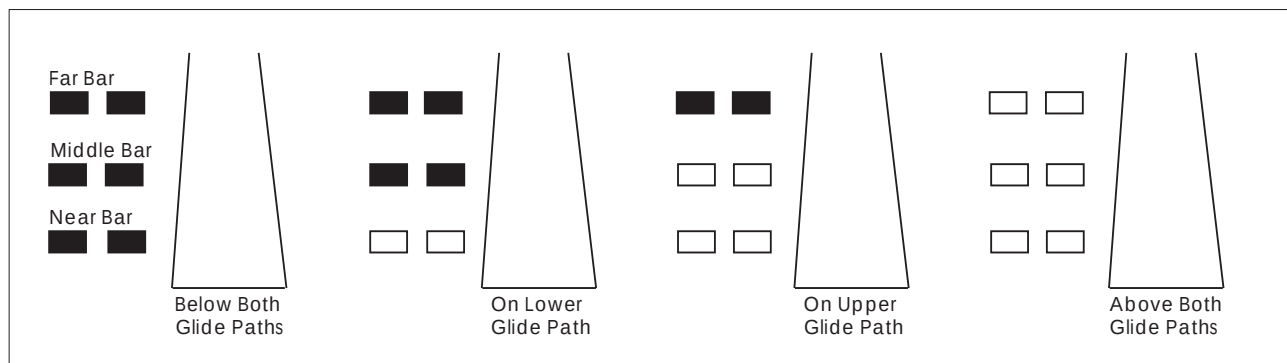

7. For other VASI configurations see FIG 2-1-4


FIG 2-1-4
VASI Variations

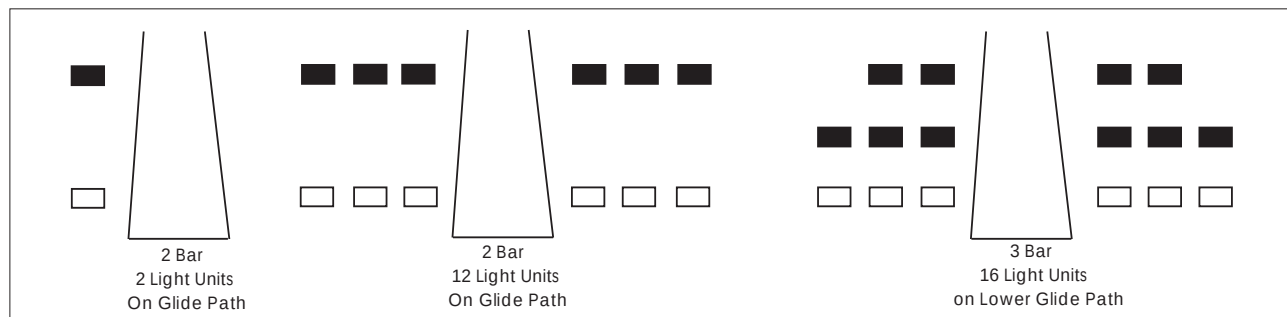

b. Precision Approach Path Indicator (PAPI). The precision approach path indicator PAPI uses light units similar to the VASI but are installed in a single row of either two or four light units. These lights are visible from about 5 miles during the day and up to 20 miles at night. The visual glide path of the PAPI typically provides safe obstruction clearance within plus or minus 10 degrees of the extended runway centerline and to 4 SM from the runway threshold. Descent using the PAPI should

not be initiated until the aircraft is visually aligned with the runway. The row of light units is normally installed on the left side of the runway and the glide path indications are as depicted. Lateral course guidance is provided by the runway or runway lights. In certain circumstances, the safe obstruction clearance area may be reduced due to local limitations, or the PAPI may be offset from the extended runway centerline. This will be noted in the Airport/ Facility Directory. See FIG 2-1-5.


FIG 2-1-5
Precision Approach Path Indicator (PAPI)

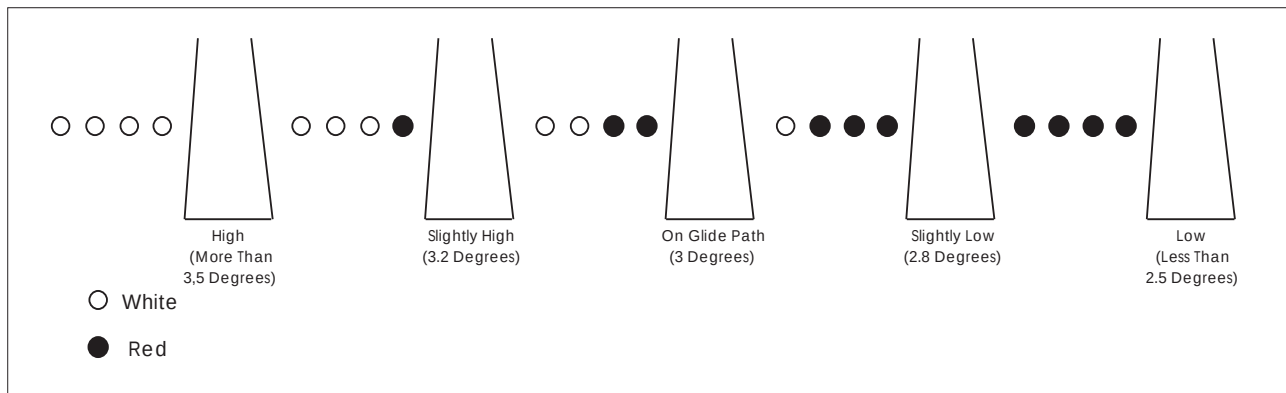

c. Tri-color Systems. Tri-color visual approach slope indicators normally consist of a single light unit projecting a three-color visual approach path into the final approach area of the runway upon which the indicator is installed. The below glide path indication is red, the above glide path indication is amber, and

the on glide path indication is green. These types of indicators have a useful range of approximately one-half to one mile during the day and up to five miles at night depending upon the visibility conditions. See FIG 2-1-6.


FIG 2-1-6
Tri-Color Visual Approach Slope Indicator

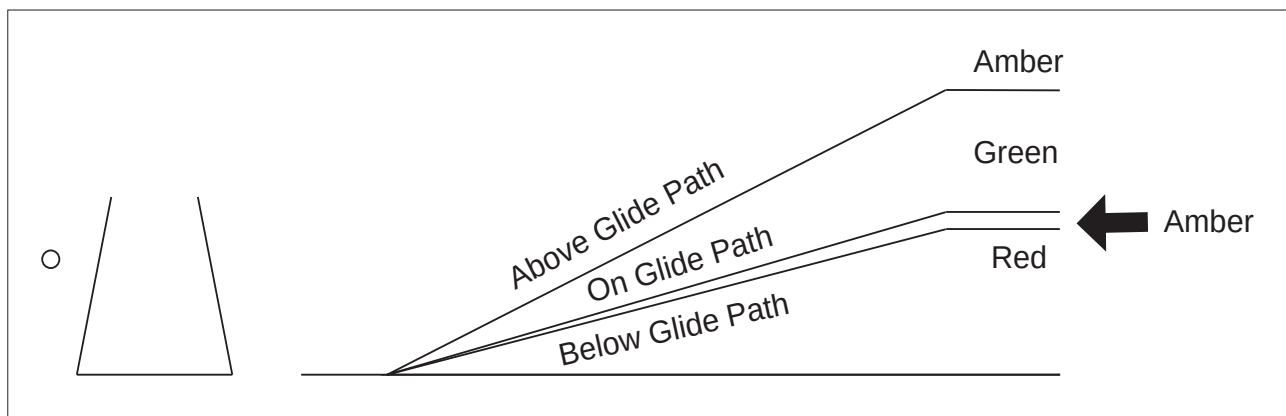

NOTE—

1. Since the tri-color VASI consists of a single light source which could possibly be confused with other light sources, pilots should exercise care to properly locate and identify the light signal.
2. When the aircraft descends from green to red, the pilot may see a dark amber color during the transition from green to red.


FIG 2-1-7
Pulsating Visual Approach Slope Indicator

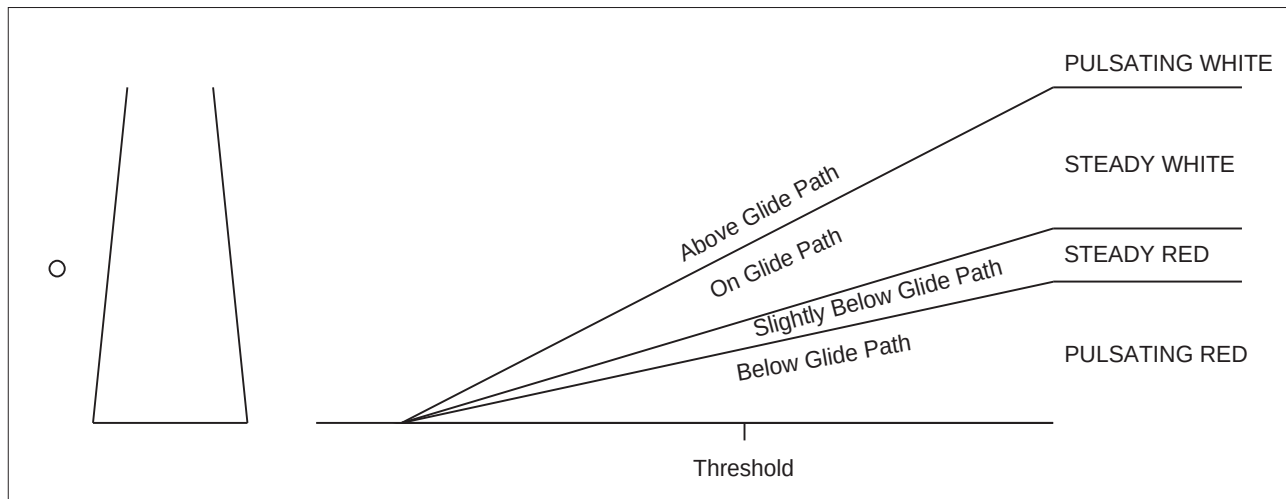

NOTE—

Since the PVASI consists of a single light source which could possibly be confused with other light sources, pilots should exercise care to properly locate and identify the light signal.

FIG 2-1-8
Alignment of Elements

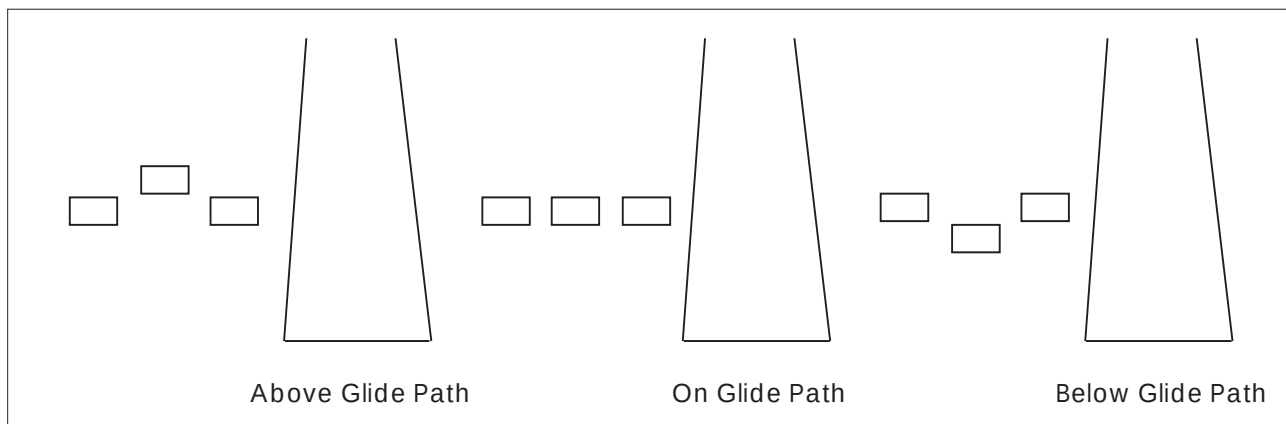

d. Pulsating Systems. Pulsating visual approach slope indicators normally consist of a single light unit projecting a two-color visual approach path into the final approach area of the runway upon which the indicator is installed. The on glide path indication is a steady white light. The slightly below glide path indication is a steady red light. If the aircraft descends further below the glide path, the red light starts to pulsate. The above glide path indication is a pulsating white light. The pulsating rate increases as the aircraft gets further above or below the desired glide slope. The useful range of the system is about

four miles during the day and up to ten miles at night. See FIG 2-1-7.

e. Alignment of Elements Systems. Alignment of elements systems are installed on some small general aviation airports and are a low-cost system consisting of painted plywood panels, normally black and white or fluorescent orange. Some of these systems are lighted for night use. The useful range of these systems is approximately three-quarter miles. To use the system, the pilot positions the aircraft so the

elements are in alignment. The glide path indications are shown in FIG 2-1-8.

2-1-3. Runway End Identifier Lights (REIL)

REILs are installed at many airfields to provide rapid and positive identification of the approach end of a particular runway. The system consists of a pair of synchronized flashing lights located laterally on each side of the runway threshold. REILs may be either omnidirectional or unidirectional facing the approach area. They are effective for

- a. Identification of a runway surrounded by a preponderance of other lighting
- b. Identification of a runway which lacks contrast with surrounding terrain
- c. Identification of a runway during reduced visibility

2-1-4. Runway Edge Light Systems

a. Runway edge lights are used to outline the edges of runways during periods of darkness or restricted visibility conditions. These light systems are classified according to the intensity or brightness they are capable of producing: they are the High Intensity Runway Lights (HIRL), Medium Intensity Runway Lights (MIRL), and the Low Intensity Runway Lights (LIRL). The HIRL and MIRL systems have variable intensity controls, whereas the LIRLs normally have one intensity setting.

b. The runway edge lights are white except on instrument runways where yellow replaces white on the last 2,000 feet or half the runway length, whichever is less, to form a caution zone for landings.

c. The lights marking the ends of the runway emit red light to warn the runway to indicate the end of runway to a departing aircraft and emit green outward from the runway end to indicate the threshold to landing aircraft.

2-1-5. In-runway Lighting

a. **Runway Centerline Lighting System (RCLS).** Runway centerline lights are installed on some precision approach runways to facilitate landing under adverse visibility conditions. They are located along the runway centerline and are spaced at 50-foot intervals. When viewed from the landing

threshold, the runway centerline lights are white until the last 3,000 feet of the runway. The white lights begin to alternate with red for the next 2,000 feet, and for the last 1,000 feet of the runway, all centerline lights are red.

b. **Touchdown Zone Lights (TDZL).** Touchdown zone lights are installed on some precision approach runways to indicate the touchdown zone when landing under adverse visibility conditions. They consist of two rows of transverse light bars disposed symmetrically about the runway centerline. The system consists of steady-burning white lights which start 100 feet beyond the landing threshold and extend to 3,000 feet beyond the landing threshold or to the midpoint of the runway, whichever is less.

c. **Taxiway Centerline Lead-Off Lights.** Taxiway centerline lead-off lights provide visual guidance to persons exiting the runway. They are color-coded to warn pilots and vehicle drivers that they are within the runway environment or instrument landing system/micro area landing system (ILS/MLS) critical area, whichever is more restrictive. Alternate green and yellow lights are installed beginning with green from the runway centerline to one centerline light position beyond the runway holding position or ILS/MLS critical area holding position.

d. **Taxiway Centerline Lead-On Lights.** Taxiway centerline lead-on lights provide visual guidance to persons entering the runway. These lead-on lights are also color-coded with the same color pattern as lead-off lights to warn pilots and vehicle drivers that they are within the runway environment or instrument landing system/micro area landing system (ILS/MLS) critical area, whichever is more conservative. The fixtures used for lead-on lights are bidirectional, i.e., one side emits light for the lead-on function while the other side emits light for the lead-off function. Any fixture that emits yellow light for the lead-off function must also emit yellow light for the lead-on function. See FIG 2-1-14.

e. **Land and Hold Short Lights.** Land and hold short lights are used to indicate the hold short point on certain runways which are approved for Land and Hold Short Operations (LAHSO). Land and hold short lights consist of a row of pulsing white lights installed across the runway at the hold short point. Where installed, the lights will be on anytime

LAHSO is in effect. These lights will be off when LAHSO is not in effect.

REFERENCE—

AIM, Pilot Responsibilities When Conducting Land and Hold Short Operations (LAHSO), Paragraph 4–3–11.

2–1–6. Runway Status Light (RWSL) System

a. Introduction

RWSL is a fully automated system that provides runway status information to pilots and surface vehicle operators to clearly indicate when it is unsafe to enter, cross, takeoff from, or land on a runway. The RWSL system processes information from surveillance systems and activates Runway Entrance Lights (REL), Takeoff Hold Lights (THL), Runway Intersection Lights (RIL), and Final Approach Runway Occupancy Signal (FAROS) in accordance with the position and velocity of the detected surface traffic and approach traffic. REL, THL, and RIL are in pavement light fixtures that are directly visible to pilots and surface vehicle operators. FAROS alerts arriving pilots that the approaching runway is occupied by flashing the Precision Approach Path Indicator (PAPI). FAROS may be implemented as an add-on to the RWSL system or implemented as a stand-alone system at airports. Without a RWSL system, RWSL is an independent safety enhancement that does not substitute for or convey an ATC clearance. Clearance to enter, cross, takeoff from, land on, or operate on a runway must still be received from ATC. Although ATC has limited control over the system, personnel do not directly use and may not be able to view light fixture activations and deactivations during the conduct of daily ATC operations.

b. Runway Entrance Lights (REL). The REL system is composed of flush-mounted, in-pavement, unidirectional light fixtures that are parallel to and focused along the taxiway centerline and directed toward the pilot at the hold line. An array of REL lights include the first light at the hold line followed by a series of evenly spaced lights to the runway edge. One additional light at the runway centerline is in line with the last two lights before the runway edge (see FIG 2–1–9 and FIG 2–1–12). When activated, the red lights indicate that there is high-speed traffic on the runway or there is an aircraft on final approach within the activation area.

1. REL Operating Characteristics – Departing Aircraft

When a departing aircraft reaches a site adaptable speed of approximately 30 knots, all taxiway intersections with REL arrays along the runway ahead of the aircraft will illuminate (see FIG 2–1–9). As the aircraft approaches an illuminated taxiway intersection, the lights at that intersection extinguish approximately 3 to 4 seconds before the aircraft reaches it. This allows controllers to apply anticipated separation to permit ATC to move traffic more expeditiously without compromising safety. After the aircraft is declared airborne by the system, all REL lights associated with this runway will extinguish.

2. REL Operating Characteristics – Arriving Aircraft


When an aircraft on final approach is approximately 1 mile from the runway threshold, all sets of taxiway REL light arrays that intersect the runway illuminate. The distance is adjustable and can be configured for specific operations at particular airports. Lights extinguish at each illuminated taxiway intersection approximately 3 to 4 seconds before the aircraft reaches it to apply anticipated separation until the aircraft has slowed to approximately 80 knots, site adjustable parameter. Below 80 knots, all arrays that are not within 30 seconds of the aircraft's forward path are extinguished. Once the arriving aircraft slows to approximately 34 knots, site adjustable parameter, it is declared to be in a taxi state, and all lights extinguish.

3. What a pilot could observe. A pilot at or approaching the hold line to a runway will observe RELs illuminate and extinguish in reaction to an aircraft or vehicle operating on the runway or an arriving aircraft operating less than 1 mile from the runway threshold.

4. When a pilot observes the red lights of the REL. That pilot will stop at the hold line or remain stopped. The pilot will then contact ATC for resolution if the clearance is in conflict with the lights. Should pilots note illuminated lights under circumstances when remaining clear of the runway is impractical for safety reasons—for example, aircraft is already on the runway—the crew should proceed according to their best judgment while understanding the illuminated lights indicate the runway is unsafe to

enter or cross. Contact ATC at the earliest possible opportunity.

FIG 2-1-9
Runway Status Light System

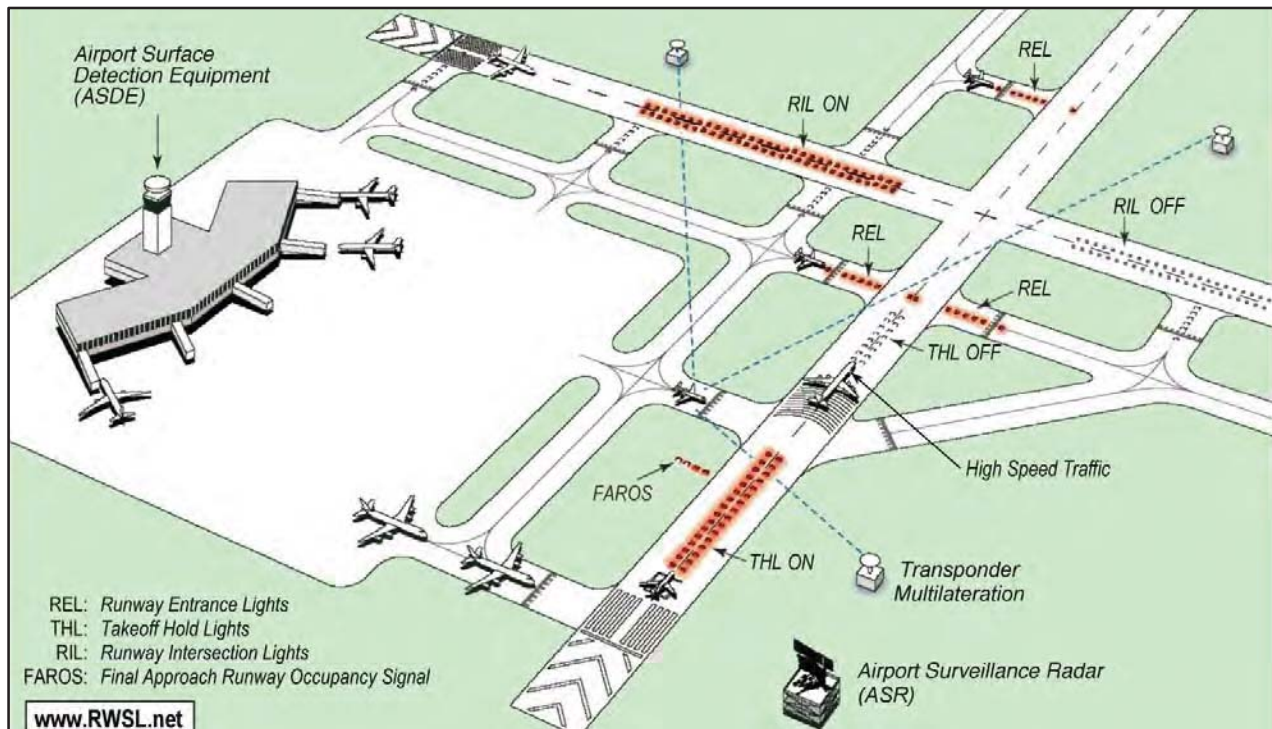

c. **Takeoff Hold Lights (THL)** The THL system is composed of flush mounted in pavement unidirectional light fixtures in a double longitudinal row aligned either side of the runway centerline lighting. Fixtures are focused toward the arrival end of the runway at the lineup and wait point. THLs extend for 1,500 feet in front of the holding aircraft starting at a point 375 feet from the departure threshold (see FIG 2-1-13). Illuminated red lights provide a signal to an aircraft in position for takeoff or rolling that it is unsafe to takeoff because the runway is occupied or about to be occupied by another aircraft or ground vehicle. Two aircraft or a surface vehicle and an aircraft are required for the lights to illuminate. The departing aircraft must be in position for takeoff or beginning takeoff roll. Another aircraft or a surface vehicle must be on or about to cross the runway.

1. THL Operating Characteristics – Departing Aircraft

THLs will illuminate for an aircraft in position for departure or departing when there is another aircraft or vehicle on the runway or about to enter the runway.

see FIG 2-1-9. Once that aircraft or vehicle exits the runway the THLs extinguish. A pilot may notice lights extinguish prior to the departure of aircraft or vehicle being completely clear of the runway but still moving. Like RELs, THLs have an anticipated separation feature.

NOTE–

When the THLs extinguish, this is not clearance to begin a takeoff roll. All takeoff clearances will be issued by ATC.

2. What a pilot could observe. A pilot in position to depart from a runway or has begun takeoff roll will observe THLs illuminate in reaction to an aircraft or vehicle on the runway or entering or crossing it. Lights will extinguish when the runway is clear. A pilot may observe several cycles of illumination and extinguishing depending on the amount of crossing traffic.

3. When a pilot observes the red light of the THLs, the pilot should safely stop if it is feasible or remain stopped. The pilot must contact ATC for resolution if any clearance is in conflict with the lights. Should pilots note illuminated lights while in takeoff roll and under circumstances when stopping is impractical for safety reasons, the crew should

proceed according to their best judgment while understanding the illuminated lights indicate that continuing the takeoff is unsafe. Contact ATC at the earliest possible opportunity.

d. Runway Intersection Lights (RIL). The RIL system is composed of flush mounted in-pavement unidirectional light fixtures in a double longitudinal row aligned either side of the runway centerline lighting in the same manner as THLs. Their appearance to a pilot is similar to that of THLs. Fixtures are focused toward the arrival end of the runway and they extend for 3 000 feet in front of an aircraft that is approaching an intersecting runway. They end at the Land and Hold Short Operation (LASHO) light bar or the hold short line for the intersecting runway.

1. RIL Operating Characteristics – Departing Aircraft

RILs will illuminate for an aircraft departing or in position to depart when there is high speed traffic operating on the intersecting runway (see FIG 2-1-9). Note that there must be an aircraft or vehicle in a position to observe the RILs for them to illuminate. Once the conflicting traffic passes through the intersection, the RILs extinguish.

2. RIL Operating Characteristics – Arriving Aircraft

RILs will illuminate for an aircraft that has landed and is rolling out when there is high speed traffic on the intersecting runway that is ± 5 seconds of meeting at the intersection. Once the conflicting traffic passes through the intersection, the RILs extinguish.

3. What a pilot could observe. A pilot departing or arriving will observe RILs illuminate in reaction to the high speed traffic operation on the intersecting runway. The lights will extinguish when that traffic has passed through the runway intersection.

4. Whenever a pilot observes the red light of the RIL array, the pilot will stop before the LASHO stop bar or the hold line for the intersecting runway. If a departing aircraft is already at high speed in the takeoff roll when the RILs illuminate, it may be impractical to stop for safety reasons. The crew should safely operate according to their best judgment while understanding the illuminated lights indicate that continuing the takeoff is unsafe. Contact ATC at the earliest possible opportunity.

e. The Final Approach Runway Occupancy Signal (FAROS) is communicated by flashing of the Precision Approach Path Indicator (PAPI) (see FIG 2-1-9). When activated, the light fixtures of the PAPI flash or pulse to indicate to the pilot on an approach that the runway is occupied and that it may be unsafe to land.

NOTE–

FAROS is an independent automatic alerting system that does not rely on ATC control or input.

1. FAROS Operating Characteristics

If an aircraft or surface vehicle occupies a FAROS equipped runway, the PAPIs on that runway will flash. The glide path indication will not be affected and the allotment of red and white PAPI lights observed by the pilot on approach will not change. The FAROS system will flash the PAPI when traffic enters the runway and there is an aircraft on approach and within 1.5 nautical miles of the landing threshold.

2. What a pilot could observe. A pilot on approach to the runway will observe the PAPI flash if there is traffic on the runway and will notice the PAPI ceases to flash when the traffic moves outside the hold short lines for the runway.

3. When a pilot observes a flashing PAPI at 500 feet above ground level (AGL), the contact height the pilot must look for and acquire the traffic on the runway. At 300 feet AGL, the pilot must contact ATC for resolution if the FAROS indication is in conflict with the clearance. If the PAPI continues to flash, the pilot must execute an immediate go-around and contact ATC at the earliest possible opportunity.

f. Pilot Actions

1. When operating at airports with RWSL, pilots will operate with the transponder. On departing the gate or parking area until it is shutdown upon arrival at the gate or parking area. This ensures interaction with the FAA surveillance systems such as ASDE which provide information to the RWSL system.

2. Pilots must always inform the ATCT when they have either stopped, are verifying a landing clearance, or are executing a go-around due to RWSL or FAROS indication that are in conflict with ATC instructions. Pilots must request clarification of the taxi, takeoff, or landing clearance.

3. Never cross over illuminated red lights. Under normal circumstances, RWSL will confirm the

pilot's taxi or takeoff clearance previously issued by ATC. If RWSL indicates that it is unsafe to takeoff from, land on, cross, or enter a runway, immediately notify ATC of the conflict and reconfirm the clearance.

4. Do not proceed when lights have extinguished without an ATC clearance. RWSL verifies an ATC clearance; it does not substitute for an ATC clearance.

5. Never land if PAPI continues to flash. Execute a go-around and notify ATC.

g. ATC Control of RWSL System

1. Controllers can set in-pavement lights to one of five (5) brightness levels to assure maximum conspicuity under all visibility and lighting conditions. REL, THL, and RIL subsystems may be independently set.

2. System lights can be disabled should RWSL operations impact the efficient movement of air traffic or contribute, in the opinion of the assigned ATC Manager, to unsafe operations. REL, THL, RIL, and FAROS light fixtures may be disabled separately. Disabling of the FAROS subsystem does not extinguish PAPI lights or impact its glide path function. Whenever the system or a component is disabled, a NOTAM must be issued, and the

Automatic Terminal Information System (ATIS) must be updated.

2-1-7. Stand-Alone Final Approach Runway Occupancy Signal (FAROS)


a. Introduction

The stand-alone FAROS system is a fully automated system that provides runway occupancy status to pilots on final approach to indicate whether it may be unsafe to land. When an aircraft or vehicle is detected on the runway, the Precision Approach Path Indicator (PAPI) light fixtures flash as a signal to indicate that the runway is occupied and that it may be unsafe to land. The stand-alone FAROS system is activated by localized or comprehensive sensors detecting aircraft or ground vehicles occupying activation zones.

The stand-alone FAROS system monitors specific areas of the runway called activation zones to determine the presence of aircraft or ground vehicles in the zone (see FIG 2-1-10). These activation zones are defined as areas on the runway that are frequently occupied by ground traffic during normal airport operations and could present a hazard to landing aircraft. Activation zones may include the full-length departure position, the midfield departure position, or the entire runway.

Pilots can refer to the airport-specific FAROS pilot information sheet for activation zone configuration.

**FIG 2-1-10
FAROS Activation Zones**

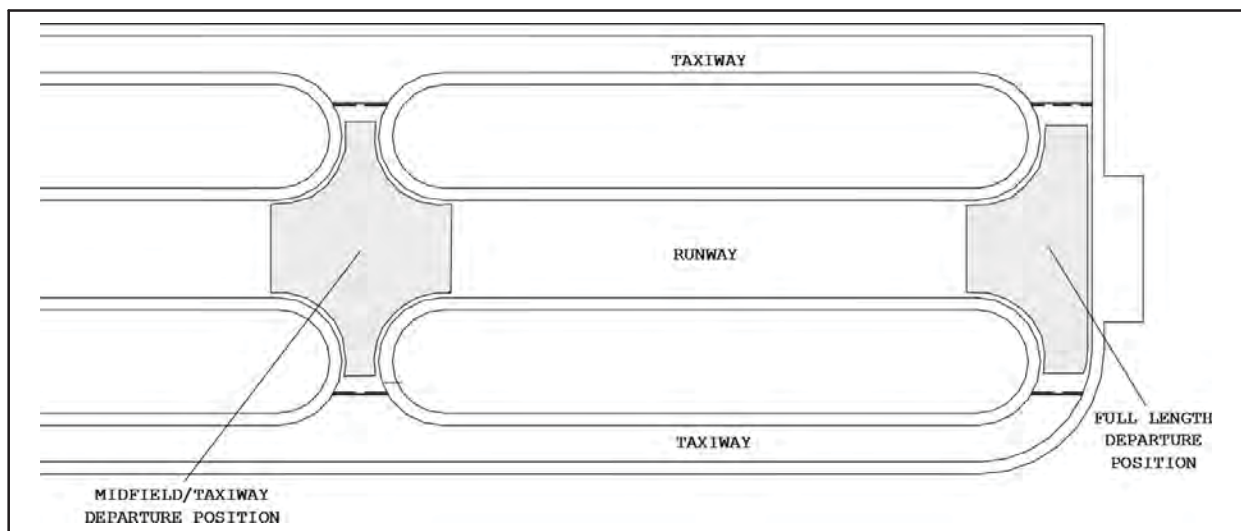

Clearance to land on a runway must be issued by Air Traffic Control (ATC). ATC personnel have limited

control over the system and may not be able to view the FAROS signal.

b. Operating Characteristics

If an aircraft or ground vehicle occupies an activation zone on the runway the PAPI light fixtures on that runway will flash. The glide path indication is not affected i.e. the configuration of red and white PAPI lights observed by the pilot on approach does not change. The stand alone FAROS system flashes the PAPI lights when traffic occupies an activation zone whether or not there is an aircraft on approach.

c. Pilot Observations


A pilot on approach to the runway observes the PAPI lights flashing if there is traffic on the runway activation zones and notices the PAPI lights cease to flash when the traffic moves outside the activation zones.

A pilot on departure from the runway should disregard any observations of flashing PAPI lights.

d. Pilot Actions

When a pilot observes a flashing PAPI at 500 feet above ground level (AGL) the pilot must look for and attempt to acquire the traffic on the runway. At 300 feet AGL the pilot must contact ATC for resolution if the FAROS indication is in conflict with the clearance (see FIG 2-1-11). If the PAPI lights continue to flash and the pilot cannot visually determine that it is safe to land, the pilot must execute an immediate go-around. As with operations at non FAROS airports, it is always the pilot's responsibility to determine whether or not it is safe to continue with the approach and to land on the runway.

FIG 2-1-11
FAROS Glide Slope Action Points

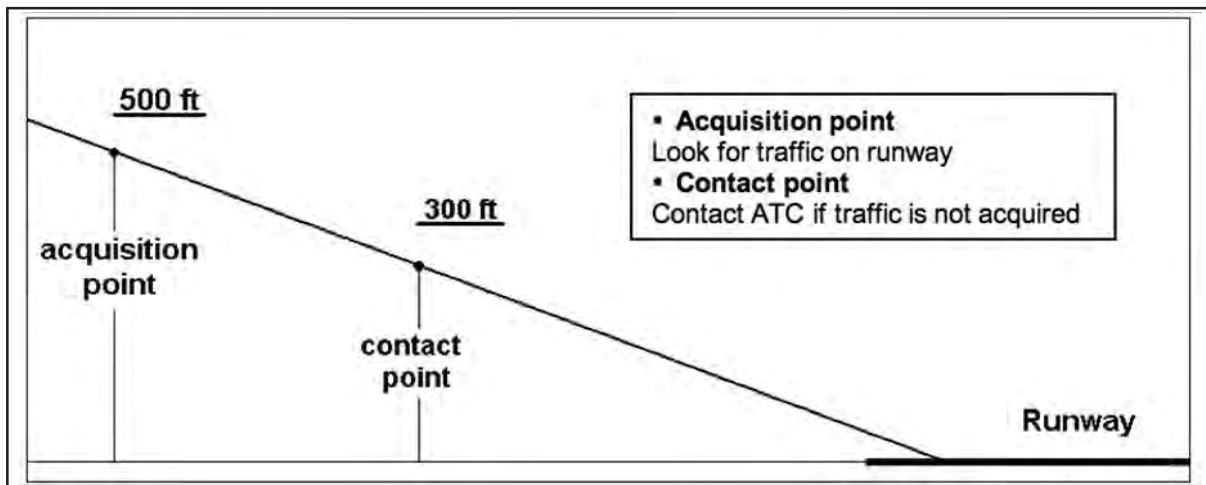

Pilots should inform the ATCT when they have executed a go-around due to a FAROS indication that is in conflict with ATC instructions.

NOTE—

At this time, the stand-alone FAROS system is not widely implemented and is used for evaluation purposes.

2-1-8. Control of Lighting Systems

a. Operation of approach light systems and runway lighting is controlled by the controller or ATCT. At some locations the FSS may control the lights where there is no controller in operation.

b. Pilots may request that lights be turned on or off. Runway edge lights, in-pavement lights, and approach lights also have intensity controls which may be varied to meet the pilot's request. Sequenced

flashing lights (SFL) may be turned on and off. Some sequenced flashing light systems also have intensity control.

2-1-9. Pilot Control of Airport Lighting

Radio control of lighting is available at selected airports to provide airborne control of lights by keying the aircraft's microphone. Control of lighting systems is often available at locations without specified hours for lighting and where there is no controller or FSS or when the controller or FSS is closed. Locations with a part-time controller or FSS or specified hours. All lighting systems which are radio controlled at an airport whether on a single runway or multiple runways operate on the same radio frequency. See TBL 2-1-1 and TBL 2-1-2.

FIG 2-1-12
Runway Entrance Lights



FIG 2-1-13
Takeoff Hold Lights



FIG 2-1-14
Taxiway Lead-On Light Configuration



TBL 2-1-1
Runways With Approach Lights

Lighting System	No. of Int. Steps	Status During Nonuse Period	Intensity Step Selected Per No. of Mike Clicks		
			3 Clicks	5 Clicks	7 Clicks
Approach Lights Med Int	2	Off	Lo	Lo	High
Approach Lights Med Int	3	Off	Lo	Med	High
MIRL	3	Off or Lo	◆	◆	◆
HIRL	5	Off or Lo	◆	◆	◆
VASI	2	Off	★	★	★

NOTES ◆ Predetermined intensity step.
 ★ Low intensity for night use. High intensity for day use as determined by photocell control.

TBL 2-1-2
Runways Without Approach Lights

Lighting System	No. of Int. Steps	Status During Nonuse Period	Intensity Step Selected Per No. of Mike Clicks		
			3 Clicks	5 Clicks	7 Clicks
MIRL	3	Off or Lo	Lo	Med	High
HIRL	5	Off or Lo	Step 1 or 2	Step 3	Step 5
LIRL	1	Off	On	On	On
VASI★	2	Off	◆	◆	◆
REIL★	1	Off	Off	On/Off	On
REIL★	3	Off	Lo	Med	High

NOTES ◆ Lo intensity for night use High intensity for day use as determined by photocell control
 ★ The control of VASI and/or REIL may be independent of other lighting systems

a. With FAA approved systems various combinations of medium intensity approach lights runway lights taxiway lights VASI and/or REIL may be activated by radio control. On runways with both approach lighting and runway lighting runway edge lights taxiway lights etc. systems the approach lighting system takes precedence for air-to-ground radio control over the runway lighting system which is set at a predetermined intensity step based on expected visibility conditions. Runways without approach lighting may provide radio controlled intensity adjustments of runway edge lights. Other lighting systems including VASI REIL and taxiway lights may be either controlled with the runway edge lights or controlled independently of the runway edge lights.

b. The control system consists of a 3-step control responsive to 7 5 and/or 3 microphone clicks. This 3-step control will turn on lighting facilities capable of either 3-step 2-step or 1-step operation. The 3-step and 2-step lighting facilities can be altered in intensity while the 1-step cannot. All lighting is illuminated for a period of 15 minutes from the most recent time of activation and may not be extinguished prior to end of the 15 minute period except for 1-step and 2-step REILs which may be turned off when desired by keying the mike 5 or 3 times respectively.

c. Suggested use is to always initially key the mike 7 times; this assures that all controlled lights are turned on to the maximum available intensity. If desired adjustment can then be made where the capability is provided to a lower intensity or the REIL turned off by keying 5 and/or 3 times. Due to the close proximity of airports using the same frequency radio controlled lighting receivers may be set at a low sensitivity requiring the aircraft to be relatively close to activate the system. Consequently even when lights are on always key mike as directed when overflying an airport of intended landing or just prior to entering the final segment of an approach. This will assure the aircraft is close enough to activate the system and a full 15 minutes lighting duration is available. Approved lighting systems may be activated by keying the mike within 5 seconds as indicated in TBL 2-1-3.

TBL 2-1-3
Radio Control System

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity Lower REIL or REIL-off
3 times within 5 seconds	Lowest intensity available Lower REIL or REIL-off

d. For all public use airports with FAA standard systems the Airport/Facility Directory contains the types of lighting runway and the frequency that is used to activate the system. Airports with IAPs include data on the approach chart identifying the light system the runway on which they are installed and the frequency that is used to activate the system.

NOTE-

Although the CTAF is used to activate the lights at many airports, other frequencies may also be used. The appropriate frequency for activating the lights on the airport is provided in the Airport/Facility Directory and the standard instrument approach procedures publications. It is not identified on the sectional charts.

e. Where the airport is not served by an IAP it may have either the standard FAA approved control system or an independent type system of different specification installed by the airport sponsor. The Airport/Facility Directory contains descriptions of pilot controlled lighting systems for each airport having other than FAA approved systems and explains the type lights method of control and operating frequency in clear text.

2-1-10. Airport/Heliport Beacons

a. Airport and heliport beacons have a vertical light distribution to make them most effective from one to ten degrees above the horizon however they can be seen well above and below this peak spread. The beacon may be an omnidirectional capacitor-discharge device or it may rotate at a constant speed which produces the visual effect of flashes at regular intervals. Flashes may be one or two colors alternately. The total number of flashes are:

1. 24 to 30 per minute for beacons marking airports landmarks and points on Federal airways
2. 30 to 45 per minute for beacons marking heliports

b. The colors and color combinations of beacons are

1. White and Green– Lighted land airport
2. Green alone– Lighted land airport
3. White and yellow – Lighted water airport
4. Yellow alone– Lighted water airport
5. Green yellow and White– Lighted heliport

NOTE–

**Green alone or yellow alone is used only in connection with a white-and-green or white-and-yellow beacon display, respectively.*

c. Military airport beacons flash alternately white and green but are differentiated from civil beacons by dualpeaked too quick white flashes between the green flashes

d. In Class B Class C Class D and Class E surface areas operation of the airport beacon during the hours of daylight often indicates that the ground visibility is less than 3 miles and/or the ceiling is less than 1 000 feet ATC clearance in accordance with 14 CFR Part 91 is required for landing takeoff and flight in the traffic pattern Pilots should not rely solely on the operation of the airport beacon to indicate if weather conditions are IFR or VFR At some locations with operating control towers ATC personnel turn the beacon on or off when controls are in the tower At many airports the airport beacon is turned on by a photoelectric cell or time clocks and ATC personnel cannot control them There is no regulatory requirement for daylight operation and it is the pilot's responsibility to comply with proper preflight planning as required by 14 CFR Section 91.103

2-1-11. Taxiway Lights

a. Taxiway Edge Lights. Taxiway edge lights are used to outline the edges of taxiways during periods of darkness or restricted visibility conditions These fixtures emit blue light

NOTE–

At most major airports these lights have variable intensity settings and may be adjusted at pilot request or when deemed necessary by the controller.

b. Taxiway Centerline Lights. Taxiway centerline lights are used to facilitate ground traffic under low visibility conditions They are located along the taxiway centerline in a straight line on straight

portions on the centerline of curved portions and along designated taxiing paths in portions of runways ramp and apron areas Taxiway centerline lights are steady burning and emit green light

c. Clearance Bar Lights. Clearance bar lights are installed at holding positions on taxiways in order to increase the conspicuity of the holding position in low visibility conditions They may also be installed to indicate the location of an intersecting taxiway during periods of darkness Clearance bars consist of three in-pavement steady-burning yellow lights

d. Runway Guard Lights. Runway guard lights are installed at taxiway/runway intersections They are primarily used to enhance the conspicuity of taxiway/runway intersections during low visibility conditions but may be used in all weather conditions Runway guard lights consist of either a pair of elevated flashing yellow lights installed on either side of the taxiway or a row of in-pavement yellow lights installed across the entire taxiway at the runway holding position marking

NOTE–

Some airports may have a row of three or five in-pavement yellow lights installed at taxiway/runway intersections. They should not be confused with clearance bar lights described in paragraph 2-1-1 c, Clearance Bar Lights.

e. Stop Bar Lights. Stop bar lights when installed are used to confirm the ATC clearance to enter or cross the active runway in low visibility conditions below 1 200 ft Runway Visual Range A stop bar consists of a row of red unidirectional steady-burning in-pavement lights installed across the entire taxiway at the runway holding position and elevated steady-burning red lights on each side A controlled stop bar is operated in conjunction with the taxiway centerline lead-on lights which extend from the stop bar toward the runway Following the ATC clearance to proceed the stop bar is turned off and the lead-on lights are turned on The stop bar and lead-on lights are automatically reset by a sensor or backup timer

CAUTION–

Pilots should never cross a red illuminated stop bar, even if an ATC clearance has been given to proceed onto or across the runway.

NOTE–

If after crossing a stop bar, the taxiway centerline lead-on lights inadvertently extinguish, pilots should hold their position and contact ATC for further instructions.

Section 2. Air Navigation and Obstruction Lighting

2-2-1. Aeronautical Light Beacons

a. An aeronautical light beacon is a visual NAVAID displaying flashes of white and/or colored light to indicate the location of an airport, a heliport, a landmark, a certain point of a Federal airway in mountainous terrain, or an obstruction. The light used may be a rotating beacon or one or more flashing lights. The flashing lights may be supplemented by steady burning lights of lesser intensity.

b. The color or color combination displayed by a particular beacon and/or its auxiliary lights tell whether the beacon is indicating a landing place, landmark, point of the Federal airway, or an obstruction. Coded flashes of the auxiliary lights, if employed, further identify the beacon site.

2-2-2. Code Beacons and Course Lights

a. **Code Beacons.** The code beacon, which can be seen from all directions, is used to identify airports and landmarks. The code beacon flashes the three or four character airport identifier in International Morse Code six to eight times per minute. Green flashes are displayed for land airports; white/yellow flashes indicate water airports.

b. **Course Lights.** The course light, which can be seen clearly from only one direction, is used only with rotating beacons of the Federal Airway System. Two course lights, back to back, direct coded flashing beams of light in either direction along the course of airway.

NOTE—

Airway beacons are remnants of the “lighted” airways which antedated the present electronically equipped federal airways system. Only a few of these beacons exist today to mark airway segments in remote mountain areas. Flashes in Morse code identify the beacon site.

2-2-3. Obstruction Lights

a. Obstructions are marked/lighted to warn airmen of their presence during daytime and nighttime conditions. They may be marked/lighted in any of the following combinations:

1. **Aviation Red Obstruction Lights.** Flashing aviation red beacons, 20 to 40 flashes per minute, and steady burning aviation red lights during nighttime operation. Aviation orange and white paint is used for daytime marking.

2. **Medium Intensity Flashing White Obstruction Lights.** Medium intensity flashing white obstruction lights may be used during daytime and twilight with automatically selected reduced intensity for nighttime operation. When this system is used on structures 500 feet (153m) AGL or less in height, other methods of marking and lighting the structure may be omitted. Aviation orange and white paint is always required for daytime marking on structures exceeding 500 feet (153m) AGL. This system is not normally installed on structures less than 200 feet (61m) AGL.

3. **High Intensity White Obstruction Lights.** Flashing high intensity white lights during daytime with reduced intensity for twilight and nighttime operation. When this type system is used, the marking of structures with red obstruction lights and aviation orange and white paint may be omitted.

4. **Dual Lighting.** A combination of flashing aviation red beacons and steady burning aviation red lights for nighttime operation and flashing high intensity white lights for daytime operation. Aviation orange and white paint may be omitted.

5. **Catenary Lighting.** Lighted markers are available for increased night conspicuity of high-voltage (69KV or higher) transmission line catenary wires. Lighted markers provide conspicuity both day and night.

b. Medium intensity omnidirectional flashing white lighting system provides conspicuity both day and night on catenary support structures. The uni-directional/simultaneous flashing light system alerts pilots of the associated catenary wires.

c. High intensity flashing white lights are being used to identify some supporting structures of overhead transmission lines located across rivers, chasms, gorges, etc. These lights flash in a middle-top/low-light sequence at approximately 60 flashes per minute. The top light is normally installed near the top of the supporting structure, while the low-light indicates the approximate lower portion of the

ire span The lights are beamed towards the companion structure and identify the area of the ire span

d. High intensity flashing white lights are also employed to identify tall structures such as chimneys

and towers as obstructions to air navigation The lights provide a 360 degree coverage about the structure at 40 flashes per minute and consist of from one to seven levels of lights depending upon the height of the structure Where more than one level is used the vertical banks flash simultaneously

Section 3. Airport Marking Aids and Signs

2-3-1. General

a. Airport pavement markings and signs provide information that is useful to a pilot during takeoff landing and taxiing

b. Uniformity in airport markings and signs from one airport to another enhances safety and improves efficiency. Pilots are encouraged to work with the operators of the airports they use to achieve the marking and sign standards described in this section

c. Pilots who encounter ineffective incorrect or confusing markings or signs on an airport should make the operator of the airport aware of the problem. These situations may also be reported under the Aviation Safety Reporting Program as described in paragraph 7-6-1 Aviation Safety Reporting Program. Pilots may also report these situations to the FAA regional airports division

d. The markings and signs described in this section of the AIM reflect the current FAA recommended standards

REFERENCE—

AC 150/5340-1, Standards for Airport Markings.

AC 150/5340-18, Standards for Airport Sign Systems.

2-3-2. Airport Pavement Markings

a. General. For the purpose of this presentation the Airport Pavement Markings have been grouped into four areas

1. Runway Markings.

2. Taxiway Markings.

3. Holding Position Markings.

4. Other Markings.

b. Marking Colors. Markings for runways are white. Markings defining the landing area on a heliport are also white except for hospital heliports which use a red H on a white cross. Markings for taxiways areas not intended for use by aircraft closed and hazardous areas and holding positions even if they are on a runway are yellow

2-3-3. Runway Markings


a. General. There are three types of markings for runways: visual nonprecision instrument and precision instrument. TBL 2-3-1 identifies the marking elements for each type of runway and TBL 2-3-2 identifies runway threshold markings

TBL 2-3-1

Runway Marking Elements

Marking Element	Visual Runway	Nonprecision Instrument Runway	Precision Instrument Runway
Designation			
Centerline			
Threshold	1		
Aiming Point	2		
Touchdown zone			
Side Stripes			
¹ On runways used or intended to be used by international commercial transports ² On runways 4 000 feet (1200 m) or longer used by jet aircraft			

FIG 2-3-1
Precision Instrument Runway Markings

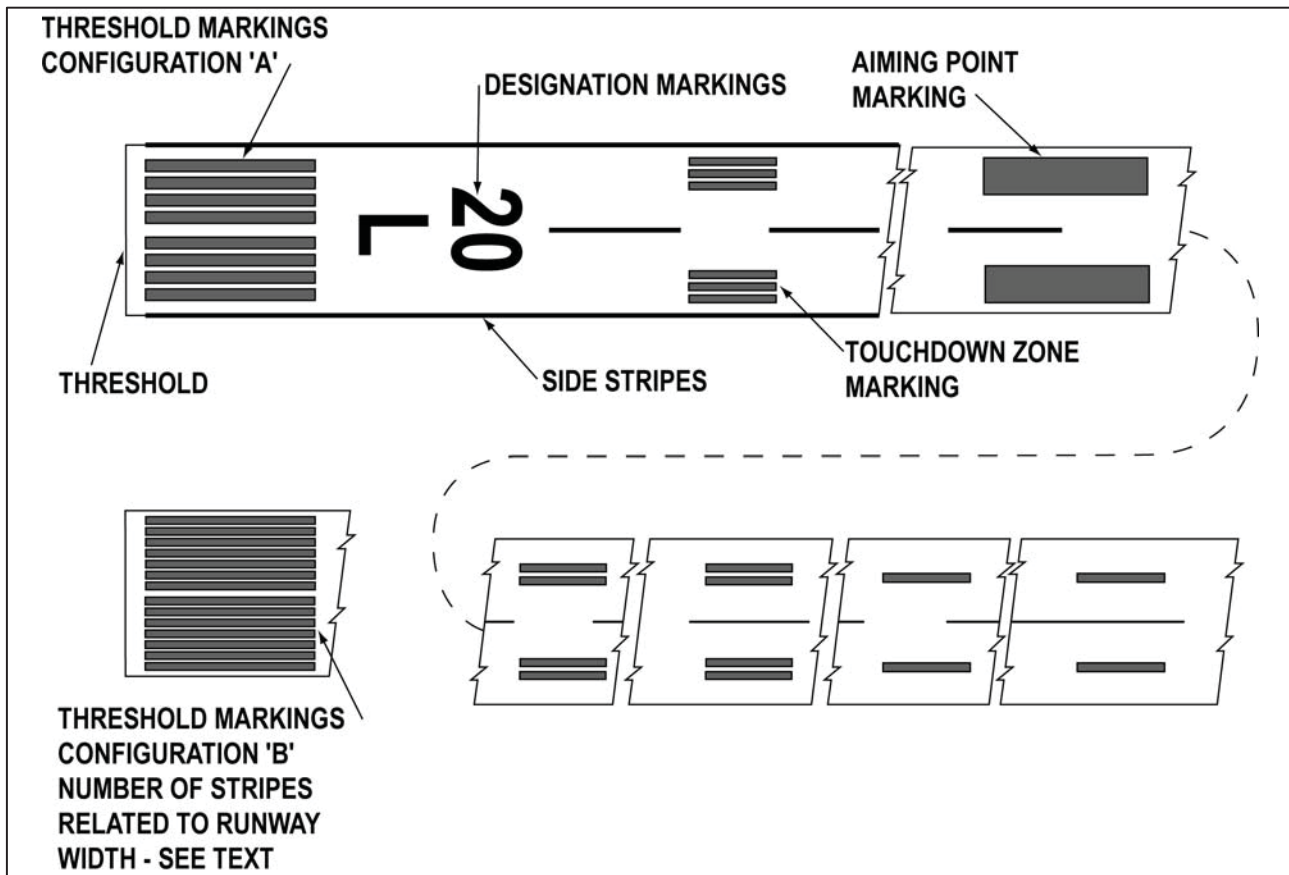

b. Runway Designators. Runway numbers and letters are determined from the approach direction. The runway number is the whole number nearest one tenth the magnetic azimuth of the centerline of the runway measured clockwise from the magnetic north. The letters differentiate between left (L), right (R), or center (C) parallel runways as applicable.


1. For two parallel runways: L, R
2. For three parallel runways: L, C, R

c. Runway Centerline Marking. The runway centerline identifies the center of the runway and provides alignment guidance during takeoff and landings. The centerline consists of a line of uniformly spaced stripes and gaps.

d. Runway Aiming Point Marking. The aiming point marking serves as a visual aiming point for a landing aircraft. These two rectangular markings consist of a broad white stripe located on each side of the runway centerline and approximately 1,000 feet from the landing threshold, as shown in FIG 2-3-1 Precision Instrument Runway Markings.

e. Runway Touchdown Zone Markers. The touchdown zone markings identify the touchdown zone for landing operations and are coded to provide distance information in 500-foot (150m) increments. These markings consist of groups of one, two, and three rectangular bars symmetrically arranged in pairs about the runway centerline, as shown in FIG 2-3-1 Precision Instrument Runway Markings. For runways having touchdown zone markings on both ends, those pairs of markings which extend to within 900 feet (270m) of the midpoint between the thresholds are eliminated.

FIG 2-3-2
Nonprecision Instrument Runway and Visual Runway Markings

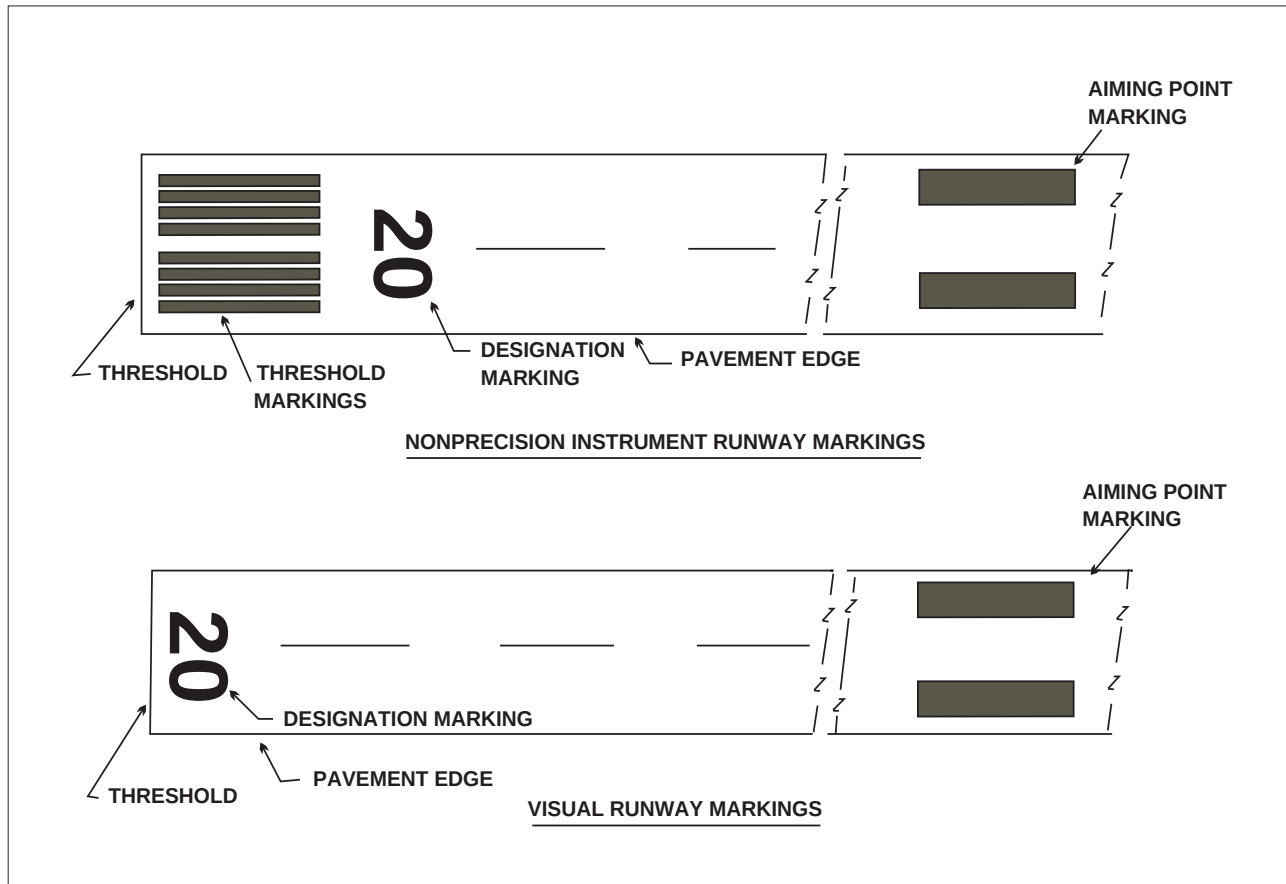

f. Runway Side Stripe Marking. Runway side stripes delineate the edges of the runway. They provide a visual contrast between runway and the abutting terrain or shoulders. Side stripes consist of continuous white stripes located on each side of the runway as shown in FIG 2-3-4.

g. Runway Shoulder Markings. Runway shoulder stripes may be used to supplement runway side stripes to identify pavement areas contiguous to the runway sides that are not intended for use by aircraft. Runway Shoulder stripes are yellow. See FIG 2-3-5.

h. Runway Threshold Markings. Runway threshold markings come in two configurations. They either consist of eight longitudinal stripes of uniform

dimensions disposed symmetrically about the runway centerline as shown in FIG 2-3-1 or the number of stripes is related to the runway width as indicated in TBL 2-3-2. A threshold marking helps identify the beginning of the runway that is available for landing. In some instances the landing threshold may be relocated or displaced.

TBL 2-3-2
Number of Runway Threshold Stripes

Runway Width	Number of Stripes
60 feet 18 m	4
75 feet 23 m	6
100 feet 30 m	8
150 feet 45 m	12
200 feet 60 m	16

1. Relocation of a Threshold. Sometimes construction maintenance or other activities require the threshold to be relocated towards the rollout end of the runway. See FIG 2-3-3. When a threshold is relocated, it closes not only a set portion of the approach end of a runway but also shortens the length of the opposite direction runway. In these cases, a NOTAM should be issued by the airport operator identifying the portion of the runway that is closed, e.g., 10/28 W 900 CLSD. Because the duration of the relocation can vary from a few hours to several months, methods identifying the new threshold may vary. One common practice is to use a ten-foot wide white threshold bar across the width of the runway. Although the runway lights in the area between the old threshold and new threshold will not be illuminated, the runway markings in this area may or may not be obliterated, removed, or covered.

2. Displaced Threshold. A displaced threshold is a threshold located at a point on the runway other than the designated beginning of the runway. Displacement of a threshold reduces the length of runway available for landings. The portion of runway behind a displaced threshold is available for takeoffs in either direction and landings from the opposite direction. A ten-foot wide white threshold bar is

located across the width of the runway at the displaced threshold. White arrows are located along the centerline in the area between the beginning of the runway and displaced threshold. White arrowheads are located across the width of the runway just prior to the threshold bar, as shown in FIG 2-3-4.

NOTE—

Airport operator. When reporting the relocation or displacement of a threshold, the airport operator should avoid language which confuses the two.

i. Demarcation Bar. A demarcation bar delineates a runway with a displaced threshold from a blast pad, stopway, or taxiway that precedes the runway. A demarcation bar is 3 feet 1m wide and yellow since it is not located on the runway, as shown in FIG 2-3-6.

1. Chevrons. These markings are used to show pavement areas aligned with the runway that are unusable for landing, takeoff, and taxiing. Chevrons are yellow. See FIG 2-3-7.

j. Runway Threshold Bar. A threshold bar delineates the beginning of the runway that is available for landing when the threshold has been relocated or displaced. A threshold bar is 10 feet 3m in width and extends across the width of the runway, as shown in FIG 2-3-4.

FIG 2-3-3
Relocation of a Threshold with Markings for Taxiway Aligned with Runway

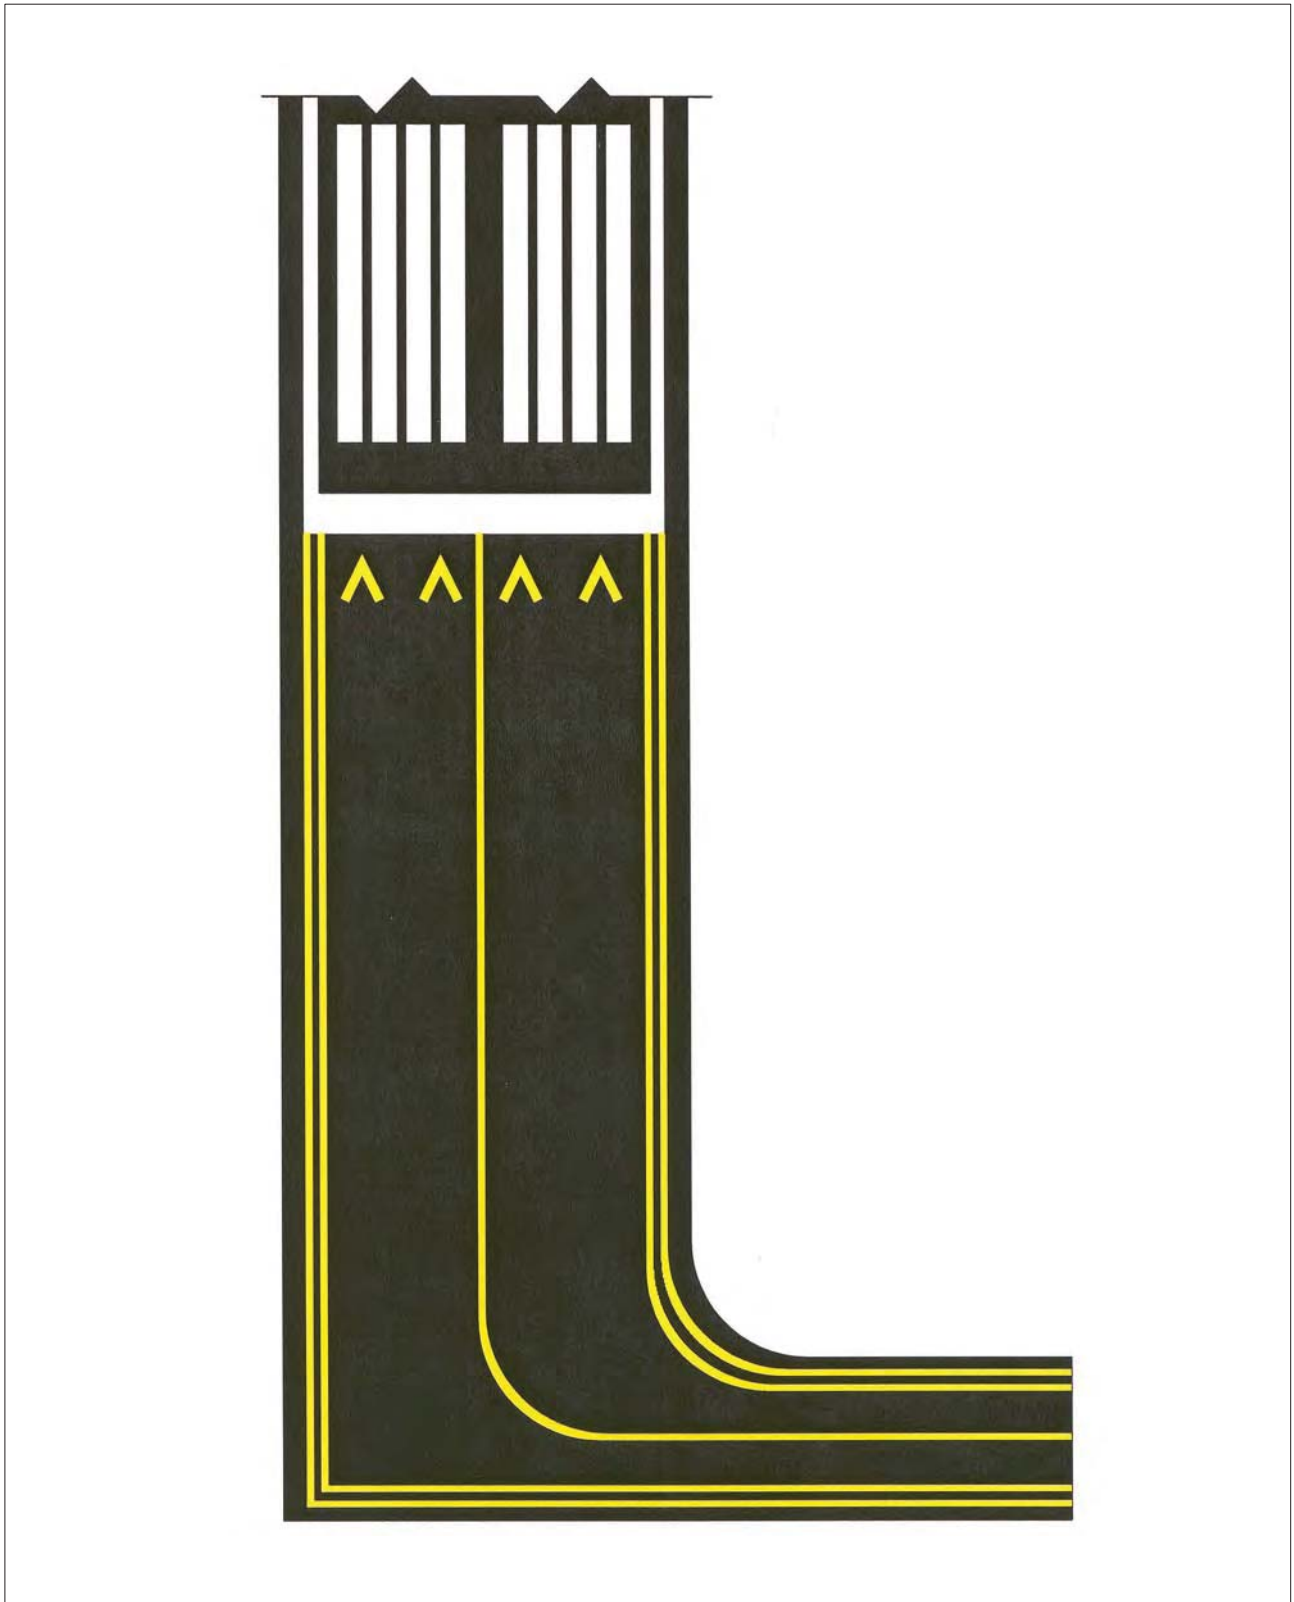


FIG 2-3-4
Displaced Threshold Markings


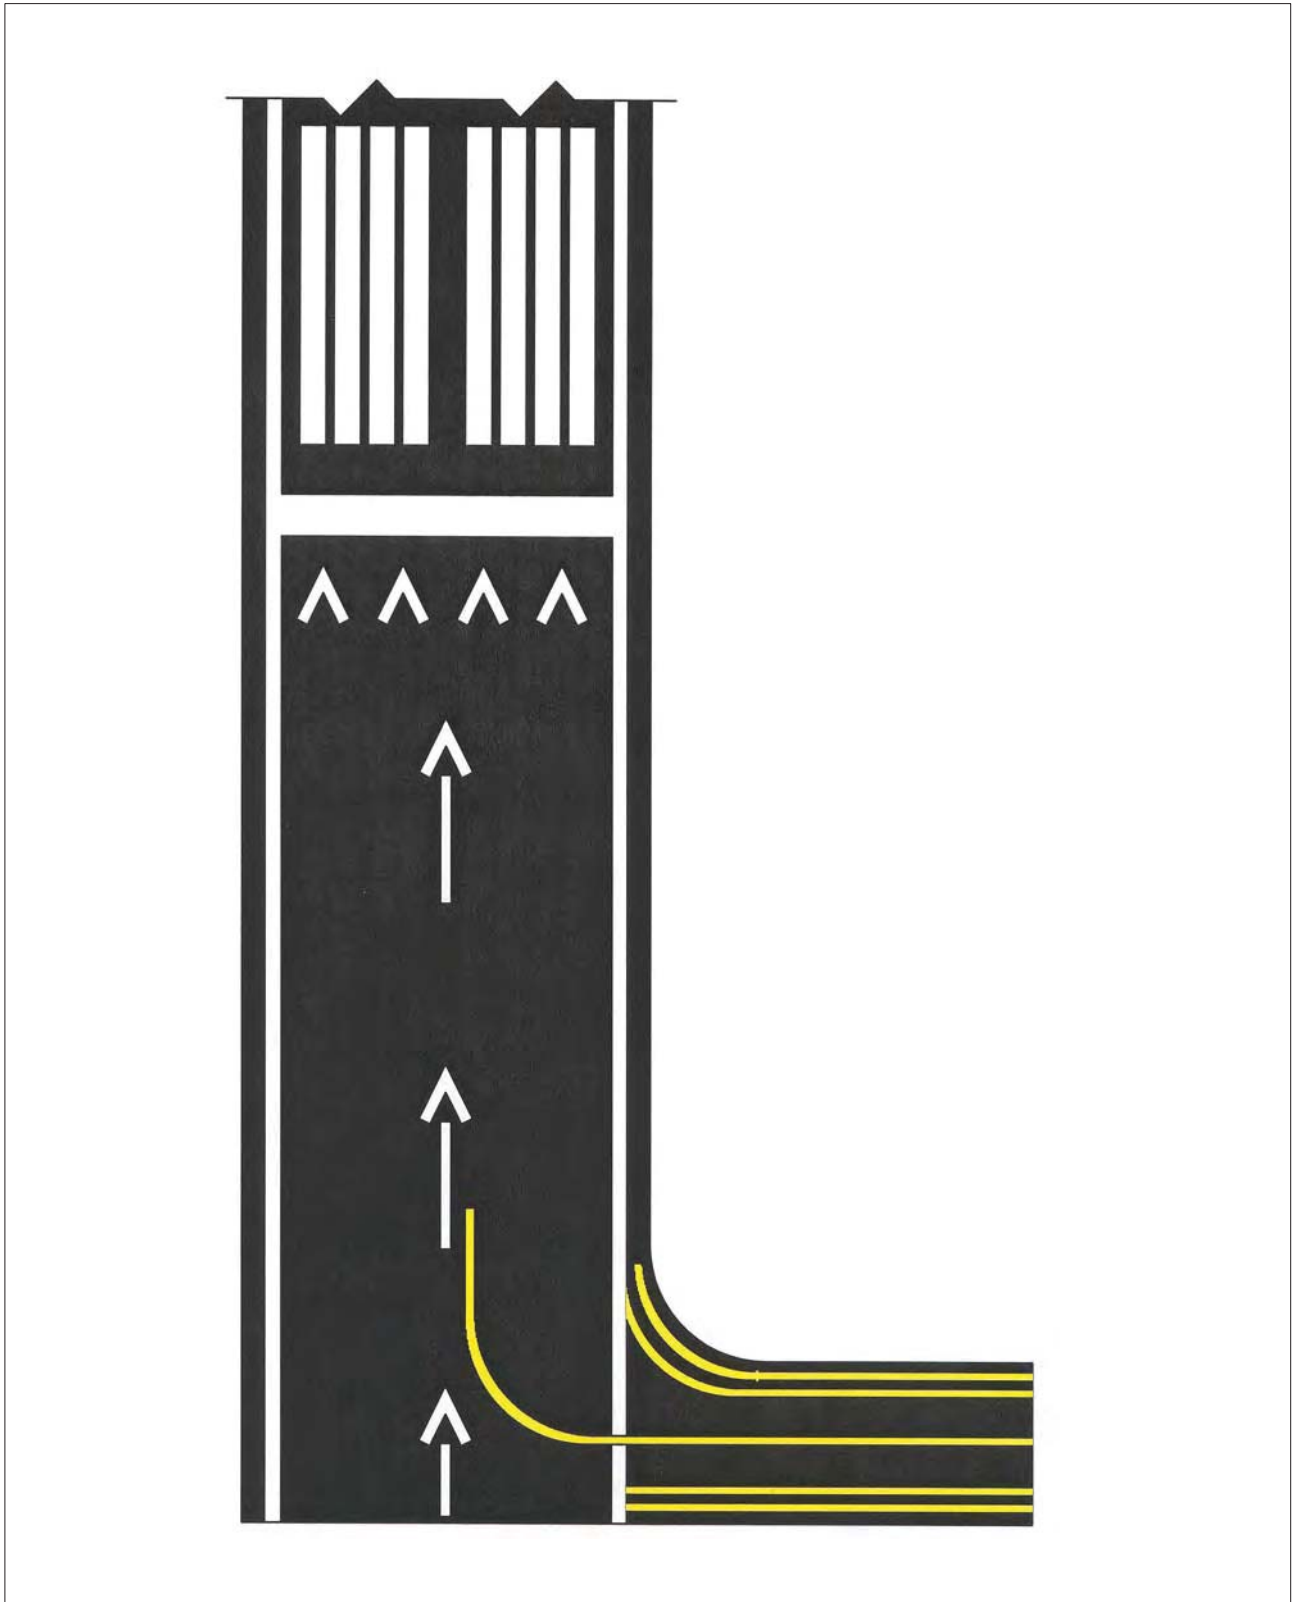


FIG 2-3-5
Runway Shoulder Markings

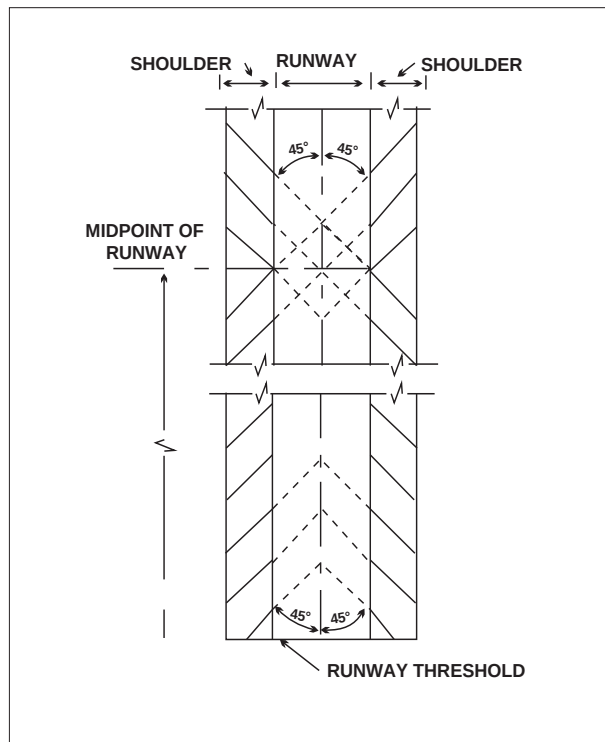

2-3-4. Taxiway Markings

a. General. All taxiways should have centerline markings and runway holding position markings whenever they intersect a runway. Taxiway edge markings are present whenever there is a need to separate the taxiway from a pavement that is not intended for aircraft use or to delineate the edge of the taxiway. Taxiways may also have shoulder markings and holding position markings for Instrument Landing System/Microwave Landing System (ILS/MLS) critical areas and taxiway/taxiway intersection markings.

REFERENCE—

AIM, Holding Position Markings, Paragraph 2-3-5

b. Taxiway Centerline.

1. Normal Centerline. The taxiway centerline is a single continuous yellow line 6 inches (15 cm) to 12 inches (30 cm) in width. This provides a visual cue to permit taxiing along a designated path. Ideally, the aircraft should be kept centered over this line during taxi. However, being centered on the taxiway centerline does not guarantee wingtip clearance with other aircraft or other objects.

2. Enhanced Centerline. At some airports, mostly the larger commercial service airports, an enhanced taxiway centerline will be used. The enhanced taxiway centerline marking consists of a parallel line of yellow dashes on either side of the normal taxiway centerline. The taxiway centerlines are enhanced for a maximum of 150 feet prior to a runway holding position marking. The purpose of this enhancement is to warn the pilot that he/she is approaching a runway holding position marking and should prepare to stop unless he/she has been cleared onto or across the runway by ATC. See FIG 2-3-8.

c. Taxiway Edge Markings. Taxiway edge markings are used to define the edge of the taxiway. They are primarily used when the taxiway edge does not correspond with the edge of the pavement. There are two types of markings depending upon whether the aircraft is supposed to cross the taxiway edge.

1. Continuous Markings. These consist of a continuous double yellow line with each line being at least 6 inches (15 cm) in width spaced 6 inches (15 cm) apart. They are used to define the taxiway edge from the shoulder or some other abutting paved surface not intended for use by aircraft.

2. Dashed Markings. These markings are used when there is an operational need to define the edge of a taxiway or taxilane on a paved surface where the adjoining pavement to the taxiway edge is intended for use by aircraft, e.g., an apron. Dashed taxiway edge markings consist of a broken double yellow line with each line being at least 6 inches (15 cm) in width spaced 6 inches (15 cm) apart edge to edge. These lines are 15 feet (4.5 m) in length with 25 foot (7.5 m) gaps. See FIG 2-3-9.

d. Taxi Shoulder Markings. Taxiways, holding bays, and aprons are sometimes provided with paved shoulders to prevent blast and water erosion. Although shoulders may have the appearance of full strength pavement, they are not intended for use by aircraft and may be unable to support an aircraft. Usually, the taxiway edge marking will define this area. Where conditions exist such as islands or taxiway curves that may cause confusion as to which side of the edge stripe is for use by aircraft, taxiway shoulder markings may be used to indicate the pavement is unusable. Taxiway shoulder markings are yellow. See FIG 2-3-10.

FIG 2-3-6
Markings for Blast Pad or Stopway or Taxiway Preceding a Displaced Threshold

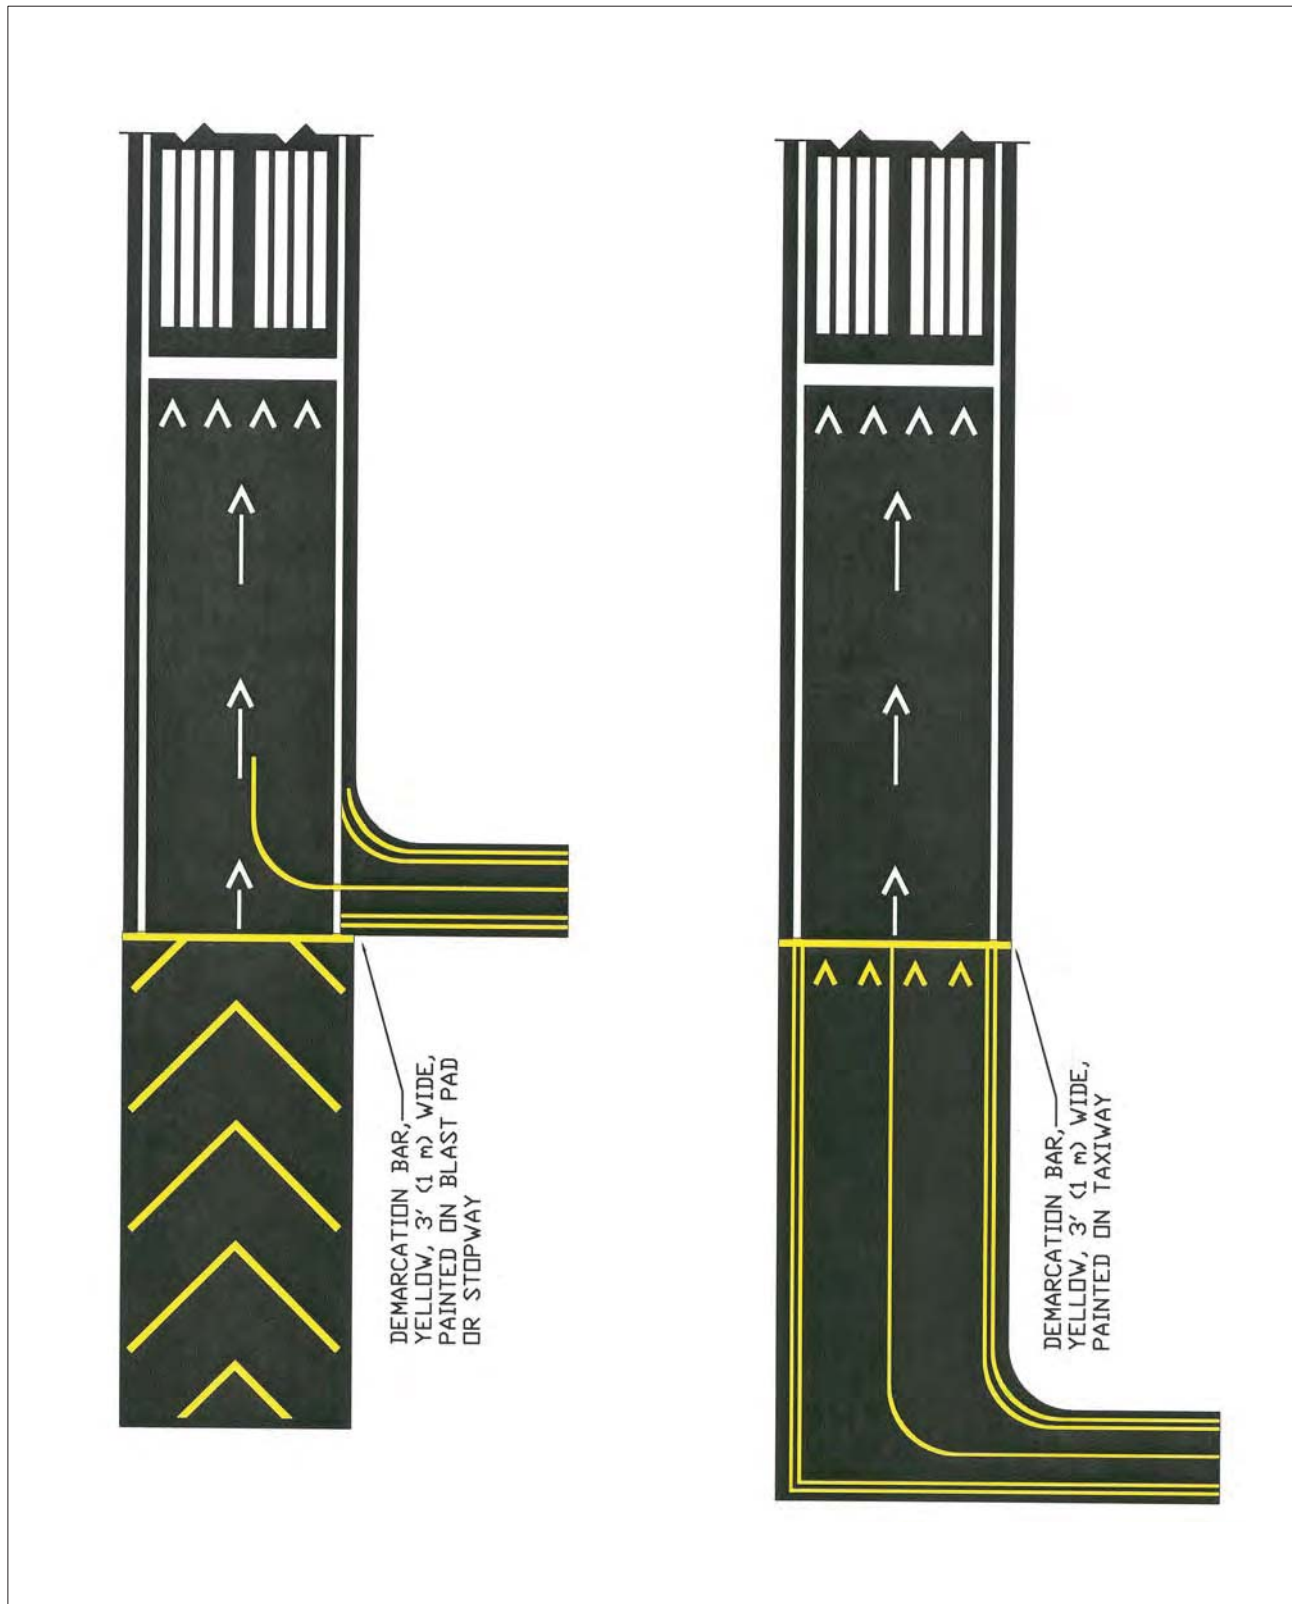


FIG 2-3-7
Markings for Blast Pads and Stopways

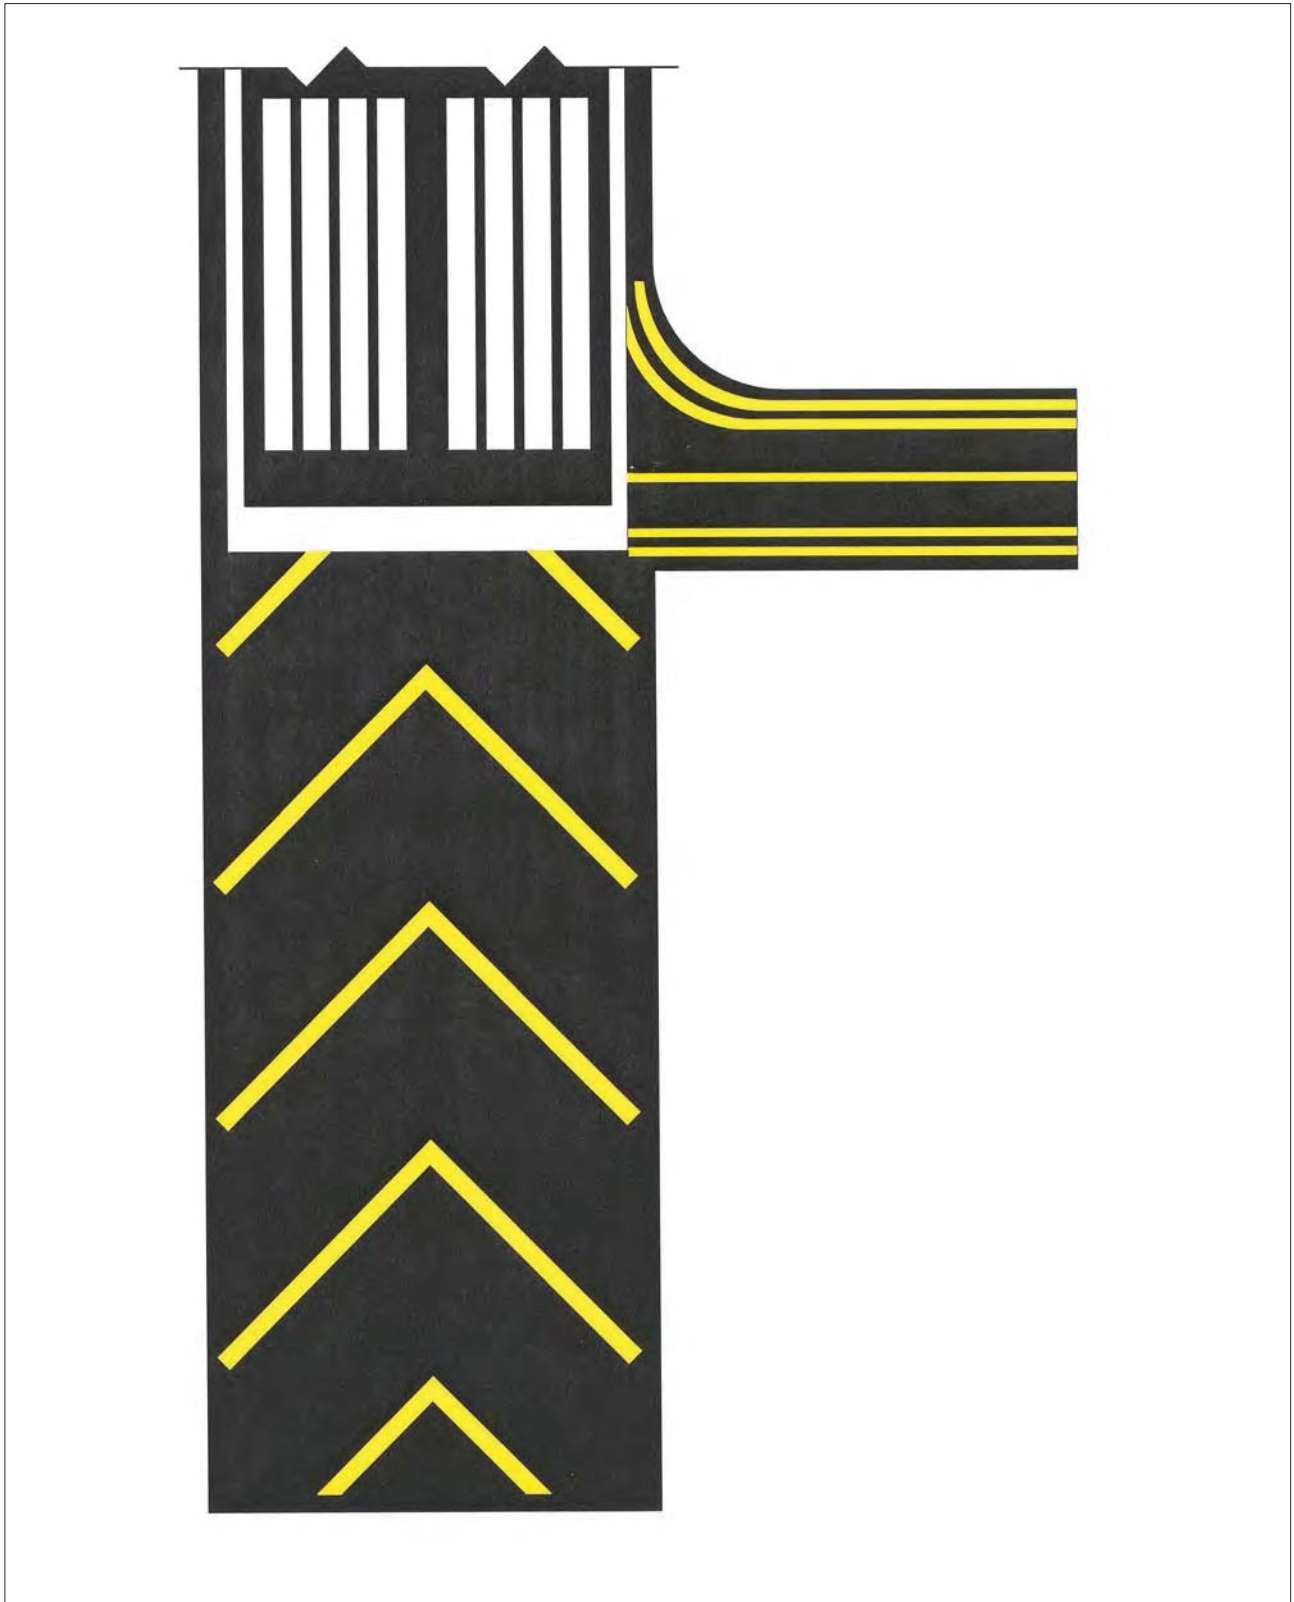


FIG 2-3-8
Enhanced Taxiway Centerline


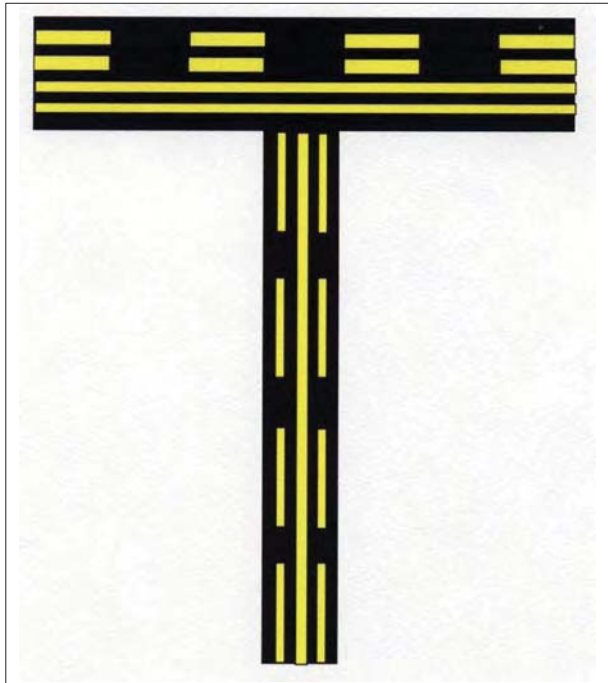



FIG 2-3-9
Dashed Markings

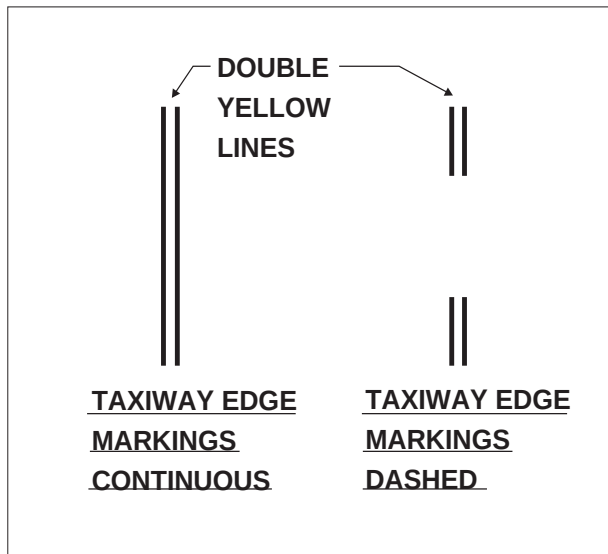

e. Surface Painted Taxiway Direction Signs. Surface painted taxiway direction signs have a yellow background with a black inscription and are provided when it is not possible to provide taxiway direction signs at intersections or when necessary to supplement such signs. These markings are located adjacent to the centerline with signs indicating turns

to the left being on the left side of the taxiway centerline and signs indicating turns to the right being on the right side of the centerline. See FIG 2-3-11


FIG 2-3-10
Taxi Shoulder Markings

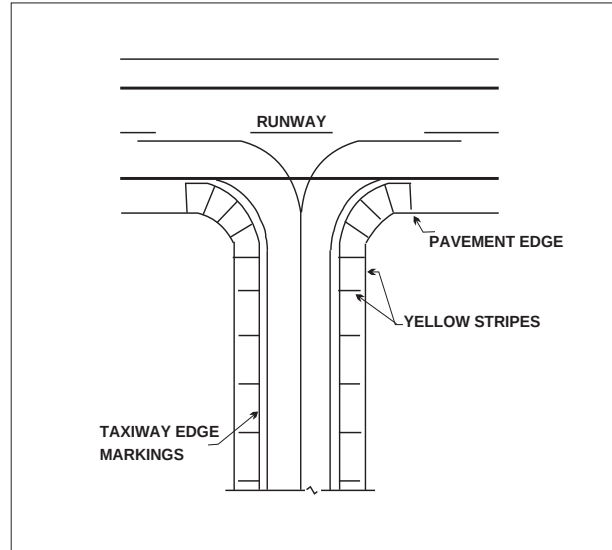

f. Surface Painted Location Signs. Surface painted location signs have a black background with a yellow inscription. When necessary, these markings are used to supplement location signs located along side the taxiway and assist the pilot in confirming the designation of the taxiway on which the aircraft is located. These markings are located on the right side of the centerline. See FIG 2-3-11

g. Geographic Position Markings. These markings are located at points along low visibility taxi routes designated in the airport's Surface Movement Guidance Control System (SMGCS) plan. They are used to identify the location of taxiing aircraft during low visibility operations. Low visibility operations are those that occur when the runway visible range (RVR) is below 1200 feet (360m). They are positioned to the left of the taxiway centerline in the direction of taxiing. See FIG 2-3-12. The geographic position marking is a circle comprised of an outer black ring contiguous to a white ring with a pink circle in the middle. When installed on asphalt or other dark colored pavements, the white ring and the black ring are reversed; i.e., the white ring becomes the outer ring and the black ring becomes the inner ring. It is designated with either a number or a number and letter. The number corresponds to the consecutive position of the marking on the route.

FIG 2-3-11
Surface Painted Signs

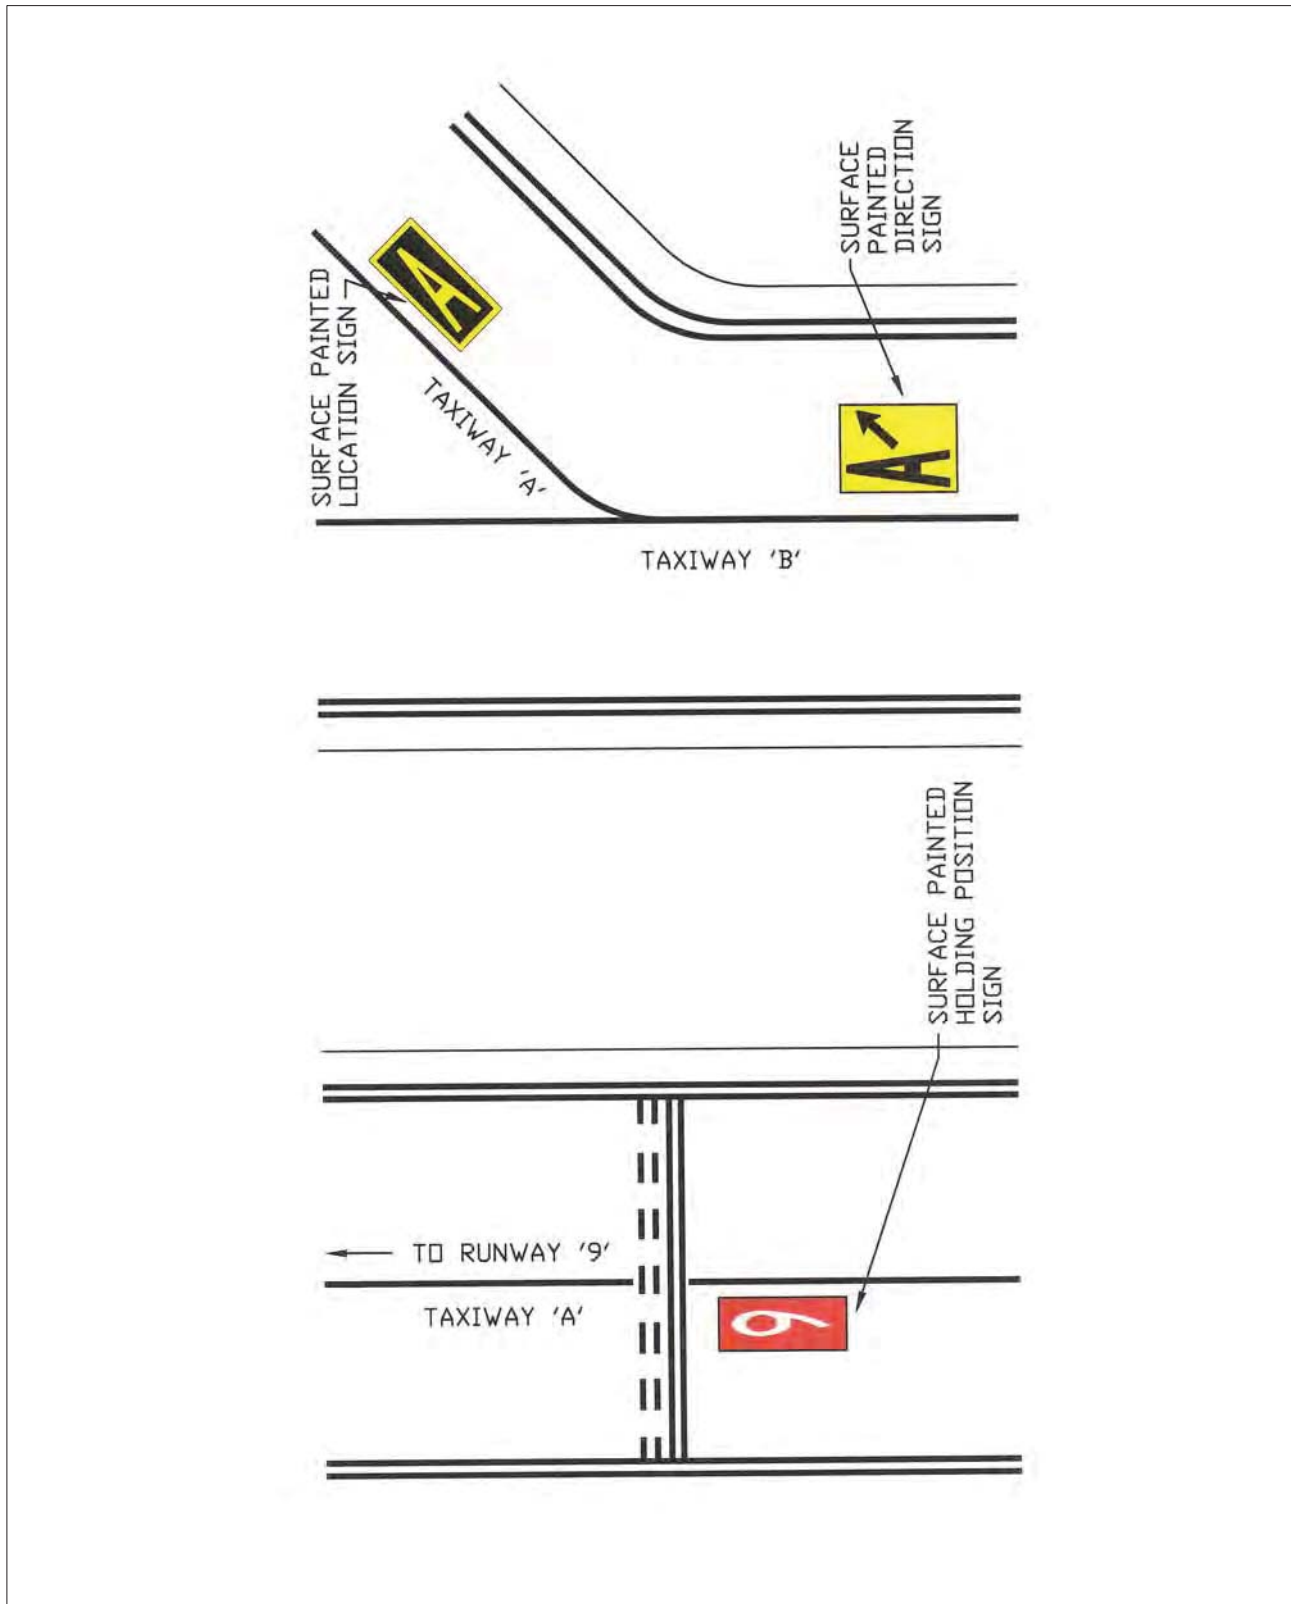

2-3-5. Holding Position Markings

a. Runway Holding Position Markings. For runways these markings indicate where an aircraft is supposed to stop when approaching a runway. They consist of four yellow lines: two solid and two dashed spaced six or twelve inches apart and extending across the width of the taxiway or runway. The solid lines are always on the side where the aircraft is to hold. There are three locations where runway holding position markings are encountered:

1. Runway Holding Position Markings on Taxiways. These markings identify the locations on a taxiway where an aircraft is supposed to stop when it does not have clearance to proceed onto the runway. Generally, runway holding position markings also identify the boundary of the runway safety area for aircraft exiting the runway. The runway holding position markings are shown in FIG 2-3-13 and FIG 2-3-16. When instructed by ATC to "Hold short of runway xx," the pilot must stop so that no part of the aircraft extends beyond the runway holding position marking. When approaching the runway, a pilot should not cross the runway holding position marking without ATC clearance at a controlled airport or without making sure of adequate separation from other aircraft at uncontrolled airports. An aircraft exiting a runway is not clear of the runway until all parts of the aircraft have crossed the applicable holding position marking.

REFERENCE-

AIM, *Exiting the Runway After Landing*, Paragraph 4-3-20

2. Runway Holding Position Markings on Runways. These markings are installed on runways only if the runway is normally used by air traffic control for land hold short operations or taxiing operations and have operational significance only for those two types of operations. A sign with a white inscription on a red background is installed adjacent to these holding position markings. See FIG 2-3-14. The holding position markings are placed on runways prior to the intersection with another runway or some designated point. Pilots receiving instructions cleared to land runway xx from air traffic control are authorized to use the entire landing length of the runway and should disregard any holding position markings located on the runway. Pilots receiving and accepting instructions cleared to land runway xx hold short of runway yy from air traffic control must either exit runway xx or stop at the holding position prior to runway yy.

3. Taxiways Located in Runway Approach

Areas. These markings are used at some airports where it is necessary to hold an aircraft on a taxiway located in the approach or departure area of a runway so that the aircraft does not interfere with the operations on that runway. This marking is collocated with the runway approach area holding position sign. When specifically instructed by ATC "Hold short of runway xx approach area," the pilot should stop so no part of the aircraft extends beyond the holding position marking. See subparagraph 2-3-8b2 Runway Approach Area Holding Position Sign and FIG 2-3-15.

b. Holding Position Markings for Instrument Landing System (ILS). Holding position markings for ILS/MLS critical areas consist of two yellow solid lines spaced two feet apart connected by pairs of solid lines spaced ten feet apart extending across the width of the taxiway as shown. See FIG 2-3-16. A sign with an inscription in white on a red background is installed adjacent to these hold position markings. When the ILS critical area is being protected, the pilot should stop so no part of the aircraft extends beyond the holding position marking. When approaching the holding position marking, a pilot should not cross the marking without ATC clearance. ILS critical area is not clear until all parts of the aircraft have crossed the applicable holding position marking.

REFERENCE-

AIM, *Instrument Landing System (ILS)*, Paragraph 1-1-9

c. Holding Position Markings for Taxiway/Taxiway Intersections. Holding position markings for taxiway/taxiway intersections consist of a single dashed line extending across the width of the taxiway as shown. See FIG 2-3-17. They are installed on taxiways where air traffic control normally holds aircraft short of a taxiway intersection. When instructed by ATC "hold short of taxiway," the pilot should stop so no part of the aircraft extends beyond the holding position marking. When the marking is not present, the pilot should stop the aircraft at a point which provides adequate clearance from an aircraft on the intersecting taxiway.

d. Surface Painted Holding Position Signs. Surface painted holding position signs have a red background with a white inscription and supplement the signs located at the holding position. This type of marking is normally used where the width of the holding position on the taxiway is greater than 200 feet (60m). It is located to the left side of the taxiway centerline on the holding side and prior to the holding position marking. See FIG 2-3-11.

FIG 2-3-12
Geographic Position Markings

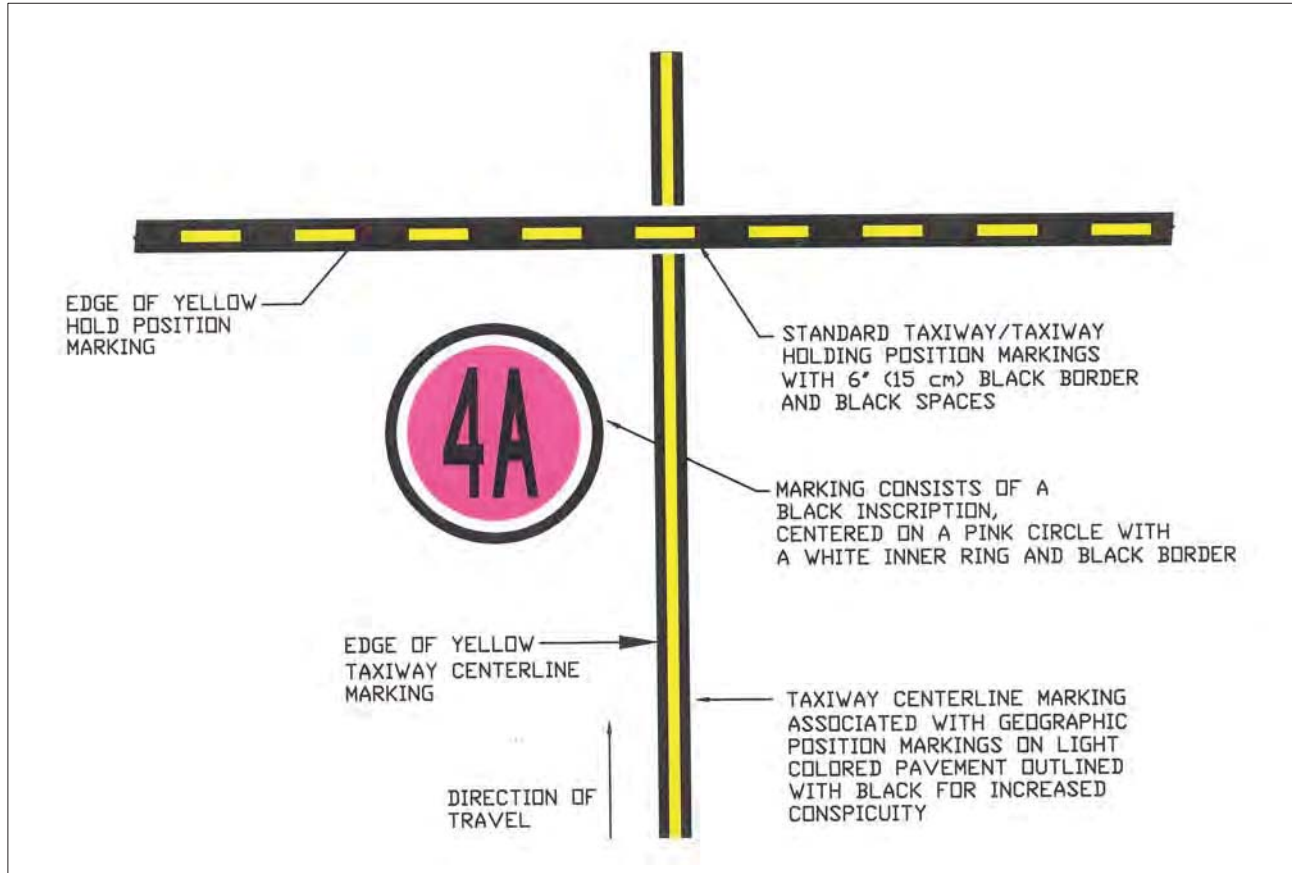


FIG 2-3-13
Runway Holding Position Markings on Taxiway

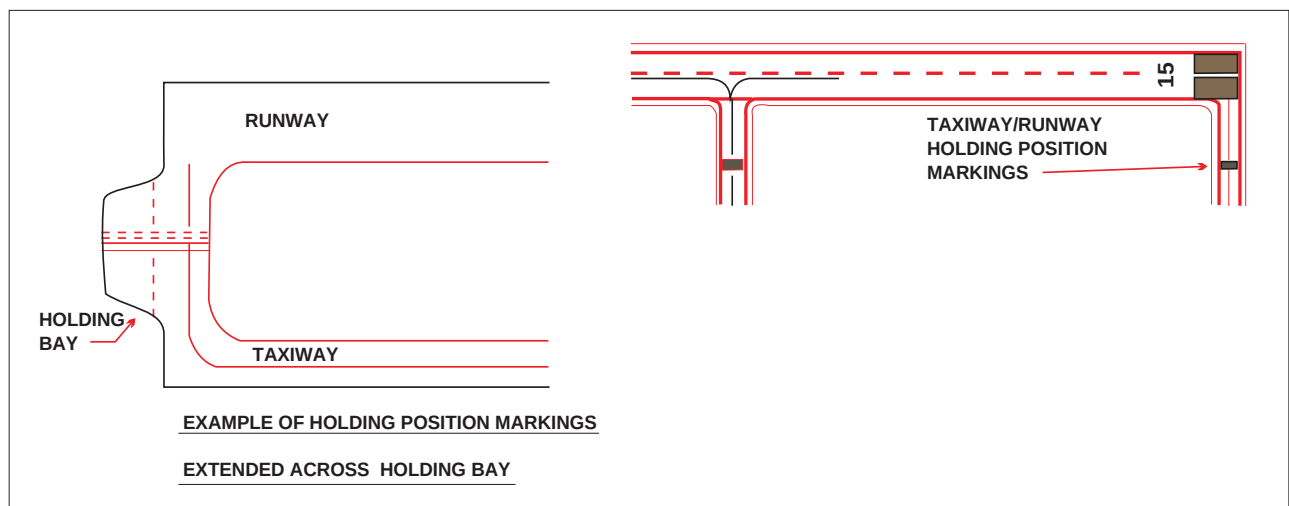


FIG 2-3-14
Runway Holding Position Markings on Runways


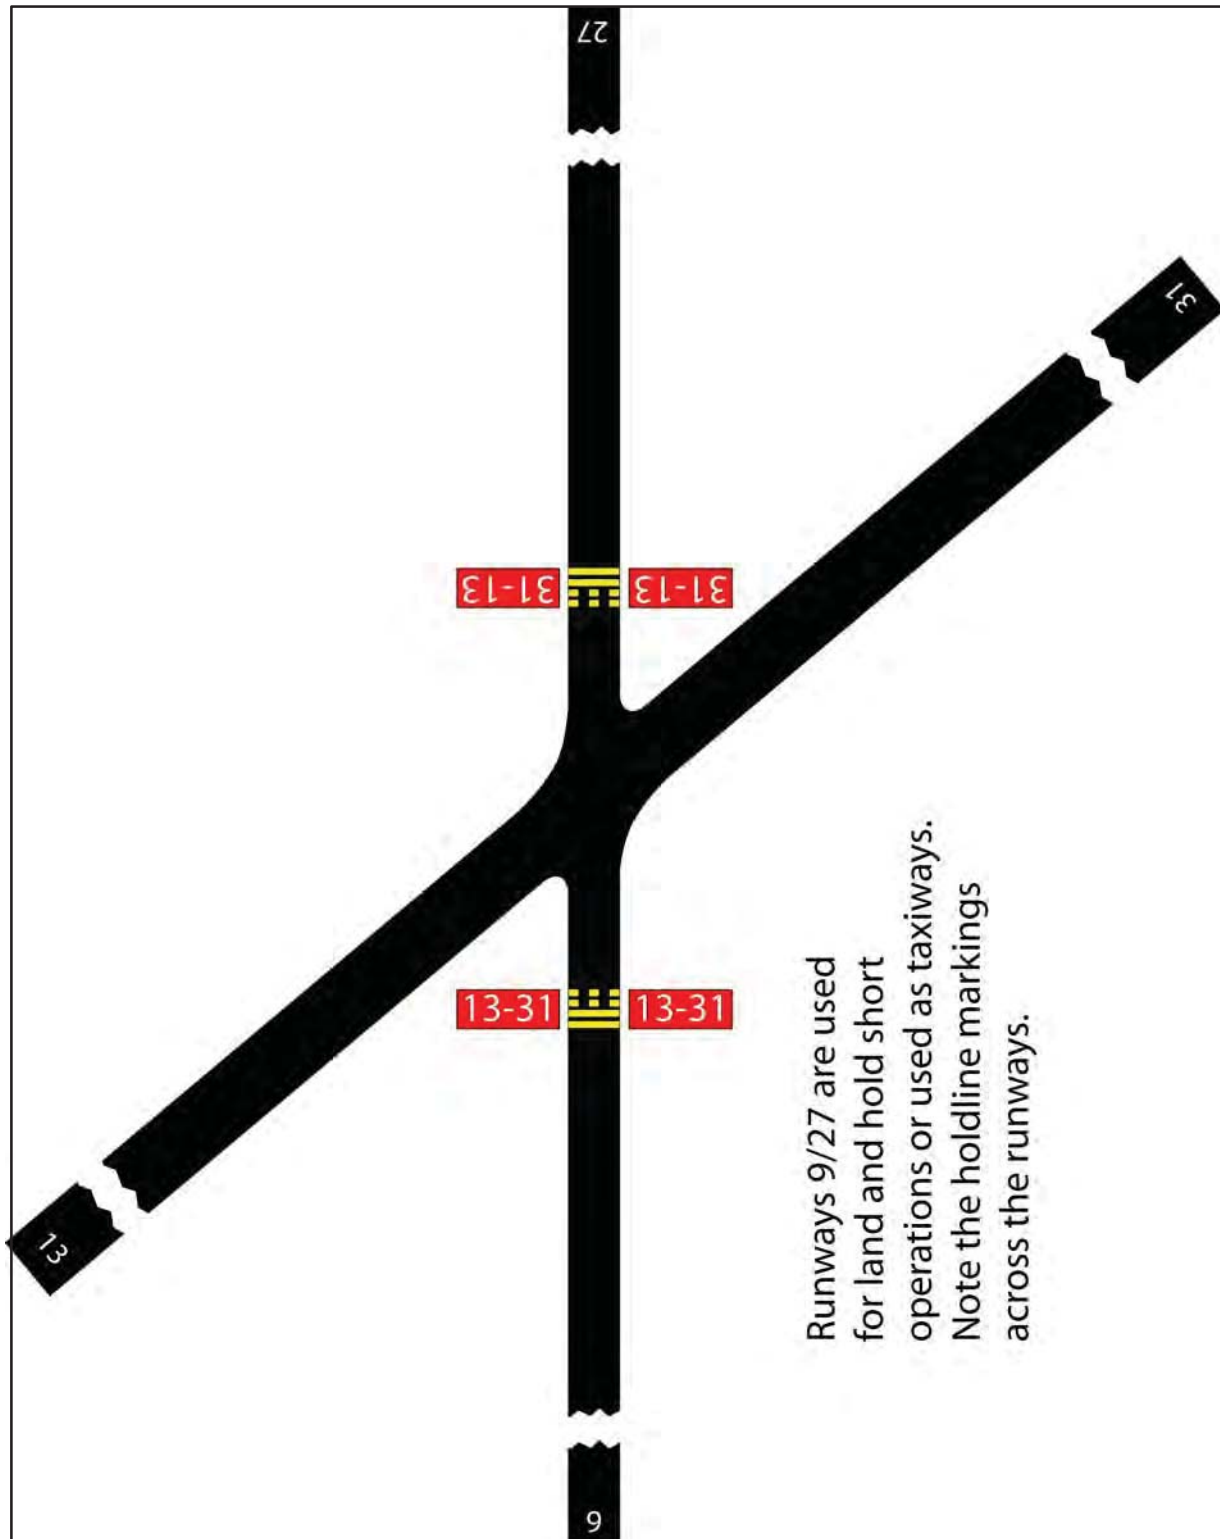


FIG 2-3-16
Holding Position Markings: ILS Critical Area

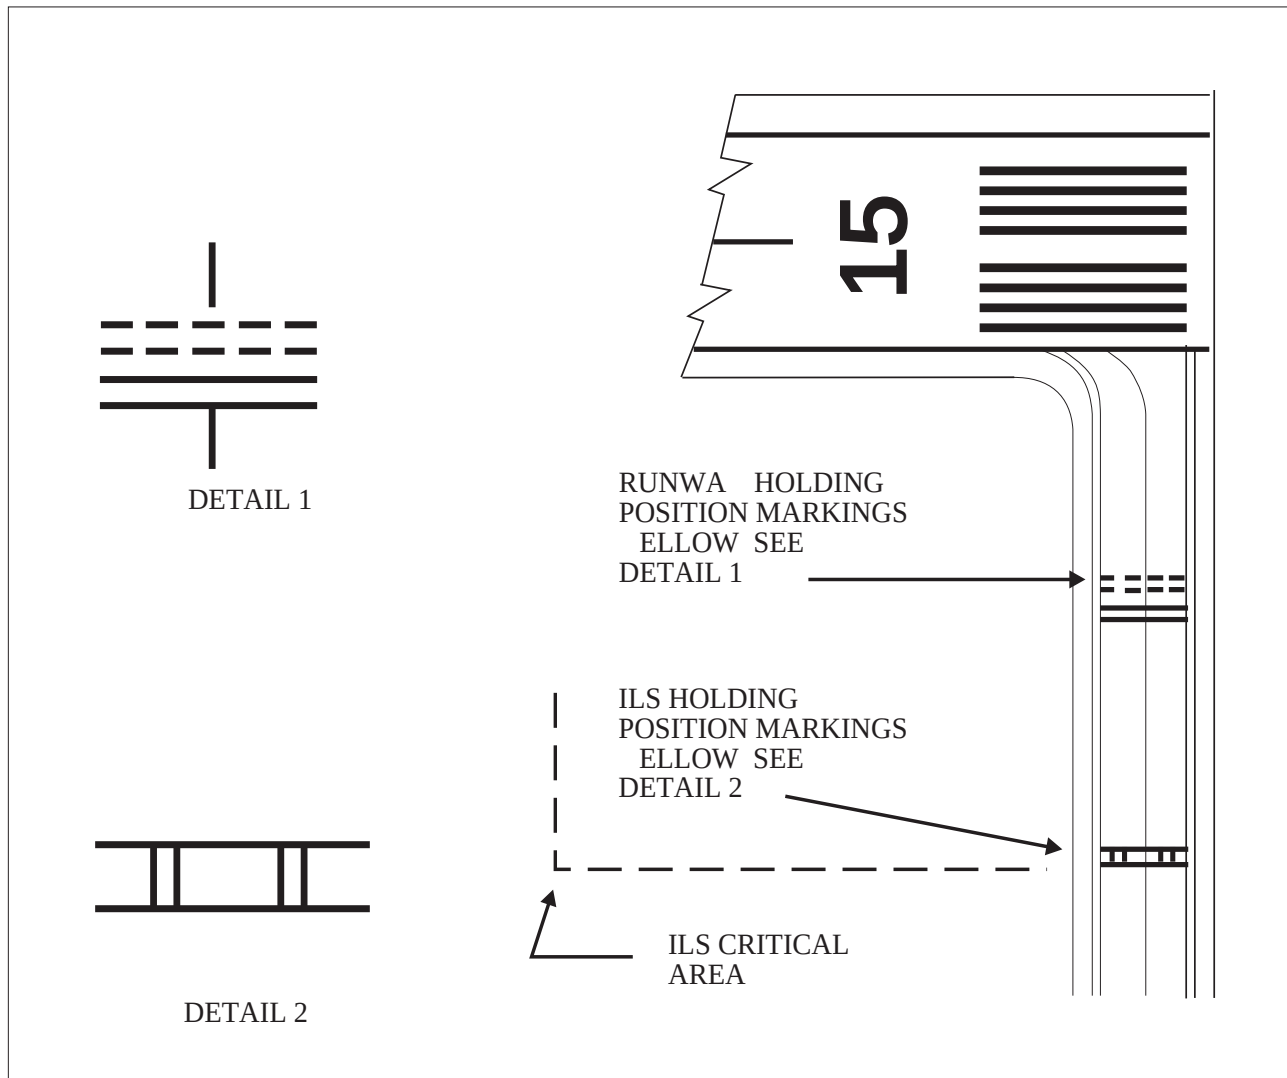

2-3-6. Other Markings

a. Vehicle Roadway Markings. The vehicle roadway markings are used when necessary to define a path way for vehicle operations on or crossing areas that are also intended for aircraft. These markings consist of a white solid line to delineate each edge of the roadway and a dashed line to separate lanes within the edges of the roadway. In lieu of the solid lines, zipper markings may be used to delineate the edges of the vehicle roadway. See FIG 2-3-18. Details of the zipper markings are shown in FIG 2-3-19.

b. VOR Receiver Checkpoint Markings. The VOR receiver checkpoint marking allows the pilot to check aircraft instruments with navigational aid signals. It consists of a painted circle with an arrow in

the middle. The arrow is aligned in the direction of the checkpoint azimuth. This marking and an associated sign is located on the airport apron or taxiway at a point selected for easy access by aircraft but where other airport traffic is not to be unduly obstructed. See FIG 2-3-20.

NOTE—

The associated sign contains the VOR station identification letter and course selected (published) for the check, the words “VOR check course,” and DME data (when applicable). The color of the letters and numerals are black on a yellow background.

EXAMPLE—

DCA 176-356
VOR check course
DME XXX

FIG 2-3-17
Holding Position Markings: Taxiway/Taxiway Intersections

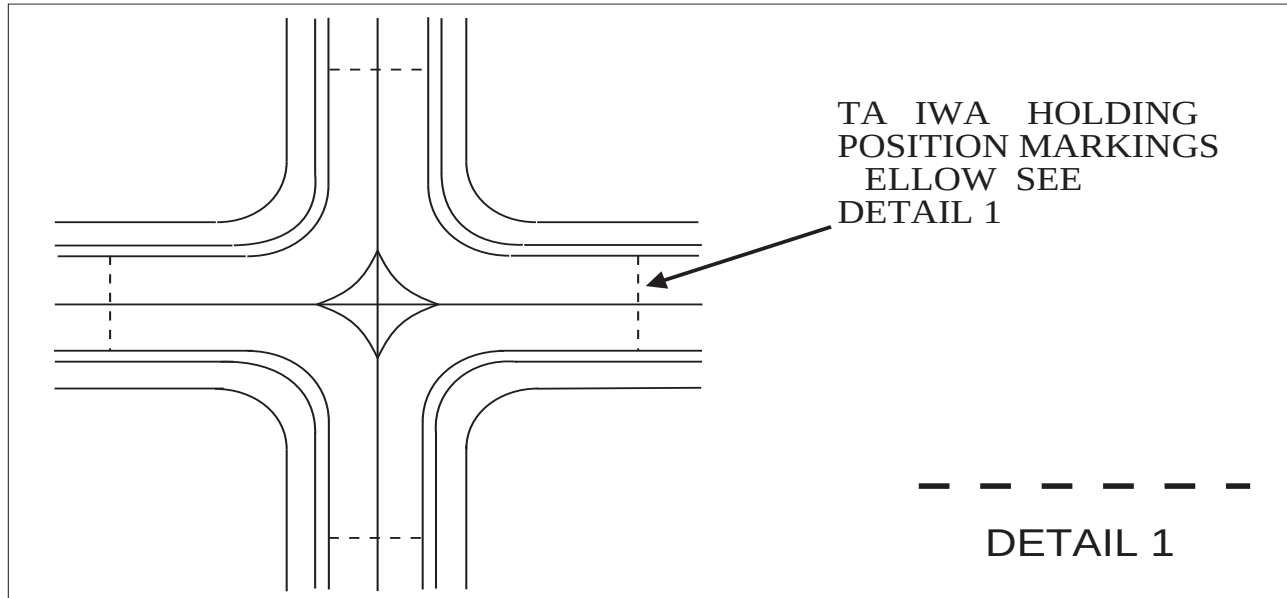


FIG 2-3-18
Vehicle Roadway Markings


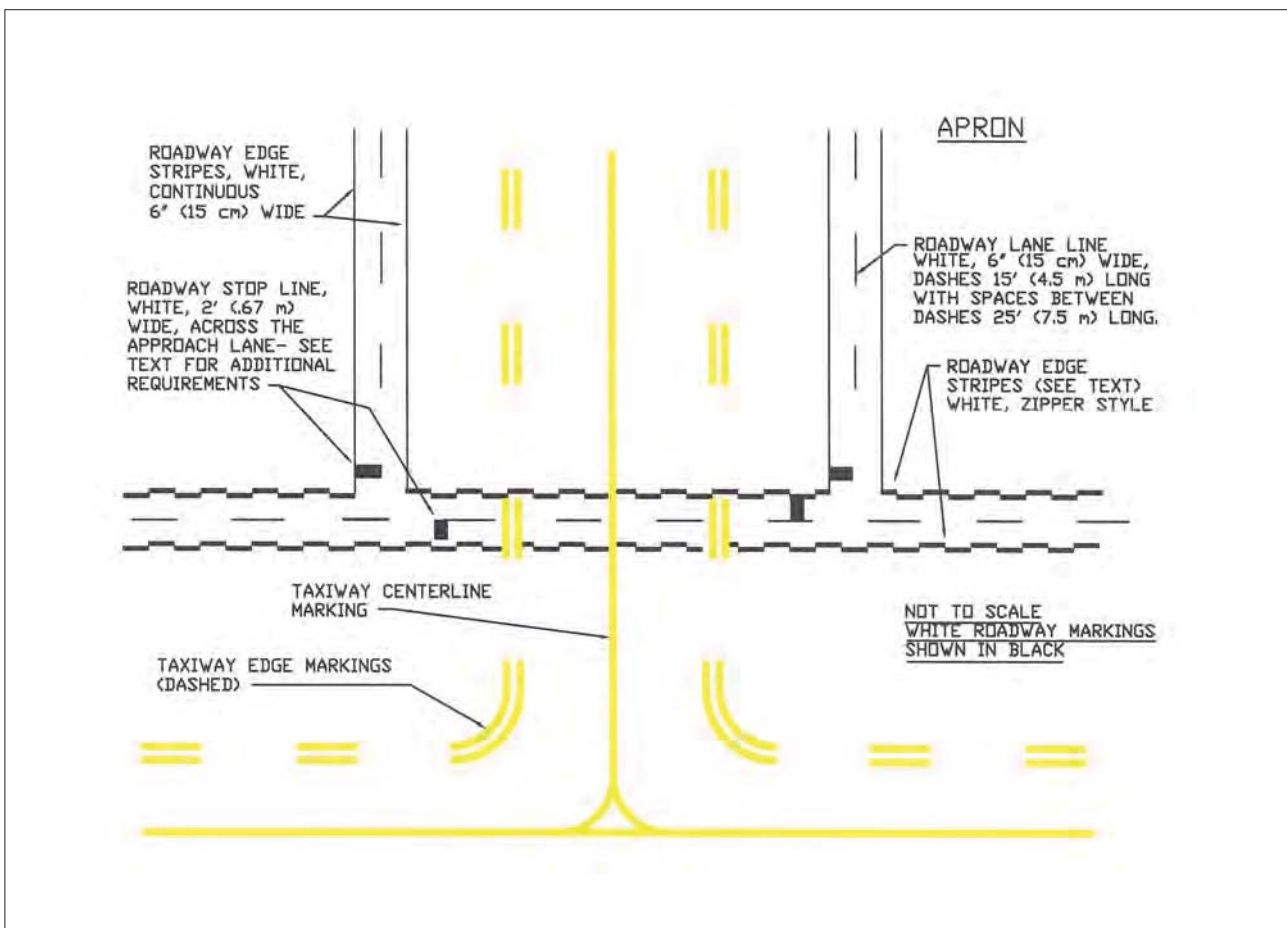


FIG 2-3-19
Roadway Edge Stripes, White, Zipper Style

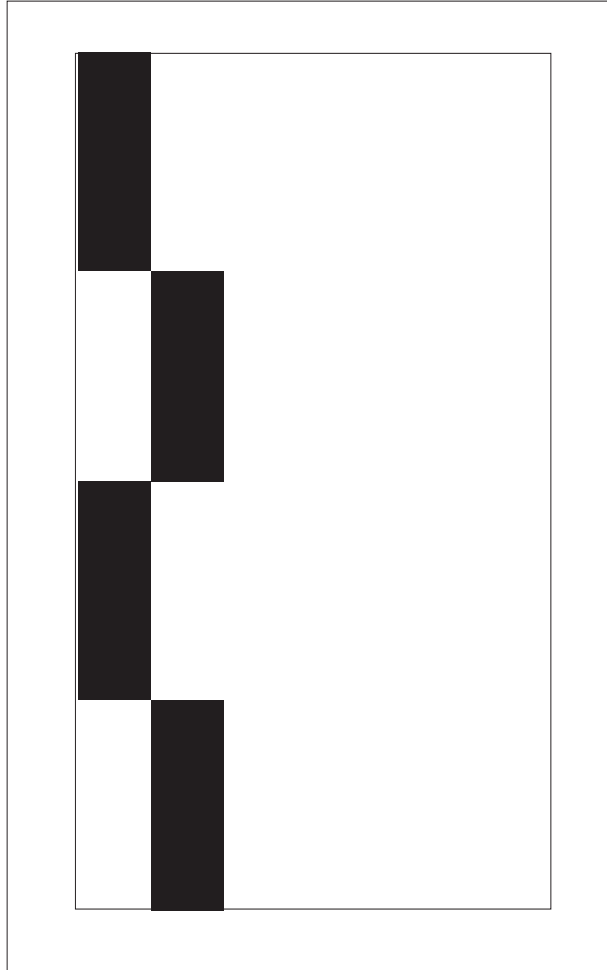

c. Nonmovement Area Boundary Markings. These markings delineate the movement area i.e. area under air traffic control. These markings are yellow and located on the boundary between the movement and nonmovement area. The nonmovement area boundary markings consist of two yellow lines, one solid and one dashed, 6 inches (15cm) in width. The solid line is located on the nonmovement area side while the dashed yellow line is located on the movement area side. The nonmovement boundary marking area is shown in FIG 2-3-21.

FIG 2-3-20
Ground Receiver Checkpoint Markings

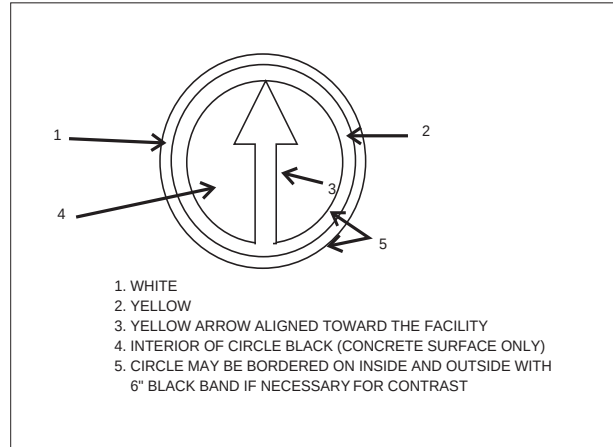


FIG 2-3-21
Nonmovement Area Boundary Markings



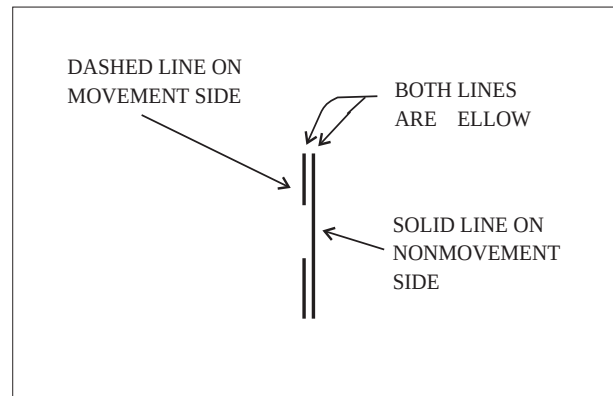


FIG 2-3-22
Closed or Temporarily Closed Runway and Taxiway Markings

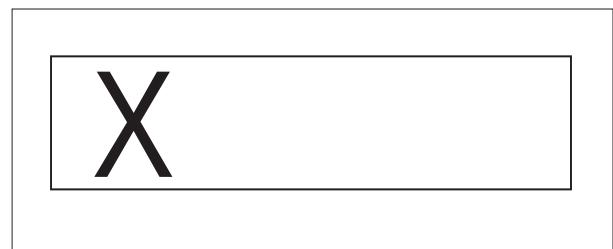

d. Marking and Lighting of Permanently Closed Runways and Taxiways. For runways and taxiways which are permanently closed, the lighting circuits will be disconnected. The runway threshold, runway designation, and touchdown markings are obliterated and yellow crosses are placed at each end of the runway and at 1,000 foot intervals. See FIG 2-3-22.

FIG 2-3-23
Helicopter Landing Areas

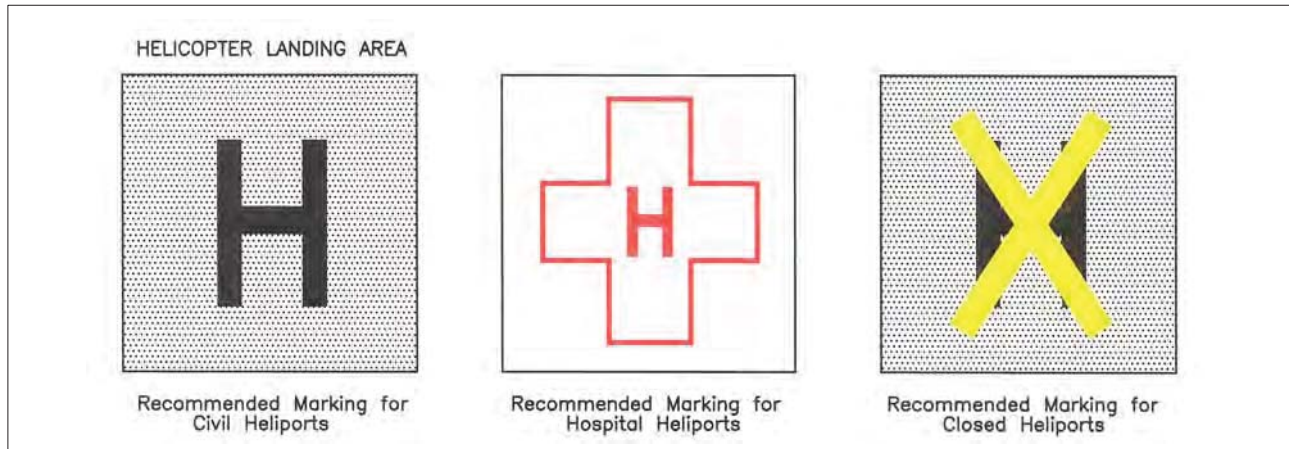

e. Temporarily Closed Runways and Taxiways. To provide a visual indication to pilots that a runway is temporarily closed crosses are placed on the runway only at each end of the runway. The crosses are yellow in color. See FIG 2-3-22.

1. A raised lighted yellow cross may be placed on each runway end in lieu of the markings described in subparagraph e Temporarily Closed Runways and Taxiways to indicate the runway is closed.

2. A visual indication may not be present depending on the reason for the closure, duration of the closure, airfield configuration and the existence and the hours of operation of an airport traffic control tower. Pilots should check NOTAMs and the Automated Terminal Information System (ATIS) for local runway and taxiway closure information.

3. Temporarily closed taxiways are usually treated as hazardous areas in which no part of an aircraft may enter and are blocked with barricades. However, as an alternative, a yellow cross may be installed at each entrance to the taxiway.

f. Helicopter Landing Areas. The markings illustrated in FIG 2-3-23 are used to identify the landing and takeoff area at a public use heliport and hospital heliport. The letter "H" in the markings is oriented to align with the intended direction of approach. FIG 2-3-23 also depicts the markings for a closed airport.

2-3-7. Airport Signs

There are six types of signs installed on airfields: mandatory instruction signs, location signs, direction signs, destination signs, information signs, and runway distance remaining signs. The characteristics and use of these signs are discussed in paragraph 2-3-8 Mandatory Instruction Signs through paragraph 2-3-13 Runway Distance Remaining Signs.

REFERENCE-

AC150/5340-18, *Standards for Airport Sign Systems for Detailed Information on Airport Signs.*

FIG 2-3-24
Runway Holding Position Sign



FIG 2-3-25
Holding Position Sign at Beginning of Takeoff Runway



2-3-8. Mandatory Instruction Signs

a. These signs have a red background with a white inscription and are used to denote

1. An entrance to a runway or critical area and
2. Areas where an aircraft is prohibited from entering

b. **Typical mandatory signs and applications are:**

1. Runway Holding Position Sign. This sign is located at the holding position on taxiways that intersect a runway or on runways that intersect other

runways. The inscription on the sign contains the designation of the intersecting runway as shown in FIG 2-3-24. The runway numbers on the sign are arranged to correspond to the respective runway threshold. For example, 15-33 indicates that the threshold for Runway 15 is to the left and the threshold for Runway 33 is to the right.

(a) On taxiways that intersect the beginning of the takeoff runway, only the designation of the takeoff runway may appear on the sign as shown in FIG 2-3-25. While all other signs will have the designation of both runway directions.

FIG 2-3-26

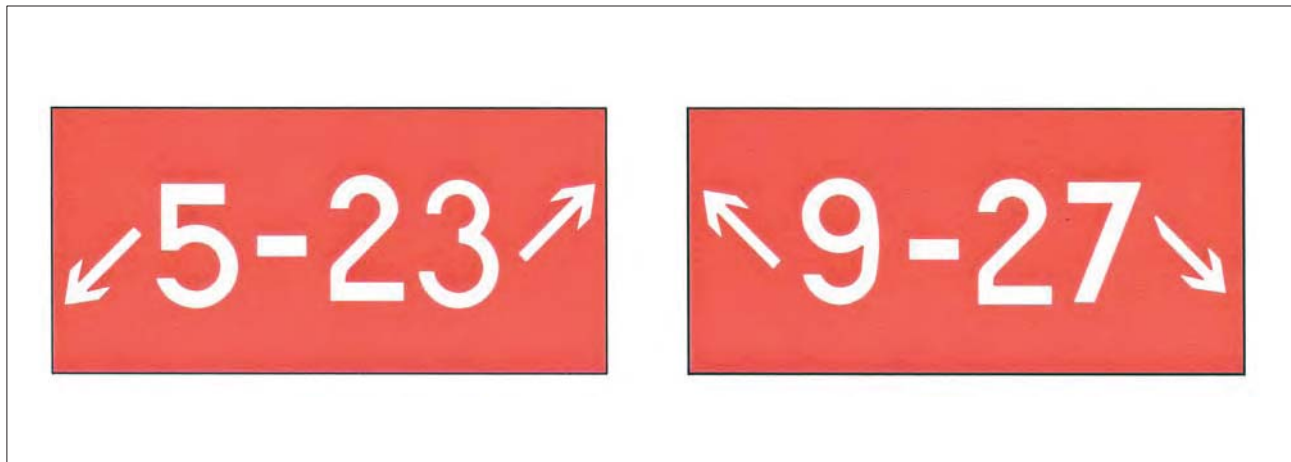
Holding Position Sign for a Taxiway that Intersects the Intersection of Two Runways

FIG 2-3-27

Holding Position Sign for a Runway Approach Area

(b) If the sign is located on a taxiway that intersects the intersection of two runways the designations for both runways will be shown on the sign along with arrows showing the approximate alignment of each runway as shown in FIG 2-3-26. In addition to showing the approximate runway alignment the arrow indicates the direction to the threshold of the runway whose designation is immediately next to the arrow.

(c) A runway holding position sign on a taxiway will be installed adjacent to holding position markings on the taxiway pavement. On runways holding position markings will be located only on the runway pavement adjacent to the sign if the runway is normally used by air traffic control for Land Hold Short operations or as a taxiway. The holding


position markings are described in paragraph 2-3-5 Holding Position Markings.

2. Runway Approach Area Holding Position Sign. At some airports it is necessary to hold an aircraft on a taxiway located in the approach or departure area for a runway so that the aircraft does not interfere with operations on that runway. In these situations a sign with the designation of the approach end of the runway followed by a dash – and letters APCH will be located at the holding position on the taxiway. Holding position markings in accordance with paragraph 2-3-5 Holding Position Markings will be located on the taxiway pavement. An example of this sign is shown in FIG 2-3-27. In this example the sign may protect the approach to Runway 15 and/or the departure for Runway 33.

FIG 2-3-28

Holding Position Sign for ILS Critical Area

FIG 2-3-29

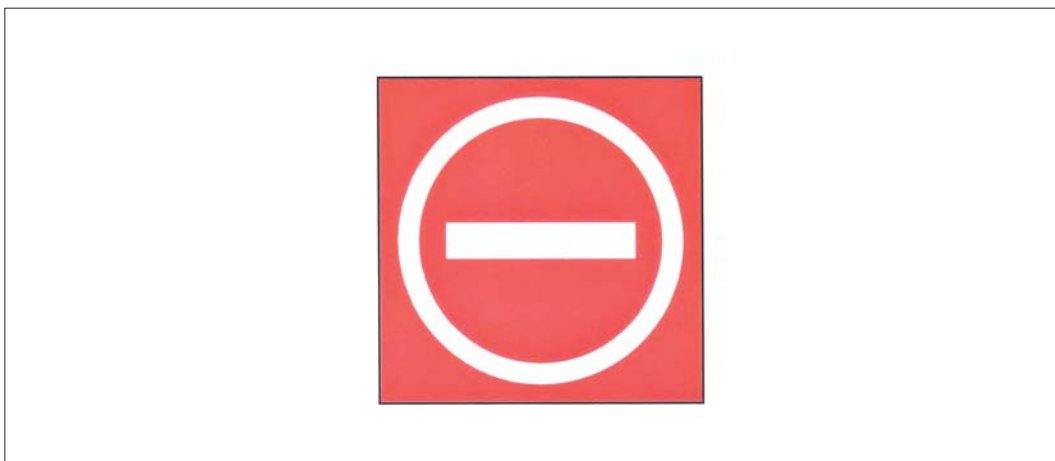Sign Prohibiting Aircraft Entry into an Area

3. ILS Critical Area Holding Position Sign. At some airports when the instrument landing system is being used it is necessary to hold an aircraft on a taxiway at a location other than the holding position described in paragraph 2-3-5 Holding Position Markings. In these situations the holding position sign for these operations will have the inscription "ILS" and be located adjacent to the holding position marking on the taxiway described in paragraph 2-3-5. An example of this sign is shown in FIG 2-3-28.

4. No Entry Sign. This sign shown in FIG 2-3-29 prohibits an aircraft from entering an area. Typically this sign could be located on a taxiway intended to be used in only one direction or at the intersection of vehicle roadways with runways, taxiways or aprons where the roadway may be mistaken as a taxiway or other aircraft movement surface.

NOTE-

The holding position sign provides the pilot with a visual cue as to the location of the holding position marking. The operational significance of holding position markings are described in the notes for paragraph 2-3-5 Holding Position Markings.

FIG 2-3-30
Taxiway Location Sign

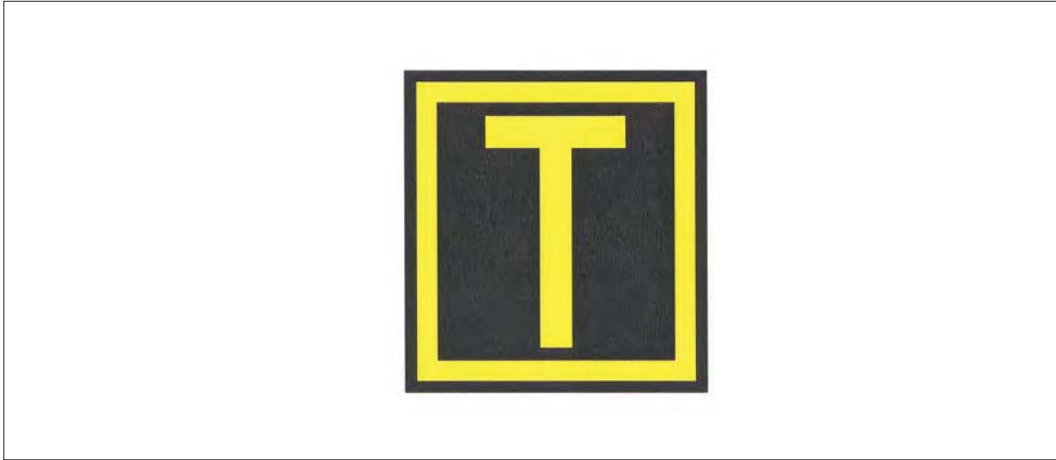


FIG 2-3-31
Taxiway Location Sign Collocated with Runway Holding Position Sign



2-3-9. Location Signs

a. Location signs are used to identify either a taxiway or runway on which the aircraft is located. Other location signs provide a visual cue to pilots to assist them in determining when they have exited an area. The various location signs are described below.

1. Taxiway Location Sign. This sign has a black background with a yellow inscription and yellow border as shown in FIG 2-3-30. The inscription is the designation of the taxiway on which the aircraft is located. These signs are installed along taxiways either by themselves or in conjunction with direction signs or runway holding position signs. See FIG 2-3-35 and FIG 2-3-31.

FIG 2-3-32
Runway Location Sign




FIG 2-3-33
Runway Boundary Sign



2. Runway Location Sign. This sign has a black background with a yellow inscription and yellow border as shown in FIG 2-3-32. The inscription is the designation of the runway on which the aircraft is located. These signs are intended to complement the information available to pilots through their magnetic compass and typically are installed where the proximity of two or more runways to one another could cause pilots to be confused as to which runway they are on.

3. Runway Boundary Sign. This sign has a yellow background with a black inscription with a graphic depicting the pavement holding position marking as shown in FIG 2-3-33. This sign, which faces the runway and is visible to the pilot exiting the runway, is located adjacent to the holding position marking on the pavement. The sign is intended to provide pilots with another visual cue which they can use as a guide in deciding when they are clear of the runway.

FIG 2-3-34
ILS Critical Area Boundary Sign

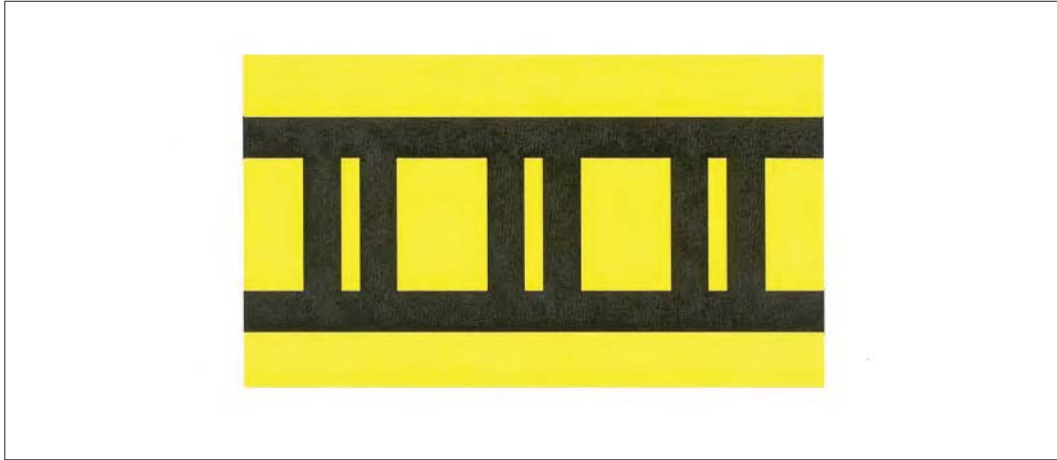

4. ILS Critical Area Boundary Sign. This sign has a yellow background with a black inscription with a graphic depicting the ILS pavement holding position marking as shown in FIG 2-3-34. This sign is located adjacent to the ILS holding position marking on the pavement and can be seen by pilots leaving the critical area. The sign is intended to provide pilots with another visual cue which they can use as a guide in deciding when they are clear of the ILS critical area.

2-3-10. Direction Signs

a. Direction signs have a yellow background with a black inscription. The inscription identifies the designation(s) of the intersecting taxiway(s) leading out of the intersection that a pilot would normally be expected to turn onto or hold short of. Each designation is accompanied by an arrow indicating the direction of the turn.

b. Except as noted in subparagraph e, each taxiway designation shown on the sign is accompanied by only one arrow. When more than one taxiway designation is shown on the sign, each designation and its associated arrow is separated from the other

taxiway designations by either a vertical message divider or a taxiway location sign as shown in FIG 2-3-35.

c. Direction signs are normally located on the left prior to the intersection. When used on a runway to indicate an exit, the sign is located on the same side of the runway as the exit. FIG 2-3-36 shows a direction sign used to indicate a runway exit.

d. The taxiway designations and their associated arrows on the sign are arranged clockwise starting from the first taxiway on the pilot's left. See FIG 2-3-35.

e. If a location sign is located with the direction signs, it is placed so that the designations for all turns to the left will be to the left of the location sign, the designations for continuing straight ahead or for all turns to the right could be located to the right of the location sign. See FIG 2-3-35.

f. When the intersection is comprised of only one crossing taxiway, it is permissible to have two arrows associated with the crossing taxiway as shown in FIG 2-3-37. In this case, the location sign is located to the left of the direction sign.

FIG 2-3-35

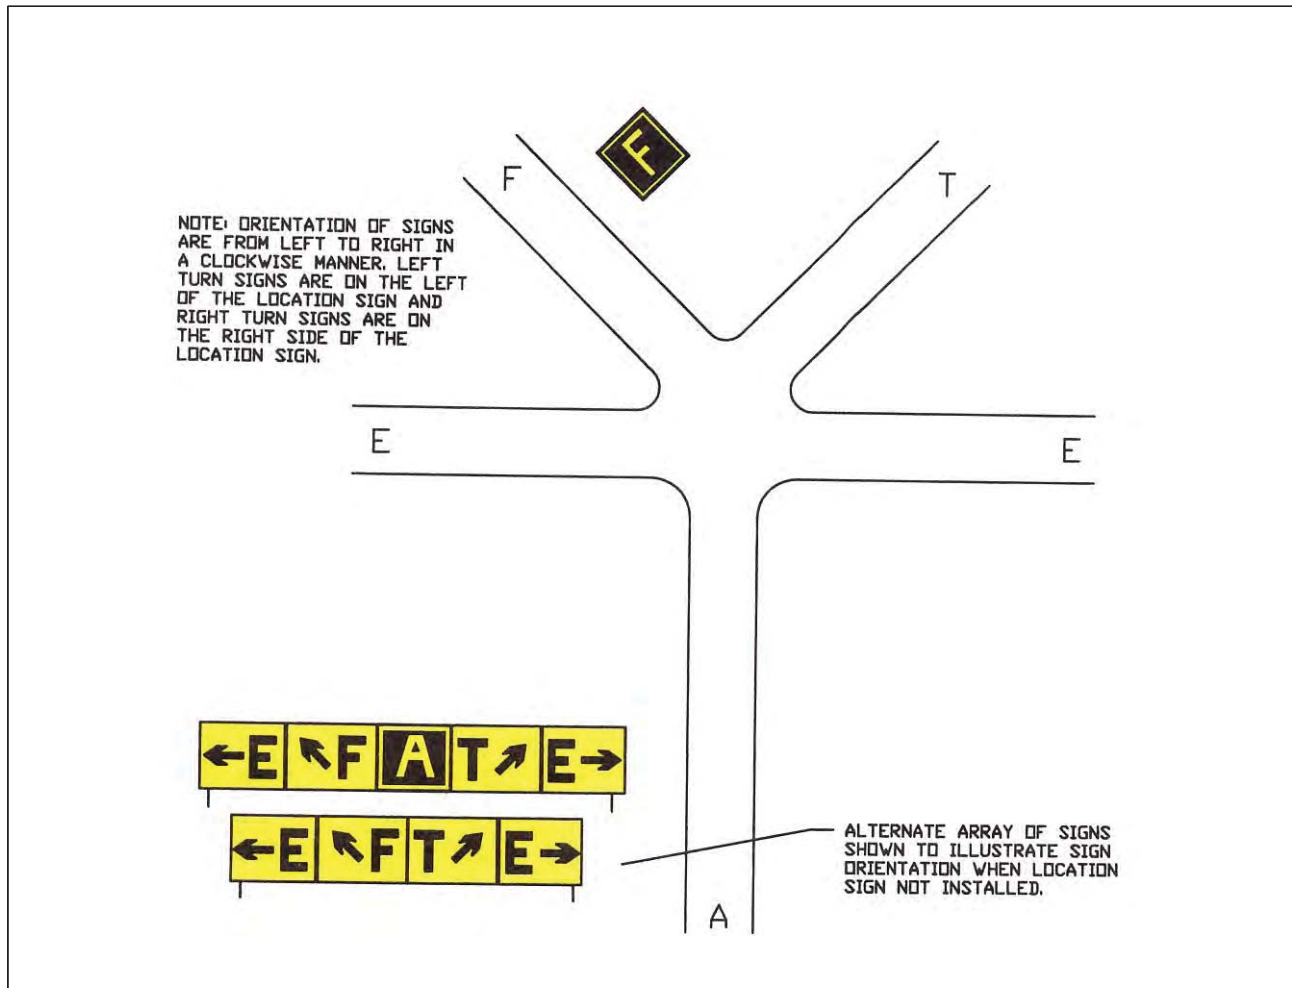
Direction Sign Array with Location Sign on Far Side of Intersection

FIG 2-3-36

Direction Sign for Runway Exit

FIG 2-3-37
Direction Sign Array for Simple Intersection

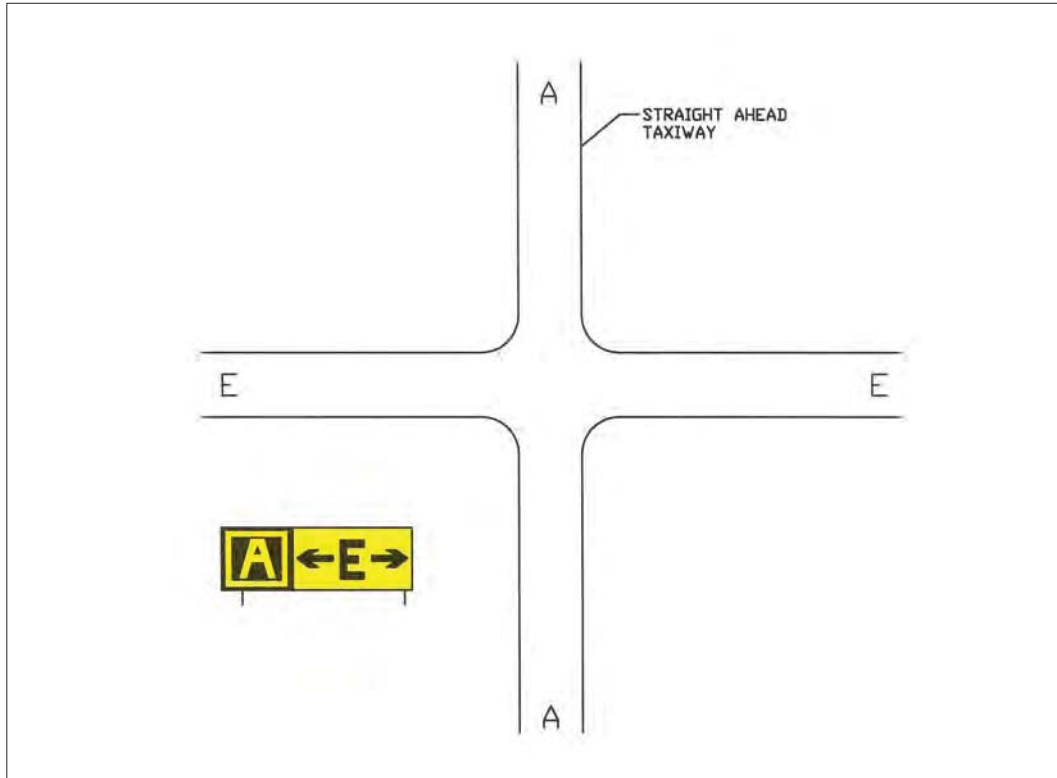


FIG 2-3-38
Destination Sign for Military Area



FIG 2-3-39
Destination Sign for Common Taxiing Route to Two Runways



2-3-11. Destination Signs

a. Destination signs also have a yellow background with a black inscription indicating a destination on the airport. These signs always have an arrow showing the direction of the taxiing route to that destination. FIG 2-3-38 is an example of a typical destination sign. When the arrow on the destination sign indicates a turn, the sign is located prior to the intersection.

b. Destinations commonly shown on these types of signs include runways, aprons, terminals, military areas, civil aviation areas, cargo areas, international

areas, and fixed base operators. An abbreviation may be used as the inscription on the sign for some of these destinations.

c. When the inscription for two or more destinations having a common taxiing route are placed on a sign, the destinations are separated by a dot (•) and one arrow could be used as shown in FIG 2-3-39. When the inscription on a sign contains two or more destinations having different taxiing routes, each destination will be accompanied by an arrow and will be separated from the other destinations on the sign with a vertical black message divider as shown in FIG 2-3-40.

FIG 2-3-40

Destination Sign for Different Taxiing Routes to Two Runways**2-3-12. Information Signs**

Information signs have a yellow background with a black inscription. They are used to provide the pilot with information on such things as areas that cannot be seen from the control tower applicable radio frequencies and noise abatement procedures. The airport operator determines the need, size and location for these signs.

2-3-13. Runway Distance Remaining Signs

Runway distance remaining signs have a black background with a white numeral inscription and may be installed along one or both sides of the runway. The number on the signs indicates the distance in thousands of feet of landing runway remaining. The last sign, i.e., the sign with the numeral 1, will be located at least 950 feet from the runway end. FIG 2-3-41 shows an example of a runway distance remaining sign.

FIG 2-3-41

Runway Distance Remaining Sign Indicating 3,000 feet of Runway Remaining

2-3-14. Aircraft Arresting Systems

a. Certain airports are equipped with a means of rapidly stopping military aircraft on a runway. This equipment normally referred to as EMERGENCY ARRESTING GEAR generally consists of pendant cables supported over the runway surface by rubber donuts. Although most devices are located in the overrun areas, a few of these arresting systems have cables stretched over the operational areas near the ends of a runway.

b. Arresting cables which cross over a runway require special markings on the runway to identify the cable location. These markings consist of 10 feet diameter solid circles painted in identification yellow 30 feet on center perpendicular to the runway centerline across the entire runway width. Additional details are contained in AC 150/5220-9 Aircraft Arresting Systems for Joint Civil/Military Airports.

NOTE-

Aircraft operations on the runway are not restricted by the installation of aircraft arresting devices.

c. Engineered materials arresting systems (EMAS) which are constructed of high energy-absorbing materials of selected strength are located in the safety area beyond the end of the runway. They are designed to crush under the weight of commercial aircraft and they exert deceleration forces on the landing gear. These systems do not affect the normal landing and takeoff of airplanes. More information concerning EMAS is in FAA Advisory Circular AC 150/5220-22 Engineered Materials Arresting Systems (EMAS) for Aircraft Overruns.

NOTE-

EMAS may be located as close as 35 feet beyond the end of the runway. Aircraft should never taxi or drive across the runway.

FIG 2-3-42
Engineered Materials Arresting System (EMAS)



2-3-15. Security Identifications Display Area (Airport Ramp Area)

a. Security Identification Display Areas (SIDA) are limited access areas that require a badge issued in accordance with procedures in CFR 49 Part 1542. Movement through or into these areas is prohibited without proper identification being displayed. If you are unsure of the location of a SIDA, contact the airport authority for additional information. Airports that have a SIDA must have the following information available:

1. A description and map detailing boundaries and pertinent features

2. Measures used to perform the access control functions required under CFR 49 Part 1542 201 b 1

3. Procedures to control movement within the secured area, including identification media required under CFR 49 Part 1542 201 b 3 and

4. A description of the notification signs required under CFR 49 Part 1542 201 b 6

b. Pilots or passengers without proper identification that are observed entering a SIDA ramp area may be reported to TSA or airport security. Pilots are advised to brief passengers accordingly.

Chapter 3. Airspace

Section 1. General

3-1-1. General

a. There are two categories of airspace or airspace areas

1. Regulatory Class A B C D and E airspace areas restricted and prohibited areas and

2. Nonregulatory military operations areas MOAs warning areas alert areas and controlled firing areas

NOTE-

Additional information on special use airspace (prohibited areas, restricted areas, warning areas, MOAs, alert areas and controlled firing areas) may be found in Chapter 3, Airspace, Section 4, Special Use Airspace, paragraphs 3-4-1 through 3-4-7

b. Within these two categories there are four types

1. Controlled
2. Uncontrolled
3. Special use and
4. Other airspace

c. The categories and types of airspace are dictated by

1. The complexity or density of aircraft movements
2. The nature of the operations conducted within the airspace
3. The level of safety required and
4. The national and public interest

d. It is important that pilots be familiar with the operational requirements for each of the various types or classes of airspace Subsequent sections will cover each class in sufficient detail to facilitate understanding

3-1-2. General Dimensions of Airspace Segments

Refer to Code of Federal Regulations CFRs for specific dimensions exceptions geographical areas covered exclusions specific transponder or equipment requirements and flight operations

3-1-3. Hierarchy of Overlapping Airspace Designations

a. When overlapping airspace designations apply to the same airspace the operating rules associated with the more restrictive airspace designation apply

b. For the purpose of clarification

1. Class A airspace is more restrictive than Class B Class C Class D Class E or Class G airspace

2. Class B airspace is more restrictive than Class C Class D Class E or Class G airspace

3. Class C airspace is more restrictive than Class D Class E or Class G airspace

4. Class D airspace is more restrictive than Class E or Class G airspace and

5. Class E is more restrictive than Class G airspace

3-1-4. Basic VFR Weather Minimums

a. No person may operate an aircraft under basic VFR when the flight visibility is less or at a distance from clouds that is less than that prescribed for the corresponding altitude and class of airspace See TBL 3-1-1

NOTE-

Student pilots must comply with 14 CFR Section 61.89(a) (6) and (7).

b. Except as provided in 14 CFR Section 91.157 Special VFR Weather Minimums no person may operate an aircraft beneath the ceiling under VFR within the lateral boundaries of controlled airspace designated to the surface for an airport when the ceiling is less than 1 000 feet See 14 CFR Section 91.155 c

TBL 3-1-1
Basic VFR Weather Minimums

Airspace	Flight Visibility	Distance from Clouds
Class A	Not Applicable	Not Applicable
Class B	3 statute miles	Clear of Clouds
Class C	3 statute miles	500 feet below 1 000 feet above 2 000 feet horizontal
Class D	3 statute miles	500 feet below 1 000 feet above 2 000 feet horizontal
Class E Less than 10 000 feet MSL	3 statute miles	500 feet below 1 000 feet above 2 000 feet horizontal
At or above 10 000 feet MSL	5 statute miles	1 000 feet below 1 000 feet above 1 statute mile horizontal
Class G 1 200 feet or less above the surface regardless of MSL altitude		
Day except as provided in section 91.155 b	1 statute mile	Clear of clouds
Night except as provided in section 91.155 b	3 statute miles	500 feet below 1 000 feet above 2 000 feet horizontal
More than 1 200 feet above the surface but less than 10 000 feet MSL		
Day	1 statute mile	500 feet below 1 000 feet above 2 000 feet horizontal
Night	3 statute miles	500 feet below 1 000 feet above 2 000 feet horizontal
More than 1 200 feet above the surface and at or above 10 000 feet MSL	5 statute miles	1 000 feet below 1 000 feet above 1 statute mile horizontal

3-1-5. VFR Cruising Altitudes and Flight Levels

See TBL 3-1-2

TBL 3-1-2
VFR Cruising Altitudes and Flight Levels

If your magnetic course (ground track) is:	And you are more than 3,000 feet above the surface but below 18,000 feet MSL, fly:	And you are above 18,000 feet MSL to FL 290, fly:
0° to 179°	Odd thousands MSL plus 500 feet 3 500 5 500 7 500 etc	Odd Flight Levels plus 500 feet FL 195 FL 215 FL 235 etc
180° to 359°	Even thousands MSL plus 500 feet 4 500 6 500 8 500 etc	Even Flight Levels plus 500 feet FL 185 FL 205 FL 225 etc

Section 2. Controlled Airspace

3-2-1. General

a. Controlled Airspace. A generic term that covers the different classification of airspace: Class A, Class B, Class C, Class D, and Class E airspace, and defined dimensions within which air traffic control service is provided to IFR flights and to VFR flights in accordance with the airspace classification. See FIG 3-2-1.

b. IFR Requirements. IFR operations in any class of controlled airspace require that a pilot must file an IFR flight plan and receive an appropriate ATC clearance.

c. IFR Separation. Standard IFR separation is provided to all aircraft operating under IFR in controlled airspace.

d. VFR Requirements. It is the responsibility of the pilot to ensure that ATC clearance or radio communication requirements are met prior to entry

into Class B, Class C, or Class D airspace. The pilot retains this responsibility when receiving ATC radar advisories. See 14 CFR Part 91.


e. Traffic Advisories. Traffic advisories will be provided to all aircraft as the controller's work situation permits.

f. Safety Alerts. Safety Alerts are mandatory services and are provided to ALL aircraft. There are two types of Safety Alerts:

1. Terrain/Obstruction Alert. A Terrain/Obstruction Alert is issued when, in the controller's judgment, an aircraft's altitude places it in unsafe proximity to terrain and/or obstructions, and

2. Aircraft Conflict/Mode C Intruder Alert. An Aircraft Conflict/Mode C Intruder Alert is issued if the controller observes another aircraft which places it in an unsafe proximity. When feasible, the controller will offer the pilot an alternative course of action.

FIG 3-2-1
Airspace Classes

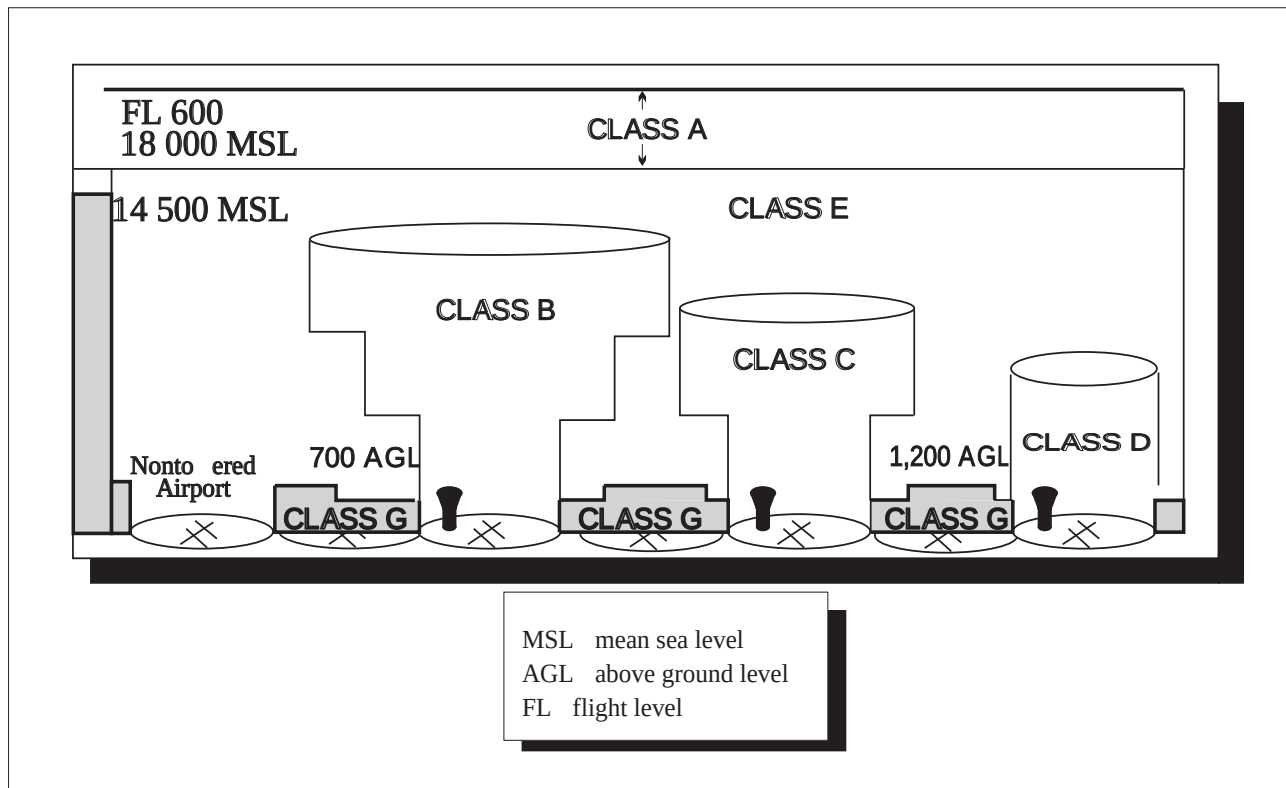

g. Ultralight Vehicles. No person may operate an ultralight vehicle within Class A, Class B, Class C, or Class D airspace or within the lateral boundaries of the surface area of Class E airspace designated for an airport unless that person has prior authorization from the ATC facility having jurisdiction over that airspace. See 14 CFR Part 103.

h. Unmanned Free Balloons. Unless otherwise authorized by ATC, no person may operate an unmanned free balloon below 2 000 feet above the surface within the lateral boundaries of Class B, Class C, Class D, or Class E airspace designated for an airport. See 14 CFR Part 101.

i. Parachute Jumps. No person may make a parachute jump, and no pilot-in-command may allow a parachute jump to be made from that aircraft in or into Class A, Class B, Class C, or Class D airspace without or in violation of the terms of an ATC authorization issued by the ATC facility having jurisdiction over the airspace. See 14 CFR Part 105.

3-2-2. Class A Airspace

a. Definition. Generally, that airspace from 18 000 feet MSL up to and including FL 600 including the airspace overlying the waters within 12 nautical miles off the coast of the 48 contiguous States and Alaska and designated international airspace beyond 12 nautical miles off the coast of the 48 contiguous States and Alaska within areas of domestic radio navigational signal or ATC radar coverage and within which domestic procedures are applied.

b. Operating Rules and Pilot/Equipment Requirements. Unless otherwise authorized, all persons must operate their aircraft under IFR. See 14 CFR Section 71.33 and 14 CFR Section 91.167 through 14 CFR Section 91.193.

c. Charts. Class A airspace is not specifically charted.

3-2-3. Class B Airspace

a. Definition. Generally, that airspace from the surface to 10 000 feet MSL surrounding the nation's busiest airports in terms of IFR operations or passenger enplanements. The configuration of each Class B airspace area is individually tailored and

consists of a surface area and two or more layers; some Class B airspace areas resemble upside down wedding cakes and is designed to contain all published instrument procedures once an aircraft enters the airspace. An ATC clearance is required for all aircraft to operate in the area, and all aircraft that are so cleared receive separation services within the airspace. The cloud clearance requirement for VFR operations is clear of clouds.

b. Operating Rules and Pilot/Equipment Requirements for VFR Operations. Regardless of weather conditions, an ATC clearance is required prior to operating within Class B airspace. Pilots should not request a clearance to operate within Class B airspace unless the requirements of 14 CFR Section 91.215 and 14 CFR Section 91.131 are met. Included among these requirements are:

1. Unless otherwise authorized by ATC, aircraft must be equipped with an operable two-way radio capable of communicating with ATC on appropriate frequencies for that Class B airspace.

2. No person may take off or land a civil aircraft at the following primary airports within Class B airspace unless the pilot-in-command holds at least a private pilot certificate:

- (a) Andrews Air Force Base, MD
- (b) Atlanta Hartsfield Airport, GA
- (c) Boston Logan Airport, MA
- (d) Chicago O'Hare Intl. Airport, IL
- (e) Dallas/Fort Worth Intl. Airport, TX
- (f) Los Angeles Intl. Airport, CA
- (g) Miami Intl. Airport, FL
- (h) Newark Intl. Airport, NJ
- (i) New York Kennedy Airport, NY
- (j) New York LaGuardia Airport, NY
- (k) Ronald Reagan Washington National Airport, DC
- (l) San Francisco Intl. Airport, CA

3. No person may take off or land a civil aircraft at an airport within Class B airspace or operate a civil aircraft within Class B airspace unless:

- (a) The pilot-in-command holds at least a private pilot certificate, or

(b) The aircraft is operated by a student pilot or recreational pilot who seeks private pilot certification and has met the requirements of 14 CFR Section 61.95

4. Unless otherwise authorized by ATC, each person operating a large turbine engine powered airplane to or from a primary airport must operate at or above the designated floors while within the lateral limits of Class B airspace

5. Unless otherwise authorized by ATC, each aircraft must be equipped as follows

(a) For IFR operations, an operable VOR or TACAN receiver, and

(b) For all operations, a two-way radio capable of communications with ATC on appropriate frequencies for that area, and

(c) Unless otherwise authorized by ATC, an operable radar beacon transponder with automatic altitude reporting equipment

NOTE—

ATC may, upon notification, immediately authorize a deviation from the altitude reporting equipment requirement; however, a request for a deviation from the 4096 transponder equipment requirement must be submitted to the controlling ATC facility at least one hour before the proposed operation.

REFERENCE—

AIM, Transponder Operation, Paragraph 4-1-20

6. Mode C Veil. The airspace within 30 nautical miles of an airport listed in Appendix D, Section 1 of 14 CFR Part 91, generally primary airports within Class B airspace areas, from the surface upward to 10,000 feet MSL. Unless otherwise authorized by ATC, aircraft operating within this airspace must be equipped with automatic pressure altitude reporting equipment having Mode C capability.

However, an aircraft that is not originally certificated with an engine-driven electrical system or which has not subsequently been certified with a system installed may conduct operations within a Mode C veil provided the aircraft remains outside Class A, B, or C airspace and below the altitude of the ceiling of a Class B or Class C airspace area designated for an airport or 10,000 feet MSL, whichever is lower.

c. Charts. Class B airspace is charted on Sectional Charts, IFR En Route Low Altitude, and Terminal Area Charts.

d. Flight Procedures.

1. Flights. Aircraft within Class B airspace are required to operate in accordance with current IFR procedures. A clearance for a visual approach to a primary airport is not authorization for turbine-powered airplanes to operate below the designated floors of the Class B airspace.

2. VFR Flights.

(a) Arriving aircraft must obtain an ATC clearance prior to entering Class B airspace and must contact ATC on the appropriate frequency and in relation to geographical fixes shown on local charts. Although a pilot may be operating beneath the floor of the Class B airspace, on initial contact communications with ATC should be established in relation to the points indicated for spacing and sequencing purposes.

(b) Departing aircraft require a clearance to depart Class B airspace and should advise the clearance delivery position of their intended altitude and route of flight. ATC will normally advise VFR aircraft when leaving the geographical limits of the Class B airspace. Radar service is not automatically terminated with this advisory unless specifically stated by the controller.

(c) Aircraft not landing or departing the primary airport may obtain an ATC clearance to transit the Class B airspace when traffic conditions permit and provided the requirements of 14 CFR Section 91.131 are met. Such VFR aircraft are encouraged to the extent possible to operate at altitudes above or below the Class B airspace or transit through established VFR corridors. Pilots operating in VFR corridors are urged to use frequency 122.750 MHz for the exchange of aircraft position information.

e. ATC Clearances and Separation. An ATC clearance is required to enter and operate within Class B airspace. VFR pilots are provided sequencing and separation from other aircraft while operating within Class B airspace.

REFERENCE—

AIM, Terminal Radar Services for VFR Aircraft, Paragraph 4-1-18

NOTE—

1. Separation and sequencing of VFR aircraft will be suspended in the event of a radar outage as this service is dependent on radar. The pilot will be advised that the service is not available and issued wind, runway information and the time or place to contact the tower.

2. Separation of VFR aircraft will be suspended during CENRAP operations. Traffic advisories and sequencing to the primary airport will be provided on a workload permitting basis. The pilot will be advised when center radar presentation (CENRAP) is in use.

1. VFR aircraft are separated from all VFR/IFR aircraft which weigh 19 000 pounds or less by a minimum of

- (a) Target resolution or
- (b) 500 feet vertical separation or
- (c) Visual separation

2. VFR aircraft are separated from all VFR/IFR aircraft which weigh more than 19 000 and turbo props by no less than

- (a) 1 1/2 miles lateral separation or
- (b) 500 feet vertical separation or
- (c) Visual separation

3. This program is not to be interpreted as relieving pilots of their responsibilities to see and avoid other traffic operating in basic VFR weather conditions to adjust their operations and flight path as necessary to preclude serious close encounters to maintain appropriate terrain and obstruction clearance or to remain in weather conditions equal to or better than the minimums required by 14 CFR Section 91.155. Approach control should be advised and a revised clearance or instruction obtained when compliance with an assigned route heading and/or altitude is likely to compromise pilot responsibility with respect to terrain and obstruction clearance vortex exposure and weather minimums

4. ATC may assign altitudes to VFR aircraft that do not conform to 14 CFR Section 91.159 **“RESUME APPROPRIATE VFR ALTITUDES”** will be broadcast when the altitude assignment is no longer needed for separation or when leaving Class B airspace. Pilots must return to an altitude that conforms to 14 CFR Section 91.159

f. Proximity operations. VFR aircraft operating in proximity to Class B airspace are cautioned against

operating too closely to the boundaries especially here the floor of the Class B airspace is 3 000 feet or less above the surface or here VFR cruise altitudes are at or near the floor of higher levels. Observance of this precaution will reduce the potential for encountering an aircraft operating at the altitudes of Class B floors. Additionally VFR aircraft are encouraged to utilize the VFR Planning Chart as a tool for planning flight in proximity to Class B airspace. Charted VFR Flyway Planning Charts are published on the back of the existing VFR Terminal Area Charts

3-2-4. Class C Airspace

a. Definition. Generally that airspace from the surface to 4 000 feet above the airport elevation charted in MSL surrounding those airports that have an operational control tower are serviced by a radar approach control and that have a certain number of IFR operations or passenger enplanements. Although the configuration of each Class C airspace area is individually tailored the airspace usually consists of a 5 NM radius core surface area that extends from the surface up to 4 000 feet above the airport elevation and a 10 NM radius shelf area that extends no lower than 1 200 feet up to 4 000 feet above the airport elevation

b. Charts. Class C airspace is charted on Sectional Charts IFR En Route Low Altitude and Terminal Area Charts where appropriate

c. Operating Rules and Pilot/Equipment Requirements:

1. **Pilot Certification.** No specific certification required

2. Equipment.

(a) Two-way radio and

(b) Unless otherwise authorized by ATC an operable radar beacon transponder with automatic altitude reporting equipment

NOTE—

See paragraph 4-1-20 Transponder Operation, subparagraph f(2)(c) for Mode C transponder requirements for operating above Class C airspace.

3. **Arrival or Through Flight Entry Requirements.** Two-way radio communication must be established with the ATC facility providing ATC services prior to entry and thereafter maintain those communications while in Class C airspace. Pilots of

arriving aircraft should contact the Class C airspace ATC facility on the published frequency and give their position altitude radar beacon code destination and request Class C service. Radio contact should be initiated far enough from the Class C airspace boundary to preclude entering Class C airspace before two-way radio communications are established.

NOTE—

1. *If the controller responds to a radio call with, “(aircraft callsign) standby,” radio communications have been established and the pilot can enter the Class C airspace.*
2. *If workload or traffic conditions prevent immediate provision of Class C services, the controller will inform the pilot to remain outside the Class C airspace until conditions permit the services to be provided.*
3. *It is important to understand that if the controller responds to the initial radio call without using the aircraft identification, radio communications have not been established and the pilot may not enter the Class C airspace.*
4. *Though not requiring regulatory action, Class C airspace areas have a procedural Outer Area. Normally this area is 20 NM from the primary Class C airspace airport. Its vertical limit extends from the lower limits of radio/radar coverage up to the ceiling of the approach control’s delegated airspace, excluding the Class C airspace itself, and other airspace as appropriate. (This outer area is not charted.)*
5. *Pilots approaching an airport with Class C service should be aware that if they descend below the base altitude of the 5 to 10 mile shelf during an instrument or visual approach, they may encounter nontransponder, VFR aircraft.*

EXAMPLE—

1. *[Aircraft callsign] “remain outside the Class Charlie airspace and standby.”*
2. *“Aircraft calling Dulles approach control, standby.”*

4. Departures from:

(a) A primary or satellite airport with an operating control tower. Two-way radio communications must be established and maintained with the control tower and thereafter as instructed by ATC while operating in Class C airspace.

(b) A satellite airport without an operating control tower. Two-way radio communications must be established as soon as practicable after departing with the ATC facility having jurisdiction over the Class C airspace.

5. Aircraft Speed. Unless otherwise authorized or required by ATC, no person may operate an aircraft at or below 2 500 feet above the surface within 4 nautical miles of the primary airport of a Class C airspace area at an indicated airspeed of more than 200 knots (230 mph).

d. Air Traffic Services. When two-way radio communications and radar contact are established, all participating VFR aircraft are:

1. Sequenced to the primary airport.
2. Provided Class C services within the Class C airspace and the outer area.
3. Provided basic radar services beyond the outer area on a workload permitting basis. This can be terminated by the controller if workload dictates.

e. Aircraft Separation. Separation is provided within the Class C airspace and the outer area after two-way radio communications and radar contact are established. VFR aircraft are separated from IFR aircraft within the Class C airspace by any of the following:

1. Visual separation.
2. 500 feet vertical, except when operating beneath a heavy jet.
3. Target resolution.

NOTE—

1. *Separation and sequencing of VFR aircraft will be suspended in the event of a radar outage as this service is dependent on radar. The pilot will be advised that the service is not available and issued wind, runway information and the time or place to contact the tower.*
2. *Separation of VFR aircraft will be suspended during CENRAP operations. Traffic advisories and sequencing to the primary airport will be provided on a workload permitting basis. The pilot will be advised when CENRAP is in use.*
3. *Pilot participation is voluntary within the outer area and can be discontinued, within the outer area, at the pilot’s request. Class C services will be provided in the outer area unless the pilot requests termination of the service.*
4. *Some facilities provide Class C services only during published hours. At other times, terminal IFR radar service will be provided. It is important to note that the communications and transponder requirements are dependent of the class of airspace established outside of the published hours.*

f. Secondary Airports

1. In some locations Class C airspace may overlies the Class D surface area of a secondary airport. In order to allow that control tower to provide service to aircraft, portions of the overlapping Class C airspace may be procedurally excluded when the secondary airport tower is in operation. Aircraft operating in these procedurally excluded areas will only be provided airport traffic control services when in communication with the secondary airport tower.

2. Aircraft proceeding inbound to a satellite airport will be terminated at a sufficient distance to allow time to change to the appropriate tower or advisory frequency. Class C services to these aircraft will be discontinued when the aircraft is instructed to contact the tower or change to advisory frequency.

3. Aircraft departing secondary controlled airports will not receive Class C services until they have been radar identified and two-way communications have been established with the Class C airspace facility.

4. This program is not to be interpreted as relieving pilots of their responsibilities to see and avoid other traffic operating in basic VFR weather conditions to adjust their operations and flight path as necessary to preclude serious wake encounters to maintain appropriate terrain and obstruction clearance or to remain in weather conditions equal to or better than the minimums required by 14 CFR Section 91.155. Approach control should be advised and a revised clearance or instruction obtained when compliance with an assigned route, heading and/or altitude is likely to compromise pilot responsibility with respect to terrain and obstruction clearance, vortex exposure, and weather minimums.

g. Class C Airspace Areas by State

These states currently have designated Class C airspace areas that are depicted on sectional charts. Pilots should consult current sectional charts and NOTAMs for the latest information on services available. Pilots should be aware that some Class C airspace underlies or is adjacent to Class B airspace. See TBL 3-2-1.

TBL 3-2-1
Class C Airspace Areas by State

State/City	Airport
ALABAMA	
Birmingham	Birmingham-Shuttlesworth International
Huntsville	International-Carl T. Jones Fld
Mobile	Regional
ALASKA	
Anchorage	Ted Stevens International
ARIZONA	
Davis-Monthan	AFB
Tucson	International
ARKANSAS	
Fayetteville	Springdale
North	West Arkansas Regional
Little Rock	Adams Field
CALIFORNIA	
Beale	AFB
Burbank	Bob Hope
Fresno	Yosemite International
Monterey	Peninsula
Oakland	Metropolitan Oakland International
Ontario	International
Riverside	March AFB
Sacramento	International
San Jose	Norman Mineta International
Santa Ana	John Wayne/Orange County
Santa Barbara	Municipal
COLORADO	
Colorado Springs	Municipal
CONNECTICUT	
Windsor Locks	Bradley International
FLORIDA	
Daytona Beach	International
Fort Lauderdale	Hollywood International
Fort Myers	SW Florida Regional
Jacksonville	International
Orlando	Sanford International
Palm Beach	International
Pensacola	NAS
Pensacola	Regional
Sarasota	Bradenton International
Tallahassee	Regional
Whiting	NAS
GEORGIA	
Savannah	Hilton Head International
HAWAII	
Kahului	Kahului
IDAHO	
Boise	Air Terminal
ILLINOIS	
Champaign	Urbana U of Illinois-Willard
Chicago	Midway International

State/City	Airport
Moline	Quad City International
Peoria	Greater Peoria Regional
Springfield	Abraham Lincoln Capital
INDIANA	
Evansville	Regional
Fort Wayne	International
Indianapolis	International
South Bend	Regional
IOWA	
Cedar Rapids	The Eastern Iowa
Des Moines	International
KANSAS	
Wichita	Mid–Continent
KENTUCKY	
Lexington	Blue Grass
Louisville	International–Standiford Field
LOUISIANA	
Baton Rouge	Metropolitan Ryan Field
Lafayette	Regional
Shreveport	Barksdale AFB
Shreveport	Regional
MAINE	
Bangor	International
Portland	International Jetport
MICHIGAN	
Flint	Bishop International
Grand Rapids	Gerald R. Ford International
Lansing	Capital City
MISSISSIPPI	
Columbus	AFB
Jackson	Jackson–Evers International
MISSOURI	
Springfield	Springfield–Branson National
MONTANA	
Billings	Logan International
NEBRASKA	
Lincoln	Lincoln
Omaha	Eppley Airfield
Offutt	AFB
NEVADA	
Reno	Reno/Tahoe International
NEW HAMPSHIRE	
Manchester	Manchester
NEW JERSEY	
Atlantic City	International
NEW MEXICO	
Albuquerque	International Sunport
NEW YORK	
Albany	International
Buffalo	Niagara International
Islip	Long Island MacArthur
Rochester	Greater Rochester International
Syracuse	Hancock International

State/City	Airport
NORTH CAROLINA	
Asheville	Regional
Fayetteville	Regional/Grannis Field
Greensboro	Piedmont Triad International
Pope	AFB
Raleigh	Raleigh–Durham International
OHIO	
Akron	Akron–Canton Regional
Columbus	Port Columbus International
Dayton	James M. Cox International
Toledo	Express
OKLAHOMA	
Oklahoma City	Will Rogers World
Tinker	AFB
Tulsa	International
OREGON	
Portland	International
PENNSYLVANIA	
Allentown	Lehigh Valley International
PUERTO RICO	
San Juan	Luis Muñoz Marín International
RHODE ISLAND	
Providence	Theodore Francis Green State
SOUTH CAROLINA	
Charleston	AFB/International
Columbia	Metropolitan
Greer	Greenville–Spartanburg International
Myrtle Beach	Myrtle Beach International
Sha	AFB
TENNESSEE	
Chattanooga	Lovell Field
Knoxville	McGhee Tyson
Nashville	International
TEXAS	
Abilene	Regional
Amarillo	Rick Husband International
Austin	Austin–Bergstrom International
Corpus Christi	International
Dyess	AFB
El Paso	International
Harlingen	Valley International
Laughlin	AFB
Lubbock	Preston Smith International
Midland	International
San Antonio	International
VERMONT	
Burlington	International
VIRGIN ISLANDS	
St. Thomas	Charlotte Amalie Cyril E. King

State/City	Airport
VIRGINIA	
Richmond	International
Norfolk	International
Roanoke	Regional/Woodrum Field
WASHINGTON	
Point Roberts	Vancouver International
Spokane	Fairchild AFB
Spokane	International
Whidbey Island	NAS Ault Field
WEST VIRGINIA	
Charleston	eager
WISCONSIN	
Green Bay	Austin Straubel International
Madison	Dane County Regional–Traux Field
Milwaukee	General Mitchell International

3–2–5. Class D Airspace

a. Definition. Generally that airspace from the surface to 2 500 feet above the airport elevation charted in MSL surrounding those airports that have an operational control tower. The configuration of each Class D airspace area is individually tailored and when instrument procedures are published the airspace will normally be designed to contain the procedures.

b. Operating Rules and Pilot/Equipment Requirements:

1. Pilot Certification. No specific certification required.

2. Equipment. Unless otherwise authorized by ATC, an operable two-way radio is required.

3. Arrival or Through Flight Entry Requirements. Two-way radio communication must be established with the ATC facility providing ATC services prior to entry and thereafter maintain those communications while in the Class D airspace. Pilots of arriving aircraft should contact the control tower on the published frequency and give their position, altitude, destination, and any requests. Radio contact should be initiated far enough from the Class D airspace boundary to preclude entering the Class D airspace before two-way radio communications are established.

NOTE–

1. If the controller responds to a radio call with, “[aircraft callsign] standby,” radio communications have been established and the pilot can enter the Class D airspace.

2. If workload or traffic conditions prevent immediate entry into Class D airspace, the controller will inform the pilot to remain outside the Class D airspace until conditions permit entry.

EXAMPLE–

1. “[Aircraft callsign] remain outside the Class Delta airspace and standby.”

It is important to understand that if the controller responds to the initial radio call without using the aircraft callsign, radio communications have not been established and the pilot may not enter the Class D airspace.

2. “Aircraft calling Manassas tower standby.”

At those airports where the control tower does not operate 24 hours a day, the operating hours of the tower will be listed on the appropriate charts and in the A/FD. During the hours the tower is not in operation, the Class E surface area rules or a combination of Class E rules to 700 feet above ground level and Class G rules to the surface will become applicable. Check the A/FD for specifics.

4. Departures from:

(a) A primary or satellite airport with an operating control tower. Two-way radio communications must be established and maintained with the control tower and thereafter as instructed by ATC while operating in the Class D airspace.

(b) A satellite airport without an operating control tower. Two-way radio communications must be established as soon as practicable after departing with the ATC facility having jurisdiction over the Class D airspace as soon as practicable after departing.

5. Aircraft Speed. Unless otherwise authorized or required by ATC, no person may operate an aircraft at or below 2 500 feet above the surface within 4 nautical miles of the primary airport of a Class D airspace area at an indicated airspeed of more than 200 knots (230 mph).

c. Class D airspace areas are depicted on Sectional and Terminal charts with blue segmented lines and on IFR En Route Logs with a boxed D.

d. Arrival extensions for instrument approach procedures may be Class D or Class E airspace. As a general rule, if all extensions are 2 miles or less, they remain part of the Class D surface area. However, if any one extension is greater than 2 miles, then all extensions become Class E.

e. Separation for VFR Aircraft. No separation services are provided to VFR aircraft.

3-2-6. Class E Airspace

a. Definition. Generally if the airspace is not Class A Class B Class C or Class D and it is controlled airspace it is Class E airspace

b. Operating Rules and Pilot/Equipment Requirements:

1. Pilot Certification. No specific certification required

2. Equipment. No specific equipment required by the airspace

3. Arrival or Through Flight Entry Requirements. No specific requirements

c. Charts. Class E airspace below 14 500 feet MSL is charted on Sectional Terminal and IFR Enroute Low Altitude charts

d. Vertical limits. Except for 18 000 feet MSL Class E airspace has no defined vertical limit but rather it extends upward from either the surface or a designated altitude to the overlying or adjacent controlled airspace

e. Types of Class E Airspace:

1. Surface area designated for an airport. When designated as a surface area for an airport the airspace will be configured to contain all instrument procedures

2. Extension to a surface area. There are Class E airspace areas that serve as extensions to Class B Class C and Class D surface areas designated for an airport Such airspace provides controlled airspace to contain standard instrument approach procedures without imposing a communications requirement on pilots operating under VFR

3. Airspace used for transition. There are Class E airspace areas beginning at either 700 or

1 200 feet AGL used to transition to/from the terminal or en route environment

4. En Route Domestic Areas. There are Class E airspace areas that extend upward from a specified altitude and are en route domestic airspace areas that provide controlled airspace in those areas where there is a requirement to provide IFR en route ATC services but the Federal airway system is inadequate

5. Federal Airways. The Federal airways are Class E airspace areas and unless otherwise specified extend upward from 1 200 feet to but not including 18 000 feet MSL The colored airways are green red amber and blue The VOR airways are classified as Domestic Alaskan and Hawaiian

6. Offshore Airspace Areas. There are Class E airspace areas that extend upward from a specified altitude to but not including 18 000 feet MSL and are designated as offshore airspace areas These areas provide controlled airspace beyond 12 miles from the coast of the U S in those areas where there is a requirement to provide IFR en route ATC services and within which the U S is applying domestic procedures

7. Unless designated at a lower altitude Class E airspace begins at 14 500 feet MSL to but not including 18 000 feet MSL overlying the 48 contiguous States including the territories within 12 miles from the coast of the 48 contiguous States the District of Columbia Alaska including the territories within 12 miles from the coast of Alaska and that airspace above FL 600 excluding the Alaska peninsula east of long 160°00'00" W and the airspace below 1 500 feet above the surface of the earth unless specifically so designated

f. Separation for VFR Aircraft. No separation services are provided to VFR aircraft

Section 3. Class G Airspace

3-3-1. General

Class G airspace (uncontrolled) is that portion of airspace that has not been designated as Class A, Class B, Class C, Class D, or Class E airspace.

3-3-2. VFR Requirements

Rules governing VFR flight have been adopted to assist the pilot in meeting the responsibility to see and avoid other aircraft. Minimum flight visibility and distance from clouds required for VFR flight are contained in 14 CFR Section 91.155.

See TBL 3-1-1.

3-3-3. IFR Requirements

a. Title 14 CFR specifies the pilot and aircraft equipment requirements for IFR flight. Pilots are reminded that in addition to altitude or flight level requirements, 14 CFR Section 91.177 includes a requirement to remain at least 1,000 feet (2,000 feet in designated mountainous terrain) above the highest obstacle within a horizontal distance of 4 nautical miles from the course to be flown.

b. IFR Altitudes

See TBL 3-3-1.

TBL 3-3-1
IFR Altitudes
Class G Airspace

If your magnetic course (ground track) is:	And you are below 18,000 feet MSL, fly:
0° to 179°	Odd thousands MSL 3,000 5,000 7,000 etc
180° to 359°	Even thousands MSL 2,000 4,000 6,000 etc

Section 4. Special Use Airspace

3-4-1. General

a. Special use airspace consists of that airspace wherein activities must be confined because of their nature or wherein limitations are imposed upon aircraft operations that are not a part of those activities or both. Except for controlled firing areas, special use airspace areas are depicted on aeronautical charts.

b. Prohibited and restricted areas are regulatory special use airspace and are established in 14 CFR Part 73 through the rulemaking process.

c. Warning areas, military operations areas, MOAs, alert areas, and controlled firing areas (CFAs) are nonregulatory special use airspace.

d. Special use airspace descriptions, except CFAs, are contained in FAA Order JO 7400.8, Special Use Airspace.

e. Special use airspace, except CFAs, are charted on IFR or visual charts and include the hours of operation, altitudes, and the controlling agency.

3-4-2. Prohibited Areas

Prohibited areas contain airspace of defined dimensions identified by an area on the surface of the earth within which the flight of aircraft is prohibited. Such areas are established for security or other reasons associated with the national welfare. These areas are published in the Federal Register and are depicted on aeronautical charts.

3-4-3. Restricted Areas

a. Restricted areas contain airspace identified by an area on the surface of the earth within which the flight of aircraft, while not wholly prohibited, is subject to restrictions. Activities within these areas must be confined because of their nature or limitations imposed upon aircraft operations that are not a part of those activities or both. Restricted areas denote the existence of unusual, often invisible, hazards to aircraft such as artillery firing, aerial gunnery, or guided missiles. Penetration of restricted areas without authorization from the using or

controlling agency may be extremely hazardous to the aircraft and its occupants. Restricted areas are published in the Federal Register and constitute 14 CFR Part 73.

b. ATC facilities apply the following procedures when aircraft are operating on an IFR clearance including those cleared by ATC to maintain VFR on top via a route which lies within joint use restricted airspace:

1. If the restricted area is not active and has been released to the controlling agency (FAA), the ATC facility will allow the aircraft to operate in the restricted airspace without issuing specific clearance for it to do so.

2. If the restricted area is active and has not been released to the controlling agency (FAA), the ATC facility will issue a clearance which will ensure the aircraft avoids the restricted airspace unless it is on an approved altitude reservation mission or has obtained its own permission to operate in the airspace and so informs the controlling facility.

NOTE—

The above apply only to joint-use restricted airspace and not to prohibited and nonjoint-use airspace. For the latter categories, the ATC facility will issue a clearance so the aircraft will avoid the restricted airspace unless it is on an approved altitude reservation mission or has obtained its own permission to operate in the airspace and so informs the controlling facility.

c. Restricted airspace is depicted on the en route chart appropriate for use at the altitude or flight level being flown. For joint use restricted areas, the name of the controlling agency is shown on these charts. For all prohibited areas and nonjoint use restricted areas, unless otherwise requested by the using agency, the phrase "NO A/G" is shown.

3-4-4. Warning Areas

A warning area is airspace of defined dimensions extending from three nautical miles outward from the coast of the U.S. that contains activity that may be hazardous to nonparticipating aircraft. The purpose of such warning areas is to warn nonparticipating pilots of the potential danger. A warning area may be located over domestic or international waters or both.

3-4-5. Military Operations Areas

a. MOAs consist of airspace of defined vertical and lateral limits established for the purpose of separating certain military training activities from IFR traffic. Whenever a MOA is being used, nonparticipating IFR traffic may be cleared through a MOA if IFR separation can be provided by ATC. Otherwise, ATC will reroute or restrict nonparticipating IFR traffic.

b. Examples of activities conducted in MOAs include, but are not limited to, air combat tactics, air intercepts, aerobatics, formation training, and low-altitude tactics. Military pilots flying in an active MOA are exempted from the provisions of 14 CFR Section 91.303(c) and (d), which prohibits aerobatic flight within Class D and Class E surface areas, and within Federal airways. Additionally, the Department of Defense has been issued an authorization to operate aircraft at indicated airspeeds in excess of 250 knots below 10,000 feet MSL within active MOAs.

c. Pilots operating under VFR should exercise extreme caution while flying within a MOA when military activity is being conducted. The activity status (active/inactive) of MOAs may change frequently. Therefore, pilots should contact any FSS within 100 miles of the area to obtain accurate real-time information concerning the MOA hours of operation. Prior to entering an active MOA, pilots should contact the controlling agency for traffic advisories.

d. MOAs are depicted on sectional, VFR Terminal Area, and Enroute Low Altitude charts.

3-4-6. Alert Areas

Alert areas are depicted on aeronautical charts to inform nonparticipating pilots of areas that may contain a high volume of pilot training or an unusual type of aerial activity. Pilots should be particularly alert when flying in these areas. All activity within an alert area must be conducted in accordance with CFRs, without waiver, and pilots of participating aircraft as well as pilots transiting the area must be equally responsible for collision avoidance.

3-4-7. Controlled Firing Areas

CFAs contain activities which, if not conducted in a controlled environment, could be hazardous to nonparticipating aircraft. The distinguishing feature of the CFA, as compared to other special use airspace, is that its activities are suspended immediately when spotter aircraft, radar, or ground lookout positions indicate an aircraft might be approaching the area. There is no need to chart CFAs since they do not cause a nonparticipating aircraft to change its flight path.

3-4-8. National Security Areas

National Security Areas consist of airspace of defined vertical and lateral dimensions established at locations where there is a requirement for increased security and safety of ground facilities. Pilots are requested to voluntarily avoid flying through the depicted NSA. When it is necessary to provide a greater level of security and safety, flight in NSAs may be temporarily prohibited by regulation under the provisions of 14 CFR Section 99.7. Regulatory prohibitions will be issued by System Operations. System Operations Airspace and AIM Office Airspace and Rules, and disseminated via NOTAM. Inquiries about NSAs should be directed to Airspace and Rules.

Section 5. Other Airspace Areas

3-5-1. Airport Advisory/Information Services

a. There are three advisory type services available at selected airports

1. Local Airport Advisory (LAA) service is operated within 10 statute miles of an airport where a control tower is not operating but where a FSS is located on the airport. At such locations, the FSS provides a complete local airport advisory service to arriving and departing aircraft. During periods of fast changing weather, the FSS will automatically provide Final Guard as part of the service from the time the aircraft reports on-final or taking-the-active-runway until the aircraft reports on-the-ground or airborne.

NOTE-

Current policy, when requesting remote ATC services, requires that a pilot monitor the automated weather broadcast at the landing airport prior to requesting ATC services. The FSS automatically provides Final Guard, when appropriate, during LAA/Remote Airport Advisory (RAA) operations. Final Guard is a value added wind/altimeter monitoring service, which provides an automatic wind and altimeter check during active weather situations when the pilot reports on-final or taking the active runway. During the landing or take-off operation when the winds or altimeter are actively changing, the FSS will broadcast significant changes when the specialist believes the change might affect the operation. Pilots should acknowledge the first wind/altimeter check but due to cockpit activity, no acknowledgement is expected for the blind broadcasts. It is prudent for a pilot to report on-the-ground or airborne to end the service.

2. RAA service is operated within 10 statute miles of specified high activity GA airports where a control tower is not operating. Airports offering this service are listed in the A/FD and the published service hours may be changed by NOTAM D. Final Guard is automatically provided with RAA.

3. Remote Airport Information Service (RAIS) is provided in support of short-term special events like small to medium fly-ins. The service is advertised by NOTAM D only. The FSS will not have access to a

continuous readout of the current winds and altimeter; therefore, RAIS does not include weather and/or Final Guard service. However, known traffic, special event instructions, and all other services are provided.

NOTE-

The airport authority and/or manager should request RAIS support on official letterhead directly with the manager of the FSS that will provide the service at least 60 days in advance. Approval authority rests with the FSS manager and is based on workload and resource availability.

REFERENCE-

AIM, Traffic Advisory Practices at Airports Without Operating Control Towers, Paragraph 4-1-9

b. It is not mandatory that pilots participate in the Airport Advisory programs. Participation enhances safety for everyone operating around busy GA airports; therefore, everyone is encouraged to participate and provide feedback that will help improve the program.

3-5-2. Military Training Routes

a. National security depends largely on the deterrent effect of our airborne military forces. To be proficient, the military services must train in a wide range of airborne tactics. One phase of this training involves low-level combat tactics. The required maneuvers and high speeds are such that they may occasionally make the see and avoid aspect of VFR flight more difficult without increased vigilance in areas containing such operations. In an effort to ensure the greatest practical level of safety for all flight operations, the Military Training Route (MTR) program was conceived.

b. The MTR program is a joint venture by the FAA and the Department of Defense (DOD). MTRs are mutually developed for use by the military for the purpose of conducting low-altitude high-speed training. The routes above 1,500 feet AGL are developed to be flown to the maximum extent possible under IFR. The routes at 1,500 feet AGL and below are generally developed to be flown under VFR.

c. Generally MTRs are established below 10 000 feet MSL for operations at speeds in excess of 250 knots. However route segments may be defined at higher altitudes for purposes of route continuity. For example route segments may be defined for descent, climbout, and mountainous terrain. There are IFR and VFR routes as follows:

1. IFR Military Training Routes–(IR).

Operations on these routes are conducted in accordance with IFR regardless of weather conditions.

2. VFR Military Training Routes–(VR).

Operations on these routes are conducted in accordance with VFR except flight visibility must be 5 miles or more, and flights must not be conducted below a ceiling of less than 3 000 feet AGL.

d. Military training routes will be identified and charted as follows:

1. Route identification.

(a) MTRs with no segment above 1 500 feet AGL must be identified by four number characters, e.g., IR1206, VR1207.

(b) MTRs that include one or more segments above 1 500 feet AGL must be identified by three number characters, e.g., IR206, VR207.

(c) Alternate IR/VR routes or route segments are identified by using the basic/principal route designation followed by a letter suffix, e.g., IR008A, VR1007B, etc.

2. Route charting.

(a) **IFR Enroute Low Altitude Chart.** This chart will depict all IR routes and all VR routes that accommodate operations above 1 500 feet AGL.

(b) **VFR Sectional Aeronautical Charts.** These charts will depict military training activities such as IR, VR, MOA, Restricted Area, Warning Area, and Alert Area information.

(c) **Area Planning (AP/1B) Chart (DOD Flight Information Publication–FLIP).** This chart is published by the National Geospatial–Intelligence Agency (NGA) primarily for military users and contains detailed information on both IR and VR routes.

REFERENCE–

AIM, National Geospatial–Intelligence Agency (NGA) Products, Paragraph 9–1–5, Subparagraph a.

e. The FLIP contains charts and narrative descriptions of these routes. To obtain this publication contact:

Defense Logistics Agency for Aviation
Mapping Customer Operations, DLA AVN/QAM
8000 Jefferson Davis Highway
Richmond, VA 23297–5339
Toll free phone: 1–800–826–0342
Commercial: 804–279–6500

This NGA FLIP is available for pilot briefings at FSS and many airports.

f. Nonparticipating aircraft are not prohibited from flying within an MTR, however extreme vigilance should be exercised when conducting flight through or near these routes. Pilots should contact FSSs within 100 NM of a particular MTR to obtain current information or route usage in their vicinity. Information available includes times of scheduled activity, altitudes in use on each route segment, and actual route width. Route width varies for each MTR and can extend several miles on either side of the charted MTR centerline. Route width information for IR and VR MTRs is also available in the FLIP AP/1B along with additional MTR slot routes/air refueling routes information. When requesting MTR information, pilots should give the FSS their position, route of flight, and destination in order to reduce frequency congestion and permit the FSS specialist to identify the MTR which could be a factor.

3–5–3. Temporary Flight Restrictions

a. **General.** This paragraph describes the types of conditions under which the FAA may impose temporary flight restrictions. It also explains which FAA elements have been delegated authority to issue a temporary flight restriction, NOTAM, and lists the types of responsible agencies/offices from which the FAA will accept requests to establish temporary flight restrictions. The 14 CFR is explicit as to what operations are prohibited, restricted, or allowed in a temporary flight restrictions area. Pilots are responsible to comply with 14 CFR Sections 91.137, 91.138, 91.141, and 91.143 when conducting flight in an area where a temporary flight restrictions area is in effect and should check appropriate NOTAMs during flight planning.

b. The purpose for establishing a temporary flight restrictions area is to:

1. Protect persons and property in the air or on the surface from an existing or imminent hazard associated with an incident on the surface when the presence of low flying aircraft could magnify, alter, spread, or compound that hazard. 14 CFR Section 91.137 a. 1.

2. Provide a safe environment for the operation of disaster relief aircraft. 14 CFR Section 91.137 a. 2. or

3. Prevent an unsafe congestion of sightseeing aircraft above an incident or event which may generate a high degree of public interest. 14 CFR Section 91.137 a. 3.

4. Protect declared national disasters for humanitarian reasons in the State of Hawaii. 14 CFR Section 91.138.

5. Protect the President, Vice President, or other public figures. 14 CFR Section 91.141.

6. Provide a safe environment for space agency operations. 14 CFR Section 91.143.

c. Except for hijacking situations when the provisions of 14 CFR Section 91.137 a. 1. or a. 2. are necessary, a temporary flight restrictions area will only be established by or through the area manager at the Air Route Traffic Control Center (ARTCC) having jurisdiction over the area concerned. A temporary flight restrictions NOTAM involving the conditions of 14 CFR Section 91.137 a. 3. will be issued at the direction of the service area office director having oversight of the airspace concerned. When hijacking situations are involved, a temporary flight restrictions area will be implemented through the TSA Aviation Command Center. The appropriate FAA air traffic element, upon receipt of such a request, will establish a temporary flight restrictions area under 14 CFR Section 91.137 a. 1.

d. The FAA accepts recommendations for the establishment of a temporary flight restrictions area under 14 CFR Section 91.137 a. 1. from military major command headquarters, regional directors of the Office of Emergency Planning, Civil Defense State Directors, State Governors, or other similar

authority. For the situations involving 14 CFR Section 91.137 a. 2., the FAA accepts recommendations from military commanders serving as regional, subregional, or Search and Rescue (SAR) coordinators by military commanders directing or coordinating air operations associated with disaster relief, or by civil authorities directing or coordinating organized relief air operations. Includes representatives of the Office of Emergency Planning, U.S. Forest Service, and State aeronautical agencies. Appropriate authorities for a temporary flight restrictions establishment under 14 CFR Section 91.137 a. 3. are any of those listed above or by State, county, or city government entities.

e. The type of restrictions issued will be kept to a minimum by the FAA consistent with achievement of the necessary objective. Situations which warrant the extreme restrictions of 14 CFR Section 91.137 a. 1. include, but are not limited to, toxic gas leaks or spills, flammable agents or fumes which if fanned by rotor or propeller wash could endanger persons or property on the surface, or if entered by an aircraft could endanger persons or property in the air, imminent volcano eruptions which could endanger airborne aircraft and occupants, nuclear accident or incident, and hijackings. Situations which warrant the restrictions associated with 14 CFR Section 91.137 a. 2. include forest fires which are being fought by releasing fire retardants from aircraft, and aircraft relief activities following a disaster, earthquake, tidal wave, flood, etc. 14 CFR Section 91.137 a. 3. restrictions are established for events and incidents that could attract an unsafe congestion of sightseeing aircraft.

f. The amount of airspace needed to protect persons and property or provide a safe environment for rescue/relief aircraft operations is normally limited to within 2,000 feet above the surface and within a 3-nautical-mile radius. Incidents occurring within Class B, Class C, or Class D airspace will normally be handled through existing procedures and should not require the issuance of a temporary flight restrictions NOTAM. Temporary flight restrictions affecting airspace outside of the U.S. and its territories and possessions are issued with verbiage excluding that airspace outside of the 12-mile coastal limits.

g. The FSS nearest the incident site is normally the coordination facility. When FAA communications assistance is required, the designated FSS will function as the primary communications facility for coordination between emergency control authorities and affected aircraft. The ARTCC may act as liaison for the emergency control authorities if adequate communications cannot be established between the designated FSS and the relief organization. For example, the coordination facility may relay authorizations from the on-scene emergency response official in cases where news media aircraft operations are approved at the altitudes used by relief aircraft.

h. ATC may authorize operations in a temporary flight restrictions area under its own authority only when flight restrictions are established under 14 CFR Section 91.137(a)(2) and (a)(3). The appropriate ARTCC/airport traffic control tower manager will, however, ensure that such authorized flights do not hamper activities or interfere with the event for which restrictions are implemented. However, ATC will not authorize local IFR flights into the temporary flight restrictions area.

i. To preclude misunderstanding, the implementing NOTAM will contain specific and formatted information. The facility establishing a temporary flight restrictions area will format a NOTAM beginning with the phrase FLIGHT RESTRICTIONS, followed by the location of the temporary flight restrictions area, the effective period, the area defined in statute miles, the altitudes affected, the FAA coordination facility and commercial telephone number, the reason for the temporary flight restrictions, the agency directing any relief activities, and its commercial telephone number, and other information considered appropriate by the issuing authority.

EXAMPLE—

1. 14 CFR Section 91.137(a)(1):

The following NOTAM prohibits all aircraft operations except those specified in the NOTAM.

Flight restrictions Matthews, Virginia, effective immediately until 9610211200. Pursuant to 14 CFR Section 91.137(a)(1) temporary flight restrictions are in effect. Rescue operations in progress. Only relief aircraft operations under the direction of the Department of Defense are authorized in the airspace at and below 5,000 feet MSL within a 2-nautical-mile radius of Laser

AFB, Matthews, Virginia. Commander, Laser AFB, in charge (897) 946-5543 (122.4). Steenson FSS (792) 555-6141 (123.1) is the FAA coordination facility.

2. 14 CFR Section 91.137(a)(2):

The following NOTAM permits flight operations in accordance with 14 CFR Section 91.137(a)(2). The on-site emergency response official to authorize media aircraft operations below the altitudes used by the relief aircraft. Flight restrictions 25 miles east of Bransome, Idaho, effective immediately until 9601202359 UTC. Pursuant to 14 CFR Section 91.137(a)(2) temporary flight restrictions are in effect within a 4-nautical-mile radius of the intersection of county roads 564 and 315 at and below 3,500 feet MSL to provide a safe environment for fire fighting aircraft operations. Davis County sheriff's department (792) 555-8122 (122.9) is in charge of on-scene emergency response activities. Glivings FSS (792) 555-1618 (122.2) is the FAA coordination facility.

3. 14 CFR Section 91.137(a)(3):

The following NOTAM prohibits sightseeing aircraft operations.

Flight restrictions Brown, Tennessee, due to olympic activity. Effective 9606181100 UTC until 9607190200 UTC. Pursuant to 14 CFR Section 91.137(a)(3) temporary flight restrictions are in effect within a 3-nautical-mile radius of N355783/W835242 and Volunteer VORTAC 019 degree radial 3.7 DME fix at and below 2,500 feet MSL. Norton FSS (423) 555-6742 (126.6) is the FAA coordination facility.

4. 14 CFR Section 91.138:

The following NOTAM prohibits all aircraft except those operating under the authorization of the official in charge of associated emergency or disaster relief response activities, aircraft carrying law enforcement officials, aircraft carrying personnel involved in an emergency or legitimate scientific purposes, carrying properly accredited news media, and aircraft operating in accordance with an ATC clearance or instruction.

Flight restrictions Kapalua, Hawaii, effective 9605101200 UTC until 9605151500 UTC. Pursuant to 14 CFR Section 91.138 temporary flight restrictions are in effect within a 3-nautical-mile radius of N205778/W1564038 and Maui/OGG/VORTAC 275 degree radial at 14.1 nautical miles. John Doe 808-757-4469 or 122.4 is in charge of the operation. Honolulu/HNL 808-757-4470 (123.6) FSS is the FAA coordination facility.

5. 14 CFR Section 91.141:

The following NOTAM prohibits all aircraft.

Flight restrictions Stillwater, Oklahoma, June 21, 1996. Pursuant to 14 CFR Section 91.141 aircraft flight operations are prohibited within a 3-nautical-mile radius,

below 2000 feet AGL of N360962/W970515 and the Stillwater/SWO/VOR/DME 176 degree radial 3.8–nautical–mile fix from 1400 local time to 1700 local time June 21, 1996, unless otherwise authorized by ATC.

6. 14 CFR Section 91.143:

The following NOTAM prohibits any aircraft of U.S. registry, or pilot any aircraft under the authority of an airman certificate issued by the FAA.

Kennedy space center space operations area effective immediately until 9610152100 UTC. Pursuant to 14 CFR Section 91.143, flight operations conducted by FAA certificated pilots or conducted in aircraft of U.S. registry are prohibited at any altitude from surface to unlimited, within the following area 30–nautical–mile radius of the Melbourne/MLB/VORTAC 010 degree radial 21–nautical–mile fix. St. Petersburg, Florida/PIE/FSS 813–545–1645(122.2) is the FAA coordination facility and should be contacted for the current status of any airspace associated with the space shuttle operations. This airspace encompasses R2933, R2932, R2931, R2934, R2935, W497A and W158A. Additional warning and restricted areas will be active in conjunction with the operations. Pilots must consult all NOTAMs regarding this operation.

3–5–4. Parachute Jump Aircraft Operations

a. Procedures relating to parachute jump areas are contained in 14 CFR Part 105. Tabulations of parachute jump areas in the U.S. are contained in the A/FD.

b. Pilots of aircraft engaged in parachute jump operations are reminded that all reported altitudes must be with reference to mean sea level or flight level as appropriate to enable ATC to provide meaningful traffic information.

c. Parachute operations in the vicinity of an airport without an operating control tower – there is no substitute for alertness while in the vicinity of an airport. It is essential that pilots conducting parachute operations be alert, look for other traffic, and

exchange traffic information as recommended in paragraph 4–1–9 Traffic Advisory Practices at Airports Without Operating Control Towers. In addition, pilots should avoid releasing parachutes

while in an airport traffic pattern when there are other aircraft in that pattern. Pilots should make appropriate broadcasts on the designated Common Traffic Advisory Frequency (CTAF) and monitor that CTAF until all parachute activity has terminated or the aircraft has left the area. Prior to commencing a jump operation, the pilot should broadcast the aircraft's altitude and position in relation to the airport, the approximate relative time when the jump will commence and terminate, and listen to the position reports of other aircraft in the area.


3–5–5. Published VFR Routes

Published VFR routes for transitioning around, under, and through complex airspace such as Class B airspace, are developed through a number of FAA and industry initiatives. All of the following terms, i.e., VFR Flyway, VFR Corridor, and Class B Airspace VFR Transition Route, have been used when referring to the same or different types of routes or airspace. The following paragraphs identify and clarify the functionality of each type of route and specify where and when an ATC clearance is required.

a. VFR Flyways.

1. VFR Flyways and their associated Flyway Planning Charts are developed from the recommendations of a National Airspace Review Task Group. A VFR Flyway is defined as a general flight path not defined as a specific course for use by pilots in planning flights into, out of, through, or near complex terminal airspace to avoid Class B airspace. An ATC clearance is NOT required to fly these routes.

FIG 3-5-1
VFR Flyway Planning Chart

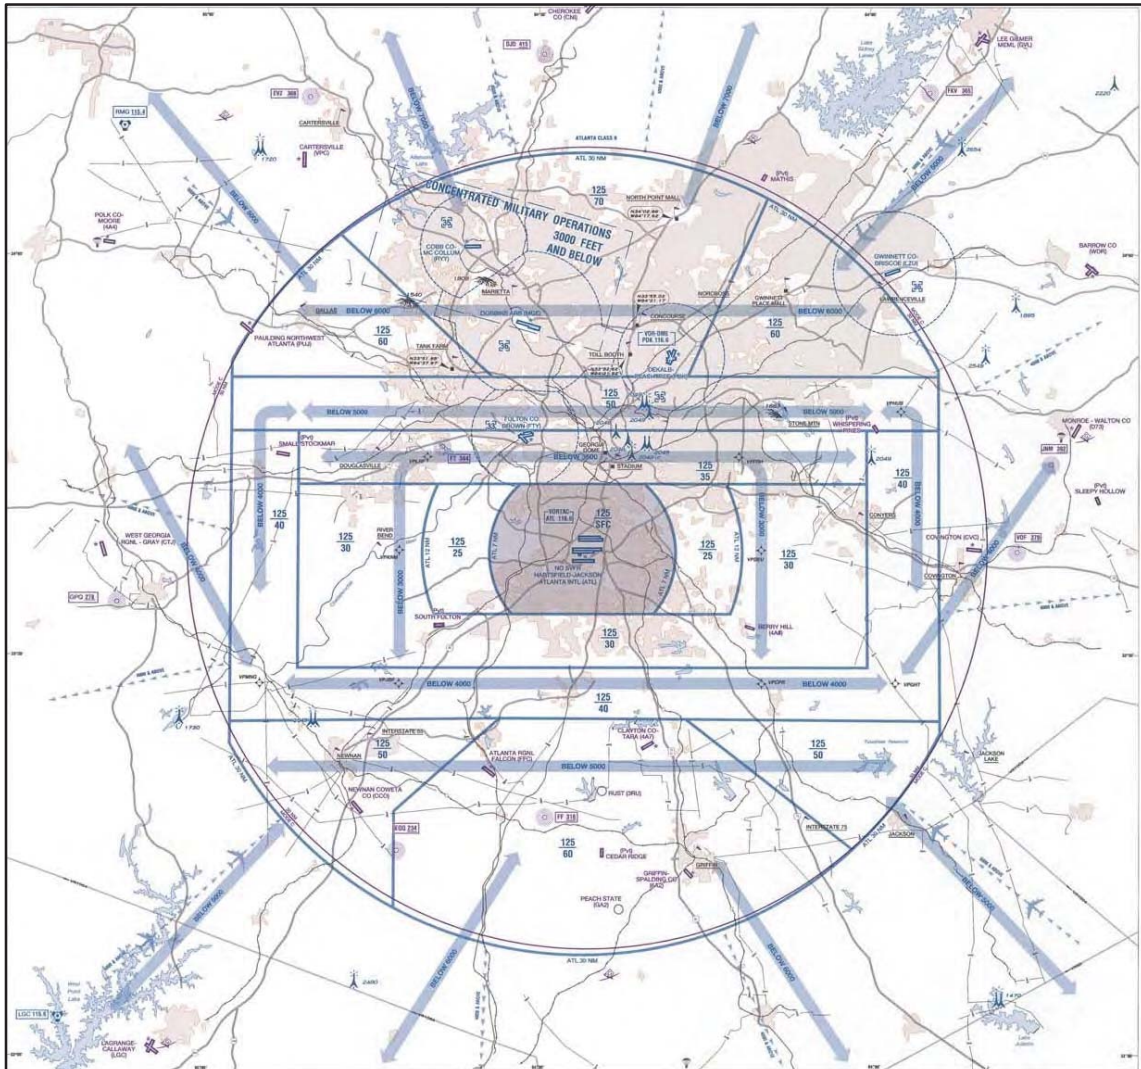

2. VFR Fly ways are depicted on the reverse side of some of the VFR Terminal Area Charts (TACs commonly referred to as Class B airspace charts). See FIG 3-5-1. Eventually all TACs will include a VFR Fly way Planning Chart. These charts identify VFR fly ways designed to help VFR pilots avoid major controlled traffic flows. They may further depict multiple VFR routings throughout the area which may be used as an alternative to flight within Class B airspace. The ground references provide a guide for improved visual navigation. These routes are not intended to discourage requests for VFR operations within Class B airspace but are designed solely to assist pilots in planning for flights under and around busy Class B airspace without actually entering Class B airspace.

3. It is very important to remember that these suggested routes are not sterile of other traffic. The entire Class B airspace and the airspace underneath it may be heavily congested with many different types of aircraft. Pilot adherence to VFR rules must be exercised at all times. Further, when operating beneath Class B airspace, communications must be established and maintained between your aircraft and any control to ensure safe transiting the Class B, Class C, and Class D surface areas of those airports under Class B airspace.


b. VFR Corridors.

1. The design of a few of the first Class B airspace areas provided a corridor for the passage of uncontrolled traffic. A VFR corridor is defined as airspace through Class B airspace with defined vertical and lateral boundaries in which aircraft may operate without an ATC clearance or communication with air traffic control.

2. These corridors are in effect a hole through Class B airspace. See FIG 3-5-2. A classic example would be the corridor through the Los Angeles Class B airspace which has been subsequently changed to Special Flight Rules airspace (SFR). A corridor is surrounded on all sides by Class B airspace and does not extend down to the surface like a VFR Fly way. Because of their finite lateral and vertical limits and the volume of VFR

traffic using a corridor, extreme caution and vigilance must be exercised.

**FIG 3-5-2
Class B Airspace**

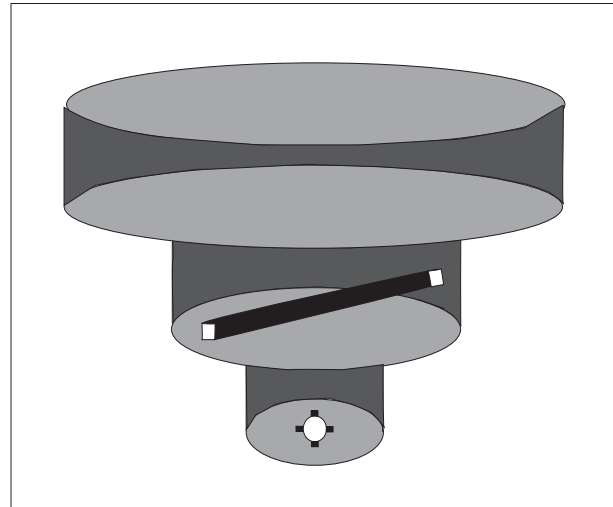


3. Because of the heavy traffic volume and the procedures necessary to efficiently manage the flow of traffic, it has not been possible to incorporate VFR corridors in the development or modifications of Class B airspace in recent years.

c. Class B Airspace VFR Transition Routes.

1. To accommodate VFR traffic through certain Class B airspace, such as Seattle, Phoenix, and Los Angeles, Class B Airspace VFR Transition Routes were developed. A Class B Airspace VFR Transition Route is defined as a specific flight course depicted on a TAC for transiting a specific Class B airspace. These routes include specific ATC assigned altitudes, and pilots must obtain an ATC clearance prior to entering Class B airspace on the route.

2. These routes, as depicted in FIG 3-5-3, are designed to show the pilot where to position the aircraft outside of or clear of the Class B airspace where an ATC clearance can normally be expected with minimal or no delay. Until ATC authorization is received, pilots must remain clear of Class B airspace. On initial contact, pilots should advise ATC of their position, altitude, route name desired, and direction of flight. After a clearance is received, pilots must fly the route as depicted and, most importantly, adhere to ATC instructions.

FIG 3-5-3
VFR Transition Route

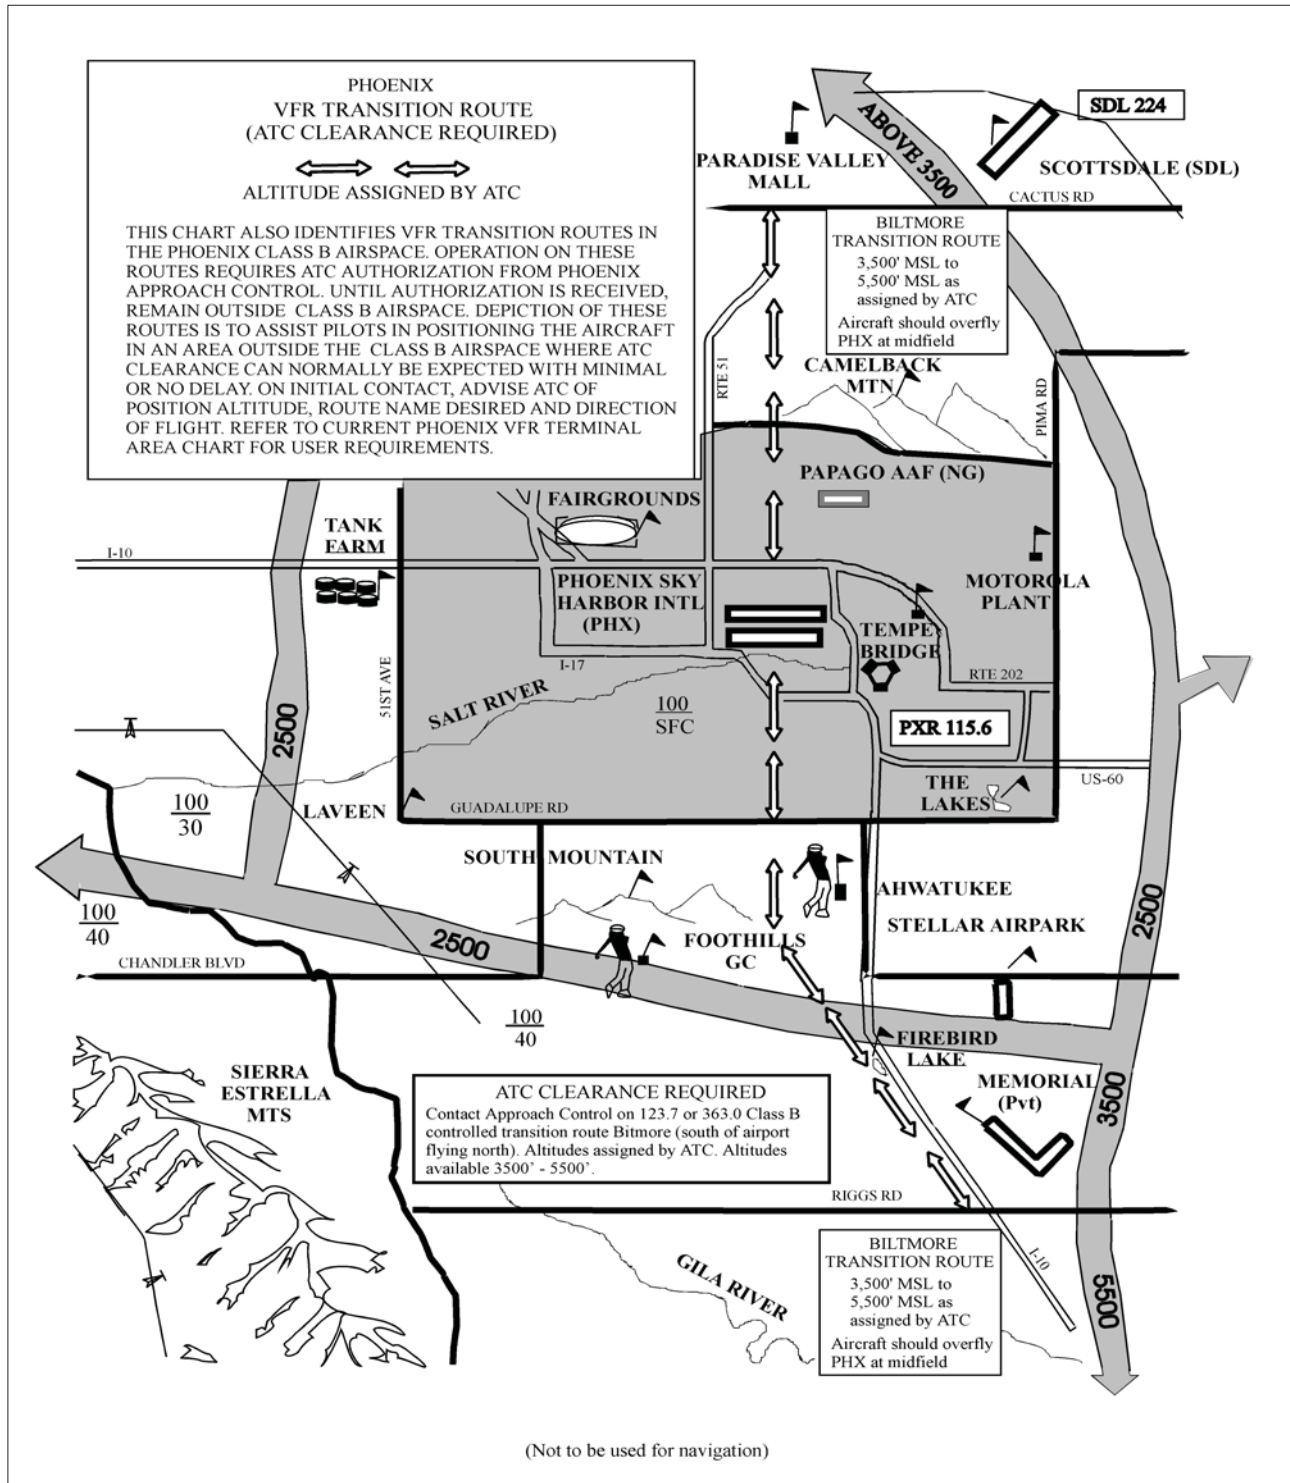

3-5-6. Terminal Radar Service Area (TRSA)

a. Background. TRSAs were originally established as part of the Terminal Radar Program at selected airports. TRSAs were never controlled airspace from a regulatory standpoint because the establishment of TRSAs was never subject to the rulemaking process. Consequently, TRSAs are not contained in 14 CFR Part 71 nor are there any TRSA operating rules in 14 CFR Part 91. Part of the Airport Radar Service Area (ARSA) program was to eventually replace all TRSAs. However, the ARSA requirements became relatively stringent and it was subsequently decided that TRSAs would have to meet ARSA criteria before they could be converted. TRSAs do not fit into any of the U.S. airspace classes; therefore, they will continue to be non-Part 71 airspace areas where participating pilots can receive additional radar services which have been redefined

as TRSA Service

b. TRSAs. The primary airport within the TRSA becomes Class D airspace. The remaining portion of the TRSA overlies other controlled airspace which is normally Class E airspace beginning at 700 or 1,200 feet and established to transition to/from the en route/terminal environment.

c. Participation. Pilots operating under VFR are encouraged to contact the radar approach control and avail themselves of the TRSA Services. However, participation is voluntary on the part of the pilot. See Chapter 4, Air Traffic Control, for details and procedures.

d. Charts. TRSAs are depicted on VFR sectional and terminal area charts with a solid black line and altitudes for each segment. The Class D portion is charted with a blue segmented line.

Chapter 4. Air Traffic Control

Section 1. Services Available to Pilots

4-1-1. Air Route Traffic Control Centers

Centers are established primarily to provide air traffic service to aircraft operating on IFR flight plans within controlled airspace and principally during the en route phase of flight

4-1-2. Control Towers

Towers have been established to provide for a safe orderly and expeditious flow of traffic on and in the vicinity of an airport. When the responsibility has been so delegated, towers also provide for the separation of IFR aircraft in the terminal areas

REFERENCE—

AIM, Approach Control, Paragraph 5-4-3

4-1-3. Flight Service Stations

Flight Service Stations (FSSs) are air traffic facilities which provide pilot briefings, flight plan processing, en route radio communications, search and rescue services, and assistance to lost aircraft and aircraft in emergency situations. FSSs also relay ATC clearances, process Notices to Airmen, broadcast aviation weather and aeronautical information, and notify Customs and Border Protection of transborder flights. In addition, at selected locations FSSs provide En Route Flight Advisory Service, Flight Watch, and Airport Advisory Service (AAS). In Alaska, designated FSSs also provide TWEB recordings and take weather observations.

4-1-4. Recording and Monitoring

a. Calls to air traffic control (ATC) facilities (ARTCCs, Towers, FSSs, Central Flow, and Operations Centers) over radio and ATC operational telephone lines (lines used for operational purposes such as controller instructions, briefings, opening and closing flight plans, issuance of IFR clearances and amendments, counter hijacking activities, etc.) may be monitored and recorded for operational uses such

as accident investigations, accident prevention, search and rescue purposes, specialist training and evaluation, and technical evaluation and repair of control and communications systems.

b. Where the public access telephone is recorded, a beeper tone is not required. In place of the beeper tone, the FCC has substituted a mandatory requirement that persons to be recorded be given notice they are to be recorded and give consent. Notice is given by this entry; consent to record is assumed by the individual placing a call to the operational facility.

4-1-5. Communications Release of IFR Aircraft Landing at an Airport Without an Operating Control Tower

Aircraft operating on an IFR flight plan, landing at an airport without an operating control tower, will be advised to change to the airport advisory frequency when direct communications with ATC are no longer required. Towers and centers do not have non-tower airport traffic and runway in use information. The instrument approach may not be aligned with the runway in use; therefore, if the information has not already been obtained, pilots should make an expeditious change to the airport advisory frequency when authorized.

REFERENCE—

AIM, Advance Information on Instrument Approach, Paragraph 5-4-4

4-1-6. Pilot Visits to Air Traffic Facilities

Pilots are encouraged to visit air traffic facilities. Towers, Centers, and FSSs and familiarize themselves with the ATC system. On rare occasions, facilities may not be able to approve a visit because of ATC workload or other reasons. It is therefore requested that pilots contact the facility prior to the visit and advise of the number of persons in the group, the time and date of the proposed visit, and the primary interest of the group. With this information available, the facility can prepare an itinerary and have someone available to guide the group through the facility.

4-1-7. Operation Take-off and Operation Raincheck

Operation Take off is a program that educates pilots in how best to utilize the FSS modernization efforts and services available in Flight Service Stations. FSS as stated in FAA Order 7230.17 Pilot Education Program – Operation Takeoff. Operation Raincheck is a program designed to familiarize pilots with the ATC system, its functions, responsibilities and benefits.

4-1-8. Approach Control Service for VFR Arriving Aircraft

a. Numerous approach control facilities have established programs for arriving VFR aircraft to contact approach control for landing information. This information includes wind run way and altimeter setting at the airport of intended landing. This information may be omitted if contained in the Automatic Terminal Information Service (ATIS) broadcast and the pilot states the appropriate ATIS code.

NOTE–

Pilot use of “have numbers” does not indicate receipt of the ATIS broadcast. In addition, the controller will provide traffic advisories on a workload permitting basis.

b. Such information will be furnished upon initial contact with concerned approach control facility. The pilot will be requested to change to the tower frequency at a predetermined time or point to receive further landing information.

c. Where available, use of this procedure will not hinder the operation of VFR flights by requiring excessive spacing between aircraft or devious routing.

d. Compliance with this procedure is not mandatory but pilot participation is encouraged.

REFERENCE–

AIM, Terminal Radar Services for VFR Aircraft, Paragraph 4-1-18

NOTE–

Approach control services for VFR aircraft are normally dependent on ATC radar. These services are not available during periods of a radar outage. Approach control services for VFR aircraft are limited when CENRAP is in use.

4-1-9. Traffic Advisory Practices at Airports Without Operating Control Towers

See TBL 4-1-1

a. Airport Operations Without Operating Control Tower

1. There is no substitute for alertness while in the vicinity of an airport. It is essential that pilots be alert and look for other traffic and exchange traffic information when approaching or departing an airport without an operating control tower. This is of particular importance since other aircraft may not have communication capability or, in some cases, pilots may not communicate their presence or intentions when operating into or out of such airports. To achieve the greatest degree of safety, it is essential that all radio equipped aircraft transmit/receive on a common frequency identified for the purpose of airport advisories.

2. An airport may have a full or part time tower or FSS located on the airport, a full or part time UNICOM station or no aeronautical station at all. There are three ways for pilots to communicate their intention and obtain airport/traffic information when operating at an airport that does not have an operating tower: by communicating with an FSS, a UNICOM operator, or by making a self-announce broadcast.

3. Many airports are not providing completely automated weather radio check capability and airport advisory information on an automated UNICOM system. These systems offer a variety of features typically selectable by microphone clicks on the UNICOM frequency. Availability of the automated UNICOM will be published in the Airport/Facility Directory and approach charts.

b. Communicating on a Common Frequency

1. The key to communicating at an airport without an operating control tower is selection of the correct common frequency. The acronym CTAF, which stands for Common Traffic Advisory Frequency, is synonymous with this program. A CTAF is a frequency designated for the purpose of carrying out airport advisory practices while operating to or from an airport without an operating control tower. The CTAF may be a UNICOM, MULTICOM, FSS, or tower frequency and is identified in appropriate aeronautical publications.

TBL 4-1-1

Summary of Recommended Communication Procedures

		Communication/Broadcast Procedures			
	Facility at Airport	Frequency Use	Outbound	Inbound	Practice Instrument Approach
1	UNICOM No Tower or FSS	Communicate with UNICOM station on published CTAF frequency 122.7, 122.8, 122.725, 122.975 or 123.0. If unable to contact UNICOM station, use self-announce procedures on CTAF.	Before taxiing and before taxiing on the runway for departure.	10 miles out. Entering downwind base and final. Leaving the runway.	
2	No Tower FSS or UNICOM	Self-announce on MULTICOM frequency 122.9.	Before taxiing and before taxiing on the runway for departure.	10 miles out. Entering downwind base and final. Leaving the runway.	Departing final approach fix name or on final approach segment inbound.
3	No Tower in operation FSS open	Communicate with FSS on CTAF frequency.	Before taxiing and before taxiing on the runway for departure.	10 miles out. Entering downwind base and final. Leaving the runway.	Approach completed/terminated.
4	FSS Closed No Tower	Self-announce on CTAF.	Before taxiing and before taxiing on the runway for departure.	10 miles out. Entering downwind base and final. Leaving the runway.	
5	Tower or FSS not in operation	Self-announce on CTAF.	Before taxiing and before taxiing on the runway for departure.	10 miles out. Entering downwind base and final. Leaving the runway.	

2. The CTAF frequency for a particular airport is contained in the A/FD, Alaska Supplement, Alaska Terminal Publication, Instrument Approach Procedure Charts, and Instrument Departure Procedure (DP) Charts. Also, the CTAF frequency can be obtained by contacting any FSS. Use of the appropriate CTAF, combined with a visual alertness and application of the following recommended good operating practices, will enhance safety of flight into and out of all uncontrolled airports.

c. Recommended Traffic Advisory Practices

1. Pilots of inbound traffic should monitor and communicate as appropriate on the designated CTAF from 10 miles to landing. Pilots of departing aircraft should monitor/communicate on the appropriate frequency from start-up during taxi and until 10 miles from the airport unless the CFRs or local procedures require otherwise.

2. Pilots of aircraft conducting other than arriving or departing operations at altitudes normally used by arriving and departing aircraft should monitor/communicate on the appropriate frequency while within 10 miles of the airport unless required to do otherwise by the CFRs or local procedures. Such operations include parachute jumping/dropping, en route practicing maneuvers, etc.

REFERENCE—

AIM, Parachute Jump Aircraft Operations, Paragraph 3-5-4

d. Airport Advisory/Information Services Provided by a FSS

1. There are three advisory type services provided at selected airports:

(a) Local Airport Advisory (LAA) is provided at airports that have a FSS physically located on the airport which does not have a control tower or where the tower is operated on a part-time basis. The CTAF for LAA airports is disseminated in the appropriate aeronautical publications.

(b) Remote Airport Advisory RAA is provided at selected very busy GA airports which do not have an operating control tower. The CTAF for RAA airports is disseminated in the appropriate aeronautical publications.

(c) Remote Airport Information Service RAIS is provided in support of special events at non-towered airports by request from the airport authority.

2. In communicating with a CTAF FSS, check the airport's automated weather and establish two-way communications before transmitting out-bound/inbound intentions or information. An inbound aircraft should initiate contact approximately 10 miles from the airport, reporting aircraft identification and type, altitude, location relative to the airport, intentions, landing or overflight, possession of the automated weather, and request airport advisory or airport information service. A departing aircraft should initiate contact before taxiing, reporting aircraft identification and type, VFR or IFR, location on the airport, intentions, direction of take-off, possession of the automated weather, and request airport advisory or information service. Also, report intentions before taxiing onto the active runway for departure. If you must change frequencies for other service after initial report to FSS, return to FSS frequency for traffic update.

(a) Inbound

EXAMPLE—

Vero Beach radio, Centurion Six Niner Delta Delta is ten miles south, two thousand, landing Vero Beach. I have the automated weather; request airport advisory.

(b) Outbound

EXAMPLE—

Vero Beach radio, Centurion Six Niner Delta Delta, ready to taxi to runway 22, VFR, departing to the southwest. I have the automated weather; request airport advisory.

3. Airport advisory service includes wind direction and velocity, favored or designated runway, altimeter setting, known airborne and ground traffic, NOTAMs, airport taxi routes, airport traffic pattern information, and instrument approach procedures. These elements are varied so as to best serve the current traffic situation. Some airport managers have specified that under certain wind or other conditions, designated runways be used. Pilots should advise the FSS of the runway they intend to use.

CAUTION—

All aircraft in the vicinity of an airport may not be in communication with the FSS.

e. Information Provided by Aeronautical Advisory Stations (UNICOM)

1. UNICOM is a nongovernment air/ground radio communication station which may provide airport information at public use airports where there is no tower or FSS.

2. On pilot request, UNICOM stations may provide pilots with weather information and direction, the recommended runway or other necessary information. If the UNICOM frequency is designated as the CTAF, it will be identified in appropriate aeronautical publications.

f. Unavailability of Information from FSS or UNICOM

Should LAA by an FSS or Aeronautical Advisory Station UNICOM be unavailable, wind and weather information may be obtainable from nearby controlled airports via Automatic Terminal Information Service (ATIS) or Automated Weather Observing System (AWOS) frequency.

g. Self-Announce Position and/or Intentions

1. General. Self announce is a procedure whereby pilots broadcast their position or intended flight activity or ground operation on the designated CTAF. This procedure is used primarily at airports which do not have an FSS on the airport. The self announce procedure should also be used if a pilot is unable to communicate with the FSS on the designated CTAF. Pilots stating “Traffic in the area, please advise” is not a recognized Self-Announce Position and/or Intention phrase and should not be used under any condition.

2. If an airport has a tower and it is temporarily closed or operated on a part-time basis and there is no FSS on the airport or the FSS is closed, use the CTAF to self announce your position or intentions.

3. Where there is no tower, FSS, or UNICOM station on the airport, use MULTICOM frequency 122.9 for self announce procedures. Such airports will be identified in appropriate aeronautical information publications.

4. Practice Approaches. Pilots conducting practice instrument approaches should be particularly alert for other aircraft that may be departing in the

opposite direction. When conducting any practice approach regardless of its direction relative to other airport operations, pilots should make announcements on the CTAF as follows:

(a) Departing the final approach fix inbound nonprecision approach or departing the outer marker or fix used in lieu of the outer marker inbound precision approach

(b) Established on the final approach segment or immediately upon being released by ATC

(c) Upon completion or termination of the approach and

(d) Upon executing the missed approach procedure

5. Departing aircraft should always be alert for arrival aircraft coming from the opposite direction.

6. Recommended self announce phraseologies. It should be noted that aircraft operating to or from another nearby airport may be making self announce broadcasts on the same UNICOM or MULTICOM frequency. To help identify one airport from another, the airport name should be spoken at the beginning and end of each self announce transmission.

(a) Inbound

EXAMPLE—

Strawn traffic, Apache Two Two Five Zulu, (position), (altitude), (descending) or entering downwind/base/final (as appropriate) runway one seven full stop, touch-and-go, Strawn.

Strawn traffic Apache Two Two Five Zulu clear of runway one seven Strawn.

(b) Outbound

EXAMPLE—

Strawn traffic, Queen Air Seven One Five Five Bravo (location on airport) taxiing to runway two six Strawn.

Strawn traffic, Queen Air Seven One Five Five Bravo departing runway two six. Departing the pattern to the (direction), climbing to (altitude) Strawn.

(c) Practice Instrument Approach

EXAMPLE—

Strawn traffic, Cessna Two One Four Three Quebec (position from airport) inbound descending through (altitude) practice (name of approach) approach runway three five Strawn.

Strawn traffic, Cessna Two One Four Three Quebec

practice (type) approach completed or terminated runway three five Strawn.

h. UNICOM Communications Procedures

1. In communicating with a UNICOM station the following practices will help reduce frequency congestion, facilitate a better understanding of pilot intentions, help identify the location of aircraft in the traffic pattern, and enhance safety of flight:

(a) Select the correct UNICOM frequency

(b) State the identification of the UNICOM station you are calling in each transmission

(c) Speak slowly and distinctly

(d) Report approximately 10 miles from the airport, reporting altitude, and state your aircraft type, aircraft identification, location relative to the airport, state whether landing or overflight, and request needed information and runway in use.

(e) Report on downwind, base, and final approach

(f) Report leaving the runway

2. Recommended UNICOM phraseologies

(a) Inbound

PHRASEOLOGY—

FREDERICK UNICOM CESSNA EIGHT ZERO ONE TANGO FOXTROT 10 MILES SOUTHEAST DESCENDING THROUGH (altitude) LANDING FREDERICK, REQUEST WIND AND RUNWAY INFORMATION FREDERICK.

FREDERICK TRAFFIC CESSNA EIGHT ZERO ONE TANGO FOXTROT ENTERING DOWNWIND/BASE/FINAL (as appropriate) FOR RUNWAY ONE NINER (full stop/touch-and-go) FREDERICK.

FREDERICK TRAFFIC CESSNA EIGHT ZERO ONE TANGO FOXTROT CLEAR OF RUNWAY ONE NINER FREDERICK.

(b) Outbound

PHRASEOLOGY—

FREDERICK UNICOM CESSNA EIGHT ZERO ONE TANGO FOXTROT (location on airport) TAXIING TO RUNWAY ONE NINER, REQUEST WIND AND TRAFFIC INFORMATION FREDERICK.

FREDERICK TRAFFIC CESSNA EIGHT ZERO ONE TANGO FOXTROT DEPARTING RUNWAY ONE NINER. “REMAINING IN THE PATTERN” OR “DEPARTING THE PATTERN TO THE (direction) (as appropriate)” FREDERICK.

4-1-10. IFR Approaches/Ground Vehicle Operations

a. IFR Approaches. When operating in accordance with an IFR clearance and ATC approves a change to the advisory frequency, make an expeditious change to the CTAF and employ the recommended traffic advisory procedures.

b. Ground Vehicle Operation. Airport ground vehicles equipped with radios should monitor the CTAF frequency when operating on the airport movement area and remain clear of runways/taxiways being used by aircraft. Radio transmissions from ground vehicles should be confined to safety-related matters.

c. Radio Control of Airport Lighting Systems. Whenever possible, the CTAF will be used to control airport lighting systems at airports without operating control towers. This eliminates the need for pilots to change frequencies to turn the lights on and allows a continuous listening watch on a single frequency. The CTAF is published on the instrument approach chart and in other appropriate aeronautical information publications. For further details concerning radio-controlled lights, see AC 150/5340-27, Air-to-Ground Radio Control of Airport Lighting Systems.

4-1-11. Designated UNICOM/MULTICOM Frequencies

Frequency use

a. The following listing depicts UNICOM and MULTICOM frequency uses as designated by the Federal Communications Commission (FCC). See TBL 4-1-2.

**TBL 4-1-2
Unicom/Multicom Frequency Usage**

Use	Frequency
Airports without an operating control tower	122.700 122.725 122.800 122.975 123.000 123.050 123.075
MULTICOM FREQUENCY Activities of a temporary seasonal emergency nature or search and rescue as well as airports without tower FSS or UNICOM	122.900
MULTICOM FREQUENCY Forestry management and fire suppression, fish and game management and protection, and environmental monitoring and protection	122.925
Airports with a control tower or FSS on airport	122.950

NOTE-

- In some areas of the country, frequency interference may be encountered from nearby airports using the same UNICOM frequency. Where there is a problem, UNICOM operators are encouraged to develop a "least interference" frequency assignment plan for airports concerned using the frequencies designated for airports without operating control towers. UNICOM licensees are encouraged to apply for UNICOM 25 kHz spaced channel frequencies. Due to the extremely limited number of frequencies with 50 kHz channel spacing, 25 kHz channel spacing should be implemented. UNICOM licensees may then request FCC to assign frequencies in accordance with the plan, which FCC will review and consider for approval.*
- Wind direction and runway information may not be available on UNICOM frequency 122.950.*

b. The following listing depicts other frequency uses as designated by the Federal Communications Commission (FCC). See TBL 4-1-3.

TBL 4-1-3
Other Frequency Usage Designated by FCC

Use	Frequency
Air to air communication private fixed wing aircraft	122 750
Air to air communications general aviation helicopters	123 025
Aviation instruction Glider Hot Air Balloon (not to be used for advisory service)	123 300 123 500

4-1-12. Use of UNICOM for ATC Purposes

UNICOM service may be used for ATC purposes only under the following circumstances:

- a. Revision to proposed departure time
- b. Takeoff arrival or flight plan cancellation time
- c. ATC clearance provided arrangements are made between the ATC facility and the UNICOM licensee to handle such messages

4-1-13. Automatic Terminal Information Service (ATIS)

a. ATIS is the continuous broadcast of recorded noncontrol information in selected high activity terminal areas. Its purpose is to improve controller effectiveness and to relieve frequency congestion by automating the repetitive transmission of essential but routine information. The information is continuously broadcast over a discrete VHF radio frequency or the voice portion of a local NAVAID. Arrival ATIS transmissions on a discrete VHF radio frequency are engineered according to the individual facility requirements which could normally be a protected service volume of 20 NM to 60 NM from the ATIS site and a maximum altitude of 25 000 feet AGL. In the case of a departure ATIS the protected service volume cannot exceed 5 NM and 100 feet AGL. At most locations ATIS signals may be received on the surface of the airport but local conditions may limit the maximum ATIS reception distance and/or altitude. Pilots are urged to cooperate in the ATIS program as it relieves frequency congestion on approach control ground control and local control frequencies. The A/FD indicates airports for which ATIS is provided.

b. ATIS information includes the time of the latest weather sea surface ceiling visibility obstructions to visibility temperature dew point if available and direction magnetic and velocity altimeter other pertinent remarks instrument approach and runway in use. The ceiling/sky condition visibility and obstructions to vision may be omitted from the ATIS broadcast if the ceiling is above 5 000 feet and the visibility is more than 5 miles. The departure runway will only be given if different from the landing runway except at locations having a separate ATIS for departure. The broadcast may include the appropriate frequency and instructions for VFR arrivals to make initial contact with approach control. Pilots of aircraft arriving or departing the terminal area can receive the continuous ATIS broadcast at times when cockpit duties are least pressing and listen to as many repeats as desired. ATIS broadcast must be updated upon the receipt of any official hourly and special weather. A net recording will also be made when there is a change in other pertinent data such as runway change instrument approach in use etc.

EXAMPLE-

Dulles International information Sierra. 1300 zulu weather. Measured ceiling three thousand overcast. Visibility three, smoke. Temperature six eight. Wind three five zero at eight. Altimeter two nine nine two. ILS runway one right approach in use. Landing runway one right and left. Departure runway three zero. Armel VORTAC out of service. Advise you have Sierra.

c. Pilots should listen to ATIS broadcasts whenever ATIS is in operation.

d. Pilots should notify controllers on initial contact that they have received the ATIS broadcast by repeating the alphabetical code word appended to the broadcast.

EXAMPLE-

"Information Sierra received."

e. When a pilot acknowledges receipt of the ATIS broadcast controllers may omit those items contained in the broadcast if they are current. Rapidly changing conditions will be issued by ATC and the ATIS will contain words as follows:

EXAMPLE-

"Latest ceiling/visibility/altimeter/wind/(other conditions) will be issued by approach control/tower."

NOTE-

The absence of a sky condition or ceiling and/or visibility on ATIS indicates a sky condition or ceiling of 5,000 feet or above and visibility of 5 miles or more. A remark may be

made on the broadcast, “the weather is better than 5000 and 5,” or the existing weather may be broadcast.

f. Controllers will issue pertinent information to pilots who do not acknowledge receipt of a broadcast or who acknowledge receipt of a broadcast which is not current

g. To serve frequency limited aircraft FSSs are equipped to transmit on the omnirange frequency at most en route VORs used as ATIS voice outlets. Such communication interrupts the ATIS broadcast. Pilots of aircraft equipped to receive on other FSS frequencies are encouraged to do so in order that these override transmissions may be kept to an absolute minimum

h. While it is a good operating practice for pilots to make use of the ATIS broadcast where it is available, some pilots use the phrase “have numbers” in communications with the controller. Use of this phrase means that the pilot has received wind and runway and altimeter information ONL and the controller does not have to repeat this information. It does not indicate receipt of the ATIS broadcast and should never be used for this purpose

4-1-14. Automatic Flight Information Service (AFIS) – Alaska FSSs Only

a. Alaska FSSs AFIS is the continuous broadcast of recorded noncontrol information at airports in Alaska where a Flight Service Station FSS provides local airport advisory service. Its purpose is to improve FSS Specialist efficiency by reducing frequency congestion on the local airport advisory frequency. The AFIS broadcast will automate the repetitive transmission of essential but routine information: weather, favored runway, breaking action, airport NOTAMs, other applicable information. The information is continuously broadcast over a discrete VHF radio frequency, usually the ASOS frequency. Use of AFIS is not mandatory, but pilots who choose to utilize VHF radio communications with the FSS are urged to listen to AFIS as it relieves frequency congestion on the local airport advisory frequency. AFIS broadcasts are updated upon the receipt of any official hourly and special weather, worsening braking action reports, and changes in other pertinent data. When a pilot acknowledges receipt of the AFIS broadcast, FSS Specialists may omit those items contained in the broadcast if they are current. When rapidly changing

conditions exist, the latest ceiling, visibility, altimeter, wind, and other conditions may be omitted from the AFIS and will be issued by the Flight Service Specialist on the appropriate radio frequency.

EXAMPLE–

“Kotzebue information ALPHA. One six five five zulu. Wind, two one zero at five; visibility two, fog; ceiling one hundred overcast; temperature minus one two, dew point minus one four; altimeter three one zero five. Altimeter in excess of three one zero zero, high pressure altimeter setting procedures are in effect. Favored runway two six. Weather in Kotzebue surface area is below V-F-R minima – an ATC clearance is required. Contact Kotzebue Radio on 123.6 for traffic advisories and advise intentions. Notice to Airmen, Hotham NDB out of service. Transcribed Weather Broadcast out of service. Advise on initial contact you have ALPHA.”

NOTE–

The absence of a sky condition or ceiling and/or visibility on Alaska FSS AFIS indicates a sky condition or ceiling of 5,000 feet or above and visibility of 5 miles or more. A remark may be made on the broadcast, “the weather is better than 5000 and 5.”

b. Pilots should listen to Alaska FSSs AFIS broadcasts whenever Alaska FSSs AFIS is in operation

NOTE–

Some Alaska FSSs are open part time and/or seasonally.

c. Pilots should notify controllers on initial contact that they have received the Alaska FSSs AFIS broadcast by repeating the phonetic alphabetic letter appended to the broadcast

EXAMPLE–

“Information Alpha received.”

d. While it is a good operating practice for pilots to make use of the Alaska FSS AFIS broadcast where it is available, some pilots use the phrase “have numbers” in communications with the FSS. Use of this phrase means that the pilot has received wind and runway and altimeter information ONL and the Alaska FSS does not have to repeat this information. It does not indicate receipt of the AFIS broadcast and should never be used for this purpose

4-1-15. Radar Traffic Information Service

This is a service provided by radar ATC facilities. Pilots receiving this service are advised of any radar target observed on the radar display which may be in such proximity to the position of their aircraft or its intended route of flight that it warrants their attention.

This service is not intended to relieve the pilot of the responsibility for continual vigilance to see and avoid other aircraft

a. Purpose of the Service

1. The issuance of traffic information as observed on a radar display is based on the principle of assisting and advising a pilot that a particular radar target's position and track indicates it may intersect or pass in such proximity to that pilot's intended flight path that it warrants attention. This is to alert the pilot to the traffic to be on the lookout for it and thereby be in a better position to take appropriate action should the need arise.

2. Pilots are reminded that the surveillance radar used by ATC does not provide altitude information unless the aircraft is equipped with Mode C and the radar facility is capable of displaying altitude information.

b. Provisions of the Service

1. Many factors such as limitations of the radar volume of traffic controller workload and communications frequency congestion could prevent the controller from providing this service. Controllers possess complete discretion for determining whether they are able to provide or continue to provide this service in a specific case. The controller's reason against providing or continuing to provide the service in a particular case is not subject to question nor need it be communicated to the pilot. In other words, the provision of this service is entirely dependent upon

whether controllers believe they are in a position to provide it. Traffic information is routinely provided to all aircraft operating on IFR flight plans except when the pilot declines the service or the pilot is operating within Class A airspace. Traffic information may be provided to flights not operating on IFR flight plans when requested by pilots of such flights.

NOTE—

Radar ATC facilities normally display and monitor both primary and secondary radar when it is available, except that secondary radar may be used as the sole display source in Class A airspace, and under some circumstances outside of Class A airspace (beyond primary coverage and in en route areas where only secondary is available). Secondary radar may also be used outside Class A airspace as the sole display source when the primary radar is temporarily unusable or out of service. Pilots in contact with the affected ATC facility are normally advised when a temporary outage occurs; i.e., "primary radar out of

service; traffic advisories available on transponder aircraft only." This means simply that only the aircraft which have transponders installed and in use will be depicted on ATC radar indicators when the primary radar is temporarily out of service.

2. When receiving VFR radar advisory service pilots should monitor the assigned frequency at all times. This is to preclude controllers' concern for radio failure or emergency assistance to aircraft under the controller's jurisdiction. VFR radar advisory service does not include vectors away from conflicting traffic unless requested by the pilot. When advisory service is no longer desired, advise the controller before changing frequencies and then change your transponder code to 1200 if applicable. Pilots should also inform the controller when changing VFR cruising altitude. Except in programs where radar service is automatically terminated, the controller will advise the aircraft when radar is terminated.

NOTE—

Participation by VFR pilots in formal programs implemented at certain terminal locations constitutes pilot request. This also applies to participating pilots at those locations where arriving VFR flights are encouraged to make their first contact with the tower on the approach control frequency.

c. Issuance of Traffic Information. Traffic information will include the following concerning a target which may constitute traffic for an aircraft that is

1. Radar identified

(a) Azimuth from the aircraft in terms of the 12-hour clock or

(b) When rapidly maneuvering civil or military aircraft prevent accurate issuance of traffic as in (a) above, specify the direction from an aircraft's position in terms of the eight cardinal compass points: N, NE, E, SE, S, SW, W, NW. This method must be terminated at the pilot's request.

(c) Distance from the aircraft in nautical miles

(d) Direction in which the target is proceeding and

(e) Type of aircraft and altitude if known

EXAMPLE—

Traffic 10 o'clock, 3 miles, west-bound (type aircraft and altitude, if known, of the observed traffic). The altitude may be known, by means of Mode C, but not verified with the

pilot for accuracy. (To be valid for separation purposes by ATC, the accuracy of Mode C readouts must be verified. This is usually accomplished upon initial entry into the radar system by a comparison of the readout to pilot stated altitude, or the field elevation in the case of continuous readout being received from an aircraft on the airport.) When necessary to issue traffic advisories containing unverified altitude information, the controller will issue the advisory in the same manner as if it were verified due to the accuracy of these readouts. The pilot may upon receipt of traffic information, request a vector (heading) to avoid such traffic. The vector will be provided to the extent possible as determined by the controller provided the aircraft to be vectored is within the airspace under the jurisdiction of the controller.

2. Not radar identified


- (a) Distance and direction with respect to a fix
- (b) Direction in which the target is proceeding and
- (c) Type of aircraft and altitude if known

EXAMPLE—

Traffic 8 miles south of the airport northeastbound, (type aircraft and altitude if known).

d. The examples depicted in the following figures point out the possible error in the position of this traffic when it is necessary for a pilot to apply drift correction to maintain this track. This error could also occur in the event a change in course is made at the time radar traffic information is issued.


**FIG 4-1-1
Induced Error in Position of Traffic**

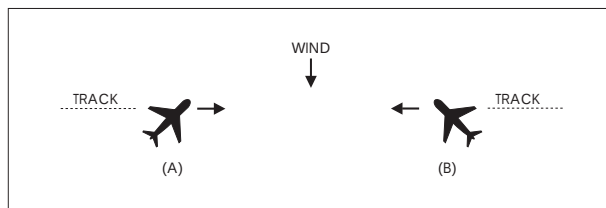

EXAMPLE—

In FIG 4-1-1 traffic information would be issued to the pilot of aircraft “A” as 12 o’clock. The actual position of the traffic as seen by the pilot of aircraft “A” would be 2 o’clock. Traffic information issued to aircraft “B” would also be given as 12 o’clock, but in this case, the pilot of “B” would see the traffic at 10 o’clock.

**FIG 4-1-2
Induced Error in Position of Traffic**

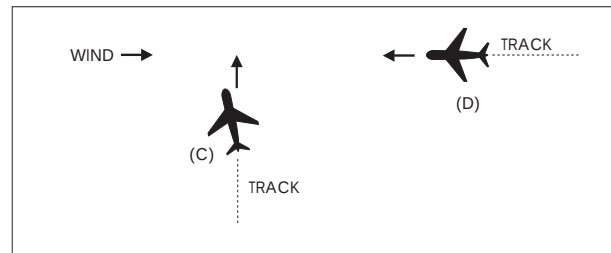

EXAMPLE—

In FIG 4-1-2 traffic information would be issued to the pilot of aircraft “C” as 2 o’clock. The actual position of the traffic as seen by the pilot of aircraft “C” would be 3 o’clock. Traffic information issued to aircraft “D” would be at an 11 o’clock position. Since it is not necessary for the pilot of aircraft “D” to apply wind correction (crab) to remain on track, the actual position of the traffic issued would be correct. Since the radar controller can only observe aircraft track (course) on the radar display, traffic advisories are issued accordingly, and pilots should give due consideration to this fact when looking for reported traffic.

4-1-16. Safety Alert

A safety alert will be issued to pilots of aircraft being controlled by ATC if the controller is aware the aircraft is at an altitude which in the controller's judgment places the aircraft in unsafe proximity to terrain obstructions or other aircraft. The provision of this service is contingent upon the capability of the controller to have an awareness of a situation involving unsafe proximity to terrain obstructions and uncontrolled aircraft. The issuance of a safety alert cannot be mandated but it can be expected on a reasonable though intermittent basis. Once the alert is issued it is solely the pilot's prerogative to determine what course of action if any to take. This procedure is intended for use in time critical situations where aircraft safety is in question. Noncritical situations should be handled via the normal traffic alert procedures.

a. Terrain or Obstruction Alert

1. Controllers will immediately issue an alert to the pilot of an aircraft under their control when they recognize that the aircraft is at an altitude which in their judgment may be in an unsafe proximity to terrain/obstructions. The primary method of detecting unsafe proximity is through Mode C automatic altitude reports.

EXAMPLE–

Low altitude alert, check your altitude immediately. The, as appropriate, MEA/MVA/MOCA in your area is (altitude) or, if past the final approach fix (nonprecision approach) or the outer marker or fix used in lieu of the outer marker (precision approach), the, as appropriate, MDA/DH (if known) is (altitude).

2. Terminal Automated Radar Terminal System ARTS IIIA Common ARTS to include ARTS IIIE and ARTS IIIE CARTS Micro En Route Automated Radar Tracking System MEARTS and Standard Terminal Automation Replacement System STARS facilities have an automated function which if operating alerts controllers when a tracked Mode C equipped aircraft under their control is below or is predicted to be below a predetermined minimum safe altitude. This function called Minimum Safe Altitude Warning MSAW is designed solely as a controller aid in detecting potentially unsafe aircraft proximity to terrain/obstructions. The ARTS IIIA CARTS MEARTS and STARS facility will when MSAW is operating provide MSAW monitoring for all aircraft with an operating Mode C altitude encoding transponder that are tracked by the system and are

(a) Operating on an IFR flight plan or

(b) Operating VFR and have requested MSAW monitoring

3. Terminal AN/TP -42A number beacon decoder system facilities have an automated function called Low Altitude Alert System LAAS. Although not as sophisticated as MSAW LAAS alerts the controller when a Mode C transponder equipped aircraft operating on an IFR flight plan is below a predetermined minimum safe altitude.

NOTE–

Pilots operating VFR may request MSAW or LAAS monitoring if their aircraft are equipped with Mode C transponders.

EXAMPLE–

Apache Three Three Papa request MSAW/LAAS.

b. Aircraft Conflict Alert.

1. Controllers will immediately issue an alert to the pilot of an aircraft under their control if they are aware of another aircraft which is not under their control at an altitude which in the controller's judgment places both aircraft in unsafe proximity to each other. With the alert when feasible the controller will offer the pilot the position of the traffic

if time permits and an alternate course of action. Any alternate course of action the controller may recommend to the pilot will be predicated only on other traffic being worked by the controller.

EXAMPLE–

American Three, traffic alert, (position of traffic, if time permits), advise you turn right/left heading (degrees) and/or climb/descend to (altitude) immediately.

4–1–17. Radar Assistance to VFR Aircraft

a. Radar equipped FAA ATC facilities provide radar assistance and navigation service vectors to VFR aircraft provided the aircraft can communicate with the facility are within radar coverage and can be radar identified.

b. Pilots should clearly understand that authorization to proceed in accordance with such radar navigational assistance does not constitute authorization for the pilot to violate CFRs. In effect assistance provided is on the basis that navigational guidance information issued is advisory in nature and the job of flying the aircraft safely remains with the pilot.

c. In many cases controllers will be unable to determine if flight into instrument conditions will result from their instructions. To avoid possible hazards resulting from being vectored into IFR conditions pilots should keep controllers advised of the weather conditions in which they are operating and along the course ahead.

d. Radar navigation assistance vectors may be initiated by the controller when one of the following conditions exist:

1. The controller suggests the vector and the pilot concurs.

2. A special program has been established and vectoring service has been advertised.

3. In the controller's judgment the vector is necessary for air safety.

e. Radar navigation assistance vectors and other radar derived information may be provided in response to pilot requests. Many factors such as limitations of radar volume of traffic communications frequency congestion and controller workload could prevent the controller from providing it. Controllers have complete discretion for determining if they are able to provide the service in a particular case. Their decision not to provide the service in a particular case is not subject to question.

4-1-18. Terminal Radar Services for VFR Aircraft

a. Basic Radar Service:

1. In addition to the use of radar for the control of IFR aircraft all commissioned radar facilities provide the following basic radar services for VFR aircraft

- (a) Safety alerts
- (b) Traffic advisories
- (c) Limited radar vectoring on a workload permitting basis
- (d) Sequencing at locations where procedures have been established for this purpose and/or when covered by a Letter of Agreement

NOTE-

When the stage services were developed, two basic radar services (traffic advisories and limited vectoring) were identified as "Stage I." This definition became unnecessary and the term "Stage I" was eliminated from use. The term "Stage II" has been eliminated in conjunction with the airspace reclassification, and sequencing services to locations with local procedures and/or letters of agreement to provide this service have been included in basic services to VFR aircraft. These basic services will still be provided by all terminal radar facilities whether they include Class B, Class C, Class D or Class E airspace. "Stage III" services have been replaced with "Class B" and "TRSA" service where applicable.

2. Vectoring service may be provided when requested by the pilot or with pilot concurrence when suggested by ATC

3. Pilots of arriving aircraft should contact approach control on the published frequency and give their position altitude aircraft call sign type aircraft radar beacon code if transponder equipped destination and request traffic information

4. Approach control will issue wind and runway except when the pilot states have numbers or this information is contained in the ATIS broadcast and the pilot states that the current ATIS information has been received Traffic information is provided on a workload permitting basis Approach control will specify the time or place at which the pilot is to contact the tower on local control frequency for further landing information Radar service is automatically terminated and the aircraft need not be advised of termination when an arriving VFR aircraft

receiving radar services to a tower-controlled airport where basic radar service is provided has landed or to all other airports is instructed to change to tower or advisory frequency See FAA Order JO 7110.65 Air Traffic Control paragraph 5-1-13 Radar Service Termination

5. Sequencing for VFR aircraft is available at certain terminal locations see locations listed in the Airport/Facility Directory The purpose of the service is to adjust the flow of arriving VFR and IFR aircraft into the traffic pattern in a safe and orderly manner and to provide radar traffic information to departing VFR aircraft Pilot participation is urged but is not mandatory Traffic information is provided on a workload permitting basis Standard radar separation between VFR or between VFR and IFR aircraft is not provided

(a) Pilots of arriving VFR aircraft should initiate radio contact on the published frequency with approach control when approximately 25 miles from the airport at which sequencing services are being provided On initial contact by VFR aircraft approach control will assume that sequencing service is requested After radar contact is established the pilot may use pilot navigation to enter the traffic pattern or depending on traffic conditions approach control may provide the pilot with routings or vectors necessary for proper sequencing with other participating VFR and IFR traffic en route to the airport When a flight is positioned behind a preceding aircraft and the pilot reports having that aircraft in sight the pilot will be instructed to follow the preceding aircraft THE ATC INSTRUCTION TO FOLLOW THE PRECEDING AIRCRAFT DOES NOT AUTHORIZE THE PILOT TO COMPLY WITH AN ATC CLEARANCE OR INSTRUCTION ISSUED TO THE PRECEDING AIRCRAFT If other nonparticipating or local aircraft are in the traffic pattern the tower will issue a landing sequence If an arriving aircraft does not want radar service the pilot should state NEGATIVE RADAR SERVICE or make a similar comment on initial contact with approach control

(b) Pilots of departing VFR aircraft are encouraged to request radar traffic information by notifying ground control on initial contact with their request and proposed direction of flight

EXAMPLE–

Xray ground control, November One Eight Six, Cessna One Seventy Two, ready to taxi, VFR southbound at 2,500, have information bravo and request radar traffic information.

NOTE–

Following takeoff, the tower will advise when to contact departure control.

(c) Pilots of aircraft transiting the area and in radar contact/communication with approach control will receive traffic information on a controller workload permitting basis. Pilots of such aircraft should give their position, altitude, aircraft call sign, aircraft type, radar beacon code, if transponder equipped, destination, and/or route of flight.

b. TRSA Service (Radar Sequencing and Separation Service for VFR Aircraft in a TRSA).

1. This service has been implemented at certain terminal locations. The service is advertised in the Airport/Facility Directory. The purpose of this service is to provide separation between all participating VFR aircraft and all IFR aircraft operating within the airspace defined as the Terminal Radar Service Area (TRSA). Pilot participation is urged but is not mandatory.

2. If any aircraft does not want the service, the pilot should state **NEGATIVE TRSA SERVICE** or make a similar comment on initial contact with approach control or ground control as appropriate.

3. TRSAs are depicted on sectional aeronautical charts and listed in the Airport/Facility Directory.

4. While operating within a TRSA, pilots are provided TRSA service and separation as prescribed in this paragraph. In the event of a radar outage, separation and sequencing of VFR aircraft will be suspended as this service is dependent on radar. The pilot will be advised that the service is not available and issued wind run way information and the time or place to contact the tower. Traffic information will be provided on a workload permitting basis.

5. Visual separation is used when prevailing conditions permit and it will be applied as follows:

(a) When a VFR flight is positioned behind a preceding aircraft and the pilot reports having that aircraft in sight, the pilot will be instructed by ATC to follow the preceding aircraft. Radar service will be continued to the runway. **THE ATC INSTRUCTION TO FOLLOW THE PRECEDING AIRCRAFT**

DOES NOT AUTHORIZE THE PILOT TO COMPLY WITH AN ATC CLEARANCE OR INSTRUCTION ISSUED TO THE PRECEDING AIRCRAFT.

(b) If other nonparticipating or local aircraft are in the traffic pattern, the tower will issue a landing sequence.

(c) Departing VFR aircraft may be asked if they can visually follow a preceding departure out of the TRSA. The pilot will be instructed to follow the other aircraft provided that the pilot can maintain visual contact with that aircraft.

6. VFR aircraft will be separated from VFR/IFR aircraft by one of the following:

(a) 500 feet vertical separation

(b) Visual separation

(c) Target resolution—a process to ensure that correlated radar targets do not touch.

7. Participating pilots operating VFR in a TRSA:

(a) Must maintain an altitude when assigned by ATC unless the altitude assignment is to maintain at or below a specified altitude. ATC may assign altitudes for separation that do not conform to 14 CFR Section 91.159. When the altitude assignment is no longer needed for separation or when leaving the TRSA, the instruction will be broadcast: **RESUME APPROPRIATE VFR ALTITUDES**. Pilots must then return to an altitude that conforms to 14 CFR Section 91.159 as soon as practicable.

(b) When not assigned an altitude, the pilot should coordinate with ATC prior to any altitude change.

8. Within the TRSA, traffic information on observed but unidentified targets will, to the extent possible, be provided to all IFR and participating VFR aircraft. The pilot will be vectored upon request to avoid the observed traffic provided the aircraft to be vectored is within the airspace under the jurisdiction of the controller.

9. Departing aircraft should inform ATC of their intended destination and/or route of flight and proposed cruising altitude.

10. ATC will normally advise participating VFR aircraft when leaving the geographical limits of the TRSA. Radar service is not automatically

terminated with this advisory unless specifically stated by the controller

c. Class C Service. This service provides in addition to basic radar service approved separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport

d. Class B Service. This service provides in addition to basic radar service approved separation of aircraft based on IFR VFR and/or height and sequencing of VFR arrivals to the primary airport s .

e. PILOT RESPONSIBILITY. THESE SERVICES ARE NOT TO BE INTERPRETED AS RELIEVING PILOTS OF THEIR RESPONSIBILITIES TO SEE AND AVOID OTHER TRAFFIC OPERATING IN BASIC VFR WEATHER CONDITIONS TO ADJUST THEIR OPERATIONS AND FLIGHT PATH AS NECESSARY TO PRECLUDE SERIOUS WAKE ENCOUNTERS TO MAINTAIN APPROPRIATE TERRAIN AND OBSTRUCTION CLEARANCE OR TO REMAIN IN WEATHER CONDITIONS EQUAL TO OR BETTER THAN THE MINIMUMS REQUIRED BY 14 CFR SECTION 91.155 WHENEVER COMPLIANCE WITH AN ASSIGNED ROUTE HEADING AND/OR ALTITUDE IS LIKELY TO COMPROMISE PILOT RESPONSIBILITY RESPECTING TERRAIN AND OBSTRUCTION CLEARANCE VORTEX POSURE AND WEATHER MINIMUMS APPROACH CONTROL SHOULD BE SO ADVISED AND A REVISED CLEARANCE OR INSTRUCTION OBTAINED.

f. ATC services for VFR aircraft participating in terminal radar services are dependent on ATC radar Services for VFR aircraft are not available during periods of a radar outage and are limited during CENRAP operations The pilot will be advised when VFR services are limited or not available

NOTE—

Class B and Class C airspace are areas of regulated airspace. The absence of ATC radar does not negate the requirement of an ATC clearance to enter Class B airspace or two way radio contact with ATC to enter Class C airspace.

4–1–19. Tower En Route Control (TEC)

a. TEC is an ATC program to provide a service to aircraft proceeding to and from metropolitan areas. It links designated Approach Control Areas by a network of identified routes made up of the existing airway structure of the National Airspace System. The FAA initiated an expanded TEC program to include as many facilities as possible. The program's intent is to provide an overflow resource in the low altitude system which could enhance ATC services. A few facilities have historically allowed turbojets to proceed between certain city pairs such as Milwaukee and Chicago via tower en route and these locations may continue this service. However, the expanded TEC program will be applied generally for nonturbojet aircraft operating at and below 10 000 feet. The program is entirely within the approach control airspace of multiple terminal facilities. Essentially, it is for relatively short flights. Participating pilots are encouraged to use TEC for flights of two hours duration or less. If longer flights are planned, extensive coordination may be required within the multiple complex which could result in unanticipated delays.

b. Pilots requesting TEC are subject to the same delay factor at the destination airport as other aircraft in the ATC system. In addition, departure and en route delays may occur depending upon individual facility workload. When a major metropolitan airport is incurring significant delays, pilots in the TEC program may want to consider an alternative airport experiencing no delay.

c. There are no unique requirements upon pilots to use the TEC program. Normal flight plan filing procedures will ensure proper flight plan processing. Pilots should include the acronym TEC in the remarks section of the flight plan when requesting tower en route control.

d. All approach controls in the system may not operate up to the maximum TEC altitude of 10 000 feet. IFR flight may be planned to any satellite airport in proximity to the major primary airport via the same routing.

4-1-20. Transponder Operation

a. General

1. Pilots should be aware that proper application of transponder operating procedures will provide both VFR and IFR aircraft with a higher degree of safety in the environment where high speed closure rates are possible. Transponders substantially increase the capability of radar to see an aircraft and the Mode C feature enables the controller to quickly determine where potential traffic conflicts may exist. Even VFR pilots who are not in contact with ATC will be afforded greater protection from IFR aircraft and VFR aircraft which are receiving traffic advisories. Nevertheless, pilots should never relax their visual scanning vigilance for other aircraft.

2. Air Traffic Control Radar Beacon System (ATCRBS) is similar to and compatible with military coded radar beacon equipment. Civil Mode A is identical to military Mode 3.

3. Civil and military transponders should be turned to the on or normal altitude reporting position prior to moving on the airport surface to ensure the aircraft is visible to ATC surveillance systems. IN ALL CASES WHILE IN CONTROLLED AIRSPACE EACH PILOT OPERATING AN AIRCRAFT EQUIPPED WITH AN OPERABLE ATC TRANSPONDER MAINTAINED IN ACCORDANCE WITH 14 CFR SECTION 91.413 MUST OPERATE THE TRANSPONDER INCLUDING MODE C IF INSTALLED ON THE APPROPRIATE CODE OR AS ASSIGNED BY ATC IN CLASS G AIRSPACE. THE TRANSPONDER SHOULD BE OPERATING WHILE AIRBORNE UNLESS OTHERWISE REQUESTED BY ATC.

4. A pilot on an IFR flight who elects to cancel the IFR flight plan prior to reaching destination should deactivate the transponder according to VFR operations.

5. If entering a U.S. OFFSHORE AIRSPACE AREA from outside the U.S., the pilot should advise on first radio contact with a U.S. radar ATC facility that such equipment is available by adding transponder to the aircraft identification.

6. It should be noted by all users of ATC transponders that the coverage they can expect is limited to line of sight. Low altitude or aircraft

antenna shielding by the aircraft itself may result in reduced range. Range can be improved by climbing to a higher altitude. It may be possible to minimize antenna shielding by locating the antenna where dead spots are only noticed during abnormal flight attitudes.

7. Aircraft equipped with ADS-B 1090 ES or UAT must operate the equipment in the transmit mode on position at all times while on any airport surface.

NOTE-

Pilots of aircraft equipped with ADS-B should refer to AIM, Automatic Dependent Surveillance – Broadcast Services, Paragraph 4-5-7 for a complete description of operating limitations and procedures.

b. Transponder Code Designation

1. For ATC to utilize one or a combination of the 4096 discrete codes, FOUR DIGIT CODE DESIGNATION will be used. e.g., code 2100 will be expressed as TWO ONE ZERO ZERO. Due to the operational characteristics of the rapidly expanding automated ATC system, THE LAST TWO DIGITS OF THE SELECTED TRANSPONDER CODE SHOULD ALWAYS READ 00 UNLESS SPECIFICALLY REQUESTED BY ATC TO BE OTHERWISE.

c. Automatic Altitude Reporting (Mode C)

1. Some transponders are equipped with a Mode C automatic altitude reporting capability. This system converts aircraft altitude in 100 foot increments to coded digital information which is transmitted together with Mode C framing pulses to the interrogating radar facility. The manner in which transponder panels are designed differs; therefore, a pilot should be thoroughly familiar with the operation of the transponder so that ATC may realize its full capabilities.

2. Adjust transponder to reply on the Mode A/3 code specified by ATC and, if equipped to reply on Mode C, with altitude reporting capability activated unless deactivation is directed by ATC or unless the installed aircraft equipment has not been tested and calibrated as required by 14 CFR Section 91.217. If deactivation is required by ATC, turn off the altitude reporting feature of your transponder. An instruction by ATC to STOP ALTITUDE SQUAWK ALTITUDE DIFFERS (number of feet FEET) may be an indication that your transponder is transmitting incorrect altitude information or that you have an

incorrect altimeter setting. While an incorrect altimeter setting has no effect on the Mode C altitude information transmitted by your transponder, transponders are preset at 29.92. It could cause you to fly at an actual altitude different from your assigned altitude. When a controller indicates that an altitude readout is invalid, the pilot should initiate a check to verify that the aircraft altimeter is set correctly.

3. Pilots of aircraft with operating Mode C altitude reporting transponders should report exact altitude or flight level to the nearest hundred foot increment when establishing initial contact with an ATC facility. Exact altitude or flight level reports on initial contact provide ATC with information that is required prior to using Mode C altitude information for separation purposes. This will significantly reduce altitude verification requests.

d. Transponder IDENT Feature

1. The transponder must be operated only as specified by ATC. Activate the IDENT feature only upon request of the ATC controller.

e. Code Changes

1. When making routine code changes, pilots should avoid inadvertent selection of Codes 7500, 7600, or 7700, thereby causing momentary false alarms at automated ground facilities. For example, when switching from Code 2700 to Code 7200, switch first to 2200, then to 7200, NOT to 7700, and then 7200. This procedure applies to nondiscrete Code 7500 and all discrete codes in the 7600 and 7700 series, i.e., 7600–7677, 7700–7777, which will trigger special indicators in automated facilities. Only nondiscrete Code 7500 will be decoded as the hijack code.

2. Under no circumstances should a pilot of a civil aircraft operate the transponder on Code 7777. This code is reserved for military interceptor operations.

3. Military pilots operating VFR or IFR within restricted/arming areas should adjust their transponders to Code 4000 unless another code has been assigned by ATC.

f. Mode C Transponder Requirements

1. Specific details concerning requirements to carry and operate Mode C transponders, as well as exceptions and ATC authorized deviations from the

requirements are found in 14 CFR Section 91.215 and 14 CFR Section 99.12.

2. In general, the CFRs require aircraft to be equipped with Mode C transponders when operating:

(a) At or above 10,000 feet MSL over the 48 contiguous states or the District of Columbia, excluding that airspace below 2,500 feet AGL.

(b) Within 30 miles of a Class B airspace primary airport below 10,000 feet MSL. Balloons, gliders, and aircraft not equipped with an engine-driven electrical system are excepted from the above requirements when operating below the floor of Class A airspace and/or outside of a Class B airspace and below the ceiling of the Class B airspace or 10,000 feet MSL, whichever is lower.

(c) Within and above all Class C airspace up to 10,000 feet MSL.

(d) Within 10 miles of certain designated airports, excluding that airspace which is both outside the Class D surface area and below 1,200 feet AGL. Balloons, gliders, and aircraft not equipped with an engine-driven electrical system are excepted from this requirement.

3. 14 CFR Section 99.12 requires all aircraft flying into, within, or across the contiguous U.S. ADI to be equipped with a Mode C or Mode S transponder. Balloons, gliders, and aircraft not equipped with an engine-driven electrical system are excepted from this requirement.

4. Pilots must ensure that their aircraft transponder is operating on an appropriate ATC assigned VFR/IFR code and Mode C when operating in such airspace. If in doubt about the operational status of either feature of your transponder while airborne, contact the nearest ATC facility or FSS, and they will advise you what facility you should contact for determining the status of your equipment.

5. In flight requests for immediate deviation from the transponder requirement may be approved by controllers only when the flight will continue IFR or when weather conditions prevent VFR descent and continued VFR flight in airspace not affected by the CFRs. All other requests for deviation should be made by contacting the nearest Flight Service or Air Traffic facility in person or by telephone. The nearest ARTCC will normally be the controlling agency and is responsible for coordinating requests involving deviations in other ARTCC areas.

g. Transponder Operation Under Visual Flight Rules (VFR)

1. Unless otherwise instructed by an ATC facility, adjust transponder to reply on Mode 3/A Code 1200 regardless of altitude.

NOTE—

1. *Aircraft not in contact with an ATC facility may squawk 1255 in lieu of 1200 while en route to, from, or within the designated fire fighting area(s).*

2. *VFR aircraft which fly authorized SAR missions for the USAF or USCG may be advised to squawk 1277 in lieu of 1200 while en route to, from, or within the designated search area.*

3. *Gliders not in contact with an ATC facility should squawk 1202 in lieu of 1200.*

REFERENCE—

FAAO 7110.66, *National Beacon Code Allocation Plan.*

2. Adjust transponder to reply on Mode C with altitude reporting *capability activated* if the aircraft is so equipped unless deactivation is directed by ATC or unless the installed equipment has not been tested and calibrated as required by 14 CFR Section 91.217. If deactivation is required and your transponder is so designed, turn off the altitude reporting switch and continue to transmit Mode C framing pulses. If this capability does not exist, turn off Mode C.

h. Radar Beacon Phraseology

Air traffic controllers, both civil and military, will use the following phraseology when referring to operation of the Air Traffic Control Radar Beacon System (ATCRBS). Instructions by ATC refer only to Mode A/3 or Mode C operation and do not affect the operation of the transponder on other Modes.

1. **SQUAWK (number).** Operate radar beacon transponder on designated code in Mode A/3.

2. **IDENT.** Engage the IDENT feature military I/P of the transponder.

3. **SQUAWK (number) and IDENT.** Operate transponder on specified code in Mode A/3 and engage the IDENT military I/P feature.

4. **SQUAWK STANDBY.** Switch transponder to standby position.

5. **SQUAWK LOW/NORMAL.** Operate transponder on low or normal sensitivity as specified. Transponder is operated in NORMAL position unless ATC specifies LOW. ON is used instead of NORMAL as a master control label on some types of transponders.

6. **SQUAWK ALTITUDE.** Activate Mode C with automatic altitude reporting.

7. **STOP ALTITUDE SQUAWK.** Turn off altitude reporting switch and continue transmitting Mode C framing pulses. If your equipment does not have this capability, turn off Mode C.


8. **STOP SQUAWK (mode in use).** Switch off specified mode. Used for military aircraft when the controller is unaware of military service requirements for the aircraft to continue operation on another Mode.

9. **STOP SQUAWK.** Switch off transponder.

10. **SQUAWK MAYDAY.** Operate transponder in the emergency position: Mode A Code 7700 for civil transponder; Mode 3 Code 7700 and emergency feature for military transponder.

11. **SQUAWK VFR.** Operate radar beacon transponder on Code 1200 in the Mode A/3 or other appropriate VFR code.

FIG 4-1-3
Hazardous Area Reporting Service

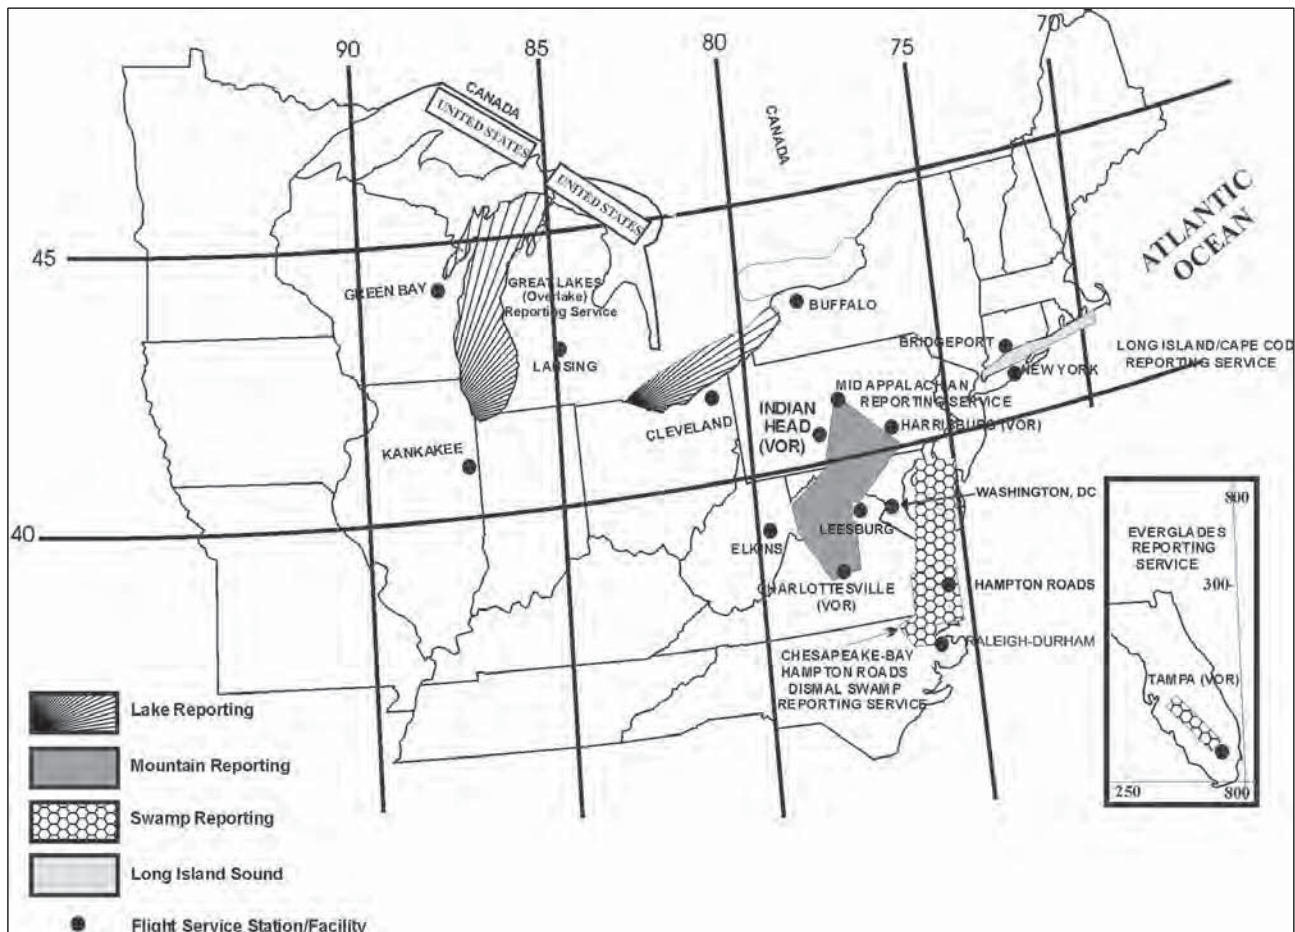

4-1-21. Hazardous Area Reporting Service

a. Selected FSSs provide flight monitoring here regularly traveled VFR routes cross large bodies of water, swamps, and mountains. This service is provided for the purpose of expeditiously alerting Search and Rescue facilities when required. See FIG 4-1-3.

1. When requesting the service either in person or by telephone or by radio, pilots should be prepared to give the following information: type of aircraft, altitude, indicated airspeed, present position, route of flight, heading.

2. Radio contacts are desired at least every 10 minutes. If contact is lost for more than 15 minutes, Search and Rescue will be alerted. Pilots are responsible for canceling their request for service when they are outside the service area boundary. Pilots experiencing total or partial radio failure are

expected to land as soon as practicable and cancel their request for the service. FIG 4-1-3 depicts the areas and the FSS facilities involved in this program.

b. Long Island Sound Reporting Service.

New York and Bridgeport FSS Radio Sectors provide Long Island Sound Reporting service on request for aircraft traversing Long Island Sound.

1. When requesting the service, pilots should ask for SOUND REPORTING SERVICE and should be prepared to provide the following appropriate information:

- (a) Type and color of aircraft
- (b) The specific route and altitude across the sound including the shore crossing point
- (c) The overwater crossing time
- (d) Number of persons on board and
- (e) True air speed

2. Radio contacts are desired at least every 10 minutes however for flights of shorter duration a midsound report is requested. If contact is lost for more than 15 minutes Search and Rescue will be alerted. Pilots are responsible for canceling their request for the Long Island Sound Reporting Service when outside the service area boundary. Aircraft experiencing radio failure will be expected to land as soon as practicable and cancel their request for the service.

3. Communications. Primary communications – pilots are to transmit on 122.1 MHz and listen on one of the following VOR frequencies:

(a) New York FSS Radio Sector Controls:

(1) Hampton RCO FSS transmits and receives on 122.6 MHz

(2) Calverton VOR FSS transmits on 117.2 and receives on standard FSS frequencies

(3) Kennedy VORTAC FSS transmits on 115.9 and receives on 122.1 MHz

(b) Bridgeport FSS Radio Sector Controls:

(1) Madison VORTAC FSS transmits on 110.4 and receives on 122.1 MHz

(2) Groton VOR FSS transmits on 110.85 and receives on 122.1 MHz

(3) Bridgeport VOR FSS transmits on 108.8 and receives on 122.1 MHz

c. Block Island Reporting Service.

Within the Long Island Sound Reporting Service the New York FSS Radio Sector also provides an additional service for aircraft operating between Montauk Point and Block Island. When requesting this service pilots should ask for BLOCK ISLAND REPORTING SERVICE and should be prepared to provide the same flight information as required for the Long Island Sound Reporting Service.

1. A minimum of three position reports are mandatory for this service; these are:

(a) Reporting leaving either Montauk Point or Block Island

(b) Midday report

(c) Report when over either Montauk Point or Block Island. At this time the overwater service is canceled.

2. Communications. Pilots are to transmit and receive on 122.6 MHz

NOTE–

Pilots are advised that 122.6 MHz is a remote receiver located at the Hampton VORTAC site and designed to provide radio coverage between Hampton and Block Island. Flights proceeding beyond Block Island may contact the Bridgeport FSS Radio Sector by transmitting on 122.1 MHz and listening on Groton VOR frequency 110.85 MHz.

d. Cape Cod and Islands Radar Overwater Flight Following.

In addition to normal VFR radar advisory services, traffic permitting, Cape Approach Control provides a radar overwater flight following service for aircraft traversing the Cape Cod and adjacent Island area. Pilots desiring this service may contact Cape TRACON on 118.2 MHz.

1. Pilots requesting this service should be prepared to give the following information:

(a) Type and color of aircraft

(b) Altitude

(c) Position and heading

(d) Route of flight and

(e) True airspeed

2. For best radar coverage, pilots are encouraged to fly at 1,500 feet MSL or above.

3. Pilots are responsible for canceling their request for overwater flight following when they are over the mainland and/or outside the service area boundary.

e. Lake Reporting Service.

Cleveland and Lansing FSS Radio Sectors provide Lake Reporting Service on request for aircraft traversing the eastern half of Lake Erie. Green Bay, Kankakee, Lansing, and Terre Haute FSS Radio Sectors provide Lake Reporting Service on request for aircraft traversing Lake Michigan.

1. When requesting the service, pilots should ask for LAKE REPORTING SERVICE.

2. Pilots not on a VFR flight plan should be prepared to provide all information that is normally provided for a complete VFR flight plan.

3. Pilots already on a VFR flight plan should be prepared to provide the following information

- (a) Aircraft or flight identification
- (b) Type of aircraft
- (c) Near-shore crossing point or last fix before crossing
- (d) Proposed time over near-shore crossing point or last fix before crossing
- (e) Proposed altitude
- (f) Proposed route of flight
- (g) Estimated time over water
- (h) Next landing point
- (i) FSS having complete VFR flight plan information

4. Radio contacts must not exceed 10 minutes when pilots fly at an altitude that affords continuous communications. If radio contact is lost for more than 15 minutes, 5 minutes after a scheduled reporting time, Search and Rescue (SAR) will be alerted.

5. The estimated time for crossing the far shore will be the scheduled reporting time for aircraft that fly at an altitude that does not afford continuous communication coverage while crossing the lake. If radio contact is not established within 5 minutes of that time, SAR will be alerted.

6. Pilots are responsible for canceling their request for Lake Reporting Service when outside the service area boundary. Aircraft experiencing radio failure will be expected to land as soon as practicable and cancel their Lake Reporting Service flight plan.

7. **Communications.** Primary communications – Pilots should communicate with the following facilities on the indicated frequencies

(a) Cleveland FSS Radio Sector Controls:

(1) Cleveland RCO FSS transmits and receives on 122.35 or 122.55 MHz

(2) Sandusky VOR FSS transmits on 109.2 and receives on 122.1 MHz

(b) Green Bay FSS Radio Sector Controls:

(1) Escanaba VORTAC FSS transmits on 110.8 and receives on 122.1 MHz

(2) Green Bay RCO FSS transmits and receives on 122.55 MHz

(3) Manistigouish RCO FSS transmits and receives on 122.25 MHz

(4) Manitowish VOR FSS transmits on 111.0 and receives on 122.1 MHz

(5) Menominee VOR FSS transmits on 109.6 and receives on 122.1 MHz

(6) Milwaukee RCO FSS transmits and receives on 122.65 MHz

(7) Falls VOR FSS transmits on 110.0 and receives on 122.1 MHz

(c) Kankakee FSS Radio Sector Controls:

(1) Chicago Heights VORTAC FSS transmits on 114.2 and receives on 122.1 MHz

(2) Meigs RCO FSS transmits and receives on 122.15 MHz

(3) Waukegan RCO FSS transmits and receives on 122.55 MHz

(d) Lansing FSS Radio Sector Controls:

(1) **Lake Erie.** Detroit City RCO FSS transmits and receives on 122.55 MHz

(2) Lake Michigan:

[a] Keeler VORTAC FSS transmits on 116.6 and receives on 122.1 MHz

[b] Ludington RCO FSS transmits and receives on 122.45 MHz

[c] Manistee VORTAC FSS transmits on 111.4 and receives on 122.1 MHz

[d] Muskegon RCO FSS transmits and receives on 122.5 MHz

[e] Pellston RCO FSS transmits and receives on 122.3 MHz

[f] Pullman VORTAC FSS transmits on 112.1 and receives on 122.1 MHz

[g] Traverse City RCO FSS transmits and receives on 122.65 MHz

(e) Terre Haute FSS Radio Sector Controls. South Bend RCO FSS transmits and receives on 122.6 MHz

f. Everglades Reporting Service.

This service is offered by Miami Automated International Flight Service Station MIA AIFSS in extreme southern Florida. The service is provided to aircraft crossing the Florida Everglades between Lee County Ft Myers FL VORTAC RSW on the north east side and Dolphin Miami FL VOR DHP on the southeast side.

1. The pilot must request the service from Miami AIFSS
2. MIA AIFSS frequency information 122.2, 122.3 and 122.65
3. The pilot must file a VFR flight plan with the remark ERS
4. The pilot must maintain 2000 feet of altitude
5. The pilot must make position reports every ten (10) minutes. SAR begins fifteen (15) minutes after position report is not made on time
6. The pilot is expected to land as soon as is practical in the event of total radio failure and advise MIA AIFSS that the service is terminated
7. The pilot must notify Miami AIFSS when the flight plan is cancelled or the service is suspended

4-1-22. Airport Reservation Operations and Special Traffic Management Programs

This section describes procedures for obtaining required airport reservations at airports designated by the FAA and for airports operating under Special Traffic Management Programs.

a. Slot Controlled Airports.

1. The FAA may adopt rules to require advance operations for unscheduled operations at certain airports. In addition to the information in the rules adopted by the FAA, a listing of the airports and relevant information will be maintained on the FAA Web site listed below.
2. The FAA has established an Airport Reservation Office (ARO) to receive and process reservations for unscheduled flights at the slot controlled airports. The ARO uses the Enhanced Computer Voice Reservation System (e-CVRS) to allocate reservations. Reservations will be available

beginning 72 hours in advance of the operation at the slot controlled airport. Refer to the Web site or touch-tone phone interface for the current listing of slot controlled airports, limitations, and reservation procedures.

NOTE-

The web interface/telephone numbers to obtain a reservation for unscheduled operations at a slot controlled airport are:

1. <http://www.fly.faa.gov/ecvrs>.
2. Touch-tone: 1-800-875-9694 or 703-707-0568. (e-CVRS interface).
3. Trouble number: 703-904-4452.

3. For more detailed information on operations and reservation procedures at a Slot Controlled Airport, please see Advisory Circular 93-1A, Reservations for Unscheduled Operations at slot controlled airports. A copy of the Advisory Circular may be obtained via the Internet at <http://faa.gov>.

b. Special Traffic Management Programs (STMP).

1. Special procedures may be established when a location requires special traffic handling to accommodate above normal traffic demand, e.g., the Indianapolis 500 Super Bowl or reduced airport capacity, e.g., airport runway/taxiway closures for airport construction. The special procedures may remain in effect until the problem has been resolved or until local traffic management procedures can handle the situation and a need for special handling no longer exists.

2. There will be two methods available for obtaining slot reservations through the ATCSCC: the web interface and the touch-tone interface. If these methods are used, a NOTAM will be issued relaying the web site address and toll free telephone number. Be sure to check current NOTAMs to determine what airports are included in the STMP, the dates and times reservations are required, the time limits for reservation requests, the point of contact for reservations, and any other instructions.

- c. Users may contact the ARO at 703-904-4452 if they have a problem making a reservation or have a question concerning the slot controlled airport/STMP regulations or procedures.

d. Making Reservations.

1. Internet Users. Detailed information and User Instruction Guides for using the Web interface to the reservation systems are available on the ebsites for the slot controlled airports e-CVRS [http // fly faa gov/ecvrs](http://fly.faa.gov/ecvrs) and STMPs e-STMP [http // fly faa gov/estmp](http://fly.faa.gov/estmp)

2. Telephone users. When using the telephone to make a reservation you are prompted for input of information about what you wish to do. All input is accomplished using the keypad on the telephone. The only problem with a telephone is that most keys have a letter and number associated with them. When the system asks for a date or time it is expecting an input of numbers. A problem arises when entering an aircraft call sign or tail number. The system does not detect if you are entering a letter alpha character or

a number. Therefore when entering an aircraft call sign or tail number two keys are used to represent each letter or number. When entering a number precede the number you wish by the number 0. For example 01 02 03 04. If you wish to enter a letter first press the key on which the letter appears and then press 1 2 or 3 depending upon whether the letter you desire is the first second or third letter on that key. For example to enter the letter N first press the 6 key because N is on that key then press the 2 key because the letter N is the second letter on the 6 key. Since there are no keys for the letters Q and e-CVRS pretends they are on the number 1 key. Therefore to enter the letter Q press 11 and to enter the letter press 12.

NOTE–

Users are reminded to enter the “N” character with their tail numbers. (See TBL 4–1–4.)

TBL 4–1–4
Codes for Call Sign/Tail Number Input

Codes for Call Sign/Tail Number Input Only			
A–21	J–51	S–73	1 01
B–22	K–52	T–81	2–02
C–23	L–53	U–82	3–03
D–31	M–61	V–83	4–04
E–32	N–62	W–91	5–05
F–33	O–63	–92	6–06
G–41	P–71	–93	7–07
H–42	Q–11	–12	8–08
I–43	R–72	0–00	9–09

3. Additional helpful key entries See TBL 4–1–5

TBL 4–1–5
Helpful Key Entries

#	After entering a call sign/tail number depressing the pound key # twice will indicate the end of the entry
2	Will take the user back to the start of the process
3	Will repeat the call sign/tail number used in a previous reservation
5	Will repeat the previous question
8	Tutorial Mode In the tutorial mode each prompt for input includes a more detailed description of what is expected as input 8 is a toggle on/off switch If you are in tutorial mode and enter 8 you will return to the normal mode
0	Expert Mode In the expert mode each prompt for input is brief with little or no explanation Expert mode is also on/off toggle

4–1–23. Requests for Waivers and Authorizations from Title 14, Code of Federal Regulations (14 CFR)

a. Requests for a Certificate of Waiver or Authorization FAA Form 7711–2 or requests for renewal of a waiver or authorization may be accepted by any FAA facility and will be forwarded if necessary to the appropriate office having waiver authority

b. The grant of a Certificate of Waiver or Authorization from 14 CFR constitutes relief from specific regulations to the degree and for the period of time specified in the certificate and does not waive any state law or local ordinance Should the proposed operations conflict with any state law or local ordinance or require permission of local authorities or property owners it is the applicant's responsibility to resolve the matter The holder of a waiver is responsible for compliance with the terms of the waiver and its provisions

c. A waiver may be canceled at any time by the Administrator the person authorized to grant the waiver or the representative designated to monitor a specific operation In such case either written notice of cancellation or written confirmation of a verbal cancellation will be provided to the holder

4–1–24. Weather System Processor

The Weather System Processor WSP was developed for use in the National Airspace System to provide weather processor enhancements to selected Airport Surveillance Radar ASR –9 facilities The WSP provides Air Traffic with warnings of hazardous wind shear and microbursts The WSP also provides users with terminal area 6–level weather storm cell locations and movement as well as the location and predicted future position and intensity of wind shifts that may affect airport operations

Section 2. Radio Communications Phraseology and Techniques

4-2-1. General

a. Radio communications are a critical link in the ATC system. The link can be a strong bond between pilot and controller or it can be broken with surprising speed and disastrous results. Discussion herein provides basic procedures for new pilots and also highlights safe operating concepts for all pilots.

b. The single most important thought in pilot-controller communications is understanding. It is essential therefore that pilots acknowledge each radio communication with ATC by using the appropriate aircraft call sign. Brevity is important and contacts should be kept as brief as possible, but controllers must know what you want to do before they can properly carry out their control duties. And you, the pilot, must know exactly what the controller wants you to do. Since concise phraseology may not always be adequate, use whatever words are necessary to get your message across. Pilots are to maintain vigilance in monitoring air traffic control radio communications frequencies for potential traffic conflicts with their aircraft, especially when operating on an active runway and/or when conducting a final approach to landing.

c. All pilots will find the Pilot/Controller Glossary very helpful in learning what certain words or phrases mean. Good phraseology enhances safety and is the mark of a professional pilot. Jargon, chatter, and CB slang have no place in ATC communications. The Pilot/Controller Glossary is the same glossary used in FAA Order JO 7110.65, Air Traffic Control. We recommend that it be studied and reviewed from time to time to sharpen your communication skills.

4-2-2. Radio Technique

a. Listen before you transmit. Many times you can get the information you want through ATIS or by monitoring the frequency. Except for a few situations, where some frequency overlap occurs, if you hear someone else talking, the keying of your transmitter will be futile and you will probably jam their receivers, causing them to repeat their call. If you have

just changed frequencies, pause, listen, and make sure the frequency is clear.

b. Think before keying your transmitter. Know what you want to say and if it is lengthy, e.g., a flight plan or IFR position report, let it do so.

c. The microphone should be very close to your lips and after pressing the mike button, a slight pause may be necessary to be sure the first word is transmitted. Speak in a normal conversational tone.

d. When you release the button, wait a few seconds before calling again. The controller or FSS specialist may be jotting down your number, looking for your flight plan, transmitting on a different frequency, or selecting the transmitter for your frequency.

e. Be alert to the sounds or the lack of sounds in your receiver. Check your volume, recheck your frequency, and *make sure that your microphone is not stuck* in the transmit position. Frequency blockage can and has occurred for extended periods of time due to unintentional transmitter operation. This type of interference is commonly referred to as a "stuck mike" and controllers may refer to it in this manner. When attempting to assign an alternate frequency, if the assigned frequency is completely blocked by this type of interference, use the procedures described for en route IFR radio frequency outage to establish or reestablish communications with ATC.

f. Be sure that you are within the performance range of your radio equipment and the ground station equipment. Remote radio sites do not always transmit and receive on all of a facility's available frequencies, particularly with regard to VOR sites, where you can hear but not reach a ground station's receiver. Remember that higher altitudes increase the range of VHF line-of-sight communications.

4-2-3. Contact Procedures

a. Initial Contact.

1. The terms *initial contact* or *initial callup* means the first radio call you make to a given facility or the first call to a different controller or FSS specialist within a facility. Use the following format:

- (a) Name of the facility being called
- (b) our *full* aircraft identification as filed in the flight plan or as discussed in paragraph 4-2-4 Aircraft Call Signs
- (c) When operating on an airport surface state your position
- (d) The type of message to follow or your request if it is short and
- (e) The word Over if required

EXAMPLE-

1. "New York Radio, Mooney Three One One Echo."
2. "Columbia Ground, Cessna Three One Six Zero Foxtrot, south ramp, I-F-R Memphis."
3. "Miami Center, Baron Five Six Three Hotel, request V-F-R traffic advisories."

2. Many FSSs are equipped with Remote Communications Outlets (RCOs) and can transmit on the same frequency at more than one location. The frequencies available at specific locations are indicated on charts above FSS communications boxes. To enable the specialist to utilize the correct transmitter, advise the location and the frequency on which you expect a reply.

EXAMPLE-

St. Louis FSS can transmit on frequency 122.3 at either Farmington, Missouri, or Decatur, Illinois, if you are in the vicinity of Decatur, your callup should be "Saint Louis radio, Piper Six Niner Six Yankee, receiving Decatur One Two Two Point Three."

3. If radio reception is reasonably assured, inclusion of your request, your position or altitude and the phrase ATIS Information Charlie received in the initial contact helps decrease radio frequency congestion. Use discretion; do not overload the controller with information unneeded or superfluous. If you do not get a response from the ground station, recheck your radios or use another transmitter, but keep the next contact short.

EXAMPLE-

"Atlanta Center, Duke Four One Romeo, request V-F-R traffic advisories, Twenty Northwest Rome, seven thousand five hundred, over."

b. Initial Contact When Your Transmitting and Receiving Frequencies are Different.

1. If you are attempting to establish contact with a ground station and you are receiving on a different frequency than that transmitted, indicate the VOR name or the frequency on which you expect a reply.

Most FSSs and control facilities can transmit on several VOR stations in the area. Use the appropriate FSS call sign as indicated on charts.

EXAMPLE-

New York FSS transmits on the Kennedy, the Hampton, and the Calverton VORTACs. If you are in the Calverton area, your callup should be "New York radio, Cessna Three One Six Zero Foxtrot, receiving Calverton V-O-R, over."

2. If the chart indicates FSS frequencies above the VORTAC or in the FSS communications boxes, transmit or receive on those frequencies nearest your location.

3. When unable to establish contact and you wish to call any ground station, use the phrase AN RADIO to the station. GIVE CESSNA THREE ONE SIX ZERO FOXTROT A CALL ON frequency OR V-O-R. If an emergency exists or you need assistance, so state.

c. Subsequent Contacts and Responses to Callup from a Ground Facility.

Use the same format as used for the initial contact, except you should state your message or request with the callup in one transmission. The ground station name and the word Over may be omitted if the message requires an obvious reply and there is no possibility for misunderstandings. You should acknowledge all callups or clearances unless the controller or FSS specialist advises otherwise. There are some occasions when controllers must issue time-critical instructions to other aircraft, and they may be in a position to observe your response, either visually or on radar. If the situation demands your response, take appropriate action or immediately advise the facility of any problem. Acknowledge with your aircraft identification, either at the beginning or at the end of your transmission, and one of the words Wilco, Roger, Affirmative, Negative, or other appropriate remarks, e.g., PIPER TWO ONE FOUR LIMA ROGER. If you have been receiving services, e.g., VFR traffic advisories, and you are leaving the area or changing frequencies, advise the ATC facility and terminate contact.

d. Acknowledgement of Frequency Changes.

1. When advised by ATC to change frequencies, acknowledge the instruction. If you select the new frequency without an acknowledgement, the controller's workload is increased because there is no way of knowing whether you received the instruction or have had radio communications failure.

2. At times a controller/specialist may be working a sector with multiple frequency assignments. In order to eliminate unnecessary verbiage and to free the controller/specialist for higher priority transmissions, the controller/specialist may request the pilot: Identification change to my frequency 123.4. This phrase should alert the pilot that the controller/specialist is only changing frequencies, not controller/specialist, and that initial callup phraseology may be abbreviated.

EXAMPLE–

“United Two Twenty–Two on one two three point four” or “one two three point four, United Two Twenty–Two.”

e. Compliance with Frequency Changes.

When instructed by ATC to change frequencies, select the new frequency as soon as possible unless instructed to make the change at a specific time, fix, or altitude. A delay in making the change could result in an untimely receipt of important information. If you are instructed to make the frequency change at a specific time, fix, or altitude, monitor the frequency you are on until reaching the specified time, fix, or altitudes unless instructed otherwise by ATC.

REFERENCE–

AIM, ARTCC Communications, Paragraph 5–3–1

4–2–4. Aircraft Call Signs

a. Precautions in the Use of Call Signs.

1. Improper use of call signs can result in pilots executing a clearance intended for another aircraft. Call signs should *never be abbreviated on an initial contact or at any time when other aircraft call signs have similar numbers/sounds or identical letters/number*; e.g., Cessna 6132F, Cessna 1622F, Baron 123F, Cherokee 7732F, etc.

EXAMPLE–

Assume that a controller issues an approach clearance to an aircraft at the bottom of a holding stack and an aircraft with a similar call sign (at the top of the stack) acknowledges the clearance with the last two or three numbers of the aircraft’s call sign. If the aircraft at the bottom of the stack did not hear the clearance and intervene, flight safety would be affected, and there would be no reason for either the controller or pilot to suspect that anything is wrong. This kind of “human factors” error can strike swiftly and is extremely difficult to rectify.

2. Pilots therefore must be certain that aircraft identification is complete and clearly identified

before taking action on an ATC clearance. ATC specialists will not abbreviate call signs of air carrier or other civil aircraft having authorized call signs. ATC specialists may initiate abbreviated call signs of other aircraft by using the *prefix and the last three digits/letters* of the aircraft identification after communications are established. The pilot may use the abbreviated call sign in subsequent contacts with the ATC specialist. When aware of similar/identical call signs, ATC specialists will take action to minimize errors by emphasizing certain numbers/letters by repeating the entire call sign, by repeating the prefix, or by asking pilots to use a different call sign temporarily. Pilots should use the phrase **VERIFY CLEARANCE FOR** your complete call sign if doubt exists concerning proper identity.

3. Civil aircraft pilots should state the aircraft type, model, or manufacturer’s name, followed by the digits/letters of the registration number. When the aircraft manufacturer’s name or model is stated, the prefix **N** is dropped; e.g., Aztec Two Four Six Four Alpha.

EXAMPLE–

1. Bonanza Six Five Five Golf.

2. Breezy Six One Three Romeo Experimental (omit “Experimental” after initial contact).

4. Air Taxi or other commercial operators not having FAA authorized call signs should prefix their normal identification with the phonetic word **Tango**.

EXAMPLE–

Tango Aztec Two Four Six Four Alpha.

5. Air carriers and commuter air carriers having FAA authorized call signs should identify themselves by stating the complete call sign using group form for the numbers and the word **heavy** if appropriate.

EXAMPLE–

1. United Twenty–Five Heavy.

2. Midwest Commuter Seven Eleven.

6. Military aircraft use a variety of systems including serial numbers, word call signs, and combinations of letters/numbers. Examples include Army Copter 48931, Air Force 61782, REACH 31792, Pat 157, Air Evac 17652, Navy Golf Alfa Kilo 21, Marine 4 Charlie 36, etc.

b. Air Ambulance Flights.

Because of the priority afforded air ambulance flights in the ATC system extreme discretion is necessary when using the term MEDEVAC. It is only intended for those missions of an urgent medical nature and to be utilized only for that portion of the flight requiring expeditious handling. When requested by the pilot, necessary notification to expedite ground handling of patients, etc., is provided by ATC whenever possible. This information should be passed in advance through non-ATC communications systems.

1. Civilian air ambulance flights responding to medical emergencies, first call to an accident scene carrying patients, organ donors, organs, or other urgently needed lifesaving medical material, will be expedited by ATC when necessary. When expeditious handling is necessary, include the word MEDEVAC in the flight plan per paragraphs 5-1-8 and 5-1-9. In radio communications, use the call sign MEDEVAC followed by the aircraft registration letters/numbers.

EXAMPLE–

MEDEVAC Two Six Four Six.

2. Similar provisions have been made for the use of AIR EVAC and HOSP by air ambulance flights, except that these flights will receive priority handling only when specifically requested.

3. Air carrier and air taxi flights responding to medical emergencies will also be expedited by ATC when necessary. The nature of these medical emergency flights usually concerns the transportation of urgently needed lifesaving medical materials or vital organs. IT IS IMPERATIVE THAT THE COMPANY/PILOT DETERMINE BY THE NATURE/URGENCY OF THE SPECIFIC MEDICAL CARGO IF PRIORITY ATC ASSISTANCE IS REQUIRED. Pilots must include the word MEDEVAC in the flight plan per paragraphs 5-1-8 and 5-1-9 and use the call sign MEDEVAC followed by the company name and flight number for all transmissions when expeditious handling is required. It is important for ATC to be aware of MEDEVAC status and it is the pilot's responsibility to ensure that this information is provided to ATC.

EXAMPLE–

MEDEVAC Delta Thirty–Seven.

c. Student Pilots Radio Identification.

1. The FAA desires to help student pilots in acquiring sufficient practical experience in the environment in which they will be required to operate. To receive additional assistance while operating in areas of concentrated air traffic, student pilots need only identify themselves as a student pilot during their initial call to an FAA radio facility.

EXAMPLE–

Dayton tower, Fleetwing One Two Three Four, student pilot.

2. This special identification will alert FAA ATC personnel and enable them to provide student pilots with such extra assistance and consideration as they may need. It is recommended that student pilots identify themselves as such on initial contact with each clearance delivery prior to taxiing, ground control to enter approach and departure control frequency or FSS contact.

4-2-5. Description of Interchange or Leased Aircraft

a. Controllers issue traffic information based on familiarity with airline equipment and color/markings. When an air carrier dispatches a flight using another company's equipment and the pilot does not advise the terminal ATC facility, the possible confusion in aircraft identification can compromise safety.

b. Pilots flying an interchange or leased aircraft not bearing the colors/markings of the company operating the aircraft should inform the terminal ATC facility on first contact the name of the operating company and trip number followed by the company name as displayed on the aircraft and aircraft type.

EXAMPLE–

Air Cal Three Eleven, United (interchange/lease), Boeing Seven Two Seven.

4-2-6. Ground Station Call Signs

Pilots when calling a ground station should begin with the name of the facility being called followed by the type of the facility being called as indicated in TBL 4-2-1.

TBL 4-2-1
Calling a Ground Station

Facility	Call Sign
Airport UNICOM	Shannon UNICOM
FAA Flight Service Station	Chicago Radio
FAA Flight Service Station En Route Flight Advisory Service Weather	Seattle Flight Watch
Airport Traffic Control Tower	Augusta Tower
Clearance Delivery Position IFR	Dallas Clearance Delivery
Ground Control Position in Tower	Miami Ground
Radar or Nonradar Approach Control Position	Oklahoma City Approach
Radar Departure Control Position	St. Louis Departure
FAA Air Route Traffic Control Center	Washington Center

4-2-7. Phonetic Alphabet

The International Civil Aviation Organization (ICAO) phonetic alphabet is used by FAA personnel when communications conditions are such that the information cannot be readily received without their use. ATC facilities may also request pilots to use phonetic letter equivalents when aircraft with similar sounding identifications are receiving communications on the same frequency. Pilots should use the phonetic alphabet when identifying their aircraft during initial contact with air traffic control facilities. Additionally, use the phonetic equivalents for single letters and to spell out groups of letters or difficult words during adverse communications conditions. See TBL 4-2-2.

TBL 4-2-2
Phonetic Alphabet/Morse Code

Character	Morse Code	Telephony	Phonic (Pronunciation)
A	• —	Alfa	AL-FAH
B	— • • •	Bravo	BRAH-VOH
C	— • — •	Charlie	CHAR-LEE or SHAR-LEE
D	— • •	Delta	DELL-TAH
E	•	Echo	ECK-OH
F	• • — •	Foxtrot	FOKS-TROT
G	— — •	Golf	GOLF
H	• • • •	Hotel	HOH-TEL
I	• •	India	IN-DEE-AH
J	• — — —	Juliett	JEW-LEE-ETT
K	— • —	Kilo	KE —LOH
L	• — • •	Lima	LEE-MAH
M	— —	Mike	MIKE
N	— •	November	NO-VEM-BER
O	— — —	Oscar	OSS-CAH
P	• — — •	Papa	PAH-PAH
Q	— — • —	Quebec	KEH-BECK
R	• — •	Romeo	ROW-ME-OH
S	• • •	Sierra	SEE-AIR-RAH
T	—	Tango	TANG-GO
U	• • —	Uniform	OU-NEE-FORM or OO-NEE-FORM
V	• • • —	Victor	VIK-TAH
W	• — —	Whiskey	WISS-KE
	— • • —	ray	ECKS-RA
	— • — —	ankee	ANG-KE
	— — • •	ulu	OO-LOO
1	• — — — —	One	WUN
2	• • — — —	Two	TOO
3	• • • — —	Three	TREE
4	• • • • —	Four	FOW-ER
5	• • • • •	Five	FIFE
6	— • • • •	Six	SI
7	— — • • •	Seven	SEV-EN
8	— — — • •	Eight	AIT
9	— — — — •	Nine	NIN-ER
0	— — — — —	Zero	EE-RO

4-2-8. Figures

a. Figures indicating hundreds and thousands in round number as for ceiling heights and upper levels up to 9 900 must be spoken in accordance with the following

EXAMPLE-

1. 500 five hundred
2. 4,500 four thousand five hundred

b. Numbers above 9 900 must be spoken by separating the digits preceding the word thousand

EXAMPLE-

1. 10,000 one zero thousand
2. 13,500 one three thousand five hundred

c. Transmit airway or route numbers as follows

EXAMPLE-

1. V12 Victor Twelve
2. J533 J Five Thirty-Three

d. All other numbers must be transmitted by pronouncing each digit

EXAMPLE-

10 one zero

e. When a radio frequency contains a decimal point the decimal point is spoken as POINT

EXAMPLE-

122.1 one two two point one

NOTE-

ICAO procedures require the decimal point be spoken as "DECIMAL." The FAA will honor such usage by military aircraft and all other aircraft required to use ICAO procedures.

4-2-9. Altitudes and Flight Levels

a. Up to but not including 18 000 feet MSL state the separate digits of the thousands plus the hundreds if appropriate

EXAMPLE-

1. 12,000 one two thousand
2. 12,500 one two thousand five hundred

b. At and above 18 000 feet MSL FL 180 state the words flight level followed by the separate digits of the flight level

EXAMPLE-

1. 190 Flight Level One Niner Zero
2. 275 Flight Level Two Seven Five

4-2-10. Directions

The three digits of bearing course heading or direction should always be magnetic. The word true must be added when it applies

EXAMPLE-

1. (Magnetic course) 005 zero zero five
2. (True course) 050 zero five zero true
3. (Magnetic bearing) 360 three six zero
4. (Magnetic heading) 100 heading one zero zero
5. (Wind direction) 220 wind two two zero

4-2-11. Speeds

The separate digits of the speed followed by the word KNOTS. Except controllers may omit the word KNOTS when using speed adjustment procedures e.g. REDUCE/INCREASE SPEED TO TWO FIVE ZERO

EXAMPLE-

- (Speed) 250 two five zero knots
 (Speed) 190 one niner zero knots

The separate digits of the Mach Number preceded by Mach

EXAMPLE-

- (Mach number) 1.5 Mach one point five
 (Mach number) 0.64 Mach point six four
 (Mach number) 0.7 Mach point seven

4-2-12. Time

a. FAA uses Coordinated Universal Time (UTC) for all operations. The word local or the time zone equivalent must be used to denote local when local time is given during radio and telephone communications. The termulu may be used to denote UTC

EXAMPLE-

- 0920 UTC zero niner two zero,
 zero one two zero pacific or local,
 or one twenty AM

occurs after departing the parking area watch the tower for light signals or monitor tower frequency

REFERENCE–

14 CFR Section 91.125 and 14 CFR Section 91.129.

4–2–14. Communications for VFR Flights

a. FSSs and Supplemental Weather Service Locations (SWSLs) are allocated frequencies for different functions for example 122.0 MHz is assigned as the En Route Flight Advisory Service frequency at selected FSSs. In addition, certain FSSs provide Local Airport Advisory on 123.6 MHz or other frequencies which can be found in the A/FD. If you are in doubt as to what frequency to use

122.2 MHz is assigned to the majority of FSSs as a common en route simplex frequency

NOTE–

In order to expedite communications, state the frequency being used and the aircraft location during initial callup.

EXAMPLE–

Dayton radio, November One Two Three Four Five on one two two point two, over Springfield V–O–R, over.

b. Certain VOR voice channels are being utilized for recorded broadcasts i.e. ATIS, HIWAS, etc. These services and appropriate frequencies are listed in the A/FD. On VFR flights, pilots are urged to monitor these frequencies. When in contact with a control facility, notify the controller if you plan to leave the frequency to monitor these broadcasts.

Section 3. Airport Operations

4-3-1. General

Increased traffic congestion, aircraft in climb and descent attitudes, and pilot preoccupation with cockpit duties are some factors that increase the hazardous accident potential near the airport. The situation is further compounded when the weather is marginal, that is, just meeting VFR requirements. Pilots must be particularly alert when operating in the vicinity of an airport. This section defines some rules, practices, and procedures that pilots should be familiar with and adhere to for safe airport operations.


4-3-2. Airports with an Operating Control Tower

a. When operating at an airport where traffic control is being exercised by a control tower, pilots are required to maintain two-way radio contact with the tower while operating within the Class B, Class C, and Class D surface area unless the tower authorizes otherwise. Initial callup should be made about 15 miles from the airport. Unless there is a good reason to leave the tower frequency before exiting the Class B, Class C, and Class D surface areas, it is a good operating practice to remain on the tower frequency for the purpose of receiving traffic information. In the interest of reducing tower frequency congestion, pilots are reminded that it is not necessary to request permission to leave the tower frequency once outside of Class B, Class C, and Class D surface areas. Not all airports with an operating control tower will have Class D airspace. These airports do not have weather reporting, which is a requirement for surface-based controlled airspace previously known as a control zone. The controlled airspace over these airports will normally begin at 700 feet or 1,200 feet above ground level and can be determined from the visual aeronautical charts. Pilots are expected to use good operating practices and communicate with the control tower as described in this section.

b. When necessary, the tower controller will issue clearances or other information for aircraft to generally follow the desired flight path, traffic patterns when flying in Class B, Class C, and Class D surface areas, and the proper taxi routes when operating on the ground. If not otherwise authorized

or directed by the tower, pilots of fixed-wing aircraft approaching to land must circle the airport to the left. Pilots approaching to land in a helicopter must avoid the flow of fixed-wing traffic. However, in all instances, an appropriate clearance must be received from the tower before landing.

FIG 4-3-1
Components of a Traffic Pattern

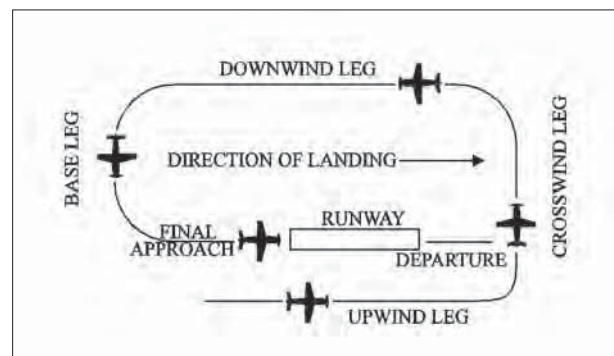

NOTE—

This diagram is intended only to illustrate terminology used in identifying various components of a traffic pattern. It should not be used as a reference or guide on how to enter a traffic pattern.

c. The following terminology for the various components of a traffic pattern has been adopted as standard for use by control towers and pilots. See FIG 4-3-1.

1. Upwind leg. A flight path parallel to the landing runway in the direction of landing.

2. Crosswind leg. A flight path at right angles to the landing runway off its takeoff end.

3. Downwind leg. A flight path parallel to the landing runway in the opposite direction of landing.

4. Base leg. A flight path at right angles to the landing runway off its approach end and extending from the downwind leg to the intersection of the extended runway centerline.

5. Final approach. A flight path in the direction of landing along the extended runway centerline from the base leg to the runway.

6. Departure leg. The flight path which begins after takeoff and continues straight ahead along the extended runway centerline. The departure climb continues until reaching a point at least $\frac{1}{2}$ mile

beyond the departure end of the runway and within 300 feet of the traffic pattern altitude

d. Many towers are equipped with a tower radar display. The radar uses are intended to enhance the effectiveness and efficiency of the local controller or tower position. They are not intended to provide radar services or benefits to pilots except as they may accrue through a more efficient tower operation. The four basic uses are

1. To determine an aircraft's exact location.

This is accomplished by radar identifying the VFR aircraft through any of the techniques available to a radar position, such as having the aircraft *squawk ident*. Once identified, the aircraft's position and spatial relationship to other aircraft can be quickly determined, and standard instructions regarding VFR operation in Class B, Class C, and Class D surface areas will be issued. Once initial radar identification of a VFR aircraft has been established and the appropriate instructions have been issued, radar monitoring may be discontinued, the reason being that the local controller's primary means of surveillance in VFR conditions is visually scanning the airport and local area.

2. To provide radar traffic advisories. Radar traffic advisories may be provided to the extent that the local controller is able to monitor the radar display. Local control has primary control responsibilities to the aircraft operating on the runways, which will normally supersede radar monitoring duties.

3. To provide a direction or suggested heading. The local controller may provide pilots flying VFR with generalized instructions, which will facilitate operations, e.g., *PROCEED SOUTH, WESTBOUND, ENTER A RIGHT DOWNWIND, RUNWAY THREE, CRO*, or provide a suggested heading to establish radar identification or as an advisory aid to navigation, e.g., *SUGGESTED HEADING TWO TWO, CRO FOR RADAR IDENTIFICATION*. In both cases, the instructions are advisory aids to the pilot flying VFR and are not radar vectors.

NOTE—

Pilots have complete discretion regarding acceptance of the suggested headings or directions and have sole responsibility for seeing and avoiding other aircraft.

4. To provide information and instructions to aircraft operating within Class B, Class C, and Class D surface areas. In an example of this situation, the local controller could use the radar to advise a pilot on an extended downwind when to turn base leg.

NOTE—


The above tower radar applications are intended to augment the standard functions of the local controller position. There is no controller requirement to maintain constant radar identification. In fact, such a requirement could compromise the local controller's ability to visually scan the airport and local area to meet FAA responsibilities to the aircraft operating on the runways and within the Class B, Class C, and Class D surface areas. Normally, pilots will not be advised of being in radar contact since that continued status cannot be guaranteed and since the purpose of the radar identification is not to establish a link for the provision of radar services.

e. A few of the radar-equipped towers are authorized to use the radar to ensure separation between aircraft in specific situations, while still others may function as limited radar approach controls. The various radar uses are strictly a function of FAA operational need. The facilities may be indistinguishable to pilots since they are all referred to as tower and no publication lists the degree of radar use. **Therefore, when in communication with a tower controller who may have radar available, do not assume that constant radar monitoring and complete ATC radar services are being provided.**

4-3-3. Traffic Patterns

At most airports and military air bases, traffic pattern altitudes for propeller-driven aircraft generally extend from 600 feet to as high as 1,500 feet above the ground. Also, traffic pattern altitudes for military turbojet aircraft sometimes extend up to 2,500 feet above the ground. Therefore, pilots of en route aircraft should be constantly on the alert for other aircraft in traffic patterns and avoid these areas whenever possible. Traffic pattern altitudes should be maintained unless otherwise required by the applicable distance from cloud criteria, 14 CFR Section 91.155. See FIG 4-3-2 and FIG 4-3-3.

FIG 4-3-2
Traffic Pattern Operations
Single Runway

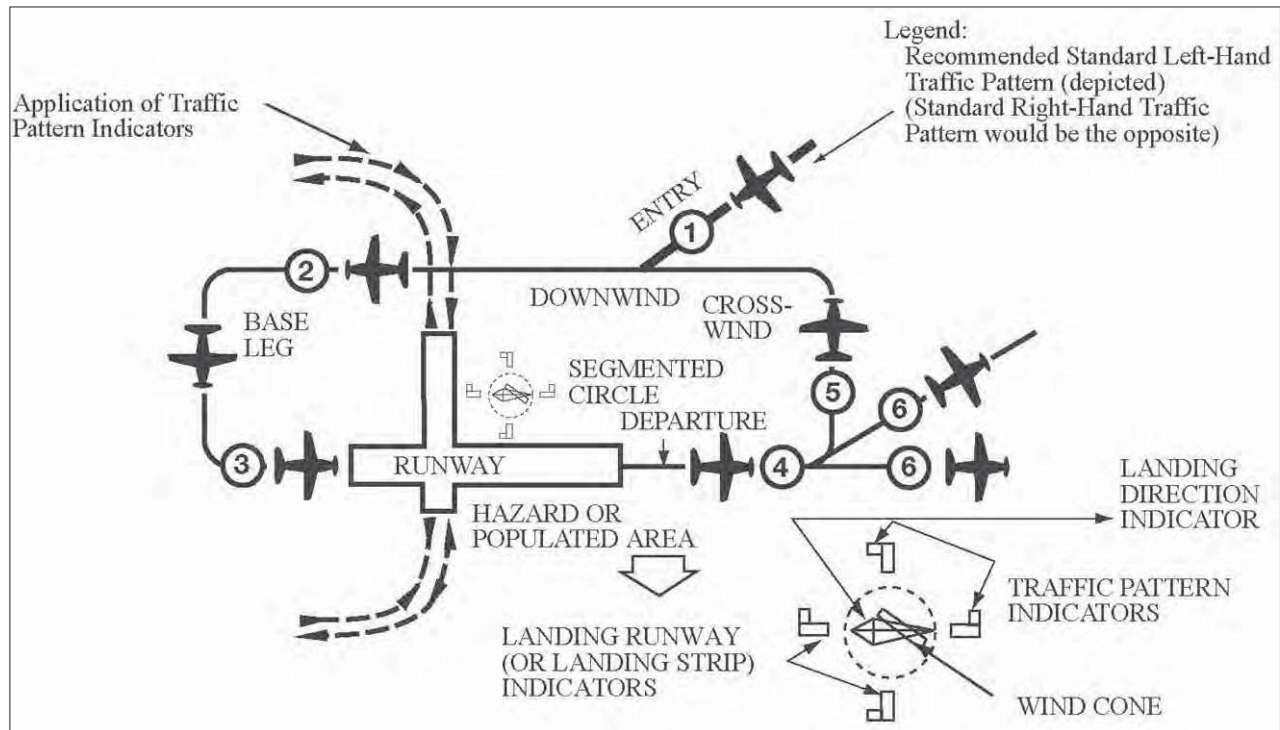

EXAMPLE –
Key to traffic pattern operations

1. Enter pattern in level flight, abeam the midpoint of the runway, at pattern altitude. (1,000' AGL is recommended pattern altitude unless established otherwise. . .)

2. Maintain pattern altitude until abeam approach end of the landing runway on downwind leg.


3. Complete turn to final at least $\frac{1}{4}$ mile from the runway.

4. Continue straight ahead until beyond departure end of runway.

5. If remaining in the traffic pattern, commence turn to crosswind leg beyond the departure end of the runway within 300 feet of pattern altitude.

6. If departing the traffic pattern, continue straight out, or exit with a 45 degree turn (to the left when in a left-hand traffic pattern; to the right when in a right-hand traffic pattern) beyond the departure end of the runway, after reaching pattern altitude.

FIG 4-3-3
Traffic Pattern Operations
Parallel Runways

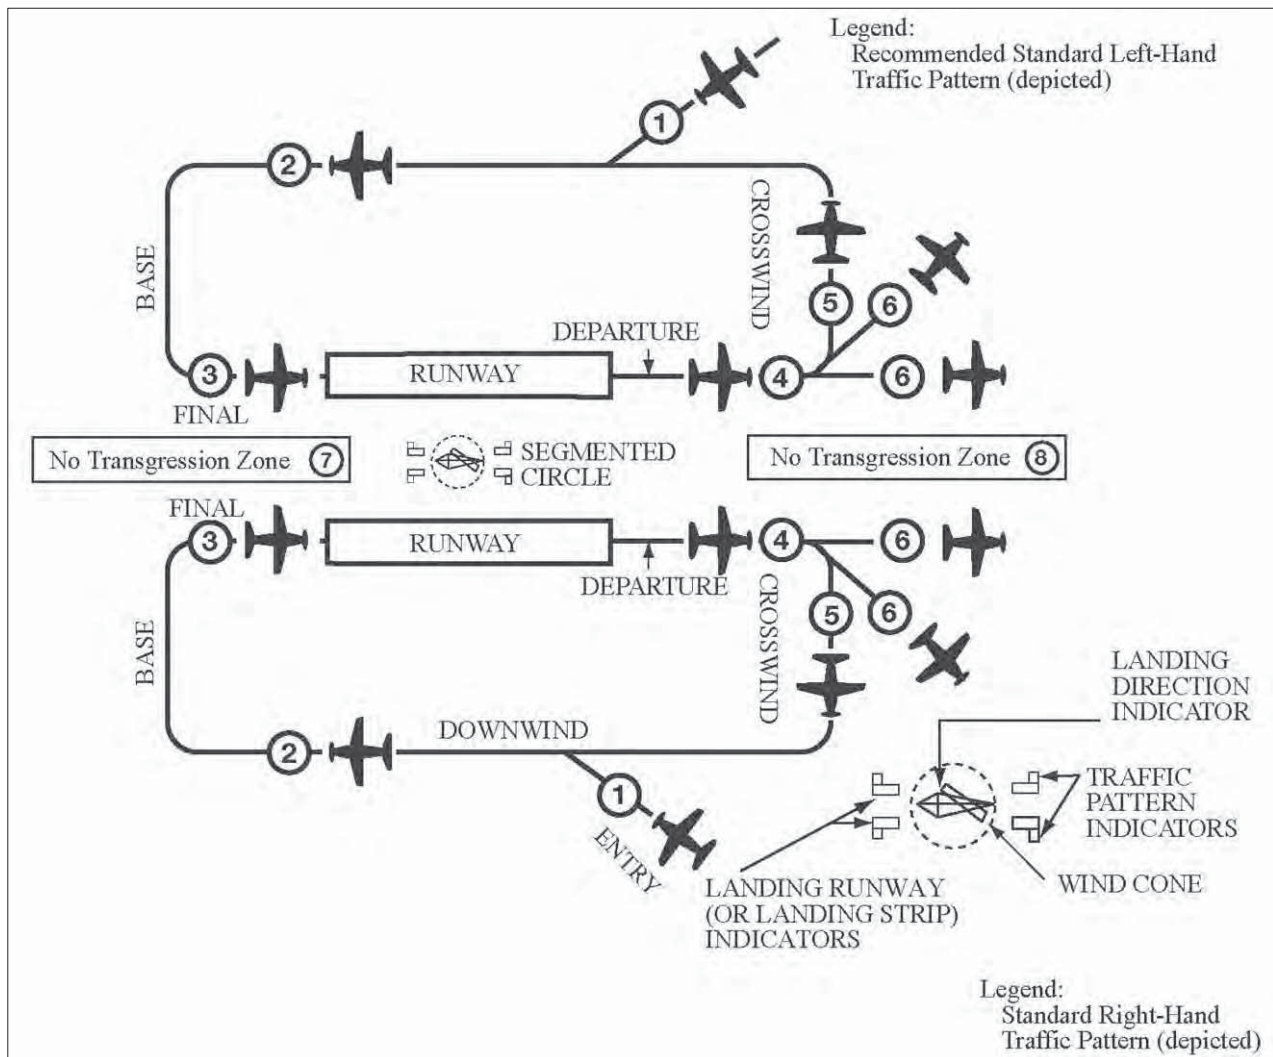

EXAMPLE –
Key to traffic pattern operations

1. Enter pattern in level flight, abeam the midpoint of the runway, at pattern altitude. (1,000' AGL is recommended pattern altitude unless established otherwise. . .)

2. Maintain pattern altitude until abeam approach end of the landing runway on downwind leg.

3. Complete turn to final at least $\frac{1}{4}$ mile from the runway.

4. Continue straight ahead until beyond departure end of runway.

5. If remaining in the traffic pattern, commence turn to crosswind leg beyond the departure end of the runway within 300 feet of pattern altitude.

6. If departing the traffic pattern, continue straight out, or exit with a 45 degree turn (to the left when in a left-hand traffic pattern; to the right when in a right-hand traffic pattern) beyond the departure end of the runway, after reaching pattern altitude.

7. Do not overshoot final or continue on a track which will penetrate the final approach of the parallel runway.

8. Do not continue on a track which will penetrate the departure path of the parallel runway.

4-3-4. Visual Indicators at Airports Without an Operating Control Tower

a. At those airports *without an operating control tower*, a segmented circle visual indicator system, if installed, is designed to provide traffic pattern information.

REFERENCE—

AIM, *Traffic Advisory Practices at Airports Without Operating Control Towers*, Paragraph 4-1-9

b. The segmented circle system consists of the following components:

1. The segmented circle. Located in a position affording maximum visibility to pilots in the air and on the ground and providing a centralized location for other elements of the system.

2. The wind direction indicator. A wind cone and sock or wind tee installed near the operational runway to indicate wind direction. The large end of the wind cone/ wind sock points into the wind as does the large end cross bar of the wind tee. In lieu of a tetrahedron and where a wind sock or wind cone is collocated with a wind tee, the wind tee may be manually aligned with the runway in use to indicate landing direction. These signaling devices may be located in the center of the segmented circle and may be lighted for night use. Pilots are cautioned against using a tetrahedron to indicate wind direction.

3. The landing direction indicator. A tetrahedron is installed when conditions at the airport warrant its use. It may be used to indicate the direction of landings and takeoffs. A tetrahedron may be located at the center of a segmented circle and may be lighted for night operations. The small end of the tetrahedron points in the direction of landing. Pilots are cautioned against using a tetrahedron for any purpose other than as an indicator of landing direction. Further, pilots should use extreme caution when making runway selection by use of a

tetrahedron in very light or calm wind conditions as the tetrahedron may not be aligned with the designated calm-wind runway. At airports with control towers, the tetrahedron should only be referenced when the control tower is not in operation. Tower instructions supersede tetrahedron indications.

4. Landing strip indicators. Installed in pairs as shown in the segmented circle diagram and used to show the alignment of landing strips.

5. Traffic pattern indicators. Arranged in pairs in conjunction with landing strip indicators and used to indicate the direction of turns when there is a variation from the normal left traffic pattern. If there is no segmented circle installed at the airport, traffic pattern indicators may be installed on or near the end of the runway.

c. Preparatory to landing at an airport without a control tower or when the control tower is not in operation, pilots should concern themselves with the indicator for the approach end of the runway to be used. When approaching for landing, all turns must be made to the left unless a traffic pattern indicator indicates that turns should be made to the right. If the pilot will mentally enlarge the indicator for the runway to be used, the base and final approach legs of the traffic pattern to be flown immediately become apparent. Similar treatment of the indicator at the departure end of the runway will clearly indicate the direction of turn after takeoff.

d. When two or more aircraft are approaching an airport for the purpose of landing, the pilot of the aircraft at the lower altitude has the right-of-way over the pilot of the aircraft at the higher altitude. However, the pilot operating at the lower altitude should not take advantage of another aircraft which is on final approach to land by cutting in front of or overtaking that aircraft.

4-3-5. Unexpected Maneuvers in the Airport Traffic Pattern

There have been several incidents in the vicinity of controlled airports that were caused primarily by aircraft executing unexpected maneuvers. ATC service is based upon observed or known traffic and airport conditions. Controllers establish the sequence of arriving and departing aircraft by requiring them to adjust flight as necessary to achieve proper spacing. These adjustments can only be based on observed traffic, accurate pilot reports, and anticipated aircraft maneuvers. Pilots are expected to cooperate so as to preclude disrupting traffic flows or creating conflicting patterns. The pilot-in-command of an aircraft is directly responsible for and is the final authority as to the operation of the aircraft. On occasion it may be necessary for pilots to maneuver their aircraft to maintain spacing with the traffic they have been sequenced to follow. The controller can anticipate minor maneuvering such as shallow turns. The controller cannot, however, anticipate a major maneuver such as a 360 degree turn. If a pilot makes a 360 degree turn after obtaining a landing sequence, the result is usually a gap in the landing interval and, more importantly, it causes a chain reaction which may result in a conflict with following traffic and an interruption of the sequence established by the tower or approach controller. Should a pilot decide to make maneuvering turns to maintain spacing behind a preceding aircraft, the pilot should always advise the controller if at all possible. Except when requested by the controller or in emergency situations, a 360 degree turn should never be executed in the traffic pattern or when receiving radar service without first advising the controller.

4-3-6. Use of Runways/Declared Distances

a. Runways are identified by numbers which indicate the nearest 10-degree increment of the azimuth of the runway centerline. For example, where the magnetic azimuth is 183 degrees, the runway designation would be 18. For a magnetic azimuth of 87 degrees, the runway designation would be 9. For a magnetic azimuth ending in the number 5, such as 185, the runway designation could be either 18 or 19. Wind direction issued by the tower is also magnetic and wind velocity is in knots.

b. Airport proprietors are responsible for taking the lead in local aviation noise control. Accordingly,

they may propose specific noise abatement plans to the FAA. If approved, these plans are applied in the form of Formal or Informal Runway Use Programs for noise abatement purposes.

REFERENCE-

Pilot/Controller Glossary Term- "Runway Use Program"

1. At airports where no runway use program is established, ATC clearances may specify:

(a) The runway most nearly aligned with the wind when it is 5 knots or more.

(b) The calm wind runway when wind is less than 5 knots or

(c) Another runway if operationally advantageous.

NOTE-

It is not necessary for a controller to specifically inquire if the pilot will use a specific runway or to offer a choice of runways. If a pilot prefers to use a different runway from that specified, or the one most nearly aligned with the wind, the pilot is expected to inform ATC accordingly.

2. At airports where a runway use program is established, ATC will assign runways deemed to have the least noise impact. If in the interest of safety a runway different from that specified is preferred, the pilot is expected to advise ATC accordingly. ATC will honor such requests and advise pilots when the requested runway is noise sensitive. When use of a runway other than the one assigned is requested, pilot cooperation is encouraged to preclude disruption of traffic flows or the creation of conflicting patterns.

c. Declared Distances.

1. Declared distances for a runway represent the maximum distances available and suitable for meeting takeoff and landing distance performance requirements. These distances are determined in accordance with FAA runway design standards by adding to the physical length of paved runway any clearway or stopway and subtracting from that sum any lengths necessary to obtain the standard runway safety areas, runway object free areas, or runway protection zones. As a result of these additions and subtractions, the declared distances for a runway may be more or less than the physical length of the runway as depicted on aeronautical charts and related publications, or available in electronic navigation databases provided by either the U.S. Government or commercial companies.

2. All 14 CFR Part 139 airports report declared distances for each runway. Other airports may also

report declared distances for a runway if necessary to meet runway design standards or to indicate the presence of a clearway or stopway. Where reported declared distances for each runway end are published in the Airport/Facility Directory (A/FD), for runways without published declared distances the declared distances may be assumed to be equal to the physical length of the runway unless there is a displaced landing threshold. In which case the Landing Distance Available (LDA) is shortened by the amount of the threshold displacement.

NOTE—

A symbol  is shown on U.S. Government charts to indicate that runway declared distance information is available (See appropriate A/FD, Alaska, or Pacific Supplement).

(a) The FAA uses the following definitions for runway declared distances. See FIG 4-3-4.

REFERENCE—

Pilot/Controller Glossary Terms: “Accelerate–Stop Distance Available,” “Landing Distance Available,” “Takeoff Distance Available,” “Takeoff Run Available,” “Stopway,” and “Clearway.”

(1) **Takeoff Run Available (TORA)** The runway length declared available and suitable for the ground run of an airplane taking off.

The TORA is typically the physical length of the runway but it may be shorter than the runway length if necessary to satisfy runway design standards. For example, the TORA may be shorter than the runway length if a portion of the runway must be used to satisfy runway protection zone requirements.

(2) **Takeoff Distance Available (TODA)** The takeoff run available plus the length of any remaining runway or clearway beyond the far end of the takeoff run available.

The TODA is the distance declared available for satisfying takeoff distance requirements for airplanes. Here the certification and operating rules and available performance data allow for the consideration of a clearway in takeoff performance computations.

NOTE—

The length of any available clearway will be included in the TODA published in the A/FD's entry for that runway end.

(3) **Accelerate–Stop Distance Available (ASDA)** The runway plus stopway length declared available and suitable for the acceleration and deceleration of an airplane aborting a takeoff.

The ASDA may be longer than the physical length of the runway when a stopway has been designated available by the airport operator or it may be shorter than the physical length of the runway if necessary to use a portion of the runway to satisfy runway design standards. For example, here the airport operator uses a portion of the runway to achieve the runway safety area requirement. ASDA is the distance used to satisfy the airplane accelerate–stop distance performance requirements. Here the certification and operating rules require accelerate–stop distance computations.

NOTE—

The length of any available stopway will be included in the ASDA published in the A/FD's entry for that runway end.

(4) **Landing Distance Available (LDA)** – The runway length declared available and suitable for a landing airplane.

The LDA may be less than the physical length of the runway or the length of the runway remaining beyond a displaced threshold if necessary to satisfy runway design standards. For example, here the airport operator uses a portion of the runway to achieve the runway safety area requirement.

Although some runway elements, such as stopway length and clearway length, may be available information, pilots must use the declared distances determined by the airport operator and not attempt to independently calculate declared distances by adding those elements to the reported physical length of the runway.

(b) The airplane operating rules and/or the airplane operating limitations establish minimum distance requirements for takeoff and landing and are based on performance data supplied in the Airplane Flight Manual or Pilot's Operating Handbook. The minimum distances required for takeoff and landing obtained either in planning prior to takeoff or in performance assessments conducted at the time of landing must fall within the applicable declared distances before the pilot can accept that runway for takeoff or landing.

(c) Runway design standards may impose restrictions on the amount of runway available for use in takeoff and landing that are not apparent from the reported physical length of the runway or from runway markings and lighting. The runway elements of Runway Safety Area (RSA), Runway Object Free Area (ROFA), and Runway Protection

one RP may reduce a runway's declared distances to less than the physical length of the runway at geographically constrained airports. See FIG 4-3-5. When considering the amount of runway available for use in takeoff or landing performance calculations, the declared distances published for a runway must always be used in lieu of the runway's physical length.

REFERENCE—

AC 150/5300-13, *Airport Design*.

(d) While some runway elements associated with declared distances may be identifiable through runway markings or lighting, for example, a displaced threshold or a stopway, the individual declared distance limits are not marked or otherwise identified on the runway. An aircraft is **not prohibited** from operating beyond a declared distance limit during the takeoff, landing, or taxi operation provided the runway surface is appropriately marked as usable runway. See FIG 4-3-5. The following examples clarify the intent of this paragraph.

REFERENCE—

AIM, *Runway Markings*, Paragraph 2-3-3.

AC 150/5340-1, *Standards for Airport Markings*.



EXAMPLE—

1. The declared LDA for runway 9 must be used when showing compliance with the landing distance requirements of the applicable airplane operating rules and/or airplane operating limitations or when making a before landing performance assessment. The LDA is less than the physical runway length, not only because of the displaced threshold, but also because of the subtractions necessary to meet the RSA beyond the far end of the runway. However, during the actual landing operation, it is permissible for the airplane to roll beyond the unmarked end of the LDA.

2. The declared ASDA for runway 9 must be used when showing compliance with the accelerate-stop distance requirements of the applicable airplane operating rules and/or airplane operating limitations. The ASDA is less than the physical length of the runway due to subtractions necessary to achieve the full RSA requirement. However, in the event of an aborted takeoff, it is permissible for the airplane to roll beyond the unmarked end of the ASDA as it is brought to a full-stop on the remaining usable runway.

FIG 4-3-4

Declared Distances with Full-Standard Runway Safety Areas, Runway Object Free Areas, and Runway Protection Zones

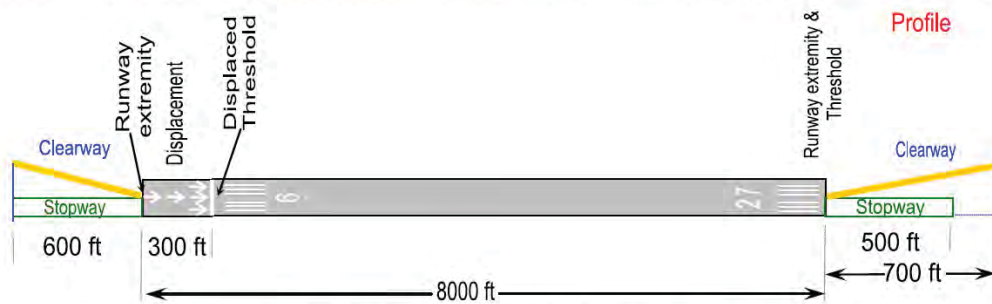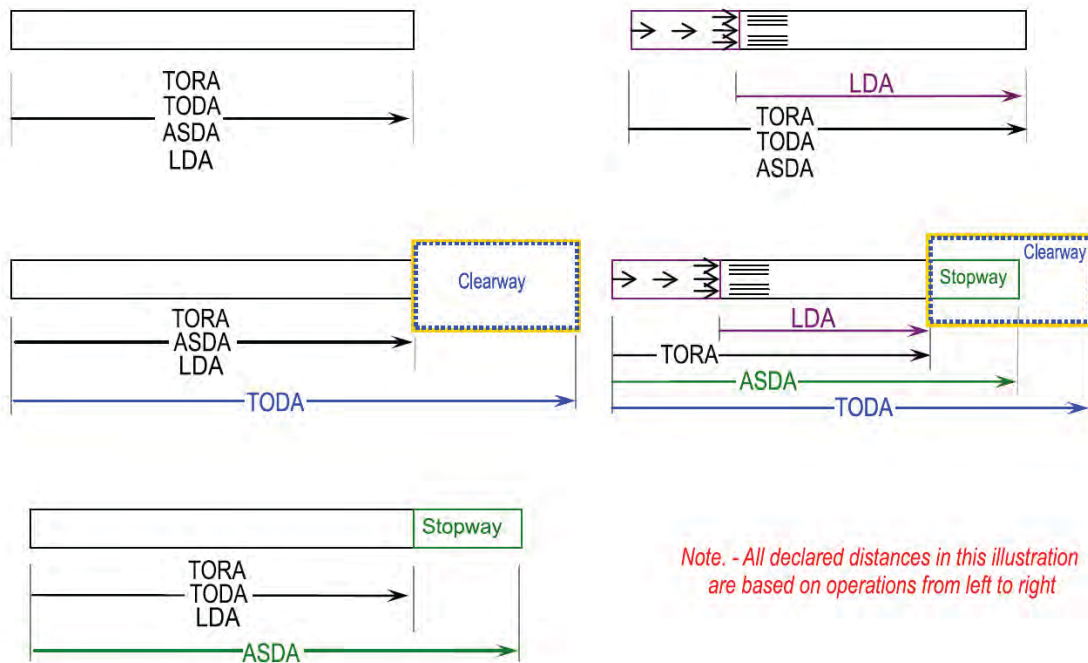


Runway	Length (feet)	TORA	ASDA	TODA	LDA
9	8000	8000	8500	8700	7700
27	8000	8000	8600	8600	8000

FIG 4-3-5

Effects of a Geographical Constraint on a Runway's Declared Distances

Runway 27 operations: Runway 27 threshold displaced to provide the required RSA at the approach end of the runway. As a result, the LDA is reduced 200 ft.

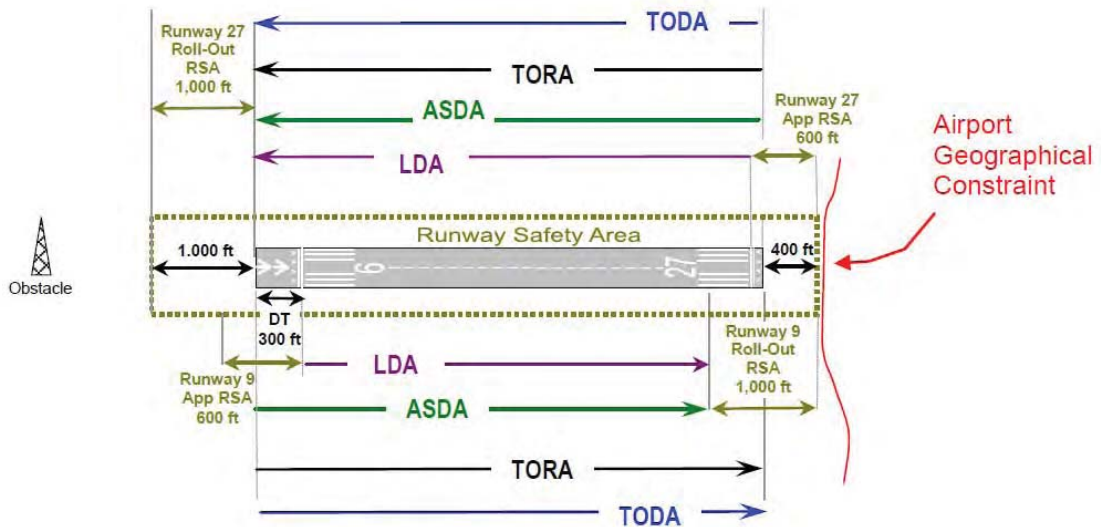

Runway 9 operations: The ASDA is reduced by 600 ft to achieve the required RSA at the roll-out end of the runway. The LDA is reduced by 900 ft because, 1) the 300 ft displaced threshold located at the approach end of the runway (due to an approach obstacle), and 2) as result of the 600 ft of runway needed to achieve the required RSA at the roll-out end of the runway.

Runway	Length (feet)	TORA	TODA	ASDA	LDA
9	8000	8000	8000	7400	7100
27		8000	8000	8000	7800

NOTE—

A runway's RSA begins a set distance prior to the threshold and will extend a set distance beyond the end of the runway depending on the runway's design criteria. If these required lengths cannot be achieved, the ASDA and/or LDA will be reduced as necessary to obtain the required lengths to the extent practicable.

4-3-7. Low Level Wind Shear/Microburst Detection Systems

Low Level Wind Shear Alert System (LLWAS) Terminal Doppler Weather Radar (TDWR) Weather System Processor (WSP) and Integrated Terminal Weather System (ITWS) display information on hazardous wind shear and microburst activity in the vicinity of an airport to air traffic controllers who relay this information to pilots.

a. LLWAS provides wind shear alert and gust front information but does not provide microburst alerts. The LLWAS is designed to detect low level wind shear conditions around the periphery of an airport. It does not detect wind shear beyond that limitation. Controllers will provide this information to pilots by giving the pilot the airport wind followed by the boundary wind.

EXAMPLE-

Wind shear alert, airport wind 230 at 8, south boundary wind 170 at 20.

b. LLWAS network expansion (LLWAS-NE) and LLWAS Relocation/Sustainment (LLWAS-RS) are systems integrated with TDWR. These systems provide the capability of detecting microburst alerts and wind shear alerts. Controllers will issue the appropriate wind shear alerts or microburst alerts. In some of these systems controllers also have the ability to issue wind information oriented to the threshold or departure end of the runway.

EXAMPLE-

Runway 17 arrival microburst alert, 40 knot loss 3 mile final.

REFERENCE-

AIM, Microbursts, Paragraph 7-1-26

c. More advanced systems are in the field or being developed such as ITWS. ITWS provides alerts for microbursts, wind shear, and significant thunderstorm activity. ITWS displays wind information oriented to the threshold or departure end of the runway.

d. The WSP provides weather processor enhancements to selected Airport Surveillance Radar (ASR) -9 facilities. The WSP provides Air Traffic with detection and alerting of hazardous weather such as wind shear, microbursts, and significant thunderstorm activity. The WSP displays terminal area 6 level weather, storm cell locations and movement as well as the location and predicted future position

and intensity of wind shifts that may affect airport operations. Controllers will receive and issue alerts based on Areas Noted for Attention (ARENA). An ARENA extends on the runway center line from a 3 mile final to the runway to a 2 mile departure.

e. An airport equipped with the LLWAS, ITWS, or WSP is so indicated in the Airport/Facility Directory under Weather Data Sources for that particular airport.

4-3-8. Braking Action Reports and Advisories

a. When available, ATC furnishes pilots the quality of braking action received from pilots or airport management. The quality of braking action is described by the terms good, fair, poor, and nil, or a combination of these terms. When pilots report the quality of braking action by using the terms noted above, they should use descriptive terms that are easily understood, such as braking action poor the first/last half of the runway together with the particular type of aircraft.

b. For NOTAM purposes, braking action reports are classified according to the most critical term (fair, poor, or nil) used and issued as a NOTAM D.

c. When tower controllers have received runway braking action reports which include the terms *poor* or *nil*, or whenever weather conditions are conducive to deteriorating or rapidly changing runway braking conditions, the tower will include on the ATIS broadcast the statement “**BRAKING ACTION ADVISORIES ARE IN EFFECT.**”

d. During the time that braking action advisories are in effect, ATC will issue the latest braking action report for the runway in use to each arriving and departing aircraft. Pilots should be prepared for deteriorating braking conditions and should request current runway condition information if not volunteered by controllers. Pilots should also be prepared to provide a descriptive runway condition report to controllers after landing.

4-3-9. Runway Friction Reports and Advisories

a. Friction is defined as the ratio of the tangential force needed to maintain uniform relative motion between two contacting surfaces (aircraft tires to the

pavement surface to the perpendicular force holding them in contact distributed aircraft weight to the aircraft tire area. Simply stated, friction quantifies slipperiness of pavement surfaces.

b. The Greek letter MU pronounced mye is used to designate a friction value representing runway surface conditions.

c. MU friction values range from 0 to 100 where 0 is the lowest friction value and 100 is the maximum friction value obtainable. For frozen contaminants on runway surfaces, a MU value of 40 or less is the level when the aircraft braking performance starts to deteriorate and directional control begins to be less responsive. The lower the MU value, the less effective braking performance becomes and the more difficult directional control becomes.

d. At airports with friction measuring devices, airport management should conduct friction measurements on runways covered with compacted snow and/or ice.

1. Numerical readings may be obtained by using any FAA approved friction measuring device. As these devices do not provide equal numerical readings on contaminated surfaces, it is necessary to designate the type of friction measuring device used.

2. When the MU value for any one-third one of an active runway is 40 or less, a report should be given to ATC by airport management for dissemination to pilots. The report will identify the runway, the time of measurement, the type of friction measuring device used, MU values for each one-third, and the contaminant conditions, e.g., wet snow, dry snow, slush, deicing chemicals, etc. Measurements for each one-third one will be given in the direction of takeoff and landing on the runway. A report should also be given when MU values rise above 40 in all ones of a runway previously reporting a MU below 40.

3. Airport management should initiate a NOTAM D when the friction measuring device is out of service.

e. When MU reports are provided by airport management, the ATC facility providing approach control or local airport advisory will provide the report to any pilot upon request.

f. Pilots should use MU information with other knowledge including aircraft performance character-

istics, type and weight, previous experience, and conditions, and aircraft tire type, i.e., bias ply vs. radial, constructed to determine runway suitability.

g. No correlation has been established between MU values and the descriptive terms good, fair, poor, and nil used in braking action reports.

4-3-10. Intersection Takeoffs

a. In order to enhance airport capacities, reduce taxiing distances, minimize departure delays, and provide for more efficient movement of air traffic, controllers may initiate intersection takeoffs as well as approve them when the pilot requests. If, for any reason, a pilot prefers to use a different intersection or the full length of the runway or desires to obtain the distance between the intersection and the runway end, THE PILOT IS EXPECTED TO INFORM ATC ACCORDINGLY.

b. Pilots are expected to assess the suitability of an intersection for use at takeoff during their preflight planning. They must consider the resultant length reduction to the published runway length and to the published declared distances from the intersection intended to be used for takeoff. The minimum runway required for takeoff must fall within the reduced runway length and the reduced declared distances before the intersection can be accepted for takeoff.

REFERENCE-

AIM, Use of Runways/Declared Distances, Paragraph 4-3-6

c. Controllers will issue the measured distance from the intersection to the runway end rounded down to the nearest 50 feet to any pilot who requests and to all military aircraft unless use of the intersection is covered in appropriate directives. Controllers, however, will not be able to inform pilots of the distance from the intersection to the end of any of the published declared distances.

REFERENCE-

FAAO JO 7110.65, Ground Traffic Movement, Paragraph 3-7-1.

d. An aircraft is expected to taxi to, but not onto, the end of the assigned runway unless prior approval for an intersection departure is received from ground control.

e. Pilots should state their position on the airport when calling the tower for takeoff from a runway intersection.

EXAMPLE-

Cleveland Tower, Apache Three Seven Two Two Papa, at the intersection of taxiway Oscar and runway two three right, ready for departure.

f. Controllers are required to separate small aircraft 12 500 pounds or less maximum certificated takeoff weight departing same or opposite direction from an intersection behind a large nonheavy aircraft on the same runway by ensuring that at least a 3-minute interval exists between the time the preceding large aircraft has taken off and the succeeding small aircraft begins takeoff roll. To inform the pilot of the required 3-minute hold, the controller will state "Hold for wake turbulence." If, after considering wake turbulence hazards, the pilot feels that a lesser time interval is appropriate, the pilot may request a waiver to the 3-minute interval. To initiate such a request, simply say "Request waiver to 3-minute interval" or a similar statement. Controllers may then issue a takeoff clearance if other traffic permits, since the pilot has accepted the responsibility for wake turbulence separation.

g. The 3-minute interval is not required when the intersection is 500 feet or less from the departure point of the preceding aircraft and both aircraft are taking off in the same direction. Controllers may permit the small aircraft to alter course after takeoff to avoid the flight path of the preceding departure.

h. The 3-minute interval is mandatory behind a heavy aircraft in all cases.

4-3-11. Pilot Responsibilities When Conducting Land and Hold Short Operations (LAHSO)

a. LAHSO is an acronym for Land and Hold Short Operations. These operations include landing and holding short of an **intersecting runway**, an **intersecting taxiway**, or some other designated **point on a runway** other than an intersecting runway or taxiway. See FIG 4-3-6, FIG 4-3-7, FIG 4-3-8.

b. Pilot Responsibilities and Basic Procedures.

1. LAHSO is an air traffic control procedure that requires pilot participation to balance the needs for

increased airport capacity and system efficiency consistent with safety. This procedure can be done safely **provided** pilots and controllers are knowledgeable and understand their responsibilities. The following paragraphs outline specific pilot/operator responsibilities when conducting LAHSO.

2. At controlled airports, air traffic may clear a pilot to land and hold short. Pilots may accept such a clearance provided that the pilot-in-command determines that the aircraft can safely land and stop within the Available Landing Distance (ALD). ALD data are published in the special notices section of the Airport/Facility Directory (A/FD) and in the U.S. Terminal Procedures Publications. Controllers will also provide ALD data upon request. Student pilots or pilots not familiar with LAHSO should **not** participate in the program.

3. The pilot-in-command has the final authority to accept or decline any land and hold short clearance. The safety and operation of the aircraft remain the responsibility of the pilot. Pilots are expected to decline a LAHSO clearance if they determine it will compromise safety.

4. To conduct LAHSO, pilots should become familiar with all available information concerning LAHSO at their destination airport. Pilots should have *readily available*, the **published ALD** and runway **slope information** for **all** LAHSO runway combinations at **each** airport of intended landing. Additionally, knowledge about landing performance data permits the pilot to *readily* determine that the ALD for the assigned runway is sufficient for safe LAHSO. As part of a pilot's preflight planning process, pilots should determine if their destination airport has LAHSO. If so, their preflight planning process should include an assessment of which LAHSO combinations would work for them given their aircraft's required landing distance. Good pilot decision making is knowing in advance whether one can accept a LAHSO clearance if offered.

FIG 4-3-6

Land and Hold Short of an Intersecting Runway

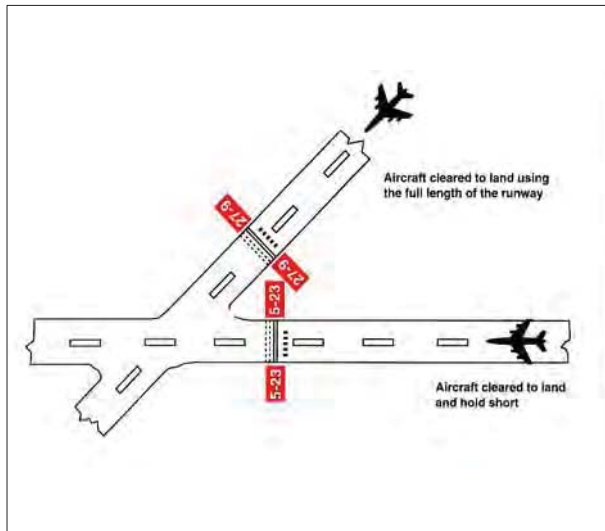
**EXAMPLE—**

FIG 4-3-8 – holding short at a designated point may be required to avoid conflicts with the runway safety area/flight path of a nearby runway.

NOTE—

Each figure shows the approximate location of LAHSO markings, signage, and in-pavement lighting when installed.

REFERENCE—

AIM, Chapter 2, Aeronautical Lighting and Other Airport Visual Aids.

FIG 4-3-7

Land and Hold Short of an Intersecting Taxiway


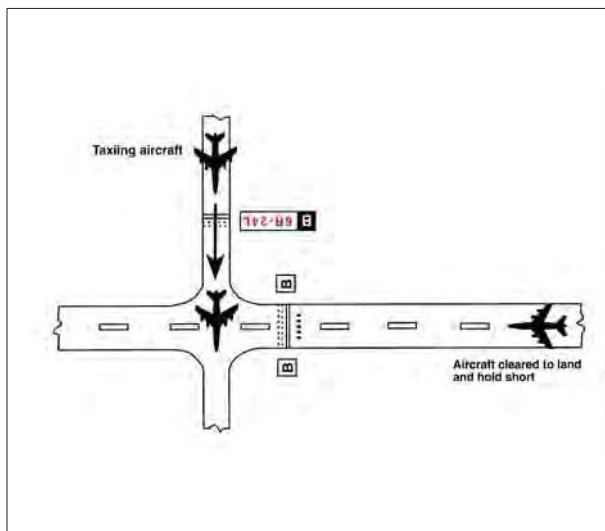


FIG 4-3-8

Land and Hold Short of a Designated Point on a Runway Other Than an Intersecting Runway or Taxiway

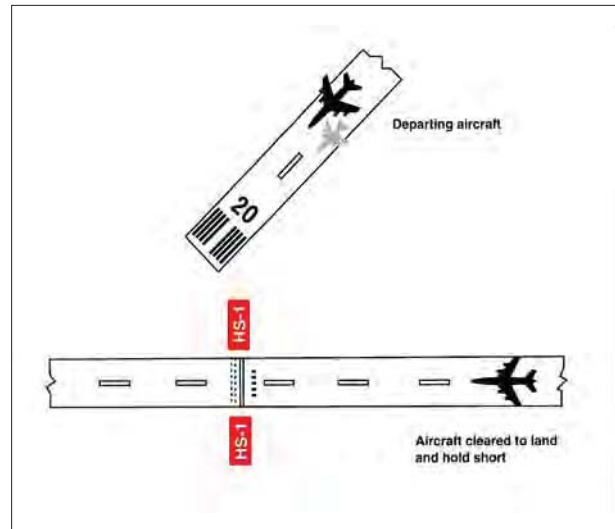

5. If for any reason such as difficulty in discerning the location of a LAHSO intersection and conditions aircraft condition etc the pilot elects to request to land on the full length of the runway to land on another runway or to decline LAHSO a pilot is expected to promptly inform air traffic ideally even before the clearance is issued **A LAHSO clearance, once accepted, must be adhered to, just as any other ATC clearance, unless an amended clearance is obtained or an emergency occurs. A LAHSO clearance does not preclude a rejected landing.**

6. A pilot who accepts a LAHSO clearance should land and exit the runway at the first convenient taxiway unless directed otherwise before reaching the hold short point. Otherwise the pilot must stop and hold at the hold short point **If a rejected landing becomes necessary after accepting a LAHSO clearance, the pilot should maintain safe separation from other aircraft or vehicles, and should promptly notify the controller.**

7. Controllers need a full read back of all LAHSO clearances. Pilots should read back their LAHSO clearance and include the words **HOLD SHORT OF RUNWAY / TAXIWAY / OR POINT** in their acknowledgment of **all** LAHSO clearances. In order to reduce frequency congestion pilots are encouraged to read back the LAHSO clearance.

without prompting. Don't make the controller have to ask for a read back.

c. LAHSO Situational Awareness

1. Situational awareness is **vital** to the success of LAHSO. Situational awareness starts with having current airport information in the cockpit readily accessible to the pilot. An airport diagram assists pilots in identifying their location on the airport, thus reducing requests for progressive taxi instructions from controllers.

2. Situational awareness includes effective pilot-controller radio communication. ATC expects pilots to specifically acknowledge and read back all LAHSO clearances as follows:

EXAMPLE—

ATC: “(Aircraft ID) cleared to land runway six right, hold short of taxiway bravo for crossing traffic (type aircraft).”

Aircraft: “(Aircraft ID), wilco, cleared to land runway six right to hold short of taxiway bravo.”

ATC: “(Aircraft ID) cross runway six right at taxiway bravo, landing aircraft will hold short.”

Aircraft: “(Aircraft ID), wilco, cross runway six right at bravo, landing traffic (type aircraft) to hold.”

3. For those airplanes flown with two crew members, effective **intra-cockpit** communication between cockpit crew members is also critical. There have been several instances where the pilot working the radios accepted a LAHSO clearance but then simply forgot to tell the pilot flying the aircraft.

4. Situational awareness also includes a thorough understanding of the airport markings, signage, and lighting associated with LAHSO. These visual aids consist of a three-part system of **yellow hold-short markings, red and white signage** and in certain cases **in-pavement lighting**. Visual aids assist the pilot in determining where to hold short. FIG 4-3-6, FIG 4-3-7, and FIG 4-3-8 depict how these markings, signage, and lighting combinations will appear once installed. Pilots are cautioned that not all airports conducting LAHSO have installed any or all of the above markings, signage, or lighting.

5. Pilots should only receive a LAHSO clearance when there is a minimum ceiling of 1,000 feet and 3 statute miles visibility. The intent of having basic VFR weather conditions is to allow pilots to maintain visual contact with other aircraft and ground vehicle operations. Pilots should consider

the effects of prevailing inflight visibility, such as landing into the sun, and how it may affect overall situational awareness. Additionally, surface vehicles and aircraft being taxied by maintenance personnel may also be participating in LAHSO, especially in those operations that involve crossing an active runway.

4-3-12. Low Approach

a. A low approach, sometimes referred to as a loop pass, is the go-around maneuver following an approach. Instead of landing or making a touch-and-go, a pilot may wish to go around. A low approach, in order to expedite a particular operation, a series of practice instrument approaches is an example of such an operation. Unless otherwise authorized by ATC, the low approach should be made straight ahead with no turns or climb made until the pilot has made a thorough visual check for other aircraft in the area.

b. When operating within a Class B, Class C, and Class D surface area, a pilot intending to make a low approach should contact the tower for approval. This request should be made prior to starting the final approach.

c. When operating to an airport not within a Class B, Class C, and Class D surface area, a pilot intending to make a low approach should, prior to leaving the final approach fix inbound nonprecision approach or the outer marker or fix used in lieu of the outer marker inbound precision approach, so advise the FSS, UNICOM, or make a broadcast as appropriate.

REFERENCE—

AIM, *Traffic Advisory Practices at Airports Without Operating Control Towers*, Paragraph 4-1-9

4-3-13. Traffic Control Light Signals

a. The following procedures are used by ATCTs in the control of aircraft, ground vehicles, equipment, and personnel not equipped with radio. These same procedures will be used to control aircraft, ground vehicles, equipment, and personnel equipped with radio if radio contact cannot be established. ATC personnel use a directive traffic control signal, which emits an intense narrow light beam of a selected color—either red, white, or green—when controlling traffic by light signals.

b. Although the traffic signal light offers the advantage that some control may be exercised over nonradio equipped aircraft pilots should be cognizant of the disadvantages which are

1. Pilots may not be looking at the control tower at the time a signal is directed toward their aircraft

2. The directions transmitted by a light signal are very limited since only approval or disapproval of a pilot's anticipated actions may be transmitted. No supplement or explanatory information may be transmitted except by the use of the General Warning Signal which advises the pilot to be on the alert

c. Between sunset and sunrise a pilot wishing to attract the attention of the control tower should turn on a landing light and taxi the aircraft into a position clear of the active runway so that light is visible to the tower. The landing light should remain on until appropriate signals are received from the tower.

d. Air Traffic Control Tower Light Gun Signals
See TBL 4-3-1

e. During daylight hours acknowledge tower transmissions or light signals by moving the ailerons or rudder. At night acknowledge by blinking the landing or navigation lights. If radio malfunction occurs after departing the parking area watch the tower for light signals or monitor tower frequency.

TBL 4-3-1

Air Traffic Control Tower Light Gun Signals

Meaning			
Color and Type of Signal	Movement of Vehicles, Equipment and Personnel	Aircraft on the Ground	Aircraft in Flight
Steady green	Cleared to cross, proceed or go	Cleared for takeoff	Cleared to land
Flashing green	Not applicable	Cleared for taxi	Return for landing to be followed by steady green at the proper time
Steady red	STOP	STOP	Give way to other aircraft and continue circling
Flashing red	Clear the taxiway/runway	Taxi clear of the runway in use	Airport unsafe, do not land
Flashing white	Return to starting point on airport	Return to starting point on airport	Not applicable
Alternating red and green	Exercise extreme caution	Exercise extreme caution	Exercise extreme caution

4-3-14. Communications

a. Pilots of departing aircraft should communicate with the control tower on the appropriate ground control/clearance delivery frequency prior to starting engines to receive engine start time, taxi and/or clearance information. Unless otherwise advised by the tower, remain on that frequency during taxiing and runup, then change to local control frequency when ready to request takeoff clearance.

NOTE-

Pilots are encouraged to monitor the local tower frequency as soon as practical consistent with other ATC requirements.

REFERENCE-

AIM, Automatic Terminal Information Service (ATIS),
Paragraph 4-1-13

b. The tower controller will consider that pilots of turbine-powered aircraft are ready for takeoff when they reach the runway or ramp-up block unless advised otherwise.

c. The majority of ground control frequencies are in the 121.6–121.9 MHz band. Ground control frequencies are provided to eliminate frequency congestion on the tower local control frequency and are limited to communications between the tower and aircraft on the ground and between the tower and utility vehicles on the airport. Provide a clear VHF channel for arriving and departing aircraft. They are used for issuance of taxi information, clearances, and other necessary contacts between the tower and aircraft or other vehicles operated on the airport. A pilot who has just landed should not change from the tower frequency to the ground control frequency until directed to do so by the controller. Normally, only one ground control frequency is assigned at an airport; however, at locations where the amount of traffic so warrants, a second ground control frequency and/or another frequency designated as a clearance delivery frequency may be assigned.

d. A controller may omit the ground or local control frequency if the controller believes the pilot knows which frequency is in use. If the ground control frequency is in the 121 MHz band, the controller may omit the numbers preceding the decimal point, e.g., 121.7 CONTACT GROUND POINT SEVEN. However, if any doubt exists as to what frequency is in use, the pilot should promptly request the controller to provide that information.

e. Controllers will normally avoid issuing a radio frequency change to helicopters known to be single-piloted, which are hovering, air taxiing, or flying near the ground. At times, it may be necessary for pilots to alert ATC regarding single pilot operations to minimize delay of essential ATC communications. Whenever possible, ATC instructions will be relayed through the frequency being monitored until a frequency change can be accomplished. You must promptly advise ATC if you are unable to comply with a frequency change. Also, you should advise ATC if you must land to accomplish the frequency change unless it is clear the landing will have no impact on other air traffic, e.g., on a taxiway or in a helicopter operating area.

4-3-15. Gate Holding Due to Departure Delays

a. Pilots should contact ground control or clearance delivery prior to starting engines as gate hold procedures will be in effect whenever departure delays exceed or are anticipated to exceed 15 minutes. The sequence for departure will be maintained in accordance with initial call up unless modified by flow control restrictions. Pilots should monitor the ground control or clearance delivery frequency for engine startup advisories or new proposed start time if the delay changes.

b. The tower controller will consider that pilots of turbine-powered aircraft are ready for takeoff when they reach the runway or ramp-up block unless advised otherwise.

4-3-16. VFR Flights in Terminal Areas

Use reasonable restraint in exercising the prerogative of VFR flight, especially in terminal areas. The weather minimums and distances from clouds are minimums. Giving yourself a greater margin in specific instances is just good judgment.

a. Approach Area. Conducting a VFR operation in a Class B, Class C, Class D, and Class E surface area when the official visibility is 3 or 4 miles is not prohibited, but good judgment could dictate that you keep out of the approach area.

b. Reduced Visibility. It has always been recognized that precipitation reduces forward visibility. Consequently, although again it may be perfectly legal to cancel your IFR flight plan at any time you can proceed VFR, it is good practice when precipitation is occurring to continue IFR operation into a terminal area until you are reasonably close to your destination.

c. Simulated Instrument Flights. In conducting simulated instrument flights, be sure that the weather is good enough to compensate for the restricted visibility of the safety pilot and your greater concentration on your flight instruments. Give yourself a little greater margin when your flight plan lies in or near a busy airway or close to an airport.

4-3-17. VFR Helicopter Operations at Controlled Airports

a. General.

1. The following ATC procedures and phraseologies recognize the unique capabilities of helicopters and were developed to improve service to all users. Helicopter design characteristics and user needs often require operations from movement areas and nonmovement areas within the airport boundary. In order for ATC to properly apply these procedures, it is essential that pilots familiarize themselves with the local operations and make it known to controllers when additional instructions are necessary.

2. Insofar as possible, helicopter operations will be instructed to avoid the flow of fixed-wing aircraft to minimize overall delays. However, there will be many situations where faster/larger helicopters may be integrated with fixed-wing aircraft for the benefit of all concerned. Examples could include IFR flights, avoidance of noise sensitive areas, or use of runways/taxiways to minimize the hazardous effects of rotor downwash in congested areas.

3. Because helicopter pilots are intimately familiar with the effects of rotor downwash, they are best qualified to determine if a given operation can be conducted safely. Accordingly, the pilot has the final authority with respect to the specific airspeed/altitude.

combinations. ATC clearances are in no way intended to place the helicopter in a hazardous position. It is expected that pilots will advise ATC if a specific clearance will cause undue hazards to persons or property.

b. Controllers normally limit ATC ground service and instruction to *movement* areas; therefore operations from *nonmovement* areas are conducted at pilot discretion and should be based on local policies, procedures, or letters of agreement. In order to maximize the flexibility of helicopter operations, it is necessary to rely heavily on sound pilot judgment. For example, hazards such as debris, obstructions, vehicles, or personnel must be recognized by the pilot, and action should be taken as necessary to avoid such hazards. Taxi, hover taxi, and air taxi operations are considered to be ground movements. Helicopters conducting such operations are expected to adhere to the same conditions, requirements, and practices as apply to other ground taxiing and ATC procedures in the AIM.

1. The phraseology *taxi* is used when it is intended or expected that the helicopter will taxi on the airport surface, either via taxi ways or other prescribed routes. *Taxi* is used primarily for helicopters equipped with wheels or in response to a pilot request. Preference should be given to this procedure whenever it is necessary to minimize effects of rotor downwash.

2. Pilots may request a *hover taxi* when slow forward movement is desired or when it may be appropriate to move very short distances. Pilots should avoid this procedure if rotor downwash is likely to cause damage to parked aircraft or if blowing dust/snow could obscure visibility. If it is necessary to operate above 25 feet AGL when hover taxiing, the pilot should initiate a request to ATC.

3. *Air taxi* is the preferred method for helicopter ground movements on airports provided ground operations and conditions permit. Unless otherwise requested or instructed, pilots are expected to remain below 100 feet AGL. However, if a higher than normal airspeed or altitude is desired, the request should be made prior to lift-off. The pilot is solely responsible for selecting a safe airspeed for the altitude/operation being conducted. Use of *air taxi* enables the pilot to proceed at an optimum airspeed/altitude, minimize downwash effect, conserve fuel, and expedite movement from one point to

another. Helicopters should avoid overflight of other aircraft, vehicles, and personnel during air-taxi operations. Caution must be exercised concerning active runways and pilots must be certain that air taxi instructions are understood. Special precautions may be necessary at unfamiliar airports or airports with multiple/intersecting active runways. The taxi procedures given in Paragraph 4-3-18, Taxiing; Paragraph 4-3-19, Taxi During Low Visibility; and Paragraph 4-3-20, Exiting the Runway After Landing, also apply.

REFERENCE—

Pilot/Controller Glossary Term— Taxi.

Pilot/Controller Glossary Term— Hover Taxi.

Pilot/Controller Glossary Term— Air Taxi.

c. Takeoff and Landing Procedures.

1. Helicopter operations may be conducted from a runway, taxiway, portion of a landing strip, or any clear area which could be used as a landing site, such as the scene of an accident, a construction site, or the roof of a building. The terms used to describe designated areas from which helicopters operate are *movement area*, *landing/takeoff area*, *apron/ramp*, *heliport*, and *helipad*. See *Pilot/Controller Glossary*. These areas may be improved or unimproved and may be separate from or located on an airport/heliport. ATC will issue takeoff clearances from *movement* areas other than active runways or in diverse directions from active runways with additional instructions as necessary. Whenever possible, takeoff clearance will be issued in lieu of extended hover/air taxi operations. Phraseology will be: **CLEARED FOR TAKEOFF FROM** taxiway, helipad, runway number, etc.; **MAKE RIGHT/LEFT TURN FOR** direction, heading, NAVAID, radial, **DEPARTURE/DEPARTURE ROUTE** number, name, etc. Unless requested by the pilot, downwind takeoffs will not be issued if the tailwind exceeds 5 knots.

2. Pilots should be alert to wind information as well as to wind indications in the vicinity of the helicopter. ATC should be advised of the intended method of departing. A pilot request to takeoff in a given direction indicates that the pilot is willing to accept the wind condition and controllers will honor the request if traffic permits. Departure points could be a significant distance from the control tower and it may be difficult or impossible for the controller to determine the helicopter's relative position to the wind.

3. If takeoff is requested from *nonmovement* areas an area not authorized for helicopter use an area not visible from the tower an unlighted area at night or an area off the airport the phraseology DEPARTURE FROM requested location WILL BE AT OUR OWN RISK additional instructions as necessary USE CAUTION if applicable The pilot is responsible for operating in a safe manner and should exercise due caution

4. Similar phraseology is used for helicopter landing operations Every effort will be made to permit helicopters to proceed direct and land as near as possible to their final destination on the airport Traffic density the need for detailed taxiing instructions frequency congestion or other factors may affect the extent to which service can be expedited As with ground movement operations a high degree of pilot/controller cooperation and communication is necessary to achieve safe and efficient operations

4-3-18. Taxiing

a. General. Approval must be obtained prior to moving an aircraft or vehicle onto the movement area during the hours an Airport Traffic Control Tower is in operation

1. Always state your position on the airport when calling the tower for taxi instructions

2. The movement area is normally described in local bulletins issued by the airport manager or control tower These bulletins may be found in FSSs fixed base operators offices air carrier offices and operations offices

3. The control tower also issues bulletins describing areas where they cannot provide ATC service due to nonvisibility or other reasons

4. A clearance must be obtained prior to taxiing on a runway taking off or landing during the hours an Airport Traffic Control Tower is in operation

5. A clearance must be obtained prior to crossing any runway ATC will issue an explicit clearance for all runway crossings

6. When assigned a takeoff runway ATC will first specify the runway issue taxi instructions and state any hold short instructions or runway crossing clearances if the taxi route will cross a runway This

does not authorize the aircraft to enter or cross the assigned departure runway at any point In order to preclude misunderstandings in radio communications ATC will not use the word cleared in conjunction with authorization for aircraft to taxi

7. When issuing taxi instructions to any point other than an assigned takeoff runway ATC will specify the point to taxi to issue taxi instructions and state any hold short instructions or runway crossing clearances if the taxi route will cross a runway

NOTE-

ATC is required to obtain a readback from the pilot of all runway hold short instructions.

8. If a pilot is expected to hold short of a runway approach APPCH area or ILS holding position see FIG 2-3-15 Taxiways Located in Runway Approach Area ATC will issue instructions

9. When taxi instructions are received from the controller pilots should always read back

(a) The runway assignment

(b) Any clearance to enter a specific runway

(c) Any instruction to hold short of a specific runway or line up and wait

Controllers are required to request a readback of runway hold short assignment when it is not received from the pilot/vehicle

b. ATC clearances or instructions pertaining to taxiing are predicated on known traffic and known physical airport conditions Therefore it is important that pilots clearly understand the clearance or instruction Although an ATC clearance is issued for taxiing purposes when operating in accordance with the CFRs it is the responsibility of the pilot to avoid collision with other aircraft Since the pilot-in-command of an aircraft is directly responsible for and is the final authority as to the operation of that aircraft the pilot should obtain clarification of any clearance or instruction which is not understood

REFERENCE-

AIM, General, Paragraph 7-3-1

1. Good operating practice dictates that pilots acknowledge all runway crossing hold short or takeoff clearances unless there is some misunderstanding at which time the pilot should query the controller until the clearance is understood

NOTE–

Air traffic controllers are required to obtain from the pilot a readback of all runway hold short instructions.

2. Pilots operating a single pilot aircraft should monitor only assigned ATC communications after being cleared onto the active runway for departure. Single pilot aircraft should not monitor other than ATC communications until flight from Class B, Class C, or Class D surface area is completed. This same procedure should be practiced from after receipt of the clearance for landing until the landing and taxi activities are complete. Proper effective scanning for other aircraft, surface vehicles, or other objects should be continuously exercised in all cases.

3. If the pilot is unfamiliar with the airport or for any reason confusion exists as to the correct taxi routing, a request may be made for progressive taxi instructions, which include step-by-step routing directions. Progressive instructions may also be issued if the controller deems it necessary due to traffic or field conditions, for example, construction or closed taxiways.

c. At those airports where the U.S. Government operates the control tower and ATC has authorized noncompliance with the requirement for two-way radio communications while operating within the Class B, Class C, or Class D surface area, or at those airports where the U.S. Government does not operate the control tower and radio communications cannot be established, pilots must obtain a clearance by visual light signal prior to taxiing on a runway and prior to takeoff and landing.

d. The following phraseologies and procedures are used in radiotelephone communications with aeronautical ground stations:

1. Request for taxi instructions prior to departure. State your aircraft identification, location, type of operation planned (VFR or IFR), and the point of first intended landing.

EXAMPLE–

Aircraft: “Washington ground, Beechcraft One Three One Five Niner at hangar eight, ready to taxi, I-F-R to Chicago.”

Tower: “Beechcraft one three one five niner, Washington ground, runway two seven, taxi via taxiways Charlie and Delta, hold short of runway three three left.”

Aircraft: “Beechcraft One Three One Five Niner, hold short of runway three three left.”

2. Receipt of ATC clearance. ARTCC clearances are relayed to pilots by airport traffic controllers in the following manner:

EXAMPLE–

Tower: “Beechcraft One Three One Five Niner, cleared to the Chicago Midway Airport via Victor Eight, maintain eight thousand.”

Aircraft: “Beechcraft One Three One Five Niner, cleared to the Chicago Midway Airport via Victor Eight, maintain eight thousand.”

NOTE–

Normally, an ATC IFR clearance is relayed to a pilot by the ground controller. At busy locations, however, pilots may be instructed by the ground controller to “contact clearance delivery” on a frequency designated for this purpose. No surveillance or control over the movement of traffic is exercised by this position of operation.

3. Request for taxi instructions after landing.

State your aircraft identification, location, and that you request taxi instructions.

EXAMPLE–

Aircraft: “Dulles ground, Beechcraft One Four Two Six One clearing runway one right on taxiway echo three, request clearance to Page.”

Tower: “Beechcraft One Four Two Six One, Dulles ground, taxi to Page via taxiways echo three, echo one, and echo niner.”

or

Aircraft: “Orlando ground, Beechcraft One Four Two Six One clearing runway one eight left at taxiway bravo three, request clearance to Page.”

Tower: “Beechcraft One Four Two Six One, Orlando ground, hold short of runway one eight right.”

Aircraft: “Beechcraft One Four Two Six One, hold short of runway one eight right.”

4-3-19. Taxi During Low Visibility

a. Pilots and aircraft operators should be constantly aware that during certain low visibility conditions the movement of aircraft and vehicles on airports may not be visible to the tower controller. This may prevent visual confirmation of an aircraft's adherence to taxi instructions.

b. Of vital importance is the need for pilots to notify the controller when difficulties are encountered or at the first indication of becoming disoriented. Pilots should proceed with extreme caution when taxiing toward the sun. When vision difficulties are encountered, pilots should immediately inform the controller.

c. Advisory Circular 120–57 Surface Movement Guidance and Control System commonly known as SMGCS pronounced SMIGS requires a low visibility taxi plan for any airport which has takeoff or landing operations in less than 1 200 feet runway visual range RVR visibility conditions. These plans which affect aircraft and vehicle operators may incorporate additional lighting markings and procedures to control airport surface traffic. They will be addressed at two levels: operations less than 1 200 feet RVR to 600 feet RVR and operations less than 600 feet RVR.

NOTE–

Specific lighting systems and surface markings may be found in paragraph 2–1–1, Taxiway Lights, and paragraph 2–3–4 Taxiway Markings.

d. When low visibility conditions exist, pilots should focus their entire attention on the safe operation of the aircraft while it is moving. Checklists and nonessential communication should be withheld until the aircraft is stopped and the brakes set.

4–3–20. Exiting the Runway After Landing

The following procedures must be followed after landing and reaching taxi speed:

a. Exit the runway without delay at the first available taxiway or on a taxiway as instructed by ATC. Pilots must not exit the landing runway onto another runway unless authorized by ATC. At airports with an operating control tower, pilots should not stop or reverse course on the runway without first obtaining ATC approval.

b. Taxi clear of the runway unless otherwise directed by ATC. An aircraft is considered clear of the runway when all parts of the aircraft are past the runway edge and there are no restrictions to its continued movement beyond the runway holding position markings. In the absence of ATC instructions, the pilot is expected to taxi clear of the landing runway by taxiing beyond the runway holding position markings associated with the landing

runway even if that requires the aircraft to protrude into or cross another taxiway or ramp area. Once all parts of the aircraft have crossed the runway holding position markings, the pilot must hold unless further instructions have been issued by ATC.

NOTE–

1. The tower will issue the pilot instructions which will permit the aircraft to enter another taxiway, runway, or ramp area when required.

2. Guidance contained in subparagraphs a and b above is considered an integral part of the landing clearance and satisfies the requirement of 14 CFR Section 91.129.

c. Immediately change to ground control frequency when advised by the tower and obtain a taxi clearance.

NOTE–

1. The tower will issue instructions required to resolve any potential conflicts with other ground traffic prior to advising the pilot to contact ground control.

2. Ground control will issue taxi clearance to parking. That clearance does not authorize the aircraft to “enter” or “cross” any runways. Pilots not familiar with the taxi route should request specific taxi instructions from ATC.

4–3–21. Practice Instrument Approaches

a. Various air traffic incidents have indicated the necessity for adoption of measures to achieve more organized and controlled operations. Where practice instrument approaches are conducted, practice instrument approaches are considered to be instrument approaches made by either a VFR aircraft not on an IFR flight plan or an aircraft on an IFR flight plan. To achieve this and thereby enhance air safety, it is Air Traffic Service policy to provide for separation of such operations at locations where approach control facilities are located and, as resources permit, at certain other locations served by ARTCCs or parent approach control facilities. Pilot requests to practice instrument approaches may be approved by ATC subject to traffic and workload conditions. Pilots should anticipate that in some instances the controller may find it necessary to deny approval or withdraw previous approval when traffic conditions warrant. It must be clearly understood, however, that even though the controller may be providing separation, pilots on VFR flight plans are required to comply with basic VFR weather minimums, 14 CFR Section 91.155. Application of ATC procedures or any action taken by the controller to avoid traffic conflicts does not relieve IFR and VFR pilots of

their responsibility to see-and-avoid other traffic while operating in VFR conditions. 14 CFR Section 91.113. In addition to the normal IFR separation minimums, which includes visual separation during VFR conditions, 500 feet vertical separation may be applied between VFR aircraft and between a VFR aircraft and the IFR aircraft. Pilots not on IFR flight plans desiring practice instrument approaches should always state practice when making requests to ATC. Controllers will instruct VFR aircraft requesting an instrument approach to maintain VFR. This is to preclude misunderstandings between the pilot and controller as to the status of the aircraft. If pilots wish to proceed in accordance with instrument flight rules, they must specifically request and obtain an IFR clearance.

b. Before practicing an instrument approach, pilots should inform the approach control facility or the tower of the type of practice approach they desire to make and how they intend to terminate it, i.e., full-stop landing, touch-and-go, or missed or loop approach maneuver. This information may be furnished progressively when conducting a series of approaches. Pilots on an IFR flight plan who have made a series of instrument approaches to full stop landings should inform ATC when they make their final landing. The controller will control flights practicing instrument approaches so as to ensure that they do not disrupt the flow of arriving and departing itinerant IFR or VFR aircraft. The priority afforded itinerant aircraft over practice instrument approaches is not intended to be so rigidly applied that it causes grossly inefficient application of services. A minimum delay to itinerant traffic may be appropriate to allow an aircraft practicing an approach to complete that approach.

NOTE—

A clearance to land means that appropriate separation on the landing runway will be ensured. A landing clearance does not relieve the pilot from compliance with any previously issued restriction.

c. At airports without a tower, pilots wishing to make practice instrument approaches should notify the facility having control jurisdiction of the desired approach as indicated on the approach chart. All approach control facilities and ARTCCs are required to publish a Letter to Airmen depicting those airports where they provide standard separation to both VFR and IFR aircraft conducting practice instrument approaches.

d. The controller will provide approved separation between both VFR and IFR aircraft when authorization is granted to make practice approaches to airports where an approach control facility is located and to certain other airports served by approach control or an ARTCC. Controller responsibility for separation of VFR aircraft begins at the point where the approach clearance becomes effective or when the aircraft enters Class B or Class C airspace or a TRSA, whichever comes first.

e. VFR aircraft practicing instrument approaches are not automatically authorized to execute the missed approach procedure. This authorization must be specifically requested by the pilot and approved by the controller. Separation will not be provided unless the missed approach has been approved by ATC.

f. Except in an emergency, aircraft cleared to practice instrument approaches must not deviate from the approved procedure until cleared to do so by the controller.

g. At radar approach control locations where a full approach procedure, procedure turn, etc., cannot be approved, pilots should expect to be vectored to a final approach course for a practice instrument approach, which is compatible with the general direction of traffic at that airport.

h. When granting approval for a practice instrument approach, the controller will usually ask the pilot to report to the tower prior to or over the final approach fix inbound, nonprecision approaches, or over the outer marker or fix used in lieu of the outer marker inbound, precision approaches.

i. When authorization is granted to conduct practice instrument approaches to an airport with a tower but where approved standard separation is not provided to aircraft conducting practice instrument approaches, the tower will approve the practice approach, instruct the aircraft to maintain VFR, and issue traffic information as required.

j. When an aircraft notifies a FSS providing Local Airport Advisory to the airport concerned of the intent to conduct a practice instrument approach and whether or not separation is to be provided, the pilot will be instructed to contact the appropriate facility on a specified frequency prior to initiating the approach. At airports where separation is not provided, the FSS will acknowledge the message and issue known traffic information but will neither approve or disapprove the approach.

k. Pilots conducting practice instrument approaches should be particularly alert for other aircraft operating in the local traffic pattern or in proximity to the airport

4-3-22. Option Approach

The Cleared for the Option procedure will permit an instructor flight examiner or pilot the option to make a touch-and-go, missed approach, stop-and-go, or full stop landing. This procedure can be very beneficial in a training situation in that neither the student pilot nor examinee would know what maneuver would be accomplished. The pilot should make a request for this procedure passing the final approach fix inbound on an instrument approach or entering downwind for a VFR traffic pattern. The advantages of this procedure as a training aid are that it enables an instructor or examiner to obtain the reaction of a trainee or examinee under changing conditions; the pilot would not have to discontinue an approach in the middle of the procedure due to student error or pilot proficiency requirements; and finally it allows more flexibility and economy in training programs. This procedure will only be used at those locations with an operational control tower and will be subject to ATC approval.

4-3-23. Use of Aircraft Lights

a. Aircraft position lights are required to be lighted on aircraft operated on the surface and in flight from sunset to sunrise. In addition, aircraft equipped with an anti-collision light system are required to operate that light system during all types of operations, day and night. However, during any adverse meteorological conditions, the pilot-in-command may determine that the anti-collision lights should be turned off when their light output could constitute a hazard to safety. 14 CFR Section 91.209. Supplementary strobe lights should be turned off on the ground when they adversely affect ground personnel or other pilots, and in flight when there are adverse reflection from clouds.

b. An aircraft anti-collision light system can use one or more rotating beacons and/or strobe lights, be colored either red or white, and have different, higher than minimum intensities when compared to other aircraft. Many aircraft have both a rotating beacon and a strobe light system.

c. The FAA has a voluntary pilot safety program, Operation Lights On, to enhance the *see-and-avoid* concept. Pilots are encouraged to turn on their landing lights during takeoff, i.e., either after takeoff clearance has been received or when beginning takeoff roll. Pilots are further encouraged to turn on their landing lights when operating below 10,000 feet, day or night, especially when operating within 10 miles of any airport or in conditions of reduced visibility and in areas where flocks of birds may be expected, i.e., coastal areas, lake areas, around refuse dumps, etc. Although turning on aircraft lights does enhance the *see-and-avoid* concept, pilots should not become complacent about keeping a sharp lookout for other aircraft. Not all aircraft are equipped with lights, and some pilots may not have their lights turned on. Aircraft manufacturer's recommendations for operation of landing lights and electrical systems should be observed.

d. Prop and jet blast forces generated by large aircraft have overturned or damaged several smaller aircraft taxiing behind them. To avoid similar results and in the interest of preventing upsets and injuries to ground personnel from such forces, the FAA recommends that air carriers and commercial operators turn on their rotating beacons anytime their aircraft engines are in operation. General aviation pilots using rotating beacons, equipped aircraft are also encouraged to participate in this program, which is designed to alert others to the potential hazard. Since this is a voluntary program, exercise caution and do not rely solely on the rotating beacon as an indication that aircraft engines are in operation.

e. Prior to commencing taxi, it is recommended to turn on navigation, position, anti-collision, and logo lights, if equipped. To signal intent to other pilots, consider turning on the taxi light when the aircraft is moving or intending to move on the ground, and turning it off when stopped or yielding to other ground traffic. Strobe lights should not be illuminated during taxi if they will adversely affect the vision of other pilots or ground personnel.

f. At the discretion of the pilot in command, all exterior lights should be illuminated when taxiing on or across any runway. This increases the conspicuity of the aircraft to controllers and other pilots approaching to land, taxiing, or crossing the runway. Pilots should comply with any equipment operating limitations and consider the effects of landing and strobe lights on other aircraft in their vicinity.

g. When entering the departure runway for takeoff or to line up and wait, all lights except for landing lights should be illuminated to make the aircraft conspicuous to ATC and other aircraft on approach. Landing lights should be turned on when takeoff clearance is received or when commencing takeoff roll at an airport without an operating control tower.

4-3-24. Flight Inspection/'Flight Check' Aircraft in Terminal Areas

a. *Flight check* is a call sign used to alert pilots and air traffic controllers when a FAA aircraft is engaged in flight inspection/certification of NAVAIDs and flight procedures. Flight check aircraft fly preplanned high/low altitude flight patterns such as grids, orbits, DME arcs, and tracks, including low passes along the full length of the runway to verify NAVAID performance.

b. Pilots should be especially watchful and avoid the flight paths of any aircraft using the call sign *Flight Check*. These flights will normally receive special handling from ATC. Pilot patience and cooperation in allowing uninterrupted recordings can significantly help expedite flight inspections, minimize costly repetitive runs, and reduce the burden on the U.S. taxpayer.

4-3-25. Hand Signals

**FIG 4-3-9
Signalman Directs Towing**

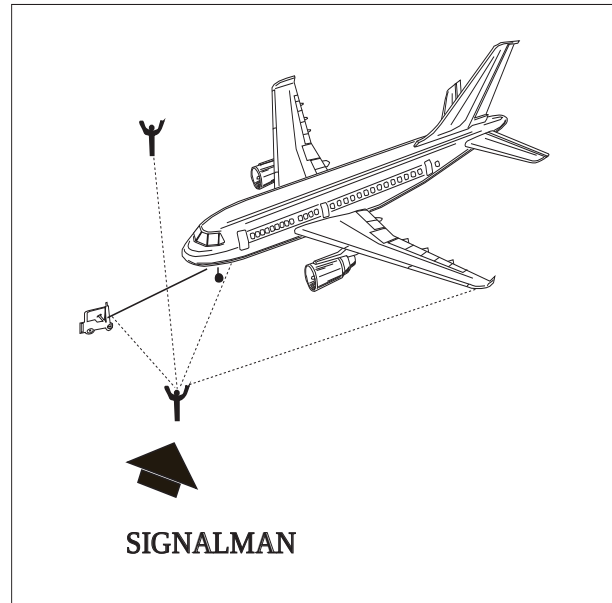


FIG 4-3-10
Signalman's Position

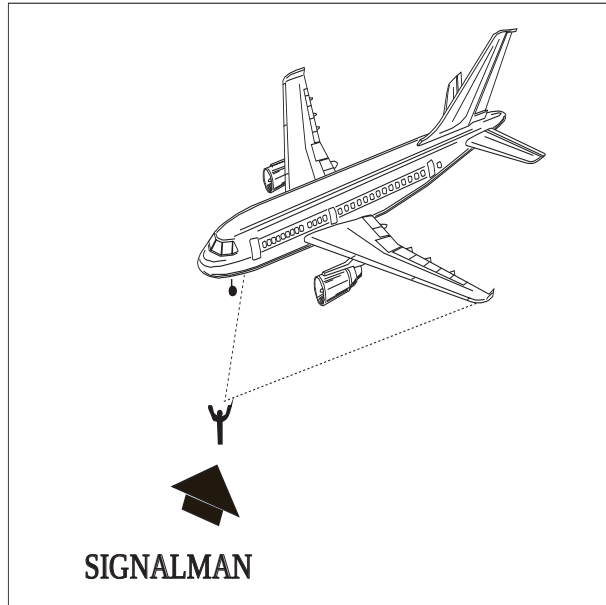


FIG 4-3-12
Start Engine

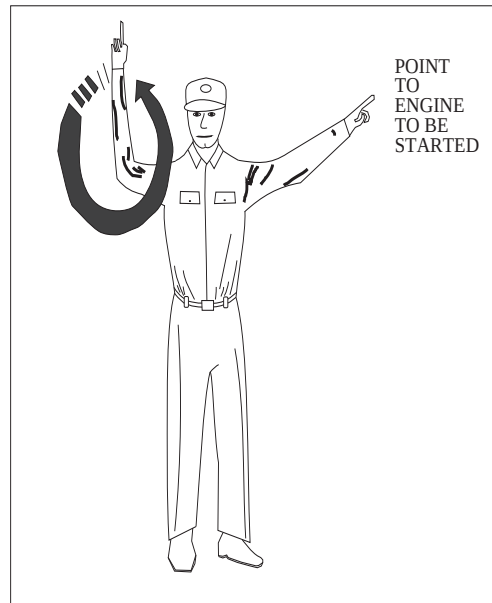


FIG 4-3-11
All Clear
(O.K.)

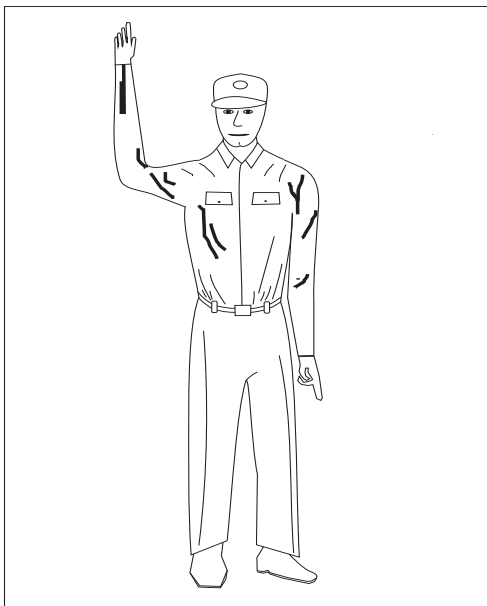


FIG 4-3-13
Pull Chocks

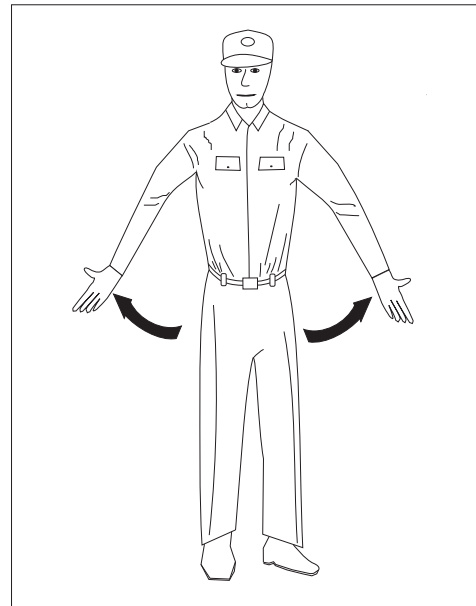


FIG 4-3-14
Proceed Straight Ahead

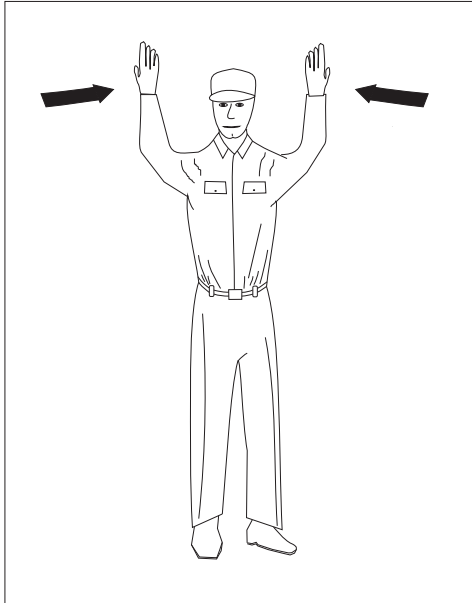


FIG 4-3-16
Right Turn

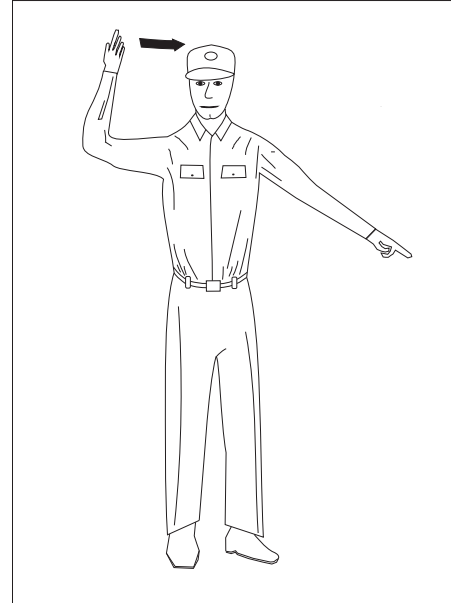


FIG 4-3-15
Left Turn

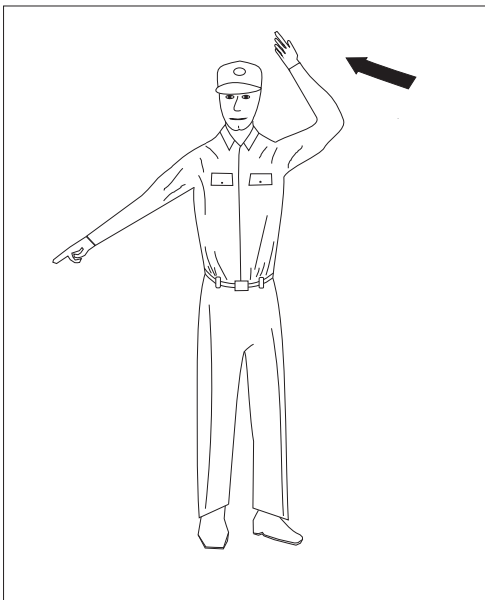


FIG 4-3-17
Slow Down

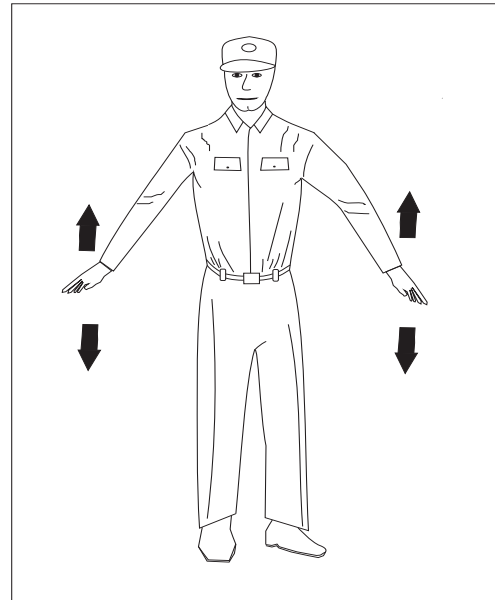


FIG 4-3-18
Flagman Directs Pilot

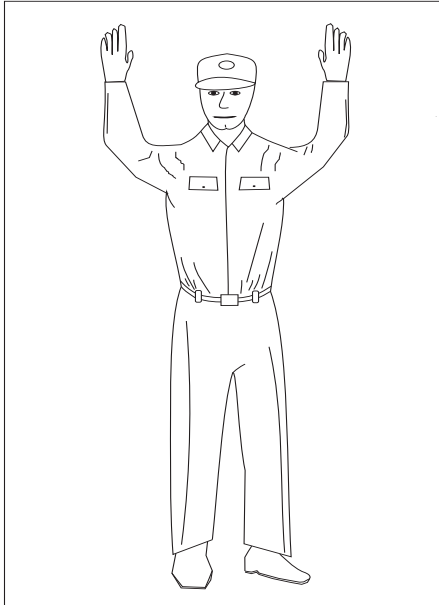


FIG 4-3-20
Cut Engines

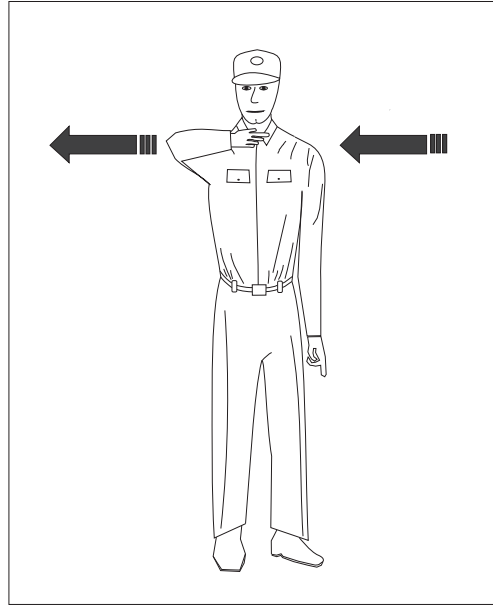


FIG 4-3-19
Insert Chocks

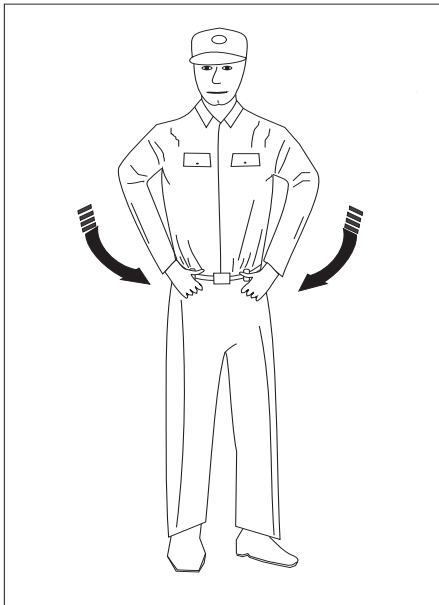


FIG 4-3-21
Night Operation


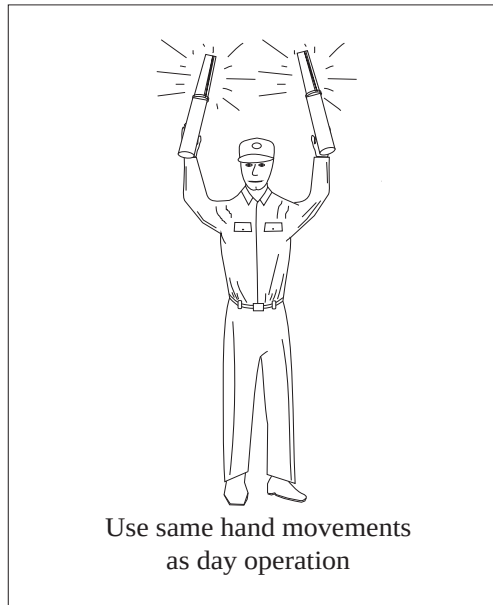


FIG 4-3-22
Stop

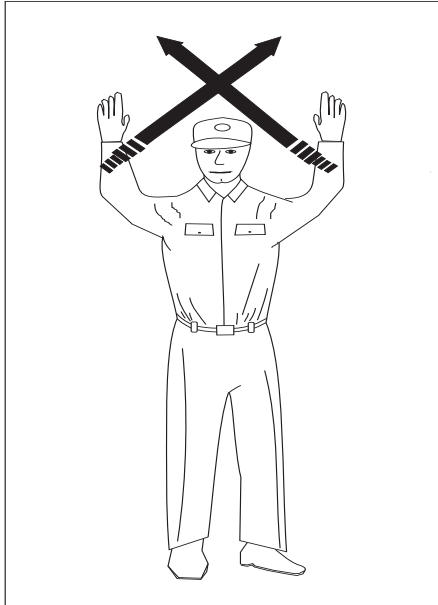

4-3-26. Operations at Uncontrolled Airports With Automated Surface Observing System (ASOS)/Automated Weather Sensor System (AWSS)/Automated Weather Observing System (AWOS)

a. Many airports throughout the National Air space System are equipped with either ASOS, AWSS, or AWOS. At most airports with an operating control tower or human observer, the weather will be available to you in an Aviation Routine Weather Report (METAR), hourly or special observation format on the Automatic Terminal Information Service (ATIS), or directly transmitted from the controller/observer.

b. At uncontrolled airports that are equipped with ASOS/AWSS/AWOS with ground-to-air broadcast capability, the one-minute updated airport weather should be available to you within approximately 25 NM of the airport below 10,000 feet. The frequency for the weather broadcast will be published on sectional charts and in the Airport/Facility Directory. Some part-time towered airports may also broadcast the automated weather on their ATIS frequency during the hours that the tower is closed.

c. Controllers issue SVFR or IFR clearances based on pilot request, known traffic, and reported weather (i.e., METAR/Nonroutine Special Aviation Weather Report (SPECI) observations) when they are available. Pilots have access to more current weather at uncontrolled ASOS/AWSS/AWOS airports than do the controllers who may be located several miles away. Controllers will rely on the pilot to determine the current airport weather from the ASOS/AWSS/AWOS. All aircraft arriving or departing an ASOS/AWSS/AWOS equipped uncontrolled airport should monitor the airport weather frequency to ascertain the status of the airspace. Pilots in Class E airspace must be alert for changing weather conditions which may effect the status of the airspace from IFR/VFR. If ATC service is required for IFR/SVFR approach/departure or requested for VFR service, the pilot should advise the controller that he/she has received the one-minute weather and state his/her intentions.

EXAMPLE-

"I have the (airport) one-minute weather, request an ILS Runway 14 approach."

REFERENCE-

AIM, Weather Observing Programs, Paragraph 7-1-12

Section 4. ATC Clearances and Aircraft Separation

4-4-1. Clearance

a. A clearance issued by ATC is predicated on known traffic and known physical airport conditions. An ATC clearance means an authorization by ATC for the purpose of preventing collision between known aircraft for an aircraft to proceed under specified conditions within controlled airspace. **IT IS NOT AUTHORIZATION FOR A PILOT TO DEVIATE FROM AN AERIAL RULE, REGULATION OR MINIMUM ALTITUDE NOR TO CONDUCT UNSAFE OPERATION OF THE AIRCRAFT.**

b. 14 CFR Section 91.3(a) states: "The pilot-in-command of an aircraft is directly responsible for, and is the final authority as to, the operation of that aircraft. If ATC issues a clearance that would cause a pilot to deviate from a rule or regulation, or in the pilot's opinion, would place the aircraft in jeopardy, **IT IS THE PILOT'S RESPONSIBILITY TO REQUEST AN AMENDED CLEARANCE.** Similarly, if a pilot prefers to follow a different course of action, such as make a 360 degree turn for spacing to follow traffic when established in a landing or approach sequence, land on a different runway, takeoff from a different intersection, takeoff from the threshold instead of an intersection, or delay operation, **THE PILOT IS EXPECTED TO INFORM ATC ACCORDINGLY.** When the pilot requests a different course of action, however, the pilot is expected to cooperate so as to preclude disruption of traffic flow or creation of conflicting patterns. The pilot is also expected to use the appropriate aircraft call sign to acknowledge all ATC clearances, frequency changes, or advisory information."

c. Each pilot who deviates from an ATC clearance in response to a Traffic Alert and Collision Avoidance System resolution advisory must notify ATC of that deviation as soon as possible.

REFERENCE—

Pilot/Controller Glossary Term—Traffic Alert and Collision Avoidance System.

d. When weather conditions permit during the time an IFR flight is operating, it is the direct responsibility of the pilot to avoid other aircraft since VFR flights may be operating in the same area without the knowledge of ATC. Traffic clearances

provide standard separation only between IFR flights.

4-4-2. Clearance Prefix

A clearance control information or a response to a request for information originated by an ATC facility and relayed to the pilot through an air-to-ground communication station will be prefixed by "ATC clears." ATC advises or ATC requests.

4-4-3. Clearance Items

ATC clearances normally contain the following:

a. **Clearance Limit.** The traffic clearance issued prior to departure will normally authorize flight to the airport of intended landing. Many airports and associated NAVAIDs are collocated with the same name and/or identifier, so care should be exercised to ensure a clear understanding of the clearance limit. When the clearance limit is the airport of intended landing, the clearance should contain the airport name followed by the word "airport." Under certain conditions, a clearance limit may be a NAVAID or other fix. When the clearance limit is a NAVAID intersection or waypoint and the type is known, the clearance should contain the type. Under certain conditions, at some locations, a short-range clearance procedure is utilized; hereby, a clearance is issued to a fix within or just outside of the terminal area and pilots are advised of the frequency on which they will receive the long-range clearance direct from the center controller.

b. **Departure Procedure.** Headings to fly and altitude restrictions may be issued to separate a departure from other air traffic in the terminal area. Where the volume of traffic warrants, DPs have been developed.

REFERENCE—

AIM, Abbreviated IFR Departure Clearance (Cleared . . . as Filed) Procedures, Paragraph 5-2-5.

AIM, Instrument Departure Procedures (DP) – Obstacle Departure Procedures (ODP) and Standard Instrument Departures (SID), Paragraph 5-2-8.

c. Route of Flight.

1. Clearances are normally issued for the altitude or flight level and route filed by the pilot. However, due to traffic conditions, it is frequently necessary for ATC to specify an altitude or flight level.

or route different from that requested by the pilot. In addition, flow patterns have been established in certain congested areas or between congested areas

hereby traffic capacity is increased by routing all traffic on preferred routes. Information on these flow patterns is available in offices where preflight briefing is furnished or where flight plans are accepted.

2. When required, air traffic clearances include data to assist pilots in identifying radio reporting points. It is the responsibility of pilots to notify ATC immediately if their radio equipment cannot receive the type of signals they must utilize to comply with their clearance.

d. Altitude Data.

1. The altitude or flight level instructions in an ATC clearance normally require that a pilot MAINTAIN the altitude or flight level at which the flight will operate when in controlled airspace. Altitude or flight level changes while en route should be requested prior to the time the change is desired.

2. When possible, if the altitude assigned is different from the altitude requested by the pilot, ATC will inform the pilot when to expect climb or descent clearance or to request altitude change from another facility. If this has not been received prior to crossing the boundary of the ATC facility's area and assignment at a different altitude is still desired, the pilot should reinitiate the request with the next facility.

3. The term *cruise* may be used instead of MAINTAIN to assign a block of airspace to a pilot from the minimum IFR altitude up to and including the altitude specified in the cruise clearance. The pilot may level off at any intermediate altitude within this block of airspace. Climb/descent within the block is to be made at the discretion of the pilot. However, once the pilot starts descent and verbally reports leaving an altitude in the block, the pilot may not return to that altitude without additional ATC clearance.

REFERENCE—

Pilot/Controller Glossary Term—Cruise.

e. Holding Instructions.

1. Whenever an aircraft has been cleared to a fix other than the destination airport and delay is expected, it is the responsibility of the ATC controller to issue complete holding instructions unless the

pattern is charted, an EFC time, and a best estimate of any additional en route/terminal delay.

2. If the holding pattern is charted and the controller doesn't issue complete holding instructions, the pilot is expected to hold as depicted on the appropriate chart. When the pattern is charted, the controller may omit all holding instructions except the charted holding direction and the statement *AS PUBLISHED*. e.g., “*HOLD EAST AS PUBLISHED.*” Controllers must always issue complete holding instructions when pilots request them.

NOTE—

Only those holding patterns depicted on U.S. government or commercially produced charts which meet FAA requirements should be used.

3. If no holding pattern is charted and holding instructions have not been issued, the pilot should ask ATC for holding instructions prior to reaching the fix. This procedure will eliminate the possibility of an aircraft entering a holding pattern other than that desired by ATC. If unable to obtain holding instructions prior to reaching the fix due to frequency congestion, stuck microphone, etc., hold in a standard pattern on the course on which you approached the fix and request further clearance as soon as possible. In this event, the altitude/flight level of the aircraft at the clearance limit will be protected so that separation will be provided as required.

4. When an aircraft is 3 minutes or less from a clearance limit and a clearance beyond the fix has not been received, the pilot is expected to start a speed reduction so that the aircraft will cross the fix initially at or below the maximum holding airspeed.

5. When no delay is expected, the controller should issue a clearance beyond the fix as soon as possible and whenever possible, at least 5 minutes before the aircraft reaches the clearance limit.

6. Pilots should report to ATC the time and altitude/flight level at which the aircraft reaches the clearance limit and report leaving the clearance limit.

NOTE—

In the event of two-way communications failure, pilots are required to comply with 14 CFR Section 91.185.

4-4-4. Amended Clearances

a. Amendments to the initial clearance will be issued at any time an air traffic controller deems such

action necessary to avoid possible confliction between aircraft. Clearances will require that a flight hold or change altitude prior to reaching the point where standard separation from other IFR traffic could no longer exist.

NOTE—

Some pilots have questioned this action and requested “traffic information” and were at a loss when the reply indicated “no traffic report.” In such cases the controller has taken action to prevent a traffic confliction which would have occurred at a distant point.

b. A pilot may wish an explanation of the handling of the flight at the time of occurrence. However, controllers are not able to take time from their immediate control duties nor can they afford to overload the ATC communications channels to furnish explanations. Pilots may obtain an explanation by directing a letter or telephone call to the chief controller of the facility involved.

c. Pilots have the privilege of requesting a different clearance from that which has been issued by ATC if they feel that they have information which would make another course of action more practicable or if aircraft equipment limitations or company procedures forbid compliance with the clearance issued.

4-4-5. Coded Departure Route (CDR)

a. CDRs provide air traffic control a rapid means to reroute departing aircraft when the filed route is constrained by either weather or congestion.

b. CDRs consist of an eight-character designator that represents a route of flight. The first three alphanumeric characters represent the departure airport; characters four through six represent the arrival airport; and the last two characters are chosen by the overlying ARTCC. For example, PITORDN1 is an alternate route from Pittsburgh to Chicago. Participating aircraft may then be re-cleared by air traffic control via the CDR abbreviated clearance PITORDN1.

c. CDRs are updated on the 56 day charting cycle. Participating aircraft must ensure that their CDR is current.

d. Traditionally, CDRs have been used by air transport companies that have signed a Memorandum of Agreement with the local air traffic control facility. General aviation customers who wish to participate in

the program may not enter CDR Capable in the remarks section of their flight plan.

e. When CDR Capable is entered into the remarks section of the flight plan, the general aviation customer communicates to ATC the ability to decode the current CDR into a flight plan route and the willingness to fly a different route than that which was filed.

4-4-6. Special VFR Clearances

a. An ATC clearance must be obtained prior to operating within a Class B, Class C, Class D, or Class E surface area when the weather is less than that required for VFR flight. A VFR pilot may request and be given a clearance to enter, leave, or operate within most Class D and Class E surface areas and some Class B and Class C surface areas in special VFR conditions, traffic permitting, and providing such flight will not delay IFR operations. All special VFR flights must remain clear of clouds. The visibility requirements for special VFR aircraft other than helicopters are:

1. At least 1 statute mile flight visibility for operations within Class B, Class C, Class D, and Class E surface areas.

2. At least 1 statute mile ground visibility if taking off or landing. If ground visibility is not reported at that airport, the flight visibility must be at least 1 statute mile.

3. The restrictions in subparagraphs 1 and 2 do not apply to helicopters. Helicopters must remain clear of clouds and may operate in Class B, Class C, Class D, and Class E surface areas with less than 1 statute mile visibility.

b. When a controlled area is located within the Class B, Class C, or Class D surface area, requests for clearances should be to the tower. In a Class E surface area, a clearance may be obtained from the nearest tower, FSS, or center.

c. It is not necessary to file a complete flight plan with the request for clearance, but pilots should state their intentions in sufficient detail to permit ATC to fit their flight into the traffic flow. The clearance will not contain a specific altitude as the pilot must remain clear of clouds. The controller may require the pilot to fly at or below a certain altitude due to other traffic, but the altitude specified will permit flight at or above the minimum safe altitude. In addition, at radar

locations flights may be vectored if necessary for control purposes or on pilot request

NOTE—

The pilot is responsible for obstacle or terrain clearance.

REFERENCE—

14 CFR Section 91.119, Minimum safe altitudes: General.

d. Special VFR clearances are effective within Class B Class C Class D and Class E surface areas only. ATC does not provide separation after an aircraft leaves the Class B Class C Class D or Class E surface area on a special VFR clearance.

e. Special VFR operations by fixed-wing aircraft are prohibited in some Class B and Class C surface areas due to the volume of IFR traffic. A list of these Class B and Class C surface areas is contained in 14 CFR Part 91 Appendix D Section 3. They are also depicted on sectional aeronautical charts.

f. ATC provides separation between Special VFR flights and between these flights and other IFR flights.

g. Special VFR operations by fixed-wing aircraft are prohibited between sunset and sunrise unless the pilot is instrument rated and the aircraft is equipped for IFR flight.

h. Pilots arriving or departing an uncontrolled airport that has automated weather broadcast capability ASOS/AWSS/AWOS should monitor the broadcast frequency, advise the controller that they have the one-minute weather, and state intentions prior to operating within the Class B Class C Class D or Class E surface areas.

REFERENCE—

Pilot/Controller Glossary Term— One-minute Weather.

4-4-7. Pilot Responsibility upon Clearance Issuance

a. Record ATC clearance. When conducting an IFR operation, make a written record of your clearance. The specified conditions, which are a part of your air traffic clearance, may be somewhat different from those included in your flight plan. Additionally, ATC may find it necessary to add conditions, such as particular departure route. The very fact that ATC specifies different or additional conditions means that other aircraft are involved in the traffic situation.

b. ATC Clearance/Instruction Readback.

Pilots of airborne aircraft should read back *those parts* of ATC clearances and instructions containing altitude assignments, vectors, or runway assignments as a means of mutual verification. The read back of the numbers serves as a double check between pilots and controllers and reduces the kinds of communications errors that occur when a number is either misheard or is incorrect.

1. Include the aircraft identification in all readbacks and acknowledgments. This aids controllers in determining that the correct aircraft received the clearance or instruction. The requirement to include aircraft identification in all readbacks and acknowledgments becomes more important as frequency congestion increases and when aircraft with similar call signs are on the same frequency.

EXAMPLE—

“Climbing to Flight Level three three zero, United Twelve” or “November Five Charlie Tango, roger, cleared to land runway nine left.”

2. Read back altitudes, altitude restrictions, and vectors in the same sequence as they are given in the clearance or instruction.

3. Altitudes contained in charted procedures, such as DPs, instrument approaches, etc., should not be read back unless they are specifically stated by the controller.

4. Initial read back of a taxi, departure, or landing clearance should include the runway assignment, including left, right, center, etc., if applicable.

c. It is the responsibility of the pilot to accept or refuse the clearance issued.

4-4-8. IFR Clearance VFR-on-top

a. A pilot on an IFR flight plan operating in VFR weather conditions may request VFR-on-top in lieu of an assigned altitude. This permits a pilot to select an altitude or flight level of their choice, subject to any ATC restrictions.

b. Pilots desiring to climb through a cloud, haze, smoke, or other meteorological formation and then either cancel their IFR flight plan or operate VFR on top may request a climb to VFR on top. The ATC authorization must contain either a top report or a statement that no top report is available, and a request to report reaching VFR on top. Additionally, the ATC authorization may contain a clearance limit.

routing and an alternative clearance if VFR-on-top is not reached by a specified altitude

c. A pilot on an IFR flight plan operating in VFR conditions may request to climb/descend in VFR conditions

d. ATC may not authorize VFR-on-top/VFR conditions operations unless the pilot requests the VFR operation or a clearance to operate in VFR conditions will result in noise abatement benefits

here part of the IFR departure route does not conform to an FAA approved noise abatement route or altitude

e. When operating in VFR conditions with an ATC authorization to maintain VFR-on-top/maintain VFR conditions pilots on IFR flight plans must

1. Fly at the appropriate VFR altitude as prescribed in 14 CFR Section 91.159

2. Comply with the VFR visibility and distance from cloud criteria in 14 CFR Section 91.155 Basic VFR Weather Minimums

3. Comply with instrument flight rules that are applicable to this flight i.e. minimum IFR altitudes position reporting radio communications course to be flown adherence to ATC clearance etc

NOTE—

Pilots should advise ATC prior to any altitude change to ensure the exchange of accurate traffic information.

f. ATC authorization to maintain VFR-on-top is not intended to restrict pilots so that they must operate only *above* an obscuring meteorological formation layer. Instead it permits operation above below between layers or in areas where there is no meteorological obscuration. It is imperative however that pilots understand that clearance to operate VFR-on-top/VFR conditions does not imply cancellation of the IFR flight plan

g. Pilots operating VFR-on-top/VFR conditions may receive traffic information from ATC on other pertinent IFR or VFR aircraft. However aircraft operating in Class B airspace/TRSAs must be separated as required by FAA Order JO 7110.65 Air Traffic Control

NOTE—

When operating in VFR weather conditions, it is the pilot's responsibility to be vigilant so as to see-and-avoid other aircraft.

h. ATC will not authorize VFR or VFR-on-top operations in Class A airspace

REFERENCE—

AIM, Class A Airspace, Paragraph 3-2-2

4-4-9. VFR/IFR Flights

A pilot departing VFR either intending to or needing to obtain an IFR clearance en route must be aware of the position of the aircraft and the relative terrain/obstructions. When accepting a clearance below the MEA/MIA/MVA/OROCA pilots are responsible for their own terrain/obstruction clearance until reaching the MEA/MIA/MVA/OROCA. If pilots are unable to maintain terrain/obstruction clearance the controller should be advised and pilots should state their intentions

NOTE—

OROCA is an off-route altitude which provides obstruction clearance with a 1,000 foot buffer in nonmountainous terrain areas and a 2,000 foot buffer in designated mountainous areas within the U.S. This altitude may not provide signal coverage from ground-based navigational aids, air traffic control radar, or communications coverage.

4-4-10. Adherence to Clearance

a. When air traffic clearance has been obtained under either visual or instrument flight rules the pilot-in-command of the aircraft must not deviate from the provisions thereof unless an amended clearance is obtained. When ATC issues a clearance or instruction pilots are expected to execute its provisions upon receipt. ATC in certain situations

will include the word IMMEDIATELY in a clearance or instruction to impress urgency of an imminent situation and expeditious compliance by the pilot is expected and necessary for safety. The addition of a VFR or other restriction i.e. climb or descent point or time crossing altitude etc does not authorize a pilot to deviate from the route of flight or any other provision of the ATC clearance

b. When a heading is assigned or a turn is requested by ATC pilots are expected to promptly initiate the turn to complete the turn and maintain the new heading unless issued additional instructions

c. The term AT PILOT'S DISCRETION included in the altitude information of an ATC clearance means that ATC has offered the pilot the option to start climb or descent when the pilot wishes

is authorized to conduct the climb or descent at any rate and to temporarily level off at any intermediate altitude as desired. However, once the aircraft has vacated an altitude, it may not return to that altitude.

d. When ATC has not used the term **AT PILOT'S DISCRETION**, nor imposed any climb or descent restrictions, pilots should initiate climb or descent promptly on acknowledgement of the clearance. Descend or climb at an optimum rate consistent with the operating characteristics of the aircraft to 1,000 feet above or below the assigned altitude and then attempt to descend or climb at a rate of between 500 and 1,500 fpm until the assigned altitude is reached. If at anytime the pilot is unable to climb or descend at a rate of at least 500 feet a minute, advise ATC. If it is necessary to level off at an intermediate altitude during climb or descent, advise ATC, except when leveling off at 10,000 feet MSL on descent or 2,500 feet above airport elevation prior to entering a Class C or Class D surface area when required for speed reduction.

REFERENCE—
14 CFR Section 91.117.

NOTE—
Leveling off at 10,000 feet MSL on descent or 2,500 feet above airport elevation (prior to entering a Class C or Class D surface area) to comply with 14 CFR Section 91.117 airspeed restrictions is commonplace. Controllers anticipate this action and plan accordingly. Leveling off at any other time on climb or descent may seriously affect air traffic handling by ATC. Consequently, it is imperative that pilots make every effort to fulfill the above expected actions to aid ATC in safely handling and expediting traffic.

e. If the altitude information of an ATC DESCENT clearance includes a provision to **CROSS** fix AT or AT OR ABOVE/BELOW altitude, the manner in which the descent is executed to comply with the crossing altitude is at the pilot's discretion. This authorization to descend at pilot's discretion is only applicable to that portion of the flight to which the crossing altitude restriction applies and the pilot is expected to comply with the crossing altitude as a provision of the clearance. Any other clearance in which pilot execution is optional will so state **AT PILOT'S DISCRETION**.

EXAMPLE—
1. *“United Four Seventeen, descend and maintain six thousand.”*

NOTE—

1. *The pilot is expected to commence descent upon receipt of the clearance and to descend at the suggested rates until reaching the assigned altitude of 6,000 feet.*

EXAMPLE—

2. *“United Four Seventeen, descend at pilot's discretion, maintain six thousand.”*

NOTE—

2. *The pilot is authorized to conduct descent within the context of the term at pilot's discretion as described above.*

EXAMPLE—

3. *“United Four Seventeen, cross Lakeview V-O-R at or above Flight Level two zero zero, descend and maintain six thousand.”*

NOTE—

3. *The pilot is authorized to conduct descent at pilot's discretion until reaching Lakeview VOR and must comply with the clearance provision to cross the Lakeview VOR at or above FL 200. After passing Lakeview VOR, the pilot is expected to descend at the suggested rates until reaching the assigned altitude of 6,000 feet.*

EXAMPLE—

4. *“United Four Seventeen, cross Lakeview V-O-R at six thousand, maintain six thousand.”*

NOTE—

4. *The pilot is authorized to conduct descent at pilot's discretion, however, must comply with the clearance provision to cross the Lakeview VOR at 6,000 feet.*

EXAMPLE—

5. *“United Four Seventeen, descend now to Flight Level two seven zero, cross Lakeview V-O-R at or below one zero thousand, descend and maintain six thousand.”*

NOTE—

5. *The pilot is expected to promptly execute and complete descent to FL 270 upon receipt of the clearance. After reaching FL 270 the pilot is authorized to descend “at pilot's discretion” until reaching Lakeview VOR. The pilot must comply with the clearance provision to cross Lakeview VOR at or below 10,000 feet. After Lakeview VOR the pilot is expected to descend at the suggested rates until reaching 6,000 feet.*

EXAMPLE—

6. *“United Three Ten, descend now and maintain Flight Level two four zero, pilot's discretion after reaching Flight Level two eight zero.”*

NOTE—

6. *The pilot is expected to commence descent upon receipt of the clearance and to descend at the suggested rates until reaching FL 280. At that point, the pilot is authorized to continue descent to FL 240 within the context of the term “at pilot's discretion” as described above.*

f. In case emergency authority is used to deviate from provisions of an ATC clearance, the pilot-in-

command must notify ATC as soon as possible and obtain an amended clearance. In an emergency situation which does not result in a deviation from the rules prescribed in 14 CFR Part 91 but which requires ATC to give priority to an aircraft, the pilot of such aircraft must, when requested by ATC, make a report within 48 hours of such emergency situation to the manager of that ATC facility.

g. The guiding principle is that the last ATC clearance has precedence over the previous ATC clearance. When the route or altitude in a previously issued clearance is amended, the controller will restate applicable altitude restrictions. If altitude to maintain is changed or restated, whether prior to departure or while airborne, and previously issued altitude restrictions are omitted, those altitude restrictions are canceled, including departure procedures and STAR altitude restrictions.

EXAMPLE—

1. A departure flight receives a clearance to destination airport to maintain FL 290. The clearance incorporates a DP which has certain altitude crossing restrictions. Shortly after takeoff, the flight receives a new clearance changing the maintaining FL from 290 to 250. If the altitude restrictions are still applicable, the controller restates them.

2. A departing aircraft is cleared to cross Fluky Intersection at or above 3,000 feet, Gordonville VOR at or above 12,000 feet, maintain FL 200. Shortly after departure, the altitude to be maintained is changed to FL 240. If the altitude restrictions are still applicable, the controller issues an amended clearance as follows: “cross Fluky Intersection at or above three thousand, cross Gordonville V–O–R at or above one two thousand, maintain Flight Level two four zero.”

3. An arriving aircraft is cleared to the destination airport via V45 Delta VOR direct; the aircraft is cleared to cross Delta VOR at 10,000 feet, and then to maintain 6,000 feet. Prior to Delta VOR, the controller issues an amended clearance as follows: “turn right heading one eight zero for vector to runway three six I–L–S approach, maintain six thousand.”

NOTE—

Because the altitude restriction “cross Delta V–O–R at 10,000 feet” was omitted from the amended clearance, it is no longer in effect.

h. Pilots of turbojet aircraft equipped with afterburner engines should advise ATC prior to takeoff if they intend to use afterburning during their climb to the en route altitude. Often, the controller

may be able to plan traffic to accommodate a high performance climb and allow the aircraft to climb to the planned altitude without restriction.

i. If an expedite climb or descent clearance is issued by ATC and the altitude to maintain is subsequently changed or restated without an expedite instruction, the expedite instruction is canceled. Expedite climb/descent normally indicates to the pilot that the approximate best rate of climb/descent should be used without requiring an exceptional change in aircraft handling characteristics. Normally, controllers will inform pilots of the reason for an instruction to expedite.

4-4-11. IFR Separation Standards

a. ATC effects separation of aircraft vertically by assigning different altitudes, longitudinally by providing an interval expressed in time or distance between aircraft on the same converging or crossing courses, and laterally by assigning different flight paths.

b. Separation will be provided between all aircraft operating on IFR flight plans except during that part of the flight outside Class B airspace or a TRSA being conducted on a VFR-on-top/VFR conditions clearance. Under these conditions, ATC may issue traffic advisories, but it is the sole responsibility of the pilot to be vigilant so as to see and avoid other aircraft.

c. When radar is employed in the separation of aircraft at the same altitude, a minimum of 3 miles separation is provided between aircraft operating within 40 miles of the radar antenna site and 5 miles between aircraft operating beyond 40 miles from the antenna site. These minima may be increased or decreased in certain specific situations.

NOTE—

Certain separation standards are increased in the terminal environment when CENRAP is being utilized.

4-4-12. Speed Adjustments

a. ATC will issue speed adjustments to pilots of radar-controlled aircraft to achieve or maintain required or desired spacing.

b. ATC will express all speed adjustments in terms of knots based on indicated airspeed (IAS) in 10 knot increments, except that at or above FL 240, speeds may be expressed in terms of Mach numbers in 0.01 increments. The use of Mach numbers is restricted to turbojet aircraft with Mach meters.

c. Pilots complying with speed adjustments are expected to maintain a speed within plus or minus 10 knots or 0.02 Mach number of the specified speed

d. When ATC assigns speed adjustments they will be in accordance with the following recommended minimums

1. To aircraft operating between FL 280 and 10,000 feet a speed not less than 250 knots or the equivalent Mach number

NOTE—

1. On a standard day the Mach numbers equivalent to 250 knots CAS (subject to minor variations) are:

FL 240–0.6

FL 250–0.61

FL 260–0.62

FL 270–0.64

FL 280–0.65

FL 290–0.66.

2. When an operational advantage will be realized, speeds lower than the recommended minima may be applied.

2. To arriving turbojet aircraft operating below 10,000 feet

(a) A speed not less than 210 knots except

(b) Within 20 flying miles of the airport of intended landing a speed not less than 170 knots

3. To arriving reciprocating engine or turboprop aircraft within 20 flying miles of the runway threshold of the airport of intended landing a speed not less than 150 knots

4. To departing aircraft

(a) Turbojet aircraft a speed not less than 230 knots

(b) Reciprocating engine aircraft a speed not less than 150 knots

e. When ATC combines a speed adjustment with a descent clearance the sequence of delivery with the word then between indicates the expected order of execution

EXAMPLE—

1. Descend and maintain (altitude); then, reduce speed to (speed).

2. Reduce speed to (speed); then, descend and maintain (altitude).

NOTE—

The maximum speeds below 10,000 feet as established in 14 CFR Section 91.117 still apply. If there is any doubt

concerning the manner in which such a clearance is to be executed, request clarification from ATC.

f. If ATC determines before an approach clearance is issued that it is no longer necessary to apply speed adjustment procedures they will

1. Advise the pilot to resume normal speed. Normal speed is used to terminate ATC assigned speed adjustments on segments where no published speed restrictions apply. It does not cancel published restrictions on upcoming procedures. This does not relieve the pilot of those speed restrictions which are applicable to 14 CFR Section 91.117

EXAMPLE—

(An aircraft is flying a SID with no published speed restrictions. ATC issues a speed adjustment and instructs the aircraft where the adjustment ends): “Maintain two two zero knots until BALTR then resume normal speed.”

NOTE—

The ATC assigned speed assignment of two two zero knots would apply until BALTR. The aircraft would then resume a normal operating speed while remaining in compliance with 14 CFR Section 91.117.

2. Instruct pilots to comply with speed restrictions when the aircraft is joining or resuming a charted procedure or route with published speed restrictions

EXAMPLE—

(ATC vectors an aircraft off of a SID to rejoin the procedure at a subsequent waypoint. When instructing the aircraft to resume the procedure, ATC also wants the aircraft to comply with the published procedure speed restrictions): “Resume the SALTY ONE departure. Comply with speed restrictions.”

CAUTION—

The phraseology “comply with restrictions” requires compliance with all altitude and/or speed restrictions depicted on the procedure.

3. Instruct the pilot to resume published speed. Resume published speed is issued to terminate a speed adjustment where speed restrictions are published on a charted procedure

NOTE—

When instructed to “comply with speed restrictions” or to “resume published speed,” ATC anticipates pilots will begin adjusting speed the minimum distance necessary prior to a published speed restriction so as to cross the waypoint/fix at the published speed. Once at the published speed, ATC expects pilots will maintain the published speed until additional adjustment is required to comply with further published or ATC assigned speed restrictions

or as required to ensure compliance with 14 CFR Section 91.117.

EXAMPLE–

(An aircraft is flying a SID/STAR with published speed restrictions. ATC issues a speed adjustment and instructs the aircraft where the adjustment ends): “Maintain two two zero knots until BALTR then resume published speed.”

NOTE–

The ATC assigned speed assignment of two two zero knots would apply until BALTR. The aircraft would then comply with the published speed restrictions.

4. Advise the pilot to delete speed restrictions when either ATC assigned or published speed restrictions on a charted procedure are no longer required

EXAMPLE–

(An aircraft is flying a SID with published speed restrictions designed to prevent aircraft overtake on departure. ATC determines there is no conflicting traffic and deletes the speed restriction): “Delete speed restrictions.”

NOTE–

When deleting published restrictions, ATC must ensure obstacle clearance until aircraft are established on a route where no published restrictions apply. This does not relieve the pilot of those speed restrictions which are applicable to 14 CFR Section 91.117.

g. Approach clearances supersede any prior speed adjustment assignments and pilots are expected to make their own speed adjustments as necessary to complete the approach. However under certain circumstances it may be necessary for ATC to issue further speed adjustments after approach clearance is issued to maintain separation between successive arrivals. Under such circumstances previously issued speed adjustments will be restated if that speed is to be maintained or additional speed adjustments are requested. Speed adjustments should not be assigned inside the final approach fix or a point 5 miles from the runway whichever is closer to the runway.

h. The pilots retain the prerogative of rejecting the application of speed adjustment by ATC if the minimum safe airspeed for any particular operation is greater than the speed adjustment.

NOTE–

In such cases, pilots are expected to advise ATC of the speed that will be used.

i. Pilots are reminded that they are responsible for rejecting the application of speed adjustment by ATC

if in their opinion it will cause them to exceed the maximum indicated airspeed prescribed by 14 CFR Section 91.117 a c and d. *IN SUCH CASES, THE PILOT IS EXPECTED TO SO INFORM ATC.* Pilots operating at or above 10 000 feet MSL who are issued speed adjustments which exceed 250 knots IAS and are subsequently cleared below 10 000 feet MSL are expected to comply with 14 CFR Section 91.117 a

j. Speed restrictions of 250 knots do not apply to U.S. registered aircraft operating beyond 12 nautical miles from the coastline within the U.S. Flight Information Region in Class E airspace below 10 000 feet MSL. However in airspace underlying a Class B airspace area designated for an airport or in a VFR corridor designated through such as a Class B airspace area pilots are expected to comply with the 200 knot speed limit specified in 14 CFR Section 91.117 c

k. For operations in a Class C and Class D surface area ATC is authorized to request or approve a speed greater than the maximum indicated airspeeds prescribed for operation within that airspace 14 CFR Section 91.117 b

NOTE–

Pilots are expected to comply with the maximum speed of 200 knots when operating beneath Class B airspace or in a Class B VFR corridor (14 CFR Section 91.117(c) and (d)).

l. When in communications with the ARTCC or approach control facility pilots should as a good operating practice state any ATC assigned speed restriction on initial radio contact associated with an ATC communications frequency change

4-4-13. Runway Separation

To ensure controllers establish the sequence of arriving and departing aircraft by requiring them to adjust flight or ground operation as necessary to achieve proper spacing. They may HOLD an aircraft short of the runway to achieve spacing between it and an arriving aircraft. The controller may instruct a pilot to E TEND DOWNWIND in order to establish spacing from an arriving or departing aircraft. At times a clearance may include the word IMMEDIATE. For example CLEARED FOR IMMEDIATE TAKEOFF. In such cases IMMEDIATE is used for purposes of *air traffic separation*. It is up to the pilot to refuse the clearance if in the pilot's

opinion compliance could adversely affect the operation

REFERENCE—

AIM, Gate Holding due to Departure Delays, Paragraph 4–3–15

4–4–14. Visual Separation

a. Visual separation is a means employed by ATC to separate aircraft in terminal areas and en route airspace in the NAS. There are two methods employed to effect this separation:

1. The tower controller sees the aircraft involved and issues instructions as necessary to ensure that the aircraft avoid each other.

2. A pilot sees the other aircraft involved and upon instructions from the controller provides separation by maneuvering the aircraft to avoid it. When pilots accept responsibility to maintain visual separation, they must maintain constant visual surveillance and not pass the other aircraft until it is no longer a factor.

NOTE—

Traffic is no longer a factor when during approach phase the other aircraft is in the landing phase of flight or executes a missed approach; and during departure or en route, when the other aircraft turns away or is on a diverging course.

b. A pilot's acceptance of instructions to follow another aircraft or provide visual separation from it is an acknowledgment that the pilot will maneuver the aircraft as necessary to avoid the other aircraft or to maintain in-trail separation. In operations conducted behind heavy jet aircraft, it is also an acknowledgment that the pilot accepts the responsibility for wake turbulence separation.

NOTE—

When a pilot has been told to follow another aircraft or to provide visual separation from it, the pilot should promptly notify the controller if visual contact with the other aircraft is lost or cannot be maintained or if the pilot cannot accept the responsibility for the separation for any reason.

c. Scanning the sky for other aircraft is a key factor in collision avoidance. Pilots and copilots or the right seat passenger should continuously scan to cover all areas of the sky visible from the cockpit. Pilots must develop an effective scanning technique which maximizes one's visual capabilities. Spotting a potential collision threat increases directly as more time is spent looking outside the aircraft. One must use timesharing techniques to effectively scan the

surrounding airspace while monitoring instruments as well.

d. Since the eye can focus only on a narrow viewing area, effective scanning is accomplished with a series of short, regularly spaced eye movements that bring successive areas of the sky into the central visual field. Each movement should not exceed ten degrees, and each area should be observed for at least one second to enable collision detection. Although many pilots seem to prefer the method of horizontal back-and-forth scanning, every pilot should develop a scanning pattern that is not only comfortable but assures optimum effectiveness. Pilots should remember, however, that they have a regulatory responsibility. 14 CFR Section 91.113(a) states that pilots must see and avoid other aircraft when weather conditions permit.

4–4–15. Use of Visual Clearing Procedures

a. **Before Takeoff.** Prior to taxiing onto a runway or landing area in preparation for takeoff, pilots should scan the approach areas for possible landing traffic and execute the appropriate clearing maneuvers to provide them a clear view of the approach areas.

b. **Climbs and Descents.** During climbs and descents in flight conditions which permit visual detection of other traffic, pilots should execute gentle banks left and right at a frequency which permits continuous visual scanning of the airspace about them.

c. **Straight and Level.** Sustained periods of straight and level flight in conditions which permit visual detection of other traffic should be broken at intervals with appropriate clearing procedures to provide effective visual scanning.

d. **Traffic Pattern.** Entries into traffic patterns while descending create specific collision hazards and should be avoided.

e. **Traffic at VOR Sites.** All operators should emphasize the need for sustained vigilance in the vicinity of VORs and airway intersections due to the convergence of traffic.

f. **Training Operations.** Operators of pilot training programs are urged to adopt the following practices:

1. Pilots undergoing flight instruction at all levels should be requested to verbalize clearing

procedures call out clear left right above or below to instill and sustain the habit of vigilance during maneuvering

2. High-wing airplane. Momentarily raise the wing in the direction of the intended turn and look

3. Low-wing airplane. Momentarily lower the wing in the direction of the intended turn and look

4. Appropriate clearing procedures should precede the execution of all turns including chandelles lazy eights stalls slow flight climbs straight and level spins and other combination maneuvers

4-4-16. Traffic Alert and Collision Avoidance System (TCAS I & II)

a. TCAS I provides proximity warning only to assist the pilot in the visual acquisition of intruder aircraft. No recommended avoidance maneuvers are provided nor authorized as a direct result of a TCAS I warning. It is intended for use by smaller commuter aircraft holding 10 to 30 passenger seats and general aviation aircraft.

b. TCAS II provides traffic advisories (TAs) and resolution advisories (RAs). Resolution advisories provide recommended maneuvers in a vertical direction (climb or descend only) to avoid conflicting traffic. Airline aircraft and larger commuter and business aircraft holding 31 passenger seats or more use TCAS II equipment.

1. Each pilot who deviates from an ATC clearance in response to a TCAS II RA must notify ATC of that deviation as soon as practicable and expeditiously return to the current ATC clearance when the traffic conflict is resolved.

2. Deviations from rules, policies, or clearances should be kept to the minimum necessary to satisfy a TCAS II RA.

3. The serving IFR air traffic facility is not responsible to provide approved standard IFR

separation to an aircraft after a TCAS II RA maneuver until one of the following conditions exists:

(a) The aircraft has returned to its assigned altitude and course.

(b) Alternate ATC instructions have been issued.

c. TCAS does not alter or diminish the pilot's basic authority and responsibility to ensure safe flight. Since TCAS does not respond to aircraft which are not transponder equipped or aircraft with a transponder failure, TCAS alone does not ensure safe separation in every case.

d. At this time, no air traffic service nor handling is predicated on the availability of TCAS equipment in the aircraft.

4-4-17. Traffic Information Service (TIS)

a. TIS provides proximity warning only to assist the pilot in the visual acquisition of intruder aircraft. No recommended avoidance maneuvers are provided nor authorized as a direct result of a TIS intruder display or TIS alert. It is intended for use by aircraft in which TCAS is not required.

b. TIS does not alter or diminish the pilot's basic authority and responsibility to ensure safe flight. Since TIS does not respond to aircraft which are not transponder equipped, aircraft with a transponder failure, or aircraft out of radar coverage, TIS alone does not ensure safe separation in every case.

c. At this time, no air traffic service nor handling is predicated on the availability of TIS equipment in the aircraft.

d. Presently, no air traffic services or handling is predicated on the availability of an ADS-B cockpit display. A traffic-in-sight reply to ATC must be based on seeing an aircraft out-the-window NOT on the cockpit display.

Section 5. Surveillance Systems

4-5-1. Radar

a. Capabilities


1. Radar is a method whereby radio waves are transmitted into the air and are then received when they have been reflected by an object in the path of the beam. Range is determined by measuring the time it takes at the speed of light for the radio wave to go out to the object and then return to the receiving antenna. The direction of a detected object from a radar site is determined by the position of the rotating antenna when the reflected portion of the radio wave is received.

2. More reliable maintenance and improved equipment have reduced radar system failures to a negligible factor. Most facilities actually have some components duplicated, one operating and another which immediately takes over when a malfunction occurs to the primary component.

b. Limitations

1. It is very important for the aviation community to recognize the fact that there are limitations to radar service and that ATC controllers may not always be able to issue traffic advisories concerning aircraft which are not under ATC control and cannot be seen on radar. See FIG 4-5-1.

FIG 4-5-1
Limitations to Radar Service

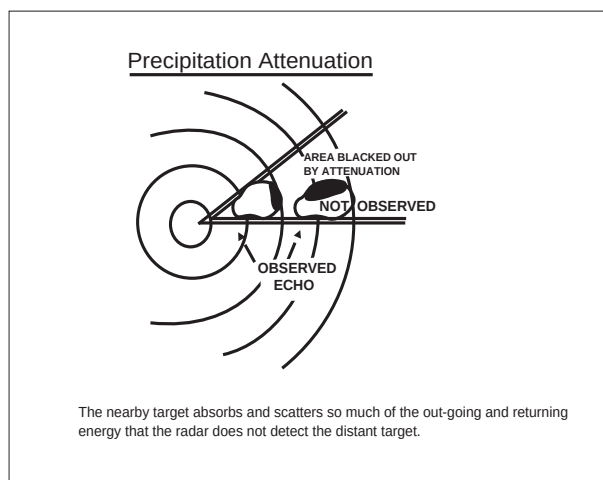

(a) The characteristics of radio waves are such that they normally travel in a continuous straight line unless they are

(1) Bent by abnormal atmospheric phenomena such as temperature inversions

(2) Reflected or attenuated by dense objects such as heavy clouds, precipitation, ground obstacles, mountains, etc. or

(3) Screened by high terrain features

(b) The bending of radar pulses, often called anomalous propagation or ducting, may cause many extraneous blips to appear on the radar operator's display if the beam has been bent toward the ground or may decrease the detection range if the wave is bent upward. It is difficult to solve the effects of anomalous propagation, but using beacon radar and electronically eliminating stationary and slow-moving targets by a method called moving target indicator (MTI) usually negate the problem.

(c) Radar energy that strikes dense objects will be reflected and displayed on the operator's scope, thereby blocking out aircraft at the same range and greatly weakening or completely eliminating the display of targets at a greater range. Again, radar beacon and MTI are very effectively used to combat ground clutter and weather phenomena, and a method of circularly polarizing the radar beam will eliminate some weather returns. A negative characteristic of MTI is that an aircraft flying a speed that coincides with the canceling signal of the MTI, tangential or blind speed, may not be displayed to the radar controller.

(d) Relatively low-altitude aircraft will not be seen if they are screened by mountains or are below the radar beam due to earth curvature. The only solution to screening is the installation of strategically placed multiple radars, which has been done in some areas.

(e) There are several other factors which affect radar control. The amount of reflective surface of an aircraft will determine the size of the radar return. Therefore, a small light airplane or a sleek jet fighter will be more difficult to see on radar than a large commercial jet or military bomber. Here again, the use of radar beacon is invaluable if the aircraft is

equipped with an airborne transponder. All ARTCCs radars in the conterminous US and many airport surveillance radars have the capability to interrogate Mode C and display altitude information to the controller from appropriately equipped aircraft. However, there are a number of airport surveillance radars that don't have Mode C display capability and therefore altitude information must be obtained from the pilot.

(f) At some locations within the ATC en route environment, secondary-radar-only or no primary radar gap filler radar systems are used to give lower altitude radar coverage between two larger radar systems, each of which provides both primary and secondary radar coverage. In those geographical areas served by secondary-radar-only aircraft without transponders cannot be provided with radar service. Additionally, transponder equipped aircraft cannot be provided with radar advisories concerning primary targets and weather.

REFERENCE—

Pilot/Controller Glossary Term— Radar.

(g) The controller's ability to advise a pilot flying on instruments or in visual conditions of the aircraft's proximity to another aircraft will be limited if the unknown aircraft is not observed on radar, if no flight plan information is available, or if the volume of traffic and workload prevent issuing traffic information. The controller's first priority is given to establishing vertical, lateral, or longitudinal separation between aircraft flying IFR under the control of ATC.

c. FAA radar units operate continuously at the locations shown in the Airport/Facility Directory and their services are available to all pilots, both civil and military. Contact the associated FAA control tower or ARTCC on any frequency guarded for initial instructions, or in an emergency, any FAA facility for information on the nearest radar service.

4-5-2. Air Traffic Control Radar Beacon System (ATCRBS)

a. The ATCRBS, sometimes referred to as secondary surveillance radar, consists of three main components:

1. Interrogator. Primary radar relies on a signal being transmitted from the radar antenna site and for this signal to be reflected or bounced back

from an object, such as an aircraft. This reflected signal is then displayed as a target on the controller's radarscope. In the ATCRBS, the Interrogator, a ground-based radar beacon transmitter-receiver, scans in synchronism with the primary radar and transmits discrete radio signals which repetitiously request all transponders on the mode being used to reply. The replies received are then mixed with the primary returns and both are displayed on the same radarscope.

2. Transponder. This airborne radar beacon transmitter-receiver automatically receives the signals from the interrogator and selectively replies with a specific pulse group code only to those interrogations being received on the mode to which it is set. These replies are independent of, and much stronger than, a primary radar return.

3. Radarscope. The radarscope used by the controller displays returns from both the primary radar system and the ATCRBS. These returns, called targets, are what the controller refers to in the control and separation of traffic.

b. The job of identifying and maintaining identification of primary radar targets is a long and tedious task for the controller. Some of the advantages of ATCRBS over primary radar are:

1. Reinforcement of radar targets
2. Rapid target identification
3. Unique display of selected codes

c. A part of the ATCRBS ground equipment is the decoder. This equipment enables a controller to assign discrete transponder codes to each aircraft under his/her control. Normally, only one code will be assigned for the entire flight. Assignments are made by the ARTCC computer on the basis of the National Beacon Code Allocation Plan. The equipment is also designed to receive Mode C altitude information from the aircraft.

NOTE—


Refer to figures with explanatory legends for an illustration of the target symbology depicted on radar scopes in the NAS Stage A (en route), the ARTS III (terminal) Systems, and other nonautomated (broadband) radar systems. (See FIG 4-5-2 and FIG 4-5-3.)

d. It should be emphasized that aircraft transponders greatly improve the effectiveness of radar systems.

REFERENCE—

AIM, Transponder Operation, Paragraph 4-1-20

FIG 4-5-2
ARTS III Radar Scope With Alphanumeric Data

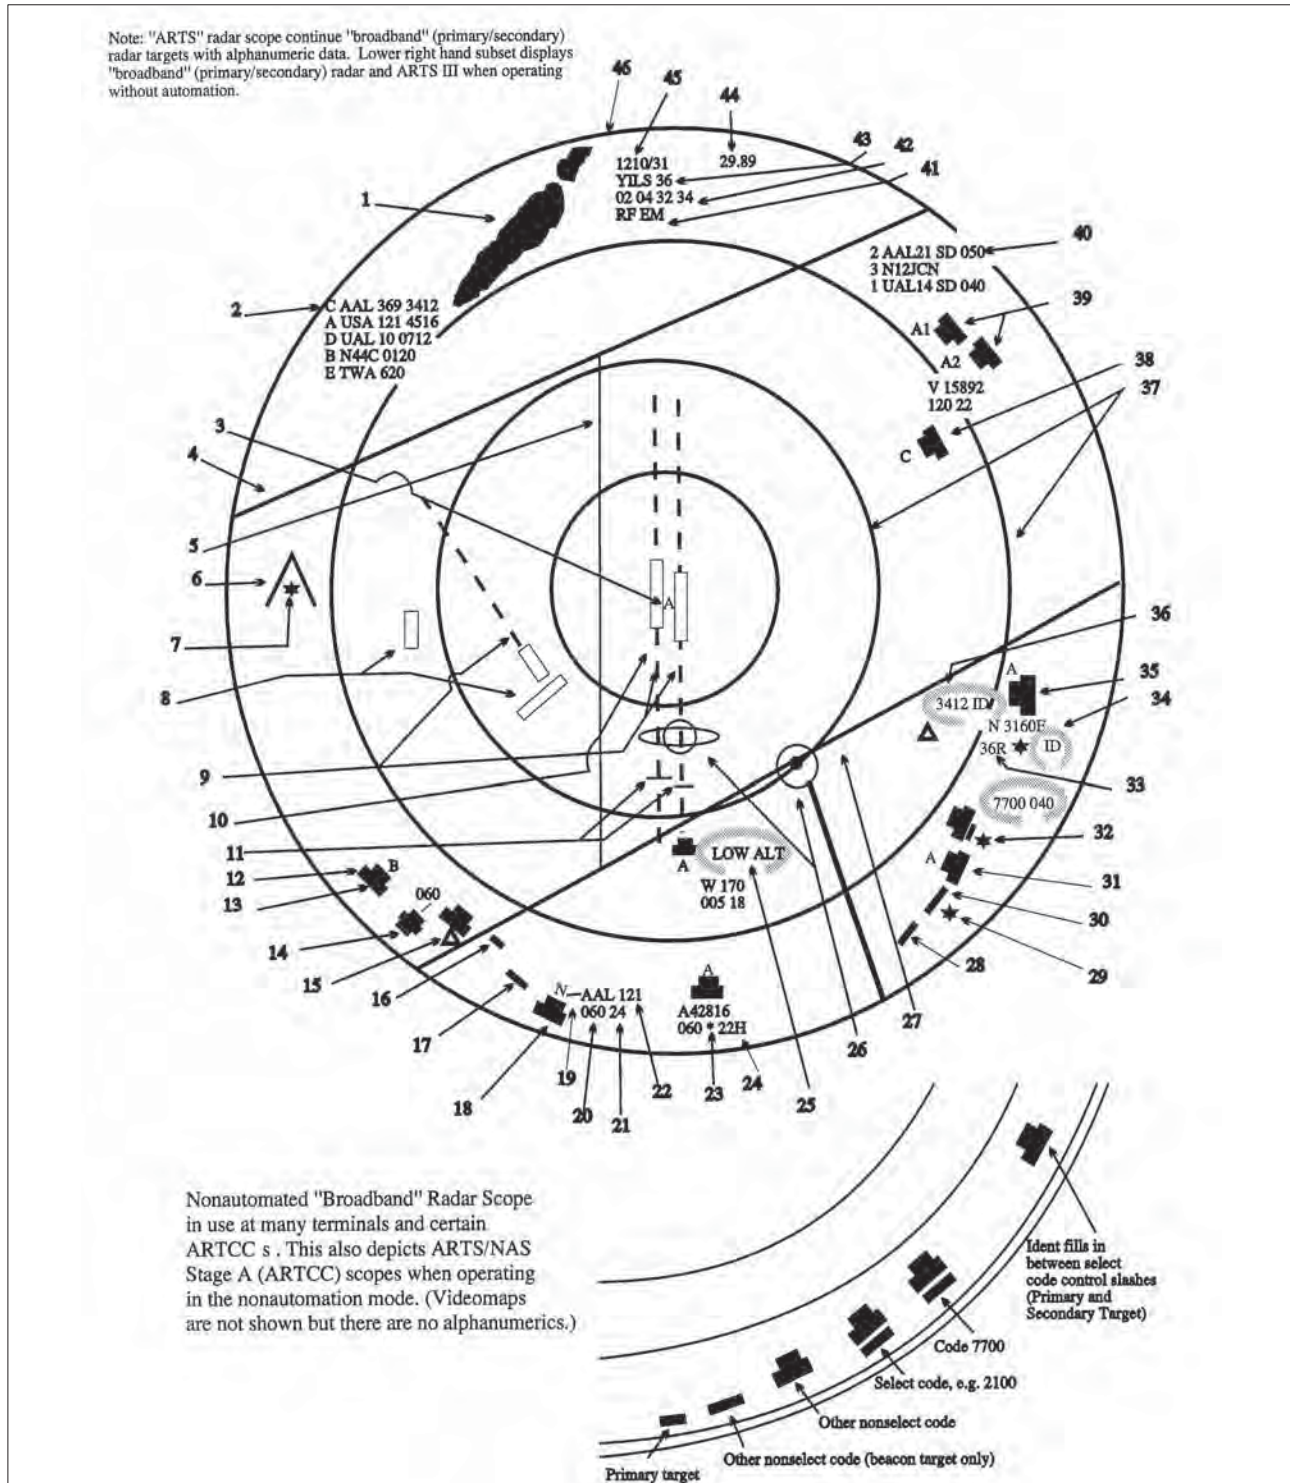

NOTE-

A number of radar terminals do not have ARTS equipment. Those facilities and certain ARTCCs outside the contiguous U.S. would have radar displays similar to the lower right hand subset. ARTS facilities and NAS Stage A ARTCCs, when operating in the nonautomation mode, would also have similar displays and certain services based on automation may not be available.

EXAMPLE–


1. Areas of precipitation (can be reduced by CP)
2. Arrival/departure tabular list
3. Trackball (control) position symbol (A)
4. Airway (lines are sometimes deleted in part)
5. Radar limit line for control
6. Obstruction (video map)
7. Primary radar returns of obstacles or terrain (can be removed by MTI)
8. Satellite airports
9. Runway centerlines (marks and spaces indicate miles)
10. Primary airport with parallel runways
11. Approach gates
12. Tracked target (primary and beacon target)
13. Control position symbol
14. Untracked target select code (monitored) with Mode C readout of 5,000'
15. Untracked target without Mode C
16. Primary target
17. Beacon target only (secondary radar) (transponder)
18. Primary and beacon target
19. Leader line
20. Altitude Mode C readout is 6,000'
(Note: readouts may not be displayed because of nonreceipt of beacon information, garbled beacon signals, and flight plan data which is displayed alternately with the altitude readout)
21. Ground speed readout is 240 knots
(Note: readouts may not be displayed because of a loss of beacon signal, a controller alert that a pilot was squawking emergency, radio failure, etc.)
22. Aircraft ID
23. Asterisk indicates a controller entry in Mode C block. In this case 5,000' is entered and "05" would alternate with Mode C readout.
24. Indicates heavy
25. "Low ALT" flashes to indicate when an aircraft's predicted descent places the aircraft in an unsafe proximity to terrain.
(Note: this feature does not function if the aircraft is not squawking Mode C. When a helicopter or aircraft is known to be operating below the lower safe limit, the "low ALT" can be changed to "inhibit" and flashing ceases.)
26. NAVAIDs
27. Airways
28. Primary target only
29. Nonmonitored. No Mode C (an asterisk would indicate nonmonitored with Mode C)
30. Beacon target only (secondary radar based on aircraft transponder)
31. Tracked target (primary and beacon target) control position A
32. Aircraft is squawking emergency Code 7700 and is nonmonitored, untracked, Mode C
33. Controller assigned runway 36 right alternates with Mode C readout
(Note: a three letter identifier could also indicate the arrival is at specific airport)
34. Ident flashes
35. Identing target blossoms
36. Untracked target identifying on a selected code
37. Range marks (10 and 15 miles) (can be changed/offset)
38. Aircraft controlled by center
39. Targets in suspend status
40. Coast/suspend list (aircraft holding, temporary loss of beacon/target, etc.)
41. Radio failure (emergency information)
42. Select beacon codes (being monitored)
43. General information (ATIS, runway, approach in use)
44. Altimeter setting
45. Time
46. System data area

FIG 4-5-3

NAS Stage A Controllers View Plan Display

This figure illustrates the controller's radar scope PVD when operating in the full automation RDP mode which is normally 20 hours per day

(When not in automation mode, the display is similar to the broadband mode shown in the ARTS III radar scope figure. Certain ARTCCs outside the contiguous U.S. also operate in "broadband" mode.)

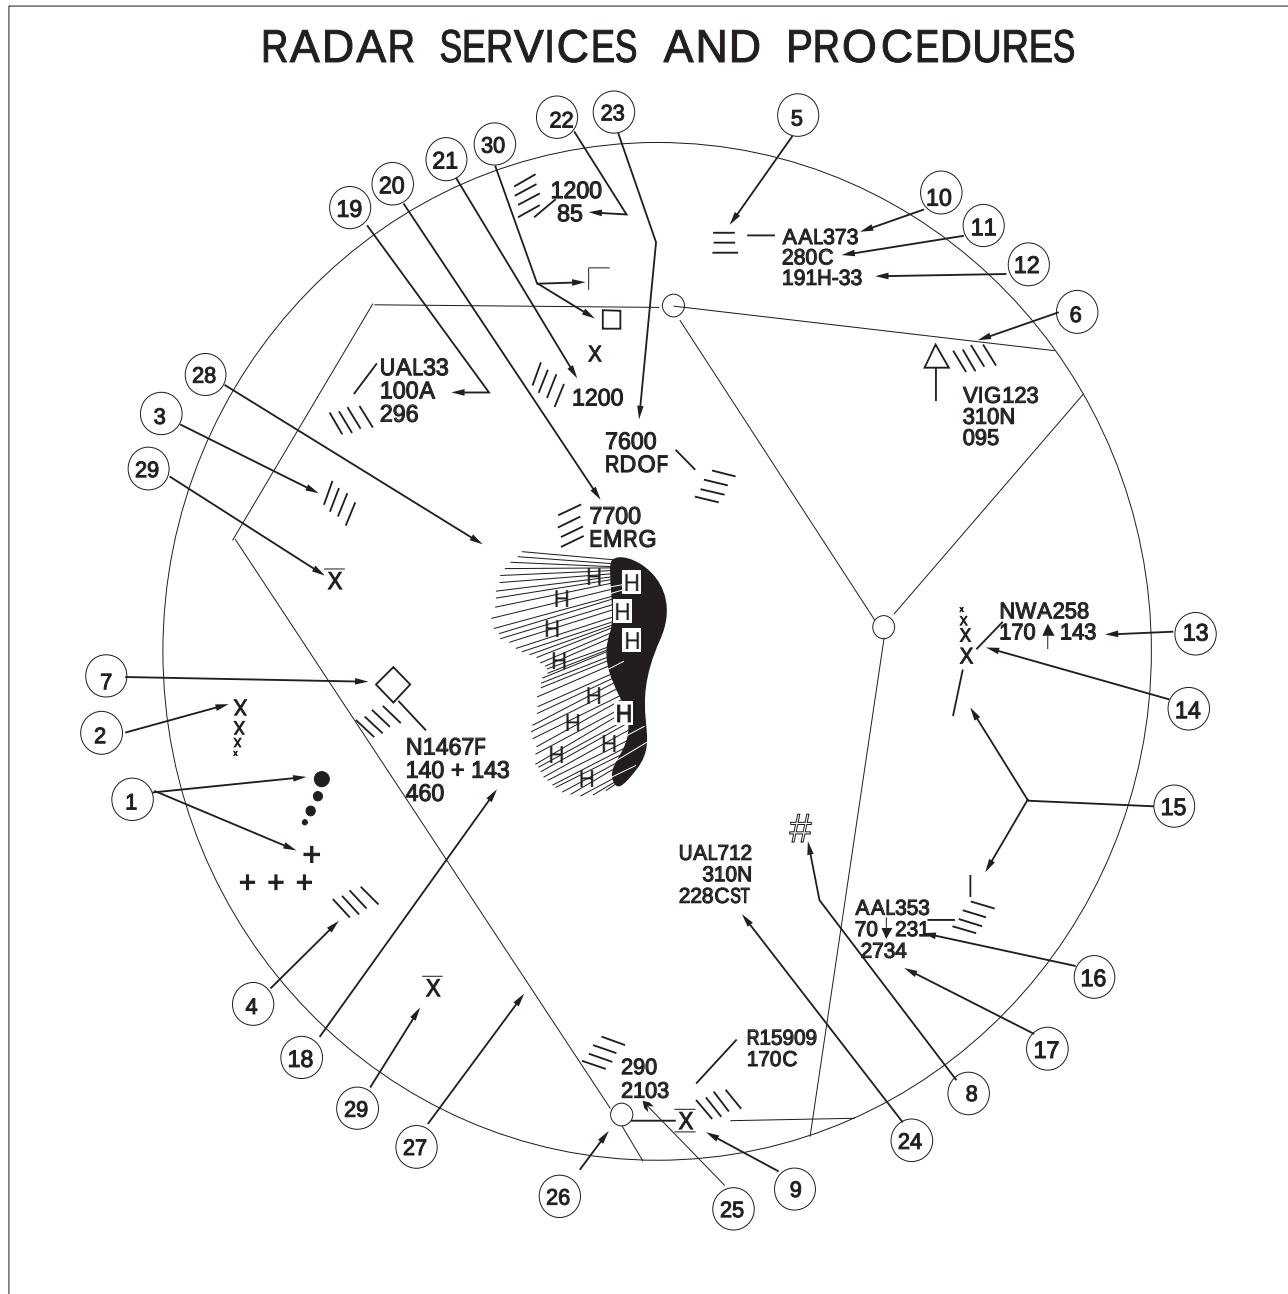

EXAMPLE–**Target symbols:**

1. Uncorrelated primary radar target ○ +
2. Correlated primary radar target ×
*See note below.
3. Uncorrelated beacon target /
4. Correlated beacon target \
5. Identifying beacon target ≡

*Note: in Number 2 correlated means the association of radar data with the computer projected track of an identified aircraft.

Position symbols:

6. Free track (no flight plan tracking) △
7. Flat track (flight plan tracking) ◇
8. Coast (beacon target lost) #
9. Present position hold ⊠

Data block information:

10. Aircraft ident
*See note below.
11. Assigned altitude FL 280, Mode C altitude same or within $\pm 200'$ of assigned altitude.
*See note below.
12. Computer ID #191, handoff is to sector 33
(0–33 would mean handoff accepted)
*See note below.
13. Assigned altitude 17,000', aircraft is climbing, Mode C readout was 14,300 when last beacon interrogation was received.
14. Leader line connecting target symbol and data block
15. Track velocity and direction vector line (projected ahead of target)

16. Assigned altitude 7,000, aircraft is descending, last Mode C readout (or last reported altitude) was 100' above FL 230

17. Transponder code shows in full data block only when different than assigned code

18. Aircraft is 300' above assigned altitude

19. Reported altitude (no Mode C readout) same as assigned. (An “n” would indicate no reported altitude.)

20. Transponder set on emergency Code 7700 (EMRG flashes to attract attention)

21. Transponder Code 1200 (VFR) with no Mode C

22. Code 1200 (VFR) with Mode C and last altitude readout

23. Transponder set on radio failure Code 7600 (RDOF flashes)

24. Computer ID #228, CST indicates target is in coast status

25. Assigned altitude FL 290, transponder code (these two items constitute a “limited data block”)

*Note: numbers 10, 11, and 12 constitute a “full data block”

Other symbols:

26. Navigational aid
27. Airway or jet route
28. Outline of weather returns based on primary radar. “H” represents areas of high density precipitation which might be thunderstorms. Radial lines indicated lower density precipitation.
29. Obstruction
30. Airports
Major: □
Small: ▤

4-5-3. Surveillance Radar

a. Surveillance radars are divided into two general categories: Airport Surveillance Radar (ASR) and Air Route Surveillance Radar (ARSR).

1. ASR is designed to provide relatively short-range coverage in the general vicinity of an airport and to serve as an expeditious means of handling terminal area traffic through observation of precise aircraft locations on a radarscope. The ASR can also be used as an instrument approach aid.

2. ARSR is a long-range radar system designed primarily to provide a display of aircraft locations over large areas.

3. Center Radar Automated Radar Terminal Systems (ARTS) Processing (CENRAP) was developed to provide an alternative to a nonradar environment at terminal facilities should an ASR fail or malfunction. CENRAP sends aircraft radar beacon target information to the ASR terminal facility equipped with ARTS. Procedures used for the separation of aircraft may increase under certain conditions when a facility is utilizing CENRAP because radar target information updates at a slower rate than the normal ASR radar. Radar services for VFR aircraft are also limited during CENRAP operations because of the additional workload required to provide services to IFR aircraft.

b. Surveillance radars scan through 360 degrees of azimuth and present target information on a radar display located in a tower or center. This information is used independently or in conjunction with other navigational aids in the control of air traffic.

4-5-4. Precision Approach Radar (PAR)

a. PAR is designed for use as a landing aid rather than an aid for sequencing and spacing aircraft. PAR equipment may be used as a primary landing aid. See Chapter 5, Air Traffic Procedures, for additional information, or it may be used to monitor other types of approaches. It is designed to display range, azimuth, and elevation information.

b. Two antennas are used in the PAR array: one scanning a vertical plane and the other scanning

horizontally. Since the range is limited to 10 miles, azimuth to 20 degrees, and elevation to 7 degrees, only the final approach area is covered. Each scope is divided into two parts. The upper half presents altitude and distance information, and the lower half presents azimuth and distance.

4-5-5. Airport Surface Detection Equipment – Model X (ASDE-X)

a. The Airport Surface Detection Equipment – Model X (ASDE-X) is a multi-sensor surface surveillance system the FAA is acquiring for airports in the United States. This system will provide high resolution, short-range, clutter-free surveillance information about aircraft and vehicles, both moving and fixed, located on or near the surface of the airport's runways and taxiways under all weather and visibility conditions. The system consists of:

1. **A Primary Radar System.** ASDE-X system coverage includes the airport surface and the airspace up to 200 feet above the surface. Typically located on the control tower or other strategic location on the airport, the Primary Radar antenna is able to detect and display aircraft that are not equipped with or have malfunctioning transponders.

2. **Interfaces.** ASDE-X contains an automation interface for flight identification via all automation platforms and interfaces with the terminal radar for position information.

3. **ASDE-X Automation.** A Multi-sensor Data Processor (MSDP) combines all sensor reports into a single target which is displayed to the air traffic controller.

4. **Air Traffic Control Tower Display.** A high resolution color monitor in the control tower cab provides controllers with a seamless picture of airport operations on the airport surface.

b. The combination of data collected from the multiple sensors ensures that the most accurate information about aircraft location is received in the tower, thereby increasing surface safety and efficiency.

c. The following facilities have been projected to receive ASDE–

TBL 4–5–1

STL	Lambert–St. Louis International
CLT	Charlotte Douglas International
SDF	Louisville International Standiford
DFW	Dallas/Ft. Worth International
ORD	Chicago O'Hare International
LA	Los Angeles International
ATL	Hartsfield Atlanta International
IAD	Washington Dulles International
SEA	Seattle–Tacoma International
MKE	General Mitchell International
MCO	Orlando International
PVD	Theodore Francis Green State
PH	Phoenix Sky Harbor International
MEM	Memphis International
RDU	Raleigh–Durham International
HOU	William P. Hobby Houston T
BDL	Bradley International
SJC	San Jose International
SAT	San Antonio International
SMF	Sacramento International
FLL	Ft. Lauderdale/Hollywood
HNL	Honolulu International – Hickam AFB
OAK	Metropolitan Oakland International
IND	Indianapolis International
TPA	Tampa International
BUR	Burbank–Glendale–Pasadena
CMH	Port Columbus International
MDW	Chicago Midway
COS	Colorado Springs Municipal
SNA	John Wayne – Orange County
ONT	Ontario International
AUS	Austin–Bergstrom International
RNO	Reno/Tahoe International
ABQ	Albuquerque International Sunport
SJU	San Juan International

4–5–6. Traffic Information Service (TIS)

a. Introduction

The Traffic Information Service (TIS) provides information to the cockpit via data link that is similar to VFR radar traffic advisories normally received over voice radio. Among the first FAA–provided data services, TIS is intended to improve the safety and efficiency of see and avoid flight through an automatic display that informs the pilot of nearby traffic and potential conflict situations. This traffic display is intended to assist the pilot in visual acquisition of these aircraft. TIS employs an enhanced capability of the terminal Mode S radar system which contains the surveillance data as well as the data link required to uplink this information to suitably–equipped aircraft known as a TIS client. TIS provides estimated position, altitude, altitude trend, and ground track information for up to 8 intruder aircraft within 7 NM horizontally, 3,500 and –3,000 feet vertically of the client aircraft (see FIG 4–5–4, TIS Proximity Coverage Volume). The range of a target reported at a distance greater than 7 NM only indicates that this target will be a threat within 34 seconds and does not display an precise distance. TIS will alert the pilot to aircraft under surveillance of the Mode S radar that are estimated to be within 34 seconds of potential collision regardless of distance or altitude. TIS surveillance data is derived from the same radar used by ATC; this data is uplinked to the client aircraft on each radar scan, nominally every 5 seconds.

b. Requirements

1. In order to use TIS, the client and any intruder aircraft must be equipped with the appropriate cockpit equipment and fly within the radar coverage of a Mode S radar capable of providing TIS. Typically, this will be within 55 NM of the sites depicted in FIG 4–5–5, Terminal Mode S Radar Sites. ATC communication is not a requirement to receive TIS, although it may be required by the particular airspace or flight operations in which TIS is being used.

FIG 4-5-4
TIS Proximity Coverage Volume

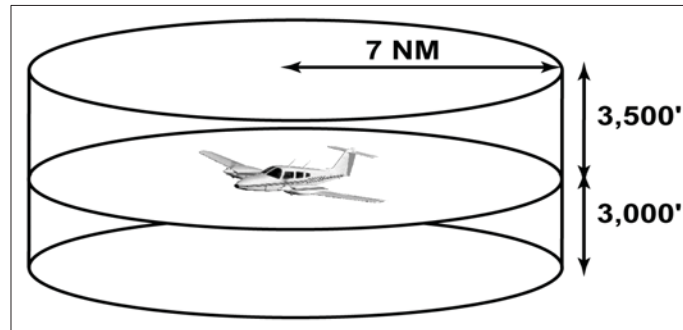


FIG 4-5-5
Terminal Mode S Radar Sites


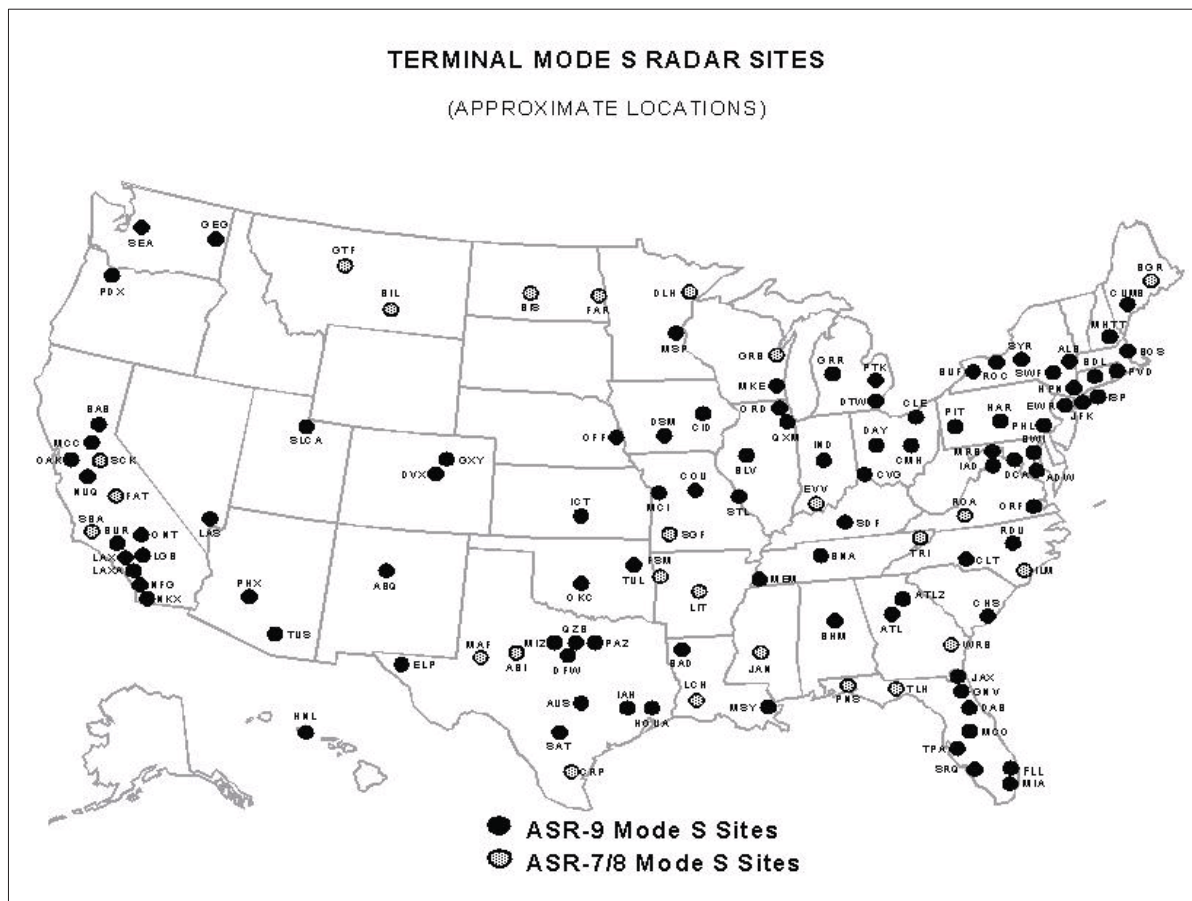


FIG 4-5-6
Traffic Information Service (TIS)
Avionics Block Diagram

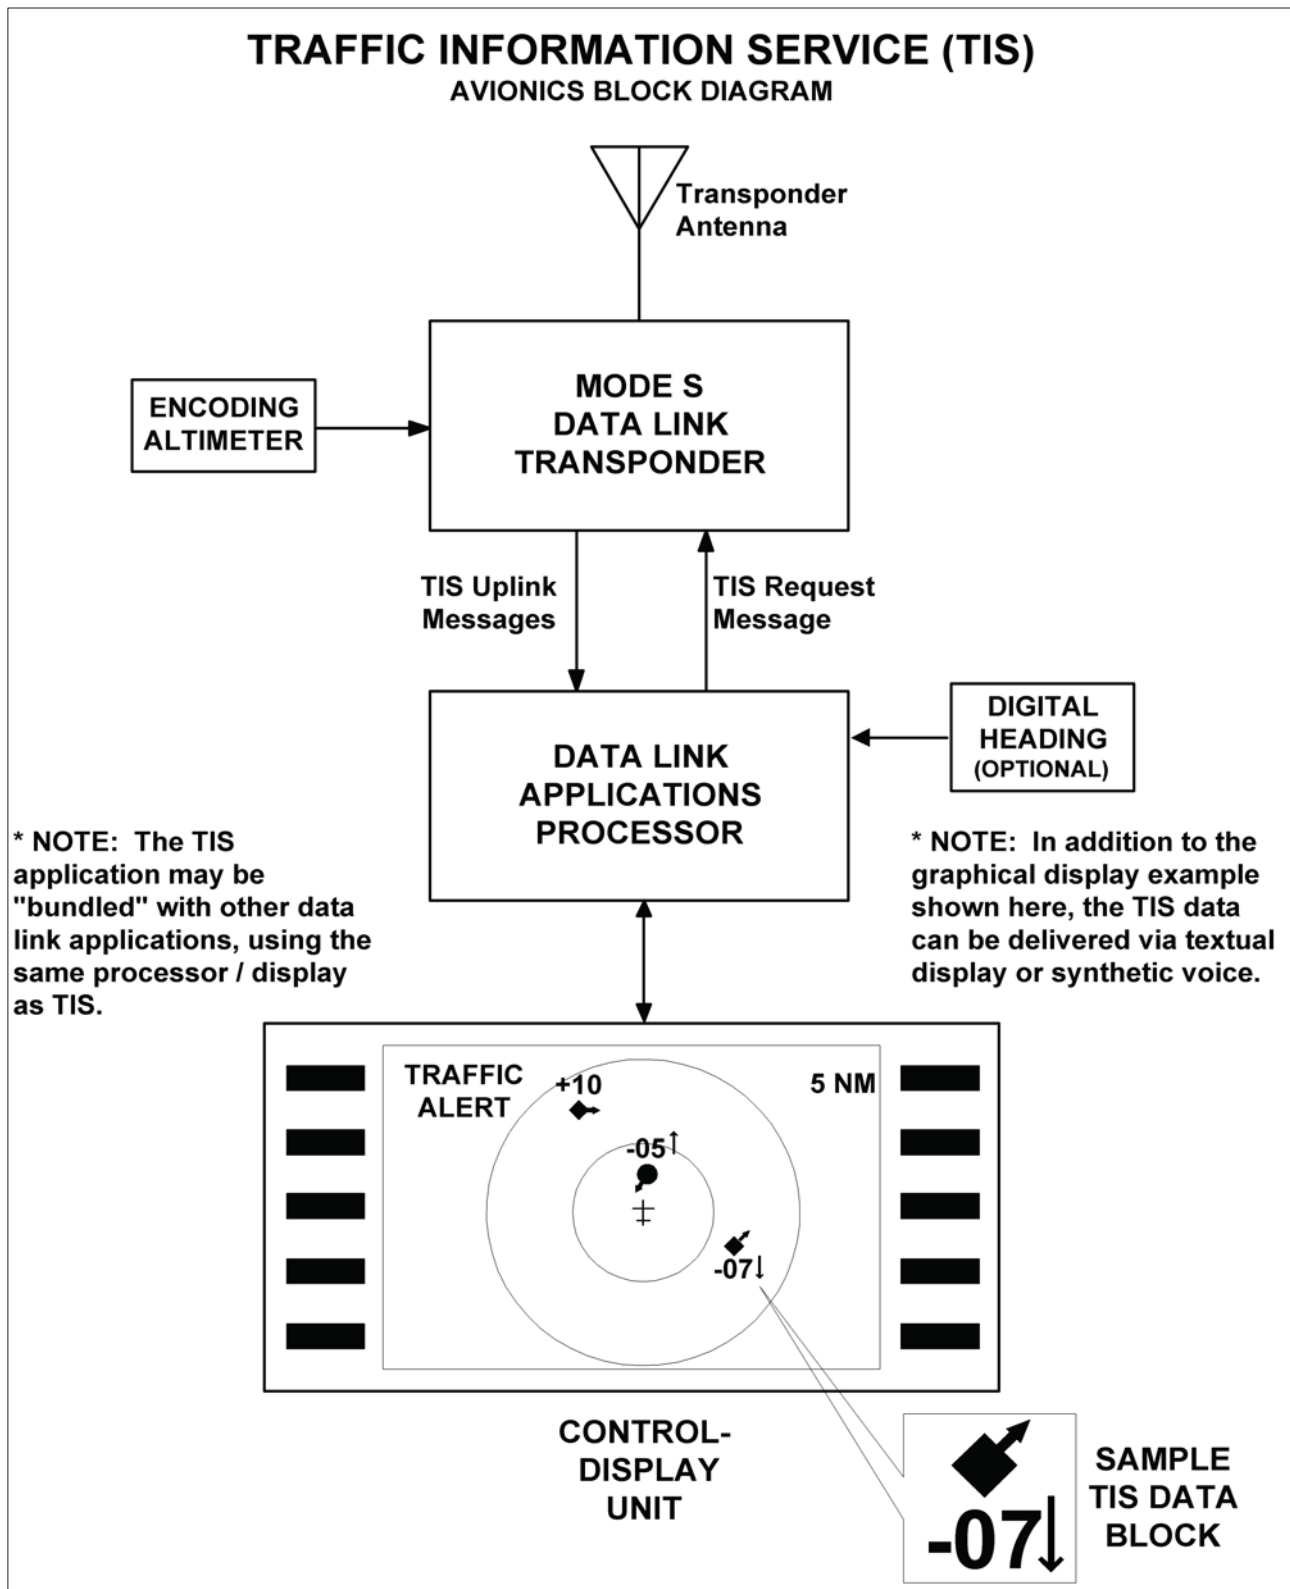

2. The cockpit equipment functionality required by a TIS client aircraft to receive the service consists of the following: refer to FIG 4-5-6

(a) Mode S data link transponder with altitude encoder

(b) Data link applications processor with TIS software installed

(c) Control-display unit

(d) Optional equipment includes a digital heading source to correct display errors caused by crab angle and turning maneuvers

NOTE—

Some of the above functions will likely be combined into single pieces of avionics, such as (a) and (b).

3. To be visible to the TIS client, the intruder aircraft must, at a minimum, have an operating transponder Mode A, C, or S. All altitude information provided by TIS from intruder aircraft is derived from Mode C reports, if appropriately equipped.

4. TIS will initially be provided by the terminal Mode S systems that are paired with ASR-9 digital primary radars. These systems are in locations with the greatest traffic densities; thus, will provide the greatest initial benefit. The remaining terminal Mode S sensors, which are paired with ASR-7 or ASR-8 analog primary radars, will provide TIS pending modification or relocation of these sites. See FIG 4-5-5, Terminal Mode S Radar Sites, for site locations. There is no mechanism in place, such as NOTAMs, to provide status update on individual radar sites since TIS is a nonessential supplemental information service.

The FAA also operates en route Mode S radars, not illustrated, that rotate once every 12 seconds. These sites will require additional development of TIS before any possible implementation. There are no plans to implement TIS in the en route Mode S radars at the present time.

c. Capabilities

1. TIS provides ground-based surveillance information over the Mode S data link to properly equipped client aircraft to aid in visual acquisition of proximate air traffic. The actual avionics capability of each installation will vary and the supplemental handbook material must be consulted prior to using

TIS. A maximum of eight intruder aircraft may be displayed. If more than eight aircraft match intruder parameters, the eight most significant intruders are uplinked. These most significant intruders are usually the ones in closest proximity and/or the greatest threat to the TIS client.

2. TIS, through the Mode S ground sensor, provides the following data on each intruder aircraft:

(a) Relative bearing information in 6-degree increments

(b) Relative range information in 1/8 NM to 1 NM increments, depending on range

(c) Relative altitude in 100-foot increments within 1,000 feet, or 500-foot increments from 1,000–3,500 feet, if the intruder aircraft has operating altitude reporting capability

(d) Estimated intruder ground track in 45-degree increments

(e) Altitude trend data: level, within 500 fpm, or climbing/descending, 500 fpm, if the intruder aircraft has operating altitude reporting capability

(f) Intruder priority as either an advisory or proximate intruder

3. When flying from surveillance coverage of one Mode S sensor to another, the transfer of TIS is an automatic function of the avionics system and requires no action from the pilot.

4. There are a variety of status messages that are provided by either the airborne system or ground equipment to alert the pilot of high priority intruders and data link system status. These messages include the following:

(a) **Alert.** Identifies a potential collision hazard within 34 seconds. This alert may be visual and/or audible, such as a flashing display symbol or a headset tone. A target is a threat if the time to the closest approach in vertical and horizontal coordinates is less than 30 seconds and the closest approach is expected to be within 500 feet vertically and 0.5 nautical miles laterally.

(b) **TIS Traffic.** TIS traffic data is displayed.

(c) **Coasting.** The TIS display is more than 6 seconds old. This indicates a missing uplink from the ground system. When the TIS display information is more than 12 seconds old, the "No Traffic" status will be indicated.

(d) No Traffic. No intruders meet proximate or alert criteria. This condition may exist when the TIS system is fully functional or may indicate coasting between 12 and 59 seconds old, see c above.

(e) TIS Unavailable. The pilot has requested TIS but no ground system is available. This condition will also be displayed when TIS uplinks are missing for 60 seconds or more.

(f) TIS Disabled. The pilot has not requested TIS or has disconnected from TIS.

(g) Good-bye. The client aircraft has flown outside of TIS coverage.

NOTE—

Depending on the avionics manufacturer implementation, it is possible that some of these messages will not be directly available to the pilot.

5. Depending on avionics system design, TIS may be presented to the pilot in a variety of different displays including text and/or graphics. Voice annunciation may also be used either alone or in combination with a visual display. FIG 4-5-6 Traffic Information Service TIS Avionics Block Diagram shows an example of a TIS display using symbology similar to the Traffic Alert and Collision Avoidance System (TCAS) installed on most passenger air carrier/commuter aircraft in the U.S. The small symbol in the center represents the client aircraft and the display is oriented track up with the 12 o'clock position at the top. The range rings indicate 2 and 5 NM. Each intruder is depicted by a symbol positioned at the approximate relative bearing and range from the client aircraft. The circular symbol near the center indicates an alert intruder and the diamond symbols indicate proximate intruders.

6. The inset in the lower right corner of FIG 4-5-6 Traffic Information Service TIS Avionics Block Diagram shows a possible TIS data block display. The following information is contained in this data block:

(a) The intruder located approximately four o'clock three miles is a proximate aircraft and currently not a collision threat to the client aircraft. This is indicated by the diamond symbol used in this example.

(b) The intruder ground track diverges to the right of the client aircraft, indicated by the small arrow.

(c) The intruder altitude is 700 feet less than or below the client aircraft, indicated by the -07 located under the symbol.

(d) The intruder is descending 500 fpm, indicated by the downward arrow next to the -07 relative altitude information. The absence of this arrow when an altitude tag is present indicates level flight or a climb/descent rate less than 500 fpm.

NOTE—

If the intruder did not have an operating altitude encoder (Mode C), the altitude and altitude trend “tags” would have been omitted.

d. Limitations

1. TIS is **NOT** intended to be used as a collision avoidance system and does not relieve the pilot responsibility to see and avoid other aircraft (see paragraph 5-5-8 See and Avoid). TIS must not be for avoidance maneuvers during IMC or other times when there is no visual contact with the intruder aircraft. TIS is intended only to assist in visual acquisition of other aircraft in VMC. **No recommended avoidance maneuvers are provided for, nor authorized, as a direct result of a TIS intruder display or TIS alert.**

2. While TIS is a useful aid to visual traffic avoidance, it has some system limitations that must be fully understood to ensure proper use. Many of these limitations are inherent in secondary radar surveillance. In other words, the information provided by TIS will be no better than that provided to ATC. Other limitations and anomalies are associated with the TIS predictive algorithm.

(a) Intruder Display Limitations. TIS will only display aircraft with operating transponders installed. TIS relies on surveillance of the Mode S radar, which is a secondary surveillance radar similar to the ATCRBS described in paragraph 4-5-2.

(b) TIS Client Altitude Reporting Requirement. Altitude reporting is required by the TIS client aircraft in order to receive TIS. If the altitude encoder is inoperative or disabled, TIS will be unavailable as TIS requests will not be honored by the ground system. As such, TIS requires altitude reporting to determine the Proximity Coverage Volume as

indicated in FIG 4-5-4 TIS users must be alert to altitude encoder malfunctions as TIS has no mechanism to determine if client altitude reporting is correct. A failure of this nature will cause erroneous and possibly unpredictable TIS operation. If this malfunction is suspected, confirmation of altitude reporting with ATC is suggested.

(c) Intruder Altitude Reporting. Intruders without altitude reporting capability will be displayed without the accompanying altitude tag. Additionally, nonaltitude reporting intruders are assumed to be at the same altitude as the TIS client for alert computations. This helps to ensure that the pilot will be alerted to all traffic under radar coverage, but the actual altitude difference may be substantial. Therefore, visual acquisition may be difficult in this instance.

(d) Coverage Limitations. Since TIS is provided by ground-based secondary surveillance radar, it is subject to all limitations of that radar. If an aircraft is not detected by the radar, it cannot be displayed on TIS. Examples of these limitations are as follows:

(1) TIS will typically be provided within 55 NM of the radars depicted in FIG 4-5-5 Terminal Mode S Radar Sites. This maximum range can vary by radar site and is always subject to line of sight limitations; the radar and data link signals will be blocked by obstructions, terrain, and curvature of the earth.

(2) TIS will be unavailable at low altitudes in many areas of the country, particularly in mountainous regions. Also, when flying near the floor of radar coverage in a particular area, intruders below the client aircraft may not be detected by TIS.

(3) TIS will be temporarily disrupted when flying directly over the radar site providing coverage if no adjacent site assumes the service. A ground-based radar like a VOR or NDB has a "enith cone," sometimes referred to as the cone of confusion or cone of silence. This is the area of ambiguity directly above the station where bearing information is unreliable. The "enith cone" setting for TIS is 34 degrees. Any aircraft above that angle with respect to the radar horizon will lose TIS coverage from that radar until it is below this 34 degree angle. The aircraft may not actually lose service in areas of

multiple radar coverage since an adjacent radar will provide TIS. If no other TIS-capable radar is available, the "Good-bye" message will be received and TIS terminated until coverage is resumed.

(e) Intermittent Operations. TIS operation may be intermittent during turns or other maneuvering, particularly if the transponder system does not include antenna diversity (antenna mounted on the top and bottom of the aircraft). As in d above, TIS is dependent on two-way line of sight communications between the aircraft and the Mode S radar. Whenever the structure of the client aircraft comes between the transponder antenna (usually located on the underside of the aircraft) and the ground-based radar antenna, the signal may be temporarily interrupted.

(f) TIS Predictive Algorithm. TIS information is collected one radar scan prior to the scan during which the uplink occurs. Therefore, the surveillance information is approximately 5 seconds old. In order to present the intruders in a real time position, TIS uses a predictive algorithm in its tracking software. This algorithm uses track history data to extrapolate intruders to their expected positions consistent with the time of display in the cockpit. Occasionally, aircraft maneuvering will cause this algorithm to induce errors in the TIS display. These errors primarily affect relative bearing information; intruder distance and altitude will remain relatively accurate and may be used to assist in "see and avoid." Some of the more common examples of these errors are as follows:

(1) When client or intruder aircraft maneuver excessively or abruptly, the tracking algorithm will report incorrect horizontal position until the maneuvering aircraft stabilizes.

(2) When a rapidly closing intruder is on a course that crosses the client at a shallow angle (either overtaking or head on) and either aircraft abruptly changes course within ¼ NM, TIS will display the intruder on the opposite side of the client than it actually is.

These are relatively rare occurrences and will be corrected in a few radar scans once the course has stabilized.

(g) Heading/Course Reference. Not all TIS aircraft installations will have onboard heading reference information. In these installations, aircraft course reference to the TIS display is provided by the

Mode S radar. The radar only determines ground track information and has no indication of the client aircraft heading. In these installations, all intruder bearing information is referenced to ground track and does not account for wind correction. Additionally, since ground-based radar will require several scans to determine aircraft course following a course change, a lag in TIS display orientation, intruder aircraft bearing will occur. As in f above, intruder distance and altitude are still usable.

(h) Closely-Spaced Intruder Errors.

When operating more than 30 NM from the Mode S sensor, TIS forces any intruder within 3/8 NM of the TIS client to appear at the same horizontal position as the client aircraft. Without this feature, TIS could display intruders in a manner confusing to the pilot in critical situations. e.g., a closely-spaced intruder that is actually to the right of the client may appear on the TIS display to the left. At longer distances from the radar, TIS cannot accurately determine relative bearing/distance information on intruder aircraft that are in close proximity to the client.

Because TIS uses a ground-based rotating radar for surveillance information, the accuracy of TIS data is dependent on the distance from the sensor radar providing the service. This is much the same phenomenon as experienced with ground-based navigational aids, such as VOR or NDB. As distance from the radar increases, the accuracy of surveillance decreases. Since TIS does not inform the pilot of distance from the Mode S radar, the pilot must assume that any intruder appearing at the same position as the client aircraft may actually be up to 3/8 NM away in any direction. Consistent with the operation of TIS, an alert on the display, regardless of distance from the radar, should stimulate an outside visual scan, intruder acquisition, and traffic avoidance based on outside reference.

e. Reports of TIS Malfunctions

1. Users of TIS can render valuable assistance in the early correction of malfunctions by reporting their observations of undesirable performance. Reporters

should identify the time of observation, location, type, and identity of aircraft, and describe the condition observed. The type of transponder, processor, and software in use can also be useful information. Since TIS performance is monitored by maintenance personnel rather than ATC, it is suggested that malfunctions be reported in the following ways:

(a) By radio or telephone to the nearest Flight Service Station (FSS) facility.

(b) By FAA Form 8740-5, Safety Improvement Report, a postage-paid card designed for this purpose. These cards may be obtained at FAA FSSs, General Aviation District Offices, Flight Standards District Offices, and General Aviation Fixed Based Operations.


4-5-7. Automatic Dependent Surveillance-Broadcast (ADS-B) Services

a. Introduction

1. Automatic Dependent Surveillance-Broadcast (ADS-B) is a surveillance technology being deployed throughout the NAS (see FIG 4-5-7). The ADS-B system is composed of aircraft avionics and a ground infrastructure. Onboard avionics determine the position of the aircraft by using the GNSS and transmit its position along with additional information about the aircraft to ground stations for use by ATC and other ADS-B services. This information is transmitted at a rate of approximately once per second.

2. In the United States, ADS-B equipped aircraft exchange information on one of two frequencies: 978 or 1090 MHz. The 1090 MHz frequency is associated with Mode A/C and S transponder operations. 1090 MHz transponders with integrated ADS-B functionality extend the transponder message sets with additional ADS-B information. This additional information is known as an extended squitter message and referred to as 1090ES. ADS-B equipment operating on 978 MHz is known as the Universal Access Transceiver (UAT).

FIG 4-5-7
**ADS-B, TIS-B, and FIS-B:
 Broadcast Services Architecture**

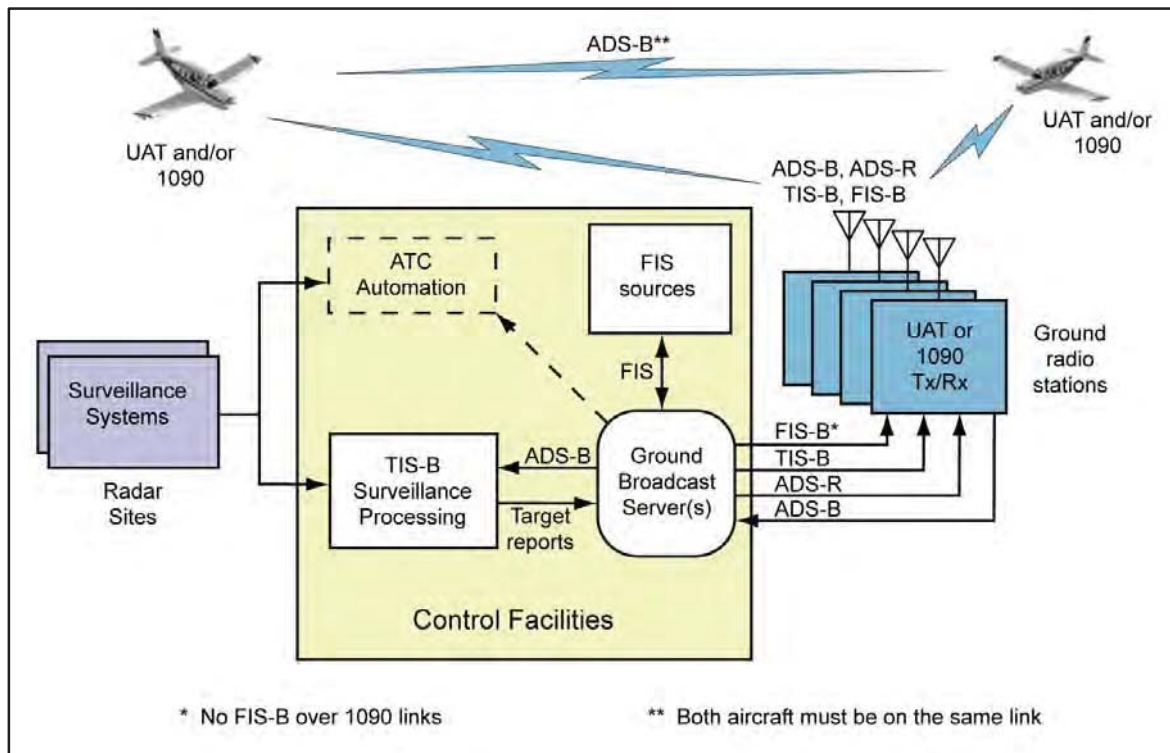

3. ADS-B avionics can have the ability to both transmit and receive information. The transmission of ADS-B information from an aircraft is known as ADS-B Out. The receipt of ADS-B information by an aircraft is known as ADS-B In. On January 1, 2020, all aircraft operating within the airspace defined in 14 CFR part 91.91.225 will be required to transmit the information defined in 91.227 using ADS-B Out avionics.

4. In general, operators flying at 18,000 feet and above will require equipment which uses 1090 ES. Those that do not fly above 18,000 may use either UAT or 1090ES equipment. Refer to 14 CFR 91.225 and 91.227. While the regulation will not require it, operators equipped with ADS-B In will realize additional benefits from ADS-B broadcast services: Traffic Information Service – Broadcast (TIS-B) paragraph 4-5-8 and Flight Information Service – Broadcast (FIS-B) paragraph 4-5-9.

b. ADS-B Certification and Performance Requirements

ADS-B equipment may be certified as a surveillance source for air traffic separation services using

ADS-B Out. ADS-B equipment may also be certified for use with ADS-B In advisory services that enable appropriately equipped aircraft to display traffic and flight information. Refer to the aircraft's flight manual supplement or Pilot Operating Handbook for the capabilities of a specific aircraft installation.

c. ADS-B Capabilities

1. ADS-B enables improved surveillance services both air-to-air and air-to-ground, especially in areas where radar is ineffective due to terrain or where it is impractical or cost prohibitive. Initial NAS applications of air-to-air ADS-B are for advisory use only, enhancing a pilot's visual acquisition of other nearby equipped aircraft either when airborne or on the airport surface. Additionally, ADS-B will enable ATC and fleet operators to monitor aircraft throughout the available ground station coverage area.

2. ADS-B avionics typically allow pilots to enter the aircraft's call sign and Air Traffic Control (ATC)-assigned transponder code, which will be transmitted to other aircraft and ground receivers. Pilots are cautioned to use care when selecting and

entering the aircraft's identification and transponder codes. Some installations may require separate entries of this information into both the ADS-B system and the transponder. Therefore, it is **extremely important to ensure that the transponder and ADS-B codes being transmitted are identical to avoid false conflict alerts within the ATC system.**

3. ADS-B systems integrated with the transponder will automatically set the applicable emergency status when 7500, 7600, or 7700 are entered into the transponder. ADS-B systems not integrated with the transponder or systems with optional emergency codes will require that the appropriate emergency code is entered through a pilot interface. **ADS-B is intended for in-flight and airport surface use. ADS-B systems should be turned "on" -- and remain "on" -- whenever operating in the air and moving on the airport surface. Civil and military Mode A/C transponders and ADS-B systems should be adjusted to the "on" or normal operating position as soon as practical unless the change to standby has been accomplished previously at the request of ATC. Mode S transponders should be left on whenever power is applied to the aircraft.**

d. ATC Surveillance Services using ADS-B – Procedures and Recommended Phraseology – For Use In Alaska Only

Radar procedures with the exceptions found in this paragraph are identical to those procedures prescribed for radar in AIM Chapter 4 and Chapter 5.

1. Preflight

If a request for ATC services is predicated on ADS-B and such services are anticipated, when either a VFR or IFR flight plan is filed, the aircraft's N number or call-sign as filed in Block 2 of the Flight Plan must be entered in the ADS-B avionics as the aircraft's flight ID.

2. Inflight

When requesting ADS-B services, while airborne, pilots should ensure that their ADS-B equipment is transmitting their aircraft's N number or call sign prior to contacting ATC. To accomplish this, the pilot must select the ADS-B broadcast flight ID function.

NOTE–

The broadcast "VFR" or "Standby" mode built into some ADS-B systems will not provide ATC with the appropriate aircraft identification information. This function should first be disabled before contacting ATC.

3. Aircraft with an Inoperative/Malfunctioning ADS-B Transmitter or in the Event of an Inoperative Ground Broadcast Transceiver (GBT)

(a) ATC will inform the flight crew when the aircraft's ADS-B transmitter appears to be inoperative or malfunctioning.

PHRASEOLOGY–

YOUR ADS-B TRANSMITTER APPEARS TO BE INOPERATIVE/MALFUNCTIONING. STOP ADS-B TRANSMISSIONS.

(b) ATC will inform the flight crew when the GBT transceiver becomes inoperative or malfunctioning as follows:

PHRASEOLOGY–

(Name of facility) GROUND BASED TRANSCEIVER INOPERATIVE/MALFUNCTIONING.

(And if appropriate) RADAR CONTACT LOST.

NOTE–

An inoperative or malfunctioning GBT may also cause a loss of ATC surveillance services.

(c) ATC will inform the flight crew if it becomes necessary to turn off the aircraft's ADS-B transmitter.

PHRASEOLOGY–

STOP ADS-B TRANSMISSIONS.

(d) Other malfunctions and considerations

Loss of automatic altitude reporting capabilities (encoder failure) will result in loss of ATC altitude advisory services.

e. ADS-B Limitations

1. The ADS-B cockpit display of traffic is **NOT** intended to be used as a collision avoidance system and does not relieve the pilot's responsibility to see and avoid other aircraft. See paragraph 5-5-8 See and Avoid. ADS-B must not be used for avoidance maneuvers during IMC or other times when there is no visual contact with the intruder aircraft. ADS-B is intended only to assist in visual acquisition of other aircraft. **No avoidance maneuvers are provided nor authorized as a direct result of an ADS-B target being displayed in the cockpit.**

2. Use of ADS-B radar services is limited to the service volume of the GBT

NOTE–

The coverage volume of GBTs are limited to line-of-sight.

f. Reports of ADS-B Malfunctions

Users of ADS-B can provide valuable assistance in the correction of malfunctions by reporting instances of undesirable system performance. Reports should identify the time of observation, location, type and identity of aircraft, and describe the condition observed. The type of avionics system and its software version in use should also be included. Since ADS-B performance is monitored by maintenance personnel rather than ATC, it is suggested that malfunctions be reported in any one of the following ways:

1. By radio or telephone to the nearest Flight Service Station (FSS) facility.

2. By FAA Form 8740-5, Safety Improvement Report. A postage-paid card is designed for this purpose. These cards may be obtained from FAA FSSs, Flight Standards District Offices, and general aviation fixed-based operators.

3. By reporting the failure directly to the FAA Safe Flight 21 program at 1-877-FL ADSB or <http://www.adsb.gov>

4-5-8. Traffic Information Service–Broadcast (TIS-B)

TIS-B is the broadcast of ATC derived traffic information to ADS-B equipped 1090ES or UAT aircraft from ground radio stations. The source of this traffic information is derived from ground-based air traffic surveillance radar sensors. TIS-B service will be available throughout the NAS where there are both adequate surveillance coverage (radar) from ground sensors and adequate broadcast coverage from ADS-B ground radio stations. The quality level of traffic information provided by TIS-B is dependent upon the number and type of ground sensors available as TIS-B sources and the timeliness of the reported data.

a. TIS-B Requirements.

In order to receive TIS-B service, the following conditions must exist:

1. Aircraft must be equipped with an ADS-B transmitter/receiver or transceiver and a cockpit display of traffic information (CDTI).

2. Aircraft must fly within the coverage volume of a compatible ground radio station that is configured for TIS-B uplinks. Not all ground radio stations provide TIS-B due to a lack of radar coverage or because a radar feed is not available.

3. Aircraft must be within the coverage of and detected by at least one ATC radar serving the ground radio station in use.

b. TIS-B Capabilities.

1. TIS-B is intended to provide ADS-B equipped aircraft with a more complete traffic picture in situations where not all nearby aircraft are equipped with ADS-B. This advisory-only application is intended to enhance a pilot's visual acquisition of other traffic.

2. Only transponder-equipped targets (i.e., Mode A/C or Mode S transponders) are transmitted through the ATC ground system architecture. Current radar siting may result in limited radar surveillance coverage at lower altitudes near some airports with subsequently limited TIS-B service volume coverage. If there is no radar coverage in a given area, then there will be no TIS-B coverage in that area.

c. TIS-B Limitations.

1. TIS-B is NOT intended to be used as a collision avoidance system and does not relieve the pilot's responsibility to see and avoid other aircraft in accordance with 14CFR 91.113b. TIS-B must not be used for avoidance maneuvers during times when there is no visual contact with the intruder aircraft. TIS-B is intended only to assist in the visual acquisition of other aircraft.

NOTE–

No aircraft avoidance maneuvers are authorized as a direct result of a TIS-B target being displayed in the cockpit.

2. While TIS-B is a useful aid to visual traffic avoidance, its inherent system limitations must be understood to ensure proper use.

(a) A pilot may receive an intermittent TIS-B target of themselves, typically when maneuvering (e.g., climbing turns) due to the radar not tracking the aircraft as quickly as ADS-B.

(b) The ADS-B-to-radar association process within the ground system may at times have difficulty correlating an ADS-B report with corresponding radar returns from the same aircraft. When this happens the pilot may see duplicate traffic symbols i.e. TIS-B shadows on the cockpit display.

(c) Updates of TIS-B traffic reports will occur less often than ADS-B traffic updates. TIS-B position updates will occur approximately once every 3–13 seconds depending on the type of radar system in use within the coverage area. In comparison, the update rate for ADS-B is nominally once per second.

(d) The TIS-B system only uplinks data pertaining to transponder-equipped aircraft. Aircraft without a transponder will not be displayed as TIS-B traffic.

(e) There is no indication provided when any aircraft is operating inside or outside the TIS-B service volume; therefore it is difficult to know if one is receiving uplinked TIS-B traffic information.

3. Pilots and operators are reminded that the airborne equipment that displays TIS-B targets is for pilot situational awareness only and is not approved as a collision avoidance tool. Unless there is an imminent emergency requiring immediate action, any deviation from an air traffic control clearance in response to perceived converging traffic appearing on a TIS-B display must be approved by the controlling ATC facility before commencing the maneuver, except as permitted under certain conditions in 14CFR 91.123. Uncoordinated deviations may place an aircraft in close proximity to other aircraft under ATC control not seen on the airborne equipment and may result in a pilot deviation or other incident.

d. Reports of TIS-B Malfunctions

Users of TIS-B can provide valuable assistance in the correction of malfunctions by reporting instances of undesirable system performance. Reporters should identify the time of observation, location, type, and identity of the aircraft, and describe the condition observed, the type of avionics system and its software version used. Since TIS-B performance is monitored by maintenance personnel rather than ATC, it is

suggested that malfunctions be reported in anyone of the following ways:

1. By radio or telephone to the nearest Flight Service Station (FSS) facility.

2. By FAA Form 8740–5, Safety Improvement Report, a postage-paid card is designed for this purpose. These cards may be obtained from FAA FSSs, Flight Standards District Offices, and general aviation fixed-based operators.

3. By reporting the failure directly to the FAA Surveillance and Broadcast Services Program Office at 1–877–FL ADSB or <http://www.adsb.gov>.

4–5–9. Flight Information Service–Broadcast (FIS-B)

a. FIS-B is a ground broadcast service provided through the ADS-B Services network over the 978 MHz UAT data link. The FAA FIS-B system provides pilots and flight crews of properly equipped aircraft with a cockpit display of certain aviation weather and aeronautical information. FIS-B service availability is expected across the NAS in 2013 and is currently available within certain regions.

b. The weather products provided by FIS-B are for information only. Therefore, these products do not meet the safety and regulatory requirements of official weather products. The weather products displayed on FIS-B should not be used as primary weather products i.e. aviation weather to meet operational and safety requirements. Official weather products, primary products, can be obtained from a variety of sources including ATC, FSSs, and if applicable, AOCC VHF/HF voice, which can transmit aviation weather, NOTAMS, and other operational aeronautical information to aircraft in flight. FIS-B augments the traditional ATC/FSS/AOCC services by providing additional information and, for some products, offers the advantage of being displayed graphically. By using FIS-B for orientation and information, the usefulness of information received from official sources may be enhanced, but the user should be alert and understand any limitations associated with individual products. FIS-B provides the initial basic products listed below at no-charge to the user. Additional products are envisioned but may incur subscription charges to the user. FIS-B reception is line-of-sight within the service volume of the ground infrastructure.

1. Airmen s Meteorological Conditions AIRMET – Text/graphical report – A concise description of expected occurrence of specified en route eather phenomena

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

2. Convective Significant Meteorological Conditions SIGMET – Text report/graphical –Convective SIGMETs also kno n internationally as SIGMET for Convection are issued for the contiguous U S Each bulletin includes one or more Convective SIGMETs for a specific region of the CONUS Convective SIGMETs issued for thunder storms and related phenomena do not include references to all eather associated ith thunder storms such as turbulence icing lo –level ind shear and IFR conditions

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

3. Aviation Routine Weather Reports METAR – Text reports – Surface meteorological data The body of the report includes airport identifier time of observation ind visibility run ay visual range present eather phenomena sky conditions temper ature de point and altimeter setting Remarks may be appended to the end

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

4. Special Aviation Reports SPECI – Text reports – Non– routine unscheduled report hen any of SPECI criteria have been met Contains all data elements found in METAR plus additional informa tion hich elaborates on data

REFERENCE–

Reference Advisory Circular AC–00–45, “Aviation Weather Services.”

5. Next Generation Radar NE RAD CONUS and Regional – Derived from Next Generation Weather Radar WSR–88D Radar mosaic consists of multiple single site radar images combined to produce a graphical image on a regional or national scale Regional and national radar mosaics can be found at the National Weather Service NWS Doppler Radar Images eb site <http://radar.eather.gov/ridge/>

REFERENCE–

Advisory Circular AC–00–45, “AviationWeather Services.”

6. Notice to Airmen NOTAM Distant and Flight Data Center D/FDC – Text/graphical reports – includes Temporary Flight Restrictions TFRs –

TFR text and graphic reports prescribes procedures used to obtain format and disseminate information on unanticipated or temporary changes to compon ents of or ha ards in the NAS until the associated aeronautical charts and related publications have been amended

REFERENCE–

FAA Order JO 7930.2, Notices to Airmen (NOTAM).

7. Pilot Weather Reports PIREP – Text report – Pilots report observations to assist other pilots ith flight planning and preparation help NWS verify forecast products and create more accurate products for aviation community

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

8. Significant Meteorological Information SIGMET – Text/graphical report – Potentially ha ardous en route phenomena such as thunder storms and hail turbulence icing sand and dust storms tropical cyclones and volcanic ash in an area affecting 3 000 s uare miles or an area deemed to have a significant effect on safety of aircraft operations

REFERENCE–

Advisory Circular AC–00–45, “AviationWeather Services.”

9. Special Use Airspace SUA Status – Text/graphical report – Establishes/designates airspace in the interest of National Defense security and/or elfare Charted SUA identifies to other airspace users here these activities occur SUA is airspace of defined dimensions herein activities must be confined because of their nature or herein limitations may be imposed upon aircraft operations that are not a part of those activities

REFERENCE–

FAA Order JO 7400.2G, Procedures for Handling Airspace Matters.

10. Terminal Aerodrome Forecast TAF and their amendments AMEND – Text report – Routine forecast that gives a concise statement of expected meteorological conditions for a specified time period ithin five statute miles SM of the center of the airport s run ay complex terminal TAFs are amended henever they become in the forecaster s udgment unrepresentative of existing or expected conditions particularly regarding those elements and events significant to aircraft and airports An amended forecast is identified by TAF AMD in place of TAF on the first line of the forecast text

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

11. Temperature Aloft – Text report – Computer
prepared forecasts based on North American Mesoscale NAM forecast model run of temperature at specified times altitudes and locations

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

12. Winds Aloft – Text report – Computer

prepared forecasts based on North American Mesoscale NAM forecast model run of wind direction and wind speed at specified times altitudes and locations

REFERENCE–

Advisory Circular AC–00–45, “Aviation Weather Services.”

TBL 4–5–2

FIS–B Basic Product Update and Transmission Intervals

Product	FIS–B Service Update Interval¹	FIS–B Service Transmission Interval²
AIRMET	As available	5 minutes
Convective SIGMET	As available	5 minutes
METAR/SPECI	Hourly/as available	5 minutes
NE RAD Reflectivity CONUS	5 minutes	15 minutes
NE RAD Reflectivity Regional	5 minutes	2 5 minutes
NOTAM–D/FDC	As available	10 minutes
PIREP	As available	10 minutes
SIGMET	As available	5 minutes
SUA Status	As available	10 minutes
TAF/AMEND	8 hours/as available	10 minutes
Temperature Aloft	6 hours	10 minutes
Winds Aloft	6 hours	10 minutes

¹ The Update Interval is the rate at which the product data is available from the source

² The Transmission Interval is the amount of time within which a new or updated product transmission must be completed and the rate or repetition interval at which the product is rebroadcast

NOTE–

Details concerning the content, format, and symbols of the various data link products provided should be obtained from the specific avionics manufacturer.

4–5–10. Automatic Dependent Surveillance–Rebroadcast (ADS–R)

ADS–R is a datalink translation function of the ADS–B ground system required to accommodate the two separate operating frequencies 978 MHz and 1090 ES. The ADS–B system receives the ADS–B messages transmitted on one frequency and ADS–R translates and reformats the

information for rebroadcast and use on the other frequency. This allows ADS–B In equipped aircraft to see nearby ADS–B Out traffic regardless of the operating link of the other aircraft. Aircraft operating on the same ADS–B frequency exchange information directly and do not require the ADS–R translation function.

Section 6. Operational Policy/Procedures for Reduced Vertical Separation Minimum (RVSM) in the Domestic U.S., Alaska, Offshore Airspace and the San Juan FIR

4-6-1. Applicability and RVSM Mandate (Date/Time and Area)

a. Applicability. The policies, guidance, and direction in this section apply to RVSM operations in the airspace over the lower 48 states, Alaska, Atlantic and Gulf of Mexico High Offshore Airspace, and airspace in the San Juan FIR where VHF or UHF voice direct controller-pilot communication (DCPC) is normally available. Policies, guidance, and direction for RVSM operations in oceanic airspace where VHF or UHF voice DCPC is not available and the airspace of other countries are posted on the FAA RVSM Documentation Webpage described in paragraph 4-6-3, Aircraft and Operator Approval Policy/Procedures, RVSM Monitoring and Data bases for Aircraft and Operator Approval.

b. Mandate. At 0901 UTC on January 20, 2005, the FAA implemented RVSM between flight level (FL) 290-410 inclusive in the following airspace: the airspace of the lower 48 states of the United States, Alaska, Atlantic and Gulf of Mexico High Offshore Airspace, and the San Juan FIR. A chart showing the location of offshore airspace is posted on the Domestic U.S. RVSM/DRVSM Webpage. See paragraph 4-6-3. On the same time and date, RVSM was also introduced into the adjoining airspace of Canada and Mexico to provide a seamless environment for aircraft traversing those borders. In addition, RVSM was implemented on the same date in the Caribbean and South American regions.

c. RVSM Authorization. In accordance with 14 CFR Section 91.180, with only limited exceptions, prior to operating in RVSM airspace, operators and aircraft must have received RVSM authorization from the responsible civil aviation authority. See paragraph 4-6-10, Procedures for Accommodation of Non-RVSM Aircraft. If the operator or aircraft or both have not been authorized for RVSM operations, the aircraft will be referred to as a non-RVSM aircraft. Paragraph 4-6-10 discusses ATC policies for accommodation of non-RVSM aircraft flown by the Department of Defense Air Ambulance.

MEDEVAC operators, foreign State governments, and aircraft flown for certification and development. Paragraph 4-6-11, Non-RVSM Aircraft Re-esting Climb to and Descent from Flight Levels Above RVSM Airspace Without Intermediate Level Off, contains policies for non-RVSM aircraft climbing and descending through RVSM airspace to/from flight levels above RVSM airspace.

d. Benefits. RVSM enhances ATC flexibility, mitigates conflict points, enhances sector throughput, reduces controller workload, and enables crossing traffic. Operators gain fuel savings and operating efficiency benefits by flying at more fuel-efficient flight levels and on more user-preferred routings.

4-6-2. Flight Level Orientation Scheme

Altitude assignments for direction of flight follow a scheme of odd altitude assignment for magnetic courses 000-179 degrees and even altitudes for magnetic courses 180-359 degrees for flights up to and including FL 410, as indicated in FIG 4-6-1.

FIG 4-6-1
Flight Level Orientation Scheme

Flight Level Orientation Scheme	
FL 430	←
FL 410	→
FL 400	←
FL 390	→
FL 380	←
FL 370	→
FL 360	←
FL 350	→
FL 340	←
FL 330	→
FL 320	←
FL 310	→
FL 300	←
FL 290	→

NOTE—

Odd Flight Levels: Magnetic Course 000-179 Degrees
Even Flight Levels: Magnetic Course 180-359 Degrees.

4-6-3. Aircraft and Operator Approval Policy/Procedures, RVSM Monitoring and Databases for Aircraft and Operator Approval

a. RVSM Authority. 14 CFR Section 91.180 applies to RVSM operations within the U.S. 14 CFR Section 91.706 applies to RVSM operations outside the U.S. Both sections require that the operator obtain authorization prior to operating in RVSM airspace. 14 CFR Section 91.180 requires that prior to conducting RVSM operations within the U.S. the operator obtain authorization from the FAA or from the responsible authority as appropriate. In addition, it requires that the operator and the operator's aircraft comply with the standards of 14 CFR Part 91 Appendix G, Operations in RVSM Airspace.

b. Sources of Information. The FAA RVSM Website Homepage can be accessed at http://www.faa.gov/about/office_org/headquarters_offices/ato/service_units/enroute/rvsm/. The RVSM Documentation and Domestic RVSM webpages are linked to the RVSM Homepage. RVSM Documentation contains guidance and direction for an operator to obtain aircraft and operator approval to conduct RVSM operations. It provides information for DRVSM and oceanic and international RVSM airspace. It is recommended that operators planning to operate in Domestic U.S. RVSM airspace first review the following documents to orient themselves to the approval process:

1. Under Area of Operations Specific Information, the document Basic Operator Information on DRVSM Programs provides an overview of the DRVSM program and the related aircraft and operator approval programs.

2. In the Getting Started section, review the RVSM Approval Checklist – U.S. Operators or RVSM Approval Checklist – Non-U.S. Operators as applicable. These are job aids or checklists that show aircraft/operator approval process events with references to related RVSM documents published on the website.

3. Under Documents Applicable to All RVSM Approvals, review RVSM Area Notice to the Operator. This document provides a guide for operators that are conducting RVSM operations in one or more areas of operation but are planning to

conduct RVSM operations in an area where they have not previously conducted RVSM operations such as the U.S.

c. TCAS Equipage. TCAS equipage requirements are contained in 14 CFR Sections 121.356, 125.224, 129.18, and 135.189. Part 91 Appendix G does not contain TCAS equipage requirements specific to RVSM; however, Appendix G does require that aircraft equipped with TCAS II and flown in RVSM airspace be modified to incorporate TCAS II Version 7.0 or a later version.

d. Aircraft Monitoring. Operators are required to participate in the RVSM aircraft monitoring program. The Monitoring Requirements and Procedures section of the RVSM Documentation Webpage contains policies and procedures for participation in the monitoring program. Ground-based and GPS-based monitoring systems are available for the Domestic RVSM program. Monitoring is a quality control program that enables the FAA and other civil aviation authorities to assess the in-service altitude-keeping performance of aircraft and operators.

e. Registration on RVSM Approvals Databases. The Registration on RVSM Approvals Database section of the RVSM Documentation Webpage provides policies/procedures for operator and aircraft registration on RVSM approvals databases.

1. Purpose of RVSM Approvals Databases. ATC does not use RVSM approvals databases to determine whether or not a clearance can be issued into RVSM airspace. RVSM program managers do regularly review the operators and aircraft that operate in RVSM airspace to identify and investigate those aircraft and operators flying in RVSM airspace but not listed on the RVSM approvals databases.

2. Registration of U.S. Operators. When U.S. operators and aircraft are granted RVSM authority, the FAA Flight Standards office makes an input to the FAA Program Tracking and Reporting Subsystem (PTRS). The Separation Standards Group at the FAA Technical Center obtains PTRS operator and aircraft information to update the FAA-maintained U.S. Operator/Aircraft RVSM Approvals Database. Basic database operator and aircraft information can be viewed on the RVSM Documentation Webpage by clicking on the appropriate database icon.

3. Registration of Non-U.S. Operators.

Non-U.S. operators can find policy/procedures for registration on the North American Approvals Registry and Monitoring Organization NAARMO database in the Registration on RVSM Approvals Database section of RVSM Documentation

4-6-4. Flight Planning into RVSM Airspace

a. Operators that do not file the correct aircraft equipment suffix on the FAA or ICAO Flight Plan may be denied clearance into RVSM airspace. Policies for the FAA Flight Plan are detailed in subparagraph c below. Policies for the ICAO Flight Plan are detailed in subparagraph d.

b. The operator will annotate the equipment block of the FAA or ICAO Flight Plan with an aircraft equipment suffix indicating RVSM capability only after the responsible civil aviation authority has determined that both the operator and its aircraft are RVSM-compliant and has issued RVSM authorization to the operator.

c. General Policies for FAA Flight Plan Equipment Suffix TBL 5-1-3 Aircraft Suffixes allows operators to indicate that the aircraft has both RVSM and Advanced Area Navigation RNAV capabilities or has only RVSM capability.

1. The operator will annotate the equipment block of the FAA Flight Plan with the appropriate aircraft equipment suffix from TBL 5-1-3.

2. Operators can only file one equipment suffix in block 3 of the FAA Flight Plan. Only this equipment suffix is displayed directly to the controller.

3. Aircraft with RNAV Capability For flight in RVSM airspace, aircraft with RNAV capability but not Advanced RNAV capability will file /W. Filing /W will not preclude such aircraft from filing and flying direct routes in en route airspace.

d. Policy for ICAO Flight Plan Equipment Suffixes

1. Operators/aircraft that are RVSM-compliant and that file ICAO flight plans will file /W in block 10 Equipment to indicate RVSM authorization and will also file the appropriate ICAO Flight Plan suffixes to indicate navigation and communication capabilities. The equipment suffixes in

TBL 5-1-3 are for use only in an FAA Flight Plan FAA Form 7233-1.

2. Operators/aircraft that file ICAO flight plans that include flight in Domestic U.S. RVSM airspace must file /W in block 10 to indicate RVSM authorization.

e. Importance of Flight Plan Equipment Suffixes The operator must file the appropriate equipment suffix in the equipment block of the FAA Flight Plan FAA Form 7233-1 or the ICAO Flight Plan. The equipment suffix informs ATC.

1. Whether or not the operator and aircraft are authorized to fly in RVSM airspace.

2. The navigation and/or transponder capability of the aircraft, e.g., advanced RNAV transponder with Mode C.

f. Significant ATC uses of the flight plan equipment suffix information are:

1. To issue or deny clearance into RVSM airspace.

2. To apply a 2,000 foot vertical separation minimum in RVSM airspace to aircraft that are not authorized for RVSM but are in one of the limited categories that the FAA has agreed to accommodate. See paragraphs 4-6-10 Procedures for Accommodation of Non-RVSM Aircraft and 4-6-11 Non-RVSM Aircraft Requesting Climb to and Descent from Flight Levels Above RVSM Airspace Without Intermediate Level Off for policy on limited operation of unapproved aircraft in RVSM airspace.

3. To determine if the aircraft has Advanced RNAV capabilities and can be cleared to fly procedures for which that capability is required.

4-6-5. Pilot RVSM Operating Practices and Procedures

a. **RVSM Mandate.** If either the operator or the aircraft or both have not received RVSM authorization, non-RVSM aircraft, the pilot will neither request nor accept a clearance into RVSM airspace unless:

1. The flight is conducted by a non-RVSM DOD MEDEVAC certification/development or foreign State government aircraft in accordance with paragraph 4-6-10 Procedures for Accommodation of Non-RVSM Aircraft.

2. The pilot intends to climb to or descend from FL 430 or above in accordance with paragraph 4-6-11 Non-RVSM Aircraft Requesting Climb to and Descent from Flight Levels Above RVSM Airspace Without Intermediate Level Off

3. An emergency situation exists

b. Basic RVSM Operating Practices and Procedures. Appendix 4 of AC 91-85 Authorization of Aircraft and Operators for Flight in Reduced Vertical Separation Minimum Airspace contains pilot practices and procedures for RVSM. Operators must incorporate Appendix 4 practices and procedures as supplemented by the applicable paragraphs of this section into operator training or pilot knowledge programs and operator documents containing RVSM operational policies

c. Appendix 4 contains practices and procedures for flight planning, preflight procedures at the aircraft, procedures prior to RVSM airspace entry, inflight en route procedures, contingency procedures and post flight

d. The following paragraphs either clarify or supplement Appendix 4 practices and procedures

4-6-6. Guidance on Severe Turbulence and Mountain Wave Activity (MWA)

a. Introduction/Explanation

1. The information and practices in this paragraph are provided to emphasize to pilots and controllers the importance of taking appropriate action in RVSM airspace when aircraft experience severe turbulence and/or MWA that is of sufficient magnitude to significantly affect altitude-keeping

2. Severe Turbulence. Severe turbulence causes large abrupt changes in altitude and/or attitude usually accompanied by large variations in indicated airspeed. Aircraft may be momentarily out of control. Encounters with severe turbulence must be remedied immediately in any phase of flight. Severe turbulence may be associated with MWA

3. Mountain Wave Activity (MWA)

(a) Significant MWA occurs both below and above the floor of RVSM airspace. FL 290 MWA often occurs in western states in the vicinity of mountain ranges. It may occur when strong winds blow perpendicular to mountain ranges resulting in

up and down or wave motions in the atmosphere. Wave action can produce altitude excursions and airspeed fluctuations accompanied by only light turbulence. With sufficient amplitude, however, wave action can induce altitude and airspeed fluctuations accompanied by severe turbulence. MWA is difficult to forecast and can be highly localized and short lived.

(b) Wave activity is not necessarily limited to the vicinity of mountain ranges. Pilots experiencing wave activity anywhere that significantly affects altitude-keeping can follow the guidance provided below.

(c) Inflight MWA Indicators. Including Turbulence Indicators that the aircraft is being subjected to MWA are:

(1) Altitude excursions and/or airspeed fluctuations with or without associated turbulence

(2) Pitch and trim changes required to maintain altitude with accompanying airspeed fluctuations

(3) Light to severe turbulence depending on the magnitude of the MWA

4. Priority for Controller Application of Merging Target Procedures

(a) **Explanation of Merging Target Procedures.** As described in subparagraph c3 below, ATC will use merging target procedures to mitigate the effects of both severe turbulence and MWA. The procedures in subparagraph c3 have been adapted from existing procedures published in FAA Order JO 7110.65, Air Traffic Control, paragraph 5-1-8, Merging Target Procedures. Paragraph 5-1-8 calls for en route controllers to advise pilots of potential traffic that they perceive may fly directly above or below his/her aircraft at minimum vertical separation. In response, pilots are given the option of requesting a radar vector to ensure their radar target will not merge or overlap with the traffic's radar target.

(b) The provision of merging target procedures to mitigate the effects of severe turbulence and/or MWA is not optional for the controller, but rather is a priority responsibility. Pilot requests for vectors for traffic avoidance when encountering MWA or pilot reports of Unable RVSM due to turbulence or MWA are considered first priority aircraft separation and sequencing responsibilities.

FAA Order JO 7110.65 paragraph 2-1-2 Duty Priority states that the controller's first priority is to separate aircraft and issue safety alerts

(c) Explanation of the term traffic permitting. The contingency actions for MWA and severe turbulence detailed in paragraph 4-6-9 Contingency Actions Weather Encounters and Aircraft System Failures state that the controller will vector aircraft to avoid merging targets with traffic at adjacent flight levels traffic permitting. The term traffic permitting is not intended to imply that merging target procedures are not a priority duty. The term is intended to recognize that as stated in FAA Order JO 7110.65 paragraph 2-1-2 Duty Priority there are circumstances when the controller is required to perform more than one action and must exercise their best judgment based on the facts and circumstances known to them to prioritize their actions. Further direction given is that action which is most critical from a safety standpoint is performed first.

5. TCAS Sensitivity. For both MWA and severe turbulence encounters in RVSM airspace an additional concern is the sensitivity of collision avoidance systems when one or both aircraft operating in close proximity receive TCAS advisories in response to disruptions in altitude hold capability.

b. Pre-flight tools. Sources of observed and forecast information that can help the pilot ascertain the possibility of MWA or severe turbulence are Forecast Winds and Temperatures Aloft (FD) Area Forecast (FA) SIGMETs and PIREPs.

c. Pilot Actions When Encountering Weather (e.g., Severe Turbulence or MWA)

1. Weather Encounters Inducing Altitude Deviations of Approximately 200 feet. When the pilot experiences weather induced altitude deviations of approximately 200 feet the pilot will contact ATC and state "Unable RVSM Due to state reason" e.g. turbulence mountain wave. See contingency actions in paragraph 4-6-9.

2. Severe Turbulence (including that associated with MWA). When pilots encounter severe turbulence they should contact ATC and report the situation. Until the pilot reports clear of severe turbulence the controller will apply merging target

vectors to one or both passing aircraft to prevent their targets from merging.

EXAMPLE–

"Yankee 123, FL 310, unable RVSM due severe turbulence."

"Yankee 123, fly heading 290; traffic twelve o'clock, 10 miles, opposite direction; eastbound MD-80 at FL 320" (or the controller may issue a vector to the MD-80 traffic to avoid Yankee 123).

3. MWA. When pilots encounter MWA they should contact ATC and report the magnitude and location of the wave activity. When a controller makes a merging targets traffic call the pilot may request a vector to avoid flying directly over or under the traffic. In situations where the pilot is experiencing altitude deviations of 200 feet or greater the pilot will request a vector to avoid traffic. Until the pilot reports clear of MWA the controller will apply merging target vectors to one or both passing aircraft to prevent their targets from merging.

EXAMPLE–

"Yankee 123, FL 310, unable RVSM due mountain wave."

"Yankee 123, fly heading 290; traffic twelve o'clock, 10 miles, opposite direction; eastbound MD-80 at FL 320" (or the controller may issue a vector to the MD-80 traffic to avoid Yankee 123).

4. FL Change or Re-route. To leave airspace where MWA or severe turbulence is being encountered the pilot may request a FL change and/or re-route if necessary.

4-6-7. Guidance on Wake Turbulence

a. Pilots should be aware of the potential for wake turbulence encounters in RVSM airspace. Experience gained since 1997 has shown that such encounters in RVSM airspace are generally moderate or less in magnitude.

b. Prior to DRVSM implementation the FAA established provisions for pilots to report wake turbulence events in RVSM airspace using the NASA Aviation Safety Reporting System (ASRS). A Safety Reporting section established on the FAA RVSM Documentation webpage provides contact forms and reporting procedures.

c. To date wake turbulence has not been reported as a significant factor in DRVSM operations. European authorities also found that reports of wake turbulence encounters did not increase significantly.

after RVSM implementation eight versus seven reports in a ten-month period. In addition, they found that reported wake turbulence was generally similar to moderate clear air turbulence.

d. Pilot Action to Mitigate Wake Turbulence Encounters

1. Pilots should be alert for wake turbulence when operating

(a) In the vicinity of aircraft climbing or descending through their altitude

(b) Approximately 10–30 miles after passing 1,000 feet below opposite-direction traffic

(c) Approximately 10–30 miles behind and 1,000 feet below same-direction traffic

2. Pilots encountering or anticipating wake turbulence in DRVSM airspace have the option of requesting a vector, FL change, or if capable, a lateral offset.

NOTE—

1. *Offsets of approximately a wing span upwind generally can move the aircraft out of the immediate vicinity of another aircraft's wake vortex.*

2. *In domestic U.S. airspace, pilots must request clearance to fly a lateral offset. Strategic lateral offsets flown in oceanic airspace do not apply.*

e. The FAA will track wake turbulence events as an element of its post implementation program. The FAA will advertise wake turbulence reporting procedures to the operator community and publish reporting procedures on the RVSM Documentation Webpage. See address in paragraph 4–6–3 Aircraft and Operator Approval Policy/Procedures, RVSM Monitoring and Databases for Aircraft and Operator Approval.

4–6–8. Pilot/Controller Phraseology

TBL 4–6–1 shows standard phraseology that pilots and controllers will use to communicate in DRVSM operations.

TBL 4-6-1
Pilot/Controller Phraseology

Message	Phraseology
For a controller to ascertain the RVSM approval status of an aircraft	call sign confirm RVSM approved
Pilot indication that flight is RVSM approved	Affirm RVSM
Pilot report of lack of RVSM approval non-RVSM status Pilot will report non-RVSM status as follows a. On the initial call on any frequency in the RVSM airspace and b. In all requests for flight level changes pertaining to flight levels within the RVSM airspace and c. In all read backs to flight level clearances pertaining to flight levels within the RVSM airspace and d. In read back of flight level clearances involving climb and descent through RVSM airspace FL 290 – 410	Negative RVSM supplementary information e.g. Certification flight
Pilot report of one of the following after entry into RVSM airspace all primary altimeters automatic altitude control systems or altitude alerters have failed See paragraph 4-6-9 Contingency Actions Weather Encounters and Aircraft System Failures NOTE– <i>This phrase is to be used to convey both the initial indication of RVSM aircraft system failure and on initial contact on all frequencies in RVSM airspace until the problem ceases to exist or the aircraft has exited RVSM airspace.</i>	Unable RVSM Due Equipment
ATC denial of clearance into RVSM airspace	Unable issue clearance into RVSM airspace maintain FL
Pilot reporting inability to maintain cleared flight level due to weather encounter See paragraph 4-6-9 Contingency Actions Weather Encounters and Aircraft System Failures	Unable RVSM due state reason e.g. turbulence mountain wave
ATC requesting pilot to confirm that an aircraft has regained RVSM-approved status or a pilot is ready to resume RVSM	Confirm able to resume RVSM
Pilot ready to resume RVSM after aircraft system or weather contingency	Ready to resume RVSM

4-6-9. Contingency Actions: Weather Encounters and Aircraft System Failures

TBL 4-6-2 provides pilot guidance on actions to take under certain conditions of aircraft system

failure and weather encounters. It also describes the expected ATC controller actions in these situations. It is recognized that the pilot and controller will use judgment to determine the action most appropriate to any given situation.

TBL 4-6-2

Contingency Actions: Weather Encounters and Aircraft System Failures

Initial Pilot Actions in Contingency Situations	
Initial pilot actions when unable to maintain flight level (FL) or unsure of aircraft altitude-keeping capability •Notify ATC and request assistance as detailed below •Maintain cleared flight level to the extent possible while evaluating the situation •Watch for conflicting traffic both visually and by reference to TCAS if equipped. •Alert nearby aircraft by illuminating exterior lights commensurate with aircraft limitations	
Severe Turbulence and/or Mountain Wave Activity (MWA) Induced Altitude Deviations of Approximately 200 feet	
Pilot will: •When experiencing severe turbulence and/or MWA induced altitude deviations of approximately 200 feet or greater, pilot will contact ATC and state "Unable RVSM Due to state reason" e.g. turbulence, mountain wave •If not issued by the controller, request vector clear of traffic at adjacent FLs •If desired, request FL change or re-route •Report location and magnitude of turbulence or MWA to ATC See paragraph 4-6-6 Guidance on Severe Turbulence and Mountain Wave Activity (MWA) for detailed guidance	Controller will: •Vector aircraft to avoid merging target with traffic at adjacent flight levels, traffic permitting •Advise pilot of conflicting traffic •Issue FL change or re-route, traffic permitting •Issue PIREP to other aircraft Paragraph 4-6-6 explains traffic permitting

Mountain Wave Activity (MWA) Encounters – General	
Pilot actions: •Contact ATC and report experiencing MWA •If so desired pilot may request a FL change or re-route •Report location and magnitude of MWA to ATC See paragraph 4–6–6 for guidance on MWA	Controller actions: •Advise pilot of conflicting traffic at adjacent FL •If pilot requests vector aircraft to avoid merging target with traffic at adjacent RVSM flight levels traffic permitting •Issue FL change or re-route traffic permitting •Issue PIREP to other aircraft Paragraph 4–6–6 explains traffic permitting
NOTE– MWA encounters do not necessarily result in altitude deviations on the order of 200 feet. The guidance below is intended to address less significant MWA encounters.	
Wake Turbulence Encounters	
Pilot should: •Contact ATC and request vector FL change or if capable a lateral offset See paragraph 4–6–7 Guidance on Wake Turbulence	Controller should: •Issue vector FL change or lateral offset clearance traffic permitting Paragraph 4–6–6 explains traffic permitting
“Unable RVSM Due Equipment” Failure of Automatic Altitude Control System, Altitude Altered or All Primary Altimeters	
Pilot will: •Contact ATC and state Unable RVSM Due Equipment •Request clearance out of RVSM airspace unless operational situation dictates otherwise	Controller will: •Provide 2 000 feet vertical separation or appropriate horizontal separation •Clear aircraft out of RVSM airspace unless operational situation dictates otherwise
One Primary Altimeter Remains Operational	
Pilot will: •Cross check stand-by altimeter •Notify ATC of operation with single primary altimeter •If unable to confirm primary altimeter accuracy follow actions for failure of all primary altimeters	Controller will: •Acknowledge operation with single primary altimeter

Transponder Failure	
Pilot will: •Contact ATC and request authority to continue to operate at cleared flight level •Comply with revised ATC clearance if issued NOTE– 14 CFR Section 91.215 (ATC transponder and altitude reporting equipment and use) regulates operation with the transponder inoperative.	Controller will: •Consider request to continue to operate at cleared flight level •Issue revised clearance if necessary

4–6–10. Procedures for Accommodation of Non–RVSM Aircraft

a. General Policies for Accommodation of Non–RVSM Aircraft

1. The RVSM mandate calls for only RVSM authorized aircraft/operators to fly in designated RVSM airspace with limited exceptions. The policies detailed below are intended exclusively for use by aircraft that the FAA has agreed to accommodate. They are not intended to provide other operators a means to circumvent the normal RVSM approval process.

2. If either the operator or aircraft or both have not been authorized to conduct RVSM operations, the aircraft will be referred to as a non–RVSM aircraft. 14 CFR Section 91.180 and Part 91 Appendix G enable the FAA to authorize a deviation to operate a non–RVSM aircraft in RVSM airspace.

3. Non–RVSM aircraft flights will be handled on a workload permitting basis. The vertical separation standard applied between aircraft not approved for RVSM and all other aircraft must be 2 000 feet.

4. Required Pilot Calls. The pilot of non–RVSM aircraft will inform the controller of the lack of RVSM approval in accordance with the direction provided in paragraph 4–6–8 Pilot/Controller Phraseology.

b. Categories of Non–RVSM Aircraft that may be Accommodated

Subject to FAA approval and clearance, the following categories of non–RVSM aircraft may operate in domestic U.S. RVSM airspace provided they have an operational transponder:

1. Department of Defense (DOD) aircraft
2. Flights conducted for aircraft certification and development purposes
3. Active air ambulance flights utilizing a MEDEVAC call sign
4. Aircraft climbing/descending through RVSM flight levels without intermediate level off to/from FLs above RVSM airspace. Policies for these flights are detailed in paragraph 4–6–11 Non–RVSM Aircraft Requesting Climb to and Descent from Flight Levels Above RVSM Airspace Without Intermediate Level Off.
5. Foreign State government aircraft

c. Methods for operators of non–RVSM aircraft to request access to RVSM Airspace. Operators may:

1. **LOA/MOU.** Enter into a Letter of Agreement (LOA) /Memorandum of Understanding (MOU) with the RVSM facility, the Air Traffic facility that provides air traffic services in RVSM airspace. Operators must comply with LOA/MOU.

2. File-and-Fly. File a flight plan to notify the FAA of their intention to request access to RVSM airspace

NOTE–

Priority for access to RVSM airspace will be afforded to RVSM compliant aircraft, then File-and-Fly flights.

d. Center Phone Numbers. Center phone numbers are posted on the RVSM Documentation Webpage North American RVSM Domestic U S RVSM section This address provides direct access to the phone number listing

http://www.faa.gov/ats/ato/150_docs/Center_Phone_No._Non-RVSM_Acft.doc

4–6–11. Non-RVSM Aircraft Requesting Climb to and Descent from Flight Levels Above RVSM Airspace Without Intermediate Level Off

a. File-and-Fly. Operators of Non-RVSM aircraft climbing to and descending from RVSM flight levels should first file a flight plan

b. Non-RVSM aircraft climbing to and descending from flight levels above RVSM airspace will be handled on a workload permitting basis The vertical separation standard applied in RVSM airspace between non-RVSM aircraft and all other aircraft must be 2 000 feet

c. Non-RVSM aircraft climbing to/descending from RVSM airspace can only be considered for accommodation provided

1. Aircraft is capable of a continuous climb/descent and does not need to level off at an intermediate altitude for any operational considerations and

2. Aircraft is capable of climb/descent at the normal rate for the aircraft

d. Required Pilot Calls. The pilot of non-RVSM aircraft will inform the controller of the lack of RVSM approval in accordance with the direction provided in paragraph 4–6–8 Pilot/Controller Phraseology

Section 7. Operational Policy/Procedures for the Gulf of Mexico 50 NM Lateral Separation Initiative

4-7-1. Introduction and Background

a. Introduction. On 20 October 2011 at 0900 UTC the Federal Aviation Administration (FAA) Servicios a la Navegacion en el Espacio Aereo Mexicano (SENEAM) and the Direccion General de Aeronautica Civil (DGAC) Mexico implemented 50 Nautical Mile (NM) lateral separation between aircraft authorized Required Navigation Performance (RNP) 10 or RNP 4 operating in the Gulf of Mexico GoMex Oceanic Control Areas (CTA) Existing Air Traffic Services (ATS) routes and route operating policies did not change for this implementation

b. RNP 10 Versus RNAV 10 Terminology. RNP 10 has the same meaning and application as RNAV 10. The ICAO Performance based Navigation (PBN) Manual (ICAO Doc 9613 Volume II Part B Chapter 1 Implementing RNAV 10 Designated and Authorized as RNP 10) explains that the term RNP 10 was in use before the publication of the ICAO PBN Manual and the manual has grandfathered in its continued use when implementing an RNAV 10 navigation specification

c. Background. 50 NM lateral separation was first applied between aircraft authorized for RNP 10 operations on the North Pacific Route System in April 1998. Since that time 50 NM lateral separation has been expanded throughout the Pacific Flight Information Regions (FIRs) and is currently applied in other airspaces including starting in June 2008 the West Atlantic Route System GoMex 50 NM lateral separation implementation will apply the experience gained in those operations

d. Project Objectives. The project objectives are to

1. Reduce lateral separation to 50 NM between aircraft authorized RNP 10 or RNP 4
2. Leave existing ATS routes and operating policies in place
3. Have approximately 90% of flights conducted by operators/aircraft over the Gulf of Mexico authorized for RNP 10 or RNP 4 operations by the appropriate State authority

4. Accommodate the operation of the small percentage of flights not authorized RNP 10

5. Establish a policy that aircraft equipped with a Single Long Range Navigation System (SLRNS) can qualify for RNP 10 operations in the Gulf of Mexico in accordance with the ICAO PBN Manual and the appropriate FAA and DGAC documents. See paragraph 4-7-7e

e. Control Areas (CTA) Affected. 50 NM lateral separation is implemented in the following CTAs/FIRs/Upper Control Areas (UTA)

1. The Houston Oceanic CTA/FIR and the Gulf of Mexico portion of the Miami Oceanic CTA/FIR

(a) The Monterrey CTA and Merida High CTA within the Mexico FIR/UTA

f. Policy and Procedures Coordination with SENEAM and the DGAC. The policies and procedures are coordinated with SENEAM and the Mexico DGAC. They are applied in the GoMex CTAs where the FAA and SENEAM provide Air Traffic Control

4-7-2. Gulf of Mexico 50 NM Lateral Separation Initiative Web Page: Policy, Procedures and Guidance for Operators and Regulators

Information on plans, policies and procedures for 50 NM lateral separation is posted on the Gulf of Mexico 50 NM Lateral Separation Web Page

http://faa.gov/about/office/org/headquarters/offices/ato/service_units/enroute/oceanic/gomex/

The web page contains detailed guidance on operator and aircraft authorization for RNP 10 or RNP 4 and includes Job Aids with FAA and ICAO document references

4-7-3. Lateral Separation Minima Applied

a. 50 NM lateral separation is applied in the GoMex CTAs between aircraft authorized RNP 10 or RNP 4 at all altitudes above the floor of controlled airspace

b. The current lateral separation minima of 100 NM in the Houston Monterrey and Merida CTAs and 90 NM in the Miami Oceanic CTA will continue to be applied between aircraft not authorized RNP 10 or RNP 4

4-7-4. Operation on Routes on the periphery of the Gulf of Mexico CTAs

Operations on certain routes that fall within the boundaries of affected CTAs are not affected by the introduction of 50 NM lateral separation. Operation on the following routes is not affected

a. Routes that are flown by reference to ICAO standard ground based navigation aids VOR VOR/DME NDB

b. Special Area Navigation RNAV routes Q100 Q102 and Q105 in the Houston Jacksonville and Miami CTAs

4-7-5. Provisions for Accommodation of NonRNP10 Aircraft (Aircraft Not Authorized RNP 10 or RNP 4)

a. Operators of NonRNP10 aircraft must annotate ICAO flight plan Item 18 as follows

STS/NONRNP10 no space between letters and numbers

b. Pilots of NonRNP10 aircraft that operate in GoMex CTAs must report the lack of authorization by stating Negative RNP 10

1. On initial call to ATC in a GoMex CTA

2. In read back of a clearance to climb to or descend from cruise altitude See paragraph 4-7-5e and

3. When approval status is requested by the controller See paragraph 4-7-9e

c. Operators of NonRNP10 aircraft must not annotate ICAO flight plan Item 18. Other Information with NAV/RNP10 or NAV/RNP4 as shown in paragraph 7 if they have not obtained RNP 10 or RNP 4 authorization

d. NonRNP10 operators/aircraft may file any route at any altitude in a GoMex CTA. They will be cleared to operate on their preferred routes and altitudes as traffic permits. 50 NM lateral separation will not be applied to NonRNP10 aircraft

e. NonRNP10 aircraft are encouraged to operate at altitudes above those where traffic is most dense, i.e. at/above FL 380 if possible. NonRNP10 aircraft should plan on completing their climb to or descent from higher FLs within radar coverage if possible

4-7-6. Operator Action

In order to maximize operational flexibility provided by 50 NM lateral separation, operators capable of meeting RNP 10 or RNP 4 that operate on oceanic routes or areas in the GoMex CTAs should obtain authorization for RNP 10 or RNP 4 and annotate the ICAO flight plan accordingly

NOTE-

1. RNP 10 is the minimum "Navigation Specification (NavSpec)" required for the application of 50 NM lateral separation. RNP 4 is an operator option. Operators/aircraft authorized RNP 4 are not required to also obtain RNP 10 authorization.

2. "RNP navigation specification" (e.g., RNP 10) is the term adopted in the ICAO Performance-based Navigation (PBN) Manual (Doc 9613). It replaces the term "RNP type".

4-7-7. RNP 10 or RNP 4 Authorization: Policy and Procedures for Aircraft and Operators

a. RNP NavSpecs Applicable To Oceanic Operations. In accordance with ICAO guidance, RNP 10 and RNP 4 are the only NavSpecs applicable to oceanic and remote area operations. Other RNAV and RNP NavSpecs are applicable to continental en route terminal area and approach operations

b. FAA Documents. The guidance and direction of FAA Order 8400.12, as amended, RNP 10 Operational Authorization, is used to grant RNP 10 authorization to operators and aircraft for which the FAA is responsible. FAA Order 8400.33, as amended, Procedures for Obtaining Authorization for RNP 4 Oceanic/Remote Area Operations, is used to authorize RNP 4. The FAA RNP 10 and RNP 4 orders are consistent with the ICAO PBN Manual guidance discussed below. FAA and ICAO documents are posted on the FAA Gulf of Mexico 50 NM Lateral Separation Initiative Web Page

c. ICAO Performance based Navigation (PBN) Manual (ICAO Doc 9613). Guidance for authorization of RNP 10 and RNP 4 is provided in ICAO Doc 9613. RNP 10 is addressed in Volume II, Part B

Chapter 1 RNP 4 is addressed in Volume II Part C Chapter 1

d. RNP 10 and RNP 4 Job Aids Operators and authorities are encouraged to use the RNP 10 or RNP 4 Job Aids posted on the FAA Gulf of Mexico 50 NM Lateral Separation Initiative Web Page. For U.S. operators, one set of RNP 10 and RNP 4 Job Aids provides references to FAA documents. For international operators, a second set of Job Aids provide references to the ICAO PBN Manual. These Job Aids address the operational and airworthiness elements of aircraft and operator authorization and provide references to appropriate document paragraphs. The Job Aids provide a method for operators to develop and authorities to track the operator/aircraft program elements required for RNP 10 or RNP 4 authorization.

e. Qualification of Aircraft Equipped With a Single Long Range Navigation System (SLRNS) For RNP 10 Operations In GoMex CTAs

1. Background SLRNS operations in the Gulf of Mexico, the Caribbean Sea and the other designated areas have been conducted for at least 25 years. Provisions allowing aircraft equipped with a SLRNS for operations in specified oceanic and off shore areas are contained in the following sections of 14 Code Of Federal Regulations (CFR): 91.511, 121.351, 125.203 and 135.165.

2. ICAO PBN Manual Reference In reference to RNP 10 authorization, the ICAO PBN Manual Volume II Part B Chapter 1 paragraph 1.3.6.2 states that "A State authority may approve the use of a single LRNS in specific circumstances, e.g., North Atlantic MNPS and 14 CFR 121.351, which refer. An RNP 10 approval is still required."

3. Policy Development The FAA worked with the ICAO NACC Office, North American Central American and Caribbean State regulators and ATS providers in the GoMex and Caribbean areas to implement a policy for SLRNS equipped aircraft to qualify for RNP 10 for GoMex operations. Allowing SLRNS equipped aircraft to qualify for RNP 10 enables more operator aircraft to be authorized RNP 10, thereby creating a more uniform operating environment for the application of 50 NM lateral separation. The factors considered were the shortness of the legs outside the range of ground

navigation aids, the availability of radar and VHF coverage in a large portion of GoMex airspace and the absence of events attributed to SLRNS in GoMex operations.

4. Document Revision The following documents were revised or created to enable implementation of the SLRNS/RNP 10 qualification policy:

(a) FAA Order FAAO 8400.12

(b) FAA Order 8900.1 Flight Standards Information Management System (FSIMS)

(c) Paragraph B054 of FAA Operations Specifications and Management Specifications Class II Navigation Using Single Long Range Navigation System

(d) LOA B054 Class II Navigation Using Single Long Range Navigation System (SLRNS) Equipped Airplane Authorized RNP 10. LOAs are applicable to International General Aviation operators.

(e) FAA RNP 10 Job Aid with FAAO 8400.12 references.

(f) RNP 10 Job Aid with ICAO PBN Manual references.

5. SLRNS/RNP 10 Authorization Limited To GoMex At this time, SLRNS qualification for RNP 10 only applies to GoMex operations. Any expansion of this provision will require assessment and agreement by the appropriate State authorities.

f. RNP 10 Time Limit for INS or IRU Only Equipped Aircraft Operators should review their Airplane Flight Manual (AFM), AFM Supplement or other appropriate documents and/or contact the airplane or avionics manufacturer to determine the RNP 10 time limit applicable to their aircraft. They will then need to determine its effect, if any, on their operation. Unless otherwise approved, the basic RNP 10 time limit is 6.2 hours between position updates for aircraft on which Inertial Navigation Systems (INS) or Inertial Reference Units (IRU) provide the only source of long range navigation. Extended RNP 10 time limits of 10 hours and greater are already approved for many IRU systems. FAA Order 8400.12 contains provisions for extending RNP 10 time limits.

4-7-8. Flight Planning Requirements

Operators must make ICAO flight plan annotations in accordance with this paragraph and if applicable paragraph 4-7-5 Provisions for Accommodation of NonRNP10 Aircraft Aircraft Not Authorized RNP 10 or RNP 4

a. ICAO Flight Plan Requirement ICAO flight plans must be filed for operation on oceanic routes and areas in the Houston Oceanic CTA/FIR the Gulf of Mexico portion of the Miami CTA/FIR the Monterrey CTA and Merida High CTA

b. To inform ATC that they have obtained RNP 10 or RNP 4 authorization and are eligible for 50 NM lateral separation operators must

1. Annotate ICAO Flight Plan Item 10 Equipment with the letters R and and

2. Annotate Item 18 Other Information with as appropriate NAV/RNP10 or NAV/RNP4 no space between letters and numbers

NOTE-

1. See paragraph 4-7-8. It provides recommended filing practices for domestic U.S. RNAV operations and filing with EUROCONTROL.

2. On the ICAO Flight Plan, the letter "R" in Item 10 indicates that the aircraft will maintain the appropriate RNP navigation specification for the entire flight through airspace where RNP is prescribed. Letter "Z" in Item 10 indicates that information explaining aircraft navigation and/or communication capability is found in Item 18.

c. 50 NM lateral separation will only be applied to operators/aircraft that annotate the ICAO flight plan in accordance with this policy See 4-7-8b

d. Operators that have not obtained RNP 10 or RNP 4 authorization must not annotate ICAO flight plan Item 18 Other information with NAV/RNP10 or NAV/RNP4 but must follow the practices detailed in paragraph 4-7-5

e. Recommendation for Filing to Show Domestic U S RNAV and Oceanic RNP Capabilities

1. Explanation. The FAA program to enhance operators' capability to communicate their domestic U S RNAV capabilities to ATC has been in place for over three years. It requires an entry following the NAV/ indicator in Item 18 of the ICAO flight plan. The initiative has provisions for including RNAV capabilities for departure D enroute E and

arrival A ith RNAV accuracy values. Detailed instructions are available on the following web page [http:// faa.gov/about/office/org/head quarters/offices/ato/service units/enroute/flight plan filing/](http://faa.gov/about/office/org/headquarters/offices/ato/service_units/enroute/flight_plan_filing/)

EXAMPLE-

An example Item 18 entry is: NAV/RNVD1E2A1. The characters in the example indicate RNAV 1 and RNAV 2 accuracy.

2. Recommendation. It is recommended that operators provide their RNAV capability for domestic U S and capabilities for oceanic operations RNP 10 or RNP 4 by filing NAV/ then the domestic U S alphanumeric sequence then a mandatory space and then RNP10 or RNP4 as appropriate

EXAMPLE-

"NAV/RNVD1E2A1 RNP10"

3. Multiple NAV/ Entries. Operators should be aware that if they make multiple NAV/ entries in a flight plan filed with EUROCONTROL only the last NAV/ entry will be forwarded to the next ATC facility. For example if NAV/RNVD1E2A1 and NAV/RNP10 are entered only NAV/RNP10 will be forwarded. Multiple NAV/ entries should therefore be consolidated following a single NAV/ indicator

4. Recommendation. Item 18 entries made in accordance with paragraph 4 7 8 e 2 above will limit the number of characters needed to show domestic U S RNAV and oceanic RNP capabilities and mitigate the chance that one or the other will not be forwarded for use by FAA domestic and oceanic automation systems

f. Implementation of ICAO Doc 4444, Revised Appendix 2 (Flight Plan). ICAO Doc 4444 Amendment 1 revises Appendix 2 Flight Plan. Specifically Amendment 1 revises the flight plan annotations in Item 10 Equipment and Item 18 Other Information that show aircraft communications navigation and surveillance capabilities. The new Appendix 2 flight plan annotations will be required on 15 November 2012. The following Websites provide information on implementation planning

1. FAA Website [http:// faa.gov/go/fpl2012](http://faa.gov/go/fpl2012)

2. ICAO Flight Plan Implementation Tracking System (FITS): <http://www2.icao.int/en/FITS/Pages/home.aspx>.

4-7-9. Pilot and Dispatcher Procedures: Basic and In-flight Contingency Procedures

a. Basic Pilot Procedures. The RNP 10 and RNP 4 Job Aids contain references to pilot and if applicable dispatcher procedures contained in

1. FAA Order 8400.12C RNP 10 Appendix D Training Programs and Operating Practices and Procedures

2. FAA Order 8400.33 RNP 4 paragraph 9 Operational Requirements and paragraph 10 Training Programs Operating Practices and Procedures

3. ICAO PBN Manual Volume II Part B Chapter 1 RNP 10

4. ICAO PBN Manual Volume II Part C Chapter 1 RNP 4

b. ICAO Doc 4444, Chapter 15, In-flight Contingency Procedures. Doc 4444 Chapter 15 contains important guidance for pilot training programs. For ease of reference significant Chapter 15 paragraphs are posted on the Gulf of Mexico 50 NM Lateral Separation Web Page. Chapter 15 paragraphs posted on the website include

1. Paragraph 15.2 Special Procedures for In Flight Contingencies in Oceanic Airspace Paragraph 15.2.2 General Procedures provides guidance for in flight diversions turn backs and for loss of or significant reduction in required navigation capability when operating in an airspace where the navigation performance accuracy is a prerequisite to the safe conduct of flight operations

2. Paragraph 15.2.3 Weather Deviation Procedures Paragraph 15.2.3 provides guidance for events where the pilot is able to obtain a clearance prior to deviating from track to avoid convective weather and for events where the pilot is unable to obtain clearance prior to deviating

c. Strategic Lateral Offset Procedures (SLOP). Pilots should use SLOP procedures in the course of regular oceanic operations. SLOP procedures are published in ICAO Document 4444 15th Edition Amendment 2 paragraph 16.5 and FAA Notices. They are posted on the Gulf of Mexico 50 NM Lateral Separation Web Page and are addressed in the RNP 10 and RNP 4 Job Aids.

d. Pilot Report of NonRNP10 Status. The pilot must report the lack of RNP 10 or RNP 4 status in accordance with the following

1. When the operator/aircraft is not authorized RNP 10 or RNP 4 See paragraph 4-7-5

2. If approval status is requested by the controller in accordance with paragraph 4-7-9e

e. Pilot Statement of RNP 10 or RNP 4 Approval Status, If Requested. If requested by the controller the pilot must communicate approval status using the following phraseology

Controller Request:
Call sign confirm RNP 10 or 4 approved
Pilot Response:
Affirm RNP 10 approved or Affirm RNP 4 approved as appropriate or
Negative RNP 10 See paragraph 4-7-5 for NonRNP10 aircraft procedures

f. Pilot action when navigation system malfunctions. In addition to the actions suggested in ICAO Doc 4444 Chapter 15 when pilots suspect a navigation system malfunction the following actions should be taken

1. Immediately inform ATC of navigation system malfunction or failure

2. Accounting for wind drift fly magnetic compass heading to maintain track

3. Request radar vectors from ATC when available

Chapter 5. Air Traffic Procedures

Section 1. Preflight

5-1-1. Preflight Preparation

a. Every pilot is urged to receive a preflight briefing and to file a flight plan. This briefing should consist of the latest or most current weather, airport, and en route NAVAID information. Briefing service may be obtained from an FSS either by telephone or interphone, by radio when airborne, or by a personal visit to the station. Pilots with a current medical certificate in the 48 contiguous States may access toll free the Direct User Access Terminal System (DUATS) through a personal computer. DUATS will provide alpha numeric preflight weather data and allow pilots to file domestic VFR or IFR flight plans.

REFERENCE—

AIM, FAA Weather Services, Paragraph 7-1-2 lists DUATS vendors.

NOTE—

Pilots filing flight plans via “fast file” who desire to have their briefing recorded, should include a statement at the end of the recording as to the source of their weather briefing.

b. The information required by the FAA to process flight plans is contained on FAA Form 7233-1 Flight Plan or FAA Form 7233-4 International Flight Plan. The forms are available at all flight service stations. Additional copies will be provided on request.

REFERENCE—

AIM, Flight Plan— VFR Flights, Paragraph 5-1-4

AIM, Flight Plan— IFR Flights, Paragraph 5-1-8

AIM, International Flight Plan— IFR Flights, Paragraph 5-1-9

c. Consult an FSS or a Weather Service Office (WSO) for preflight weather briefing. Supplemental Weather Service Locations (SWSLs) do not provide weather briefings.

d. FSSs are required to advise of pertinent NOTAMs if a *standard* briefing is requested, but if they are overlooked, don't hesitate to remind the specialist that you have not received NOTAM information.

NOTE—

NOTAMs which are known in sufficient time for publication and are of 7 days duration or longer are normally incorporated into the Notices to Airmen Publication and carried there until cancellation time. FDC NOTAMs, which apply to instrument flight procedures, are

also included in the Notices to Airmen Publication up to and including the number indicated in the FDC NOTAM legend. Printed NOTAMs are not provided during a briefing unless specifically requested by the pilot since the FSS specialist has no way of knowing whether the pilot has already checked the Notices to Airmen Publication prior to calling. Remember to ask for NOTAMs in the Notices to Airmen Publication. This information is not normally furnished during your briefing.

REFERENCE—

AIM, Notice to Airmen (NOTAM) System, Paragraph 5-1-3

e. Pilots are urged to use only the latest issue of aeronautical charts in planning and conducting flight operations. Aeronautical charts are revised and reissued on a regular scheduled basis to ensure that depicted data are current and reliable. In the conterminous U.S., Sectional Charts are updated every 6 months. IFR En Route Charts every 56 days and amendments to civil IFR Approach Charts are accomplished on a 56-day cycle with a change notice volume issued on the 28-day midcycle. Charts that have been superseded by those of a more recent date may contain obsolete or incomplete flight information.

REFERENCE—

AIM, General Description of Each Chart Series, Paragraph 9-1-4

f. When requesting a preflight briefing, identify yourself as a pilot and provide the following:

1. **Type of flight planned; e.g., VFR or IFR.**
2. **Aircraft's number or pilot's name.**
3. **Aircraft type.**
4. **Departure Airport.**
5. **Route of flight.**
6. **Destination.**
7. **Flight altitude(s).**
8. **ETD and ETE.**

g. Prior to conducting a briefing, briefers are required to have the background information listed above so that they may tailor the briefing to the needs of the proposed flight. The objective is to communicate a picture of meteorological and aeronautical information necessary for the conduct of

a safe and efficient flight. Briefers use all available weather and aeronautical information to summarize data applicable to the proposed flight. They do not read weather reports and forecasts verbatim unless specifically requested by the pilot. FSS briefers do not provide FDC NOTAM information for special instrument approach procedures unless specifically asked. Pilots authorized by the FAA to use special instrument approach procedures must specifically request FDC NOTAM information for these procedures. Pilots who receive the information electronically will receive NOTAMs for special IAPs automatically.

REFERENCE—

AIM, *Preflight Briefings*, Paragraph 7-1-4 contains those items of a weather briefing that should be expected or requested.

h. FAA by 14 CFR Part 93 Subpart K has designated High Density Traffic Airports (HDTAs) and has prescribed air traffic rules and requirements for operating aircraft excluding helicopter operations to and from these airports.

REFERENCE—

Airport/Facility Directory, *Special Notices Section*.

AIM, *Airport Reservation Operations and Special Traffic Management Programs*, Paragraph 4-1-22

i. In addition to the filing of a flight plan, if the flight will traverse or land in one or more foreign countries, it is particularly important that pilots leave a complete itinerary with someone directly concerned and keep that person advised of the flight's progress. If serious doubt arises as to the safety of the flight, that person should first contact the FSS.

REFERENCE—

AIM, *Flights Outside the U.S. and U.S. Territories*, Paragraph 5-1-1

j. Pilots operating under provisions of 14 CFR Part 135 on a domestic flight and not having an FAA assigned 3-letter designator are urged to prefix the normal registration N number with the letter T on flight plan filing, e.g., TN1234B.

REFERENCE—

AIM, *Aircraft Call Signs*, Paragraph 4-2-4

5-1-2. Follow IFR Procedures Even When Operating VFR

a. To maintain IFR proficiency, pilots are urged to practice IFR procedures whenever possible, even when operating VFR. Some suggested practices include:

1. Obtain a complete preflight and weather briefing. Check the NOTAMs.

2. File a flight plan. This is an excellent low-cost insurance policy. The cost is the time it takes to fill it out. The insurance includes the knowledge that someone will be looking for you if you become overdue at your destination.

3. Use current charts.

4. Use the navigation aids. Practice maintaining a good course—keep the needle centered.

5. Maintain a constant altitude, which is appropriate for the direction of flight.

6. Estimate en route position times.

7. Make accurate and frequent position reports to the FSSs along your route of flight.

b. Simulated IFR flight is recommended under the hood, however, pilots are cautioned to review and adhere to the requirements specified in 14 CFR Section 91.109 before and during such flight.

c. When flying VFR at night, in addition to the altitude appropriate for the direction of flight, pilots should maintain an altitude which is at or above the minimum en route altitude as shown on charts. This is especially true in mountainous terrain where there is usually very little ground reference. Do not depend on your eyes alone to avoid rising unlighted terrain or even lighted obstructions such as TV towers.

5-1-3. Notice to Airmen (NOTAM) System

a. Time critical aeronautical information, which is of either a temporary nature or not sufficiently known in advance to permit publication on aeronautical charts or in other operational publications, receives immediate dissemination via the National NOTAM System.

NOTE—

1. NOTAM information is that aeronautical information that could affect a pilot's decision to make a flight. It includes such information as airport or aerodrome primary runway closures, taxiways, ramps, obstructions, communications, airspace, changes in the status of navigational aids, ILSs, radar service availability, and other information essential to planned en route, terminal, or landing operations.

2. NOTAM information is transmitted using standard contractions to reduce transmission time. See TBL 5-1-2 for a listing of the most commonly used contractions. For a complete listing, see FAA Order JO 7340.2, *Contractions*.

b. NOTAM information is classified into five categories. These are NOTAM D or distant Flight

Data Center FDC NOTAMs Pointer NOTAMs Special Activity Airspace SAA NOTAMs and Military NOTAMs

1. NOTAM (D) information is disseminated for all navigational facilities that are part of the National Airspace System NAS all public use airports seaplane bases and heliports listed in the Airport/Facility Directory A/FD The complete file of all NOTAM D information is maintained in a computer database at the Weather Message Switching Center WMSC located in Atlanta Georgia This category of information is distributed automatically via Service A telecommunications system Air traffic facilities primarily FSSs with Service A capability have access to the entire WMSC database of NOTAMs These NOTAMs remain available via Service A for the duration of their validity or until published Once published the NOTAM data is deleted from the system NOTAM D information includes such data as taxiway closures personnel and equipment near or crossing runways and airport lighting aids that do not affect instrument approach criteria such as VASI

All NOTAM Ds must have one of the key words listed in TBL 5-1-1 as the first part of the text after the location identifier

2. FDC NOTAMs. On those occasions when it becomes necessary to disseminate information which is regulatory in nature the National Flight Data Center NFDC in Washington DC will issue an FDC NOTAM FDC NOTAMs contain such things as amendments to published IAPs and other current aeronautical charts They are also used to advertise temporary flight restrictions caused by such things as natural disasters or large scale public events that may generate a congestion of air traffic over a site

NOTE—

1. DUATS vendors will provide FDC NOTAMs only upon site-specific requests using a location identifier.

2. NOTAM data may not always be current due to the changeable nature of national airspace system components, delays inherent in processing information, and occasional temporary outages of the U.S. NOTAM system. While en route, pilots should contact FSSs and obtain updated information for their route of flight and destination.

3. Pointer NOTAMs. NOTAMs issued by a flight service station to highlight or point out another

NOTAM such as an FDC or NOTAM D NOTAM This type of NOTAM will assist users in cross-referencing important information that may not be found under an airport or NAVAID identifier Key words in pointer NOTAMs must match the key words in the NOTAM that is being pointed out The key word in pointer NOTAMs related to Temporary Flight Restrictions TFR must be AIRSPACE

4. SAA NOTAMs. These NOTAMs are issued when Special Activity Airspace will be active outside the published schedule times and when required by the published schedule Pilots and other users are still responsible to check published schedule times for Special Activity Airspace as well as any NOTAMs for that airspace

5. Military NOTAMs. NOTAMs pertaining to U S Air Force Army Marine and Navy navigational aids/airports that are part of the NAS

c. Notices to Airmen Publication (NTAP). The NTAP is published by Mission Support Services ATC Products and Publications every 28 days Data of a permanent nature can be published in the NTAP as an interim step between publication cycles of the A/FD and aeronautical charts The NTAP is divided into four parts

1. Notices in part 1 are provided by ATC Products and Publications This part contains selected FDC NOTAMs that are expected to be in effect on the effective date of the publication This part is divided into three sections

(a) Section 1 Airway NOTAMs reflects airway changes that fall within an ARTCC's airspace

(b) Section 2 Procedural NOTAMs

(c) Section 3 General NOTAMs contains NOTAMs that are general in nature and not tied to a specific airport/facility for example flight advisories and restrictions open duration special security instructions and special flight rules area

2. Part 2 provided by NFDC contains Part 95 Revisions Revisions to Minimum En Route IFR Altitudes and Changeover Points

3. Part 3 International NOTAMs is divided into two sections

(a) Section 1 International Flight Prohibitions Potential Hostile Situations and Foreign Notices

(b) Section 2 International Oceanic Airspace Notices

4. Part 4 Graphic Notices compiled by ATC Products and Publications from data provided by FAA service area offices and other lines of business

contains special notices and graphics pertaining to almost every aspect of aviation such as military training areas large scale sporting events air show information Special Traffic Management Programs STMP and airport specific information This part is comprised of 6 sections General Special Military Operations Airport and Facility Notices Major Sporting and Entertainment Events Airshows and Special Notices

TBL 5-1-1

NOTAM Keywords

Keyword	Definition
RWY <i>Example</i>	Runway BNA BNA RW 36 CLSD 1309131300-1309132000EST
TWY <i>Example</i>	Taxiway BTW BTW TW C EDGE LGT OBSC 1310131300-1310141300EST
APRON <i>Example</i>	Apron/Ramp BNA BNA APRON NORTH APRON EAST SIDE CLSD 13111221500 1312220700
AD <i>Example</i>	Aerodrome BET BET AD ELK NEAR MVMT AREAS 1309251300 1309262200EST
OBST <i>Example</i>	Obstruction SJT SJT OBST MOORED BALLOON WITHIN AREA DEFINED AS 1NM RADIUS OF SJT 2430FT 510FT AGL FLAGGED 1309251400-1309261400EST
NAV <i>Example</i>	Navigation Aids SHV SHV NAV ILS RW 32 110 3 COMMISSIONED 1311251600 PERM
COM <i>Example</i>	Communications INW INW COM REMOTE COM OUTLET 122 6 OUT OF SERVICE 1307121330 1307151930EST
SVC <i>Example</i>	Services ROA ROA SVC TWR COMMISSIONED 1301050001 PERM
AIRSPACE <i>Example</i>	Airspace MIV MIV AIRSPACE AIRSHOW ACFT WITHIN AREA DEFINED AS 5NM RADIUS OF MIV SFC 10000FT AVOIDANCE ADVISED 1308122100 1308122300
OPD <i>Example</i>	Obstacle Departure Procedure FDC 2/9700 DIK ODP DICKINSON THEODORE ROOSEVELT RGNL DICKINSON ND TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES AMDT 1 DEPARTURE PROCEDURE RW 25 CLIMB HEADING 250 TO 3500 BEFORE TURNING LEFT ALL OTHER DATA REMAINS AS PUBLISHED THIS IS TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES AMDT 1A 1305011200 PERM
SID <i>Example</i>	Standard Instrument Departure FDC x/xxxx DFW SID DALLAS/FORT WORTH INTL DALLAS T PODDE THREE DEPARTURE CHANGE NOTES TO READ RW S 17C/R 18L/R DO NOT EXCEED 240KT UNTIL LARRN RW S 35L/C 36L/R DONOT EXCEED 240KT UNTIL KMART 1305011200 1312111200EST
STAR <i>Example</i>	Standard Terminal Arrival FDC x/xxxx DCA STAR RONALD REAGAN WASHINGTON NATIONAL WASHINGTON DC W RRD TWO ARRIVAL SHAAR TRANSITION ROUTE FROM DRU INT TO W RRD INT NOT AUTHORIZED AFTER DRU INT EXPECT RADAR VECTORS TO AML VORTAC 1305011200 1312111200ES

Keyword	Definition
CHART <i>Example</i>	Chart FDC 2/9997 DAL IAP DALLAS LOVE FIELD DALLAS T ILS OR LOC RW 31R AMDT 5 CHART NOTE SIMULTANEOUS APPROACH AUTHORIZED WITH RW 31L MISSED APPROACH CLIMB TO 1000 THEN CLIMBING RIGHT TURN TO 5000 ON HEADING 330 AND CIRCLE 046 TO FINGER INT/CVE 36.4 DME AND HOLD CHART LOC RW 31L THIS IS ILS OR LOC RW 31R AMDT 5A 1305011200 PERM
DATA <i>Example</i>	Data FDC 2/9700 DIK ODP DICKINSON THEODORE ROOSEVELT RGNL DICKINSON ND TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES AMDT 1 DEPARTURE PROCEDURE RW 25 CLIMB HEADING 250 TO 3500 BEFORE TURNING LEFT ALL OTHER DATA REMAINS AS PUBLISHED THIS IS TAKEOFF MINIMUMS AND OBSTACLE DEPARTURE PROCEDURES AMDT 1A 1305011200 PERM
IAP <i>Example</i>	Instrument Approach Procedure FDC 2/9997 DAL IAP DALLAS LOVE FIELD DALLAS T ILS OR LOC RW 31R AMDT 5 CHART NOTE SIMULTANEOUS APPROACH AUTHORIZED WITH RW 31L MISSED APPROACH CLIMB TO 1000 THEN CLIMBING RIGHT TURN TO 5000 ON HEADING 330 AND CIRCLE 046 TO FINGER INT/CVE 36.4 DME AND HOLD CHART LOC RW 31L THIS IS ILS OR LOC RW 31R AMDT 5A 1305011200 PERM
VFP <i>Example</i>	Visual Flight Procedures FDC / JFK VFP JOHN F KENNEDY INTL NEW YORK N PARKWAY VISUAL RW 13L/R ORIG WEATHER MINIMUMS 3000 FOOT CEILING AND 3 MILES VISIBILITY 1303011200 1308011400EST
ROUTE <i>Example</i>	Route FDC x/xxxx FW OK ROUTE FW KC V140 SA RE S O VORTAC OK TO TULSA TUL VORTAC OK MEA 4300 1305041000 1306302359EST
SPECIAL <i>Example</i>	Special FDC x/xxxx PAJN SPECIAL JUNEAU INTERNATIONAL JUNEAU AK LDA 2 RW 8 AMDT 9 PROCEDURE TURN NA 1305011200 1312111200EST
SECURITY <i>Example</i>	Security FDC SECURITY SPECIAL NOTICE THIS NOTICE IS TO EMPHASIZE THAT BEFORE OPERATING IN OR ADJACENT TO IRANIAN AIRSPACE ALL U.S. AIRMEN AND OPERATORS SHOULD BE FAMILIAR WITH CURRENT CONDITIONS IN THE MIDDLE EAST THE U.S. DEPART- MENT OF STATE HAS ISSUED A TRAVEL WARNING FOR IRAN ADVISING IN PART THAT THE U.S. GOVERNMENT DOES NOT CURRENTLY MAINTAIN DIPLOMATIC OR CONSULAR RELATIONS WITH THE ISLAMIC REPUBLIC OF IRAN AN U.S. OPERATOR PLANNING A FLIGHT THROUGH IRANIAN AIRSPACE SHOULD PLAN IN ADVANCE AND HAVE ALL CURRENT NOTAMS AND AERONAUTICAL INFORMATION FOR AN PLANNED FLIGHT 1311011200 1403301800EST
U	Unverified Aeronautical Information <i>for use only where authorized by Letter of Agreement</i>
O	Other Aeronautical Information

NOTE—

1. * **Unverified Aeronautical Information** can be movement area or other information received that meets NOTAM criteria and has not been confirmed by the Airport Manager (AMGR) or their designee. If Flight Service is unable to contact airport management, Flight Service must forward (U) NOTAM information to the United States NOTAM System (USNS). Subsequent to USNS distribution of a (U) NOTAM, Flight Service will inform airport management of the action taken as soon as practical. Any such NOTAM will be prefaced with “(U)” as the keyword and followed by the appropriate keyword contraction, following the location identifier.

2. ** **Other Aeronautical Information** is that which is received from any authorized source that may be beneficial to aircraft operations and does not meet defined NOTAM criteria. Any such NOTAM will be prefaced with “(O)” as the keyword following the location identifier.

TBL 5-1-2
Contractions Commonly Found in NOTAMs

	A
ABN	Aerodrome Beacon
ABV	Above
ACFT	Aircraft
ACT	Active
ADJ	Ad acent
AGL	Above Ground Level
ALS	Approach Light System
ALT	Altitude
ALTN/ALTNL	Alternate/Alternately
AMDT	Amendment
APCH	Approach
ARFF	Aircraft Rescue & Fire Fighting
ASDA	Accelerate Stop Distance Available
ASOS	Automated Surface Observing System
ASPH	Asphalt
ATC	Air Traffic Control
ATIS	Automated Terminal Information Service
AVBL	Available
AWOS	Automatic Weather Observing System
AWSS	Automated Weather Sensor System
A M	A imuth
	B
BTN	Bet een
	C
CAT	Category
CH	Channel
CL	Centerline
CLSD	Closed
COM	Communication
CONC	Concrete
CONT	Continue/Continuously
CTL	Control
	D
DCT	Direct
DEP	Depart/Departure
DH	Decision Height
DLA/DLAD	Delay/Delayed
DME	Distance Measuring E uipment
DWPNT	De Point Temperature
	E
E	East
EB	Eastbound
ELEV	Elevate/Elevation
ENG	Engine
EST	Estimated
E C	Except
	F
FAC	Facility
FAF	Final Approach Fix
FDC	Flight Data Center
FICON	Field Condition
FREQ	Fre uency

FSS	Flight Service Station
FT	Feet
	G
GCA	Ground Controlled Approach
GP	Glide Path
GPS	Global Positioning System
GRVL	Gravel
	H
HEL	Helicopter
HIRL	High Intensity Run ay Lights
HR	Hour
	I
ID	Identify/Identifier
IFR	Instrument Flight Rules
ILS	Instrument Landing System
IM	Inner Marker
IN	Inch/Inches
INOP	Inoperative
INST	Instrument
INT	Intersection
INTST	Intensity
	L
L	Left
LB	Pound/Pounds
LDA	Landing Distance Available
LDG	Landing
LGT/LGTD	Light/Lighted
LIRL	Lo Intensity Run ay Edge Lights
LNDG	Landing
LOC	Locali er
	M
MALS	Medium Intensity Approach Lighting System
MALSF	Medium Intensity Approach Lighting System ith Se uenced Flashers
MALSR	Medium Intensity Approach Lighting System ith Run ay Alignment Indicator Lights
MCA	Minimum Crossing Altitude
MDA	Minimum Descent Altitude
MEA	Minimum En Route Altitude
MIRL	Medium Intensity Run ay Edge Lights
MKR	Marker
MM	Middle Marker
MNM	Minimum
MOA	Military Operations Area
MOCA	Minimum Obstruction Clearance Altitude
MSG	Message
MSL	Mean Sea Level
MU	Designate a Friction Value Representing Run ay Surface Conditions
	N
N	North
NDB	Nondirectional Radio Beacon
NE	Northeast
NM	Nautical Mile/s

NTAP	Notice To Airmen Publication
NW	North west
	O
OBSC	Obscured
OM	Outer Marker
OPR	Operate
ORIG	Original
	P
PAPI	Precision Approach Path Indicator
PARL	Parallel
PA	Passenger/s
PCL	Pilot Controlled Lighting
PERM	Permanent
PJE	Parachute Jumping Activities
PLA	Practice Low Approach
PN	Prior Notice Required
PPR	Prior Permission Required
PT	Procedure Turn
	R
RAI	Runway Alignment Indicator
RCL	Runway Centerline
RCLL	Runway Centerline Light
REC	Receive/Receiver
RLLS	Runway Lead-in Light System
RNAV	Area Navigation
RVR	Runway Visual Range
RVRM	RVR Midpoint
RVRR	RVR Rollout
RVRT	RVR Touchdown
RW	Runway
	S
S	South
SAA	Special Activity Airspace
SE	Southeast
SFC	Surface
SKED	Scheduled
SN	Snow
SR	Sunrise
SS	Sunset
SSALF	Simplified Short Approach Lighting System with Sequenced Flashers
SSALR	Simplified Short Approach Lighting System with Runway Alignment Indicator Lights
SSALS	Simplified Short Approach Lighting System
STAR	Standard Terminal Arrival
STD	Standard
SW	Southwest
	T
TACAN	Tactical Air Navigational Aid
TD	Touchdown zone
TEMPO	Temporary
TFC	Traffic
TFR	Temporary Flight Restriction
TGL	Touch and Go Landings

THR	Threshold
TKOF	Takeoff
TODA	Take-off Distance Available
TORA	Take-off Run Available
TWR	Aerodrome Control Tower
TW	Taxiway
	U
UNL	Unlimited
UNREL	Unreliable
	V
VASI	Visual Approach Slope Indicator
VFR	Visual Flight Rules
VHF	Very High Frequency
VIS	Visibility
VMC	Visual Meteorological Conditions
VOLMET	Meteorological Information for Aircraft in Flight
VOR	VHF Omni Directional Radio Range
VORTAC	VOR and TACAN collocated
VOT	VOR Test Facility
	W
W	West
WAAS	Wide Area Augmentation System
WDI	Wind Direction Indicator
WPT	Waypoint
W	Weather

5-1-4. Flight Plan – VFR Flights

a. Except for operations in or penetrating a Coastal or Domestic ADI or DEWI a flight plan is not required for VFR flight

REFERENCE–

AIM, National Security, Paragraph 5-6-1

b. It is strongly recommended that a flight plan for a VFR flight be filed with an FAA FSS. This will ensure that you receive VFR Search and Rescue Protection

REFERENCE–

AIM, Search and Rescue, Paragraph 6-2-6 gives the proper method of filing a VFR flight plan.

c. To obtain maximum benefits from the flight plan program flight plans should be filed directly with the nearest FSS. For your convenience FSSs provide aeronautical and meteorological briefings while accepting flight plans. Radio may be used to file if no other means are available

NOTE–

Some states operate aeronautical communications facilities which will accept and forward flight plans to the FSS for further handling.

d. When a stopover flight is anticipated it is recommended that a separate flight plan be filed for

each leg when the stop is expected to be more than 1 hour duration

e. Pilots are encouraged to give their departure times directly to the FSS serving the departure airport or as otherwise indicated by the FSS when the flight plan is filed. This will ensure more efficient flight plan service and permit the FSS to advise you of significant changes in aeronautical facilities or meteorological conditions. When a VFR flight plan is filed, it will be held by the FSS until 1 hour after the proposed departure time unless

1. The actual departure time is received
2. A revised proposed departure time is received
3. At a time of filing, the FSS is informed that the proposed departure time will be met, but actual time cannot be given because of inadequate communications assumed departures
- f.** On pilot's request at a location having an active tower, the aircraft identification will be forwarded by the tower to the FSS for reporting the actual departure time. This procedure should be avoided at busy airports

g. Although position reports are not required for VFR flight plans, periodic reports to FAA FSSs along

the route are good practice. Such contacts permit significant information to be passed to the transiting aircraft and also serve to check the progress of the flight should it be necessary for any reason to locate the aircraft.

EXAMPLE—

1. *Bonanza 314K, over Kingfisher at (time), VFR flight plan, Tulsa to Amarillo.*
2. *Cherokee 5133J, over Oklahoma City at (time), Shreveport to Denver, no flight plan.*

h. Pilots not operating on an IFR flight plan and when in level cruising flight are cautioned to conform with VFR cruising altitudes appropriate to the direction of flight.

i. When filing VFR flight plans, indicate aircraft equipment capabilities by appending the appropriate suffix to aircraft type in the same manner as that prescribed for IFR flight.

REFERENCE—

AIM, Flight Plan— Domestic IFR Flights, Paragraph 5–1–8

j. Under some circumstances, ATC computer tapes can be useful in constructing the radar history of a downed or crashed aircraft. In each case, knowledge of the aircraft's transponder equipment is necessary in determining whether or not such computer tapes might prove effective.

FIG 5-1-1
FAA Flight Plan
Form 7233-1 (8-82)

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION		FAA USE ONLY ☐ PILOT BRIEFING ☐ VNR ☐ STOPOVER			TIME STARTED		SPECIALIST INITIALS		
FLIGHT PLAN									
1 TYPE	2 AIRCRAFT IDENTIFICATION	3 AIRCRAFT TYPE/SPECIAL EQUIPMENT	4 TRUE AIRSPEED	5 DEPARTURE POINT	6 DEPARTURE TIME		7 CRUISING ALTITUDE		
VFR					PROPOSED	ACTUAL			
IFR			KTS						
DVFR									
8 ROUTE OF FLIGHT									
9 DESTINATION Name of airport and city		10 EST TIME ENROUTE		11 REMARKS					
		HOURS MINUTES							
12 FUEL ON BOARD		13 ALTERNATE AIRPORT S		14 PILOT'S NAME ADDRESS & TELEPHONE NUMBER & AIRCRAFT HOME BASE				15 NUMBER ABOARD	
HOURS	MINUTES								
				17 DESTINATION CONTACT/TELEPHONE OPTIONAL					
16 COLOR OF AIRCRAFT		CIVIL AIRCRAFT PILOTS, FAR 91 requires you file an IFR flight plan to operate under instrument flight rules in controlled airspace. Failure to file could result in a civil penalty not to exceed \$1,000 for each violation (Section 901 of the Federal Aviation Act of 1958, as amended). Filing of a VFR flight plan is recommended as a good operating practice. See also Part 99 for requirements concerning DVFR flight plans.							
FAA Form 7233 1 8 82			CLOSE VFR FLIGHT PLAN WITH			FSS ON ARRIVAL			

k. Flight Plan Form – See FIG 5-1-1

l. Explanation of VFR Flight Plan Items.

1. Block 1. Check the type flight plan. Check both the VFR and IFR blocks if composite VFR/IFR.

2. Block 2. Enter your complete aircraft identification including the prefix N if applicable.

3. Block 3. Enter the designator for the aircraft or if unknown consult an FSS briefer.

4. Block 4. Enter your true airspeed TAS.

5. Block 5. Enter the departure airport identifier code or if unknown the name of the airport.

6. Block 6. Enter the proposed departure time in Coordinated Universal Time (UTC). If airborne specify the actual or proposed departure time as appropriate.

7. Block 7. Enter the appropriate VFR altitude to assist the briefer in providing weather and wind information.

8. Block 8. Define the route of flight by using NAVAID identifier codes and airways.

9. Block 9. Enter the destination airport identifier code or if unknown the airport name.

NOTE–

Include the city name (or even the state name) if needed for clarity.

10. Block 10. Enter your estimated time en route in hours and minutes.

11. Block 11. Enter only those remarks that may aid in VFR search and rescue such as planned stops en route or student cross country or remarks pertinent to the clarification of other flight plan information such as the radiotelephony call sign associated with a designator filed in Block 2 if the radiotelephony is new or has changed within the last 60 days or is a special FAA assigned temporary radiotelephony. Items of a personal nature are not accepted.

12. Block 12. Specify the fuel on board in hours and minutes

13. Block 13. Specify an alternate airport if desired

14. Block 14. Enter your complete name address and telephone number Enter sufficient information to identify home base airport or operator

NOTE–

This information is essential in the event of search and rescue operations.

15. Block 15. Enter total number of persons on board POB including cre

16. Block 16. Enter the predominant colors

17. Block 17. Record the FSS name for closing the flight plan If the flight plan is closed with a different FSS or facility state the recorded FSS name that could normally have closed your flight plan

NOTE–

1. Optional– record a destination telephone number to assist search and rescue contact should you fail to report or cancel your flight plan within 1/2 hour after your estimated time of arrival (ETA).

2. The information transmitted to the destination FSS will consist only of flight plan blocks 2, 3, 9, and 10. Estimated time en route (ETE) will be converted to the correct ETA.

5–1–5. Operational Information System (OIS)

a. The FAA's Air Traffic Control System Command Center ATCSCC maintains a web site with near real-time National Airspace System NAS status information NAS operators are encouraged to access the web site at <http://www.fly.faa.gov> prior to filing their flight plan

b. The web site consolidates information from advisories An advisory is a message that is disseminated electronically by the ATCSCC that contains information pertinent to the NAS

1. Advisories are normally issued for the following items

(a) Ground Stops

(b) Ground Delay Programs

(c) Route Information

(d) Plan of Operations

(e) Facility Outages and Scheduled Facility Outages

(f) Volcanic Ash Activity Bulletins

(g) Special Traffic Management Programs

2. This list is not all-inclusive Any time there is information that may be beneficial to a large number of people an advisory may be sent Additionally there may be times when an advisory is not sent due to workload or the short length of time of the activity

3. Route information is available on the web site and in specific advisories Some route information subject to the 56-day publishing cycle is located on the OIS under Products Route Management Tool RMT and What's New Playbook The RMT and Playbook contain routings for use by Air Traffic and NAS operators when they are coordinated real-time and are then published in an ATCSCC advisory

4. Route advisories are identified by the word Route in the header the associated action is required RQD recommended RMD planned PLN or for your information F I Operators are expected to file flight plans consistent with the Route RQD advisories

5. Electronic System Impact Reports are on the intranet at <http://atcsc.faa.gov/ois/> under System Impact Reports This page lists scheduled outages/events/projects that significantly impact the NAS for example runway closures air shows and construction projects Information includes anticipated delays and traffic management initiatives TMI that may be implemented

5–1–6. Flight Plan– Defense VFR (DVFR) Flights

VFR flights except DOD or law enforcement flights into a Coastal or Domestic ADI /DEWI are required to file DVFR flight plans for security purposes Detailed ADI procedures are found in Section 6 National Security and Interception Procedures of this chapter See 14 CFR Part 99

5-1-7. Composite Flight Plan (VFR/IFR Flights)

a. Flight plans which specify VFR operation for one portion of a flight and IFR for another portion will be accepted by the FSS at the point of departure. If VFR flight is conducted for the first portion of the flight, pilots should report their departure time to the FSS with whom the VFR/IFR flight plan was filed and subsequently close the VFR portion and request ATC clearance from the FSS nearest the point at which change from VFR to IFR is proposed. Regardless of the type facility you are communicating with, FSS center or tower, it is the pilot's responsibility to request that facility to **CLOSE VFR FLIGHT PLAN**. The pilot must remain in VFR weather conditions until operating in accordance with the IFR clearance.

b. When a flight plan indicates IFR for the first portion of flight and VFR for the latter portion, the pilot will normally be cleared to the point at which the change is proposed. After reporting over the clearance limit and not desiring further IFR clearance, the pilot should advise ATC to cancel the IFR portion of the flight plan. Then the pilot should contact the nearest FSS to activate the VFR portion of the flight plan. If the pilot desires to continue the IFR flight plan beyond the clearance limit, the pilot should contact ATC at least 5 minutes prior to the clearance limit and request further IFR clearance. If the requested clearance is not received prior to reaching the clearance limit, the pilot will be expected to enter into a standard holding pattern on the radial or course to the fix unless a holding pattern for the clearance limit fix is depicted on a U.S. Government or commercially produced meeting FAA requirements, low or high altitude enroute area or STAR chart. In this case the pilot will hold according to the depicted pattern.

5-1-8. Flight Plan (FAA Form 7233-1)-Domestic IFR Flights

NOTE-

1. Procedures outlined in this section apply to operators filing FAA Form 7233-1 (Flight Plan) and to flights that will be conducted entirely within U.S. domestic airspace.
2. Filers utilizing FAA Form 7233-1 may not be eligible for assignment of RNAV SIDs and STARs. Filers desiring assignment of these procedures should file using FAA Form

7233-4 (International Flight Plan), as described in paragraph 5-1-9.

a. General

1. Prior to departure from within or prior to entering controlled airspace, a pilot must submit a complete flight plan and receive an air traffic clearance if weather conditions are below VFR minimums. Instrument flight plans may be submitted to the nearest FSS or ATCT either in person or by telephone or by radio if no other means are available. Pilots should file IFR flight plans at least 30 minutes prior to estimated time of departure to preclude possible delay in receiving a departure clearance from ATC. In order to provide FAA traffic management units strategic route planning capabilities, nonscheduled operators conducting IFR operations above FL 230 are requested to voluntarily file IFR flight plans at least 4 hours prior to estimated time of departure (ETD). To minimize your delay in entering Class B, Class C, Class D, and Class E surface areas at destination, when IFR weather conditions exist or are forecast at that airport, an IFR flight plan should be filed before departure. Otherwise, a 30 minute delay is not unusual in receiving an ATC clearance because of time spent in processing flight plan data. Traffic saturation frequently prevents control personnel from accepting flight plans by radio. In such cases, the pilot is advised to contact the nearest FSS for the purpose of filing the flight plan.

NOTE-

1. There are several methods of obtaining IFR clearances at nontower, non-FSS, and outlying airports. The procedure may vary due to geographical features, weather conditions, and the complexity of the ATC system. To determine the most effective means of receiving an IFR clearance, pilots should ask the nearest FSS the most appropriate means of obtaining the IFR clearance.
2. When requesting an IFR clearance, it is highly recommended that the departure airport be identified by stating the city name and state and/or the airport location identifier in order to clarify to ATC the exact location of the intended airport of departure.

2. When filing an IFR flight plan, include as a prefix to the aircraft type, the number of aircraft, when more than one, and/or heavy aircraft indicator, H/, if appropriate.

EXAMPLE-

H/DC10/A
2/F15/A

3. When filing an IFR flight plan identify the equipment capability by adding a suffix preceded by a slant to the AIRCRAFT TYPE as shown in TBL 5-1-3 Aircraft Suffixes

NOTE-

1. ATC issues clearances based on filed suffixes. Pilots should determine the appropriate suffix based upon desired services and/or routing. For example, if a desired route/procedure requires GPS, a pilot should file /G even if the aircraft also qualifies for other suffixes.

2. For procedures requiring GPS, if the navigation system does not automatically alert the flight crew of a loss of GPS, the operator must develop procedures to verify correct GPS operation.

3. The suffix is not to be added to the aircraft identification or be transmitted by radio as part of the aircraft

identification.

4. It is recommended that pilots file the maximum transponder or navigation capability of their aircraft in the equipment suffix. This will provide ATC with the necessary information to utilize all facets of navigational equipment and transponder capabilities available

5. When filing an IFR flight plan via telephone or radio it is highly recommended that the departure airport be clearly identified by stating the city name and state and/or airport location identifier. With cell phone use and flight service specialists covering larger areas of the country clearly identifying the departure airport can prevent confusing your airport of departure with those of identical or similar names in other states

**TBL 5-1-3
Aircraft Equipment Suffixes**

	Navigation Capability	Transponder Capability	Suffix
RVSM	No GNSS No RNAV	Transponder with Mode C	/W
	RNAV No GNSS	Transponder with Mode C	/
	GNSS	Transponder with Mode C	/L
No RVSM	No DME	No Transponder	/
		Transponder with no Mode C	/T
		Transponder with Mode C	/U
	DME	No Transponder	/D
		Transponder with no Mode C	/B
		Transponder with Mode C	/A
	TACAN	No Transponder	/M
		Transponder with no Mode C	/N
		Transponder with Mode C	/P
	RNAV no GNSS	No Transponder	/
		Transponder with no Mode C	/C
		Transponder with Mode C	/I
	GNSS	No Transponder	/V
		Transponder with no Mode C	/S
		Transponder with Mode C	/G

b. Airways and Jet Routes Depiction on Flight Plan

1. It is vitally important that the route of flight be accurately and completely described in the flight plan. To simplify definition of the proposed route and to facilitate ATC, pilots are requested to file via airways or jet routes established for use at the altitude or flight level planned.

2. If flight is to be conducted via designated airways or jet routes, describe the route by indicating the type and number designators of the airways or jet routes requested. If more than one airway or jet route is to be used, clearly indicate points of transition. If the transition is made at an unnamed intersection, show the next succeeding NAVAID or named intersection on the intended route and the complete route from that point. Reporting points may be identified by using authorized name/code as depicted on appropriate aeronautical charts. The following two examples illustrate the need to specify the transition point when two routes share more than one transition fix.

EXAMPLE–

1. ALB J37 BUMPY J14 BHM

Spelled out: from Albany, New York, via Jet Route 37 transitioning to Jet Route 14 at BUMPY intersection, thence via Jet Route 14 to Birmingham, Alabama.

2. ALB J37 ENO J14 BHM

Spelled out: from Albany, New York, via Jet Route 37 transitioning to Jet Route 14 at Smyrna VORTAC (ENO) thence via Jet Route 14 to Birmingham, Alabama.

3. The route of flight may also be described by naming the reporting points or NAVAIDs over which the flight will pass, provided the points named are established for use at the altitude or flight level planned.

EXAMPLE–

BWI V44 SWANN V433 DQO

Spelled out: from Baltimore-Washington International, via Victor 44 to Swann intersection, transitioning to Victor 433 at Swann, thence via Victor 433 to Dupont.

4. When the route of flight is defined by named reporting points, whether alone or in combination with airways or jet routes, and the navigational aids VOR, VORTAC, TACAN, NDB, to be used for the flight, are a combination of different types of aids, enough information should be included to clearly indicate the route requested.

EXAMPLE–

LAX J5 LKV J3 GEG YXC FL 330 J500 VLR J515 YWG
Spelled out: from Los Angeles International via Jet Route 5 Lakeview, Jet Route 3 Spokane, direct Cranbrook, British Columbia VOR/DME, Flight Level 330 Jet Route 500 to Langruth, Manitoba VORTAC, Jet Route 515 to Winnipeg, Manitoba.

5. When filing IFR, it is to the pilot's advantage to file a preferred route.

REFERENCE–

Preferred IFR Routes are described and tabulated in the Airport/Facility Directory.

6. ATC may issue a SID or a STAR as appropriate.

REFERENCE–

AIM, Instrument Departure Procedures (DP) – Obstacle Departure Procedures (ODP) and Standard Instrument Departures (SID), Paragraph 5–2–8

AIM, Standard Terminal Arrival (STAR), Area Navigation (RNAV) STAR, and Flight Management System Procedures (FMSP) for Arrivals, Paragraph 5–4–1

NOTE–

Pilots not desiring a SID or STAR should so indicate in the remarks section of the flight plan as “no SID” or “no STAR.”

c. Direct Flights

1. All or any portions of the route which will not be flown on the radials or courses of established airways or routes, such as direct route flights, must be defined by indicating the radio fixes over which the flight will pass. Fixes selected to define the route must be those over which the position of the aircraft can be accurately determined. Such fixes automatically become compulsory reporting points for the flight unless advised otherwise by ATC. Only those navigational aids established for use in a particular structure, i.e., in the low or high structures, may be used to define the en route phase of a direct flight within that altitude structure.

2. The altitude feature of VOR aids and that of altitude and distance (DME) features of VORTAC and TACAN aids are assigned certain frequency-protected areas of airspace which are intended for application to established airway and route use and to provide guidance for planning flights outside of established airways or routes. These areas of airspace are expressed in terms of cylindrical service volumes of specified dimensions called class limits or categories.

REFERENCE–

AIM, Navigational Aid (NAVAID) Service Volumes, Paragraph 1–1–8

3. An operational service volume has been established for each class in which adequate signal

coverage and frequency protection can be assured. To facilitate use of VOR, VORTAC, or TACAN aids consistent with their operational service volume limits, pilot use of such aids for defining a direct route of flight in controlled airspace should not exceed the following:

(a) Operations above FL 450 – Use aids not more than 200 NM apart. These aids are depicted on enroute high altitude charts.

(b) Operation off established routes from 18 000 feet MSL to FL 450 – Use aids not more than 260 NM apart. These aids are depicted on enroute high altitude charts.

(c) Operation off established airways below 18 000 feet MSL – Use aids not more than 80 NM apart. These aids are depicted on enroute low altitude charts.

(d) Operation off established airways between 14 500 feet MSL and 17 999 feet MSL in the conterminous U.S. – H-facilities not more than 200 NM apart may be used.

4. Increasing use of self-contained airborne navigational systems which do not rely on the VOR/VORTAC/TACAN system has resulted in pilot requests for direct routes which exceed NAVAID service volume limits. These direct route requests will be approved only in a radar environment with approval based on pilot responsibility for navigation on the authorized direct route. Radar flight following will be provided by ATC for ATC purposes.

5. At times, ATC will initiate a direct route in a radar environment which exceeds NAVAID service volume limits. In such cases, ATC will provide radar monitoring and navigational assistance as necessary.

6. Airway or route numbers appropriate to the stratum in which operation will be conducted may also be included to describe portions of the route to be flown.

EXAMPLE–

MDW V262 BDF V10 BRL STJ SLN GCK

Spelled out: from Chicago Midway Airport via Victor 262 to Bradford, Victor 10 to Burlington, Iowa, direct St. Joseph, Missouri, direct Salina, Kansas, direct Garden City, Kansas.

NOTE–

When route of flight is described by radio fixes, the pilot

will be expected to fly a direct course between the points named.

7. Pilots are reminded that they are responsible for adhering to obstruction clearance requirements on those segments of direct routes that are outside of controlled airspace. The MEAs and other altitudes shown on low altitude IFR enroute charts pertain to those route segments within controlled airspace, and those altitudes may not meet obstruction clearance criteria when operating off those routes.

d. Area Navigation (RNAV)

1. Random impromptu routes can only be approved in a radar environment. Factors that will be considered by ATC in approving random impromptu routes include the capability to provide radar monitoring and compatibility with traffic volume and flow. ATC will radar monitor each flight. However, navigation on the random impromptu route is the responsibility of the pilot.

2. Pilots of aircraft equipped with approved area navigation equipment may file for RNAV routes throughout the National Airspace System and may be filed for in accordance with the following procedures:

(a) File airport to airport flight plans.

(b) File the appropriate RNAV capability certification suffix in the flight plan.

(c) Plan the random route portion of the flight plan to begin and end over appropriate arrival and departure transition fixes or appropriate navigation aids for the altitude stratum within which the flight will be conducted. The use of normal preferred departure and arrival routes (DP/STAR) where established is recommended.

(d) File route structure transitions to and from the random route portion of the flight.

(e) Define the random route by waypoints. File route description waypoints by using degree/distance fixes based on navigational aids which are appropriate for the altitude stratum.

(f) File a minimum of one route description waypoint for each ARTCC through whose area the random route will be flown. These waypoints must be located within 200 NM of the preceding center's boundary.

(g) File an additional route description waypoint for each turnpoint in the route.

(h) Plan additional route description waypoints as required to ensure accurate navigation via the filed route of flight. Navigation is the pilot's responsibility unless ATC assistance is requested.

(i) Plan the route of flight so as to avoid prohibited and restricted airspace by 3 NM unless permission has been obtained to operate in that airspace and the appropriate ATC facilities are advised.

NOTE—

To be approved for use in the National Airspace System, RNAV equipment must meet the appropriate system availability, accuracy, and airworthiness standards. For additional guidance on equipment requirements see AC 20–130, Airworthiness Approval of Vertical Navigation (VNAV) Systems for use in the U.S. NAS and Alaska, or AC 20–138, Airworthiness Approval of Global Positioning System (GPS) Navigation Equipment for Use as a VFR and IFR Supplemental Navigation System. For airborne navigation database, see AC 90–94, Guidelines for Using GPS Equipment for IFR En Route and Terminal Operations and for Nonprecision Instrument Approaches in the U.S. National Airspace System, Section 2.

3. Pilots of aircraft equipped with latitude/longitude coordinate navigation capability independent of VOR/TACAN references may file for random RNAV routes at and above FL 390 within the conterminous U.S. using the following procedures:

(a) File airport to airport flight plans prior to departure.

(b) File the appropriate RNAV capability certification suffix in the flight plan.

(c) Plan the random route portion of the flight to begin and end over published departure/arrival transition fixes or appropriate navigation aids for airports without published transition procedures. The use of preferred departure and arrival routes such as DP and STAR where established is recommended.

(d) Plan the route of flight so as to avoid prohibited and restricted airspace by 3 NM unless permission has been obtained to operate in that airspace and the appropriate ATC facility is advised.

(e) Define the route of flight after the departure fix including each intermediate fix, turnpoint, and the arrival fix for the destination airport in terms of latitude/longitude coordinates plotted to the nearest minute or in terms of Navigation

Reference System (NRS) waypoints. For latitude/longitude filing the arrival fix must be identified by both the latitude/longitude coordinates and a fix identifier.

EXAMPLE—

MIA¹ SRQ² 3407/10615³ 3407/11546 TNP⁴ LAX⁵

¹ Departure airport.

² Departure fix.

³ Intermediate fix (turning point).

⁴ Arrival fix.

⁵ Destination airport.

or

ORD¹ IOW² KP49G³ KD34U⁴ KL16O⁵ OAL⁶ MOD2⁷ SFO⁸

¹ Departure airport.

² Transition fix (pitch point).

³ Minneapolis ARTCC waypoint.

⁴ Denver ARTCC Waypoint.

⁵ Los Angeles ARTCC waypoint (catch point).

⁶ Transition fix.

⁷ Arrival.

⁸ Destination airport.

(f) Record latitude/longitude coordinates by four figures describing latitude in degrees and minutes followed by a solidus and five figures describing longitude in degrees and minutes.

(g) File at FL 390 or above for the random RNAV portion of the flight.

(h) Fly all routes/route segments on Great Circle tracks.

(i) Make any inflight requests for random RNAV clearances or route amendments to an en route ATC facility.

e. Flight Plan Form— See FIG 5–1–2.

f. Explanation of IFR Flight Plan Items.

1. Block 1. Check the type flight plan. Check both the VFR and IFR blocks if composite VFR/IFR.

2. Block 2. Enter your complete aircraft identification including the prefix, N, if applicable.

3. Block 3. Enter the designator for the aircraft followed by a slant / and the transponder or DME equipment code letter. e.g., C–182/U. Heavy aircraft add prefix H to aircraft type. example H/DC10/U. Consult an FSS briefer for any unknown elements.

FIG 5-1-2
FAA Flight Plan
Form 7233-1 (8-82)

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION FLIGHT PLAN			FAA USE ONLY ☐ PILOT BRIEFING ☐ VNR ☐ STOPOVER			TIME STARTED		SPECIALIST INITIALS		
1 T PE ☐ VFR ☐ IFR ☐ DVFR	2 AIRCRAFT IDENTIFICATION		3 AIRCRAFT PE/SPECIAL EQUIPMENT	4 TRUE AIRSPEED KTS	5 DEPARTURE POINT		6 DEPARTURE TIME PROPOSED ACTUAL		7 CRUISING ALTITUDE	
8 ROUTE OF FLIGHT										
9 DESTINATION Name of airport and city				10 EST TIME ENROUTE HOURS MINUTES		11 REMARKS				
12 FUEL ON BOARD HOURS MINUTES		13 ALTERNATE AIRPORT S			14 PILOT'S NAME ADDRESS & TELEPHONE NUMBER & AIRCRAFT HOME BASE 17 DESTINATION CONTACT/TELEPHONE OPTIONAL				15 NUMBER ABOARD	
16 COLOR OF AIRCRAFT			CIVIL AIRCRAFT PILOTS, FAR 91 requires you file an IFR flight plan to operate under instrument flight rules in controlled airspace. Failure to file could result in a civil penalty not to exceed \$1,000 for each violation (Section 901 of the Federal Aviation Act of 1958, as amended). Filing of a VFR flight plan is recommended as a good operating practice. See also Part 99 for requirements concerning DVFR flight plans.							

4. Block 4. Enter your computed true airspeed
TAS

NOTE-

If the average TAS changes plus or minus 5 percent or 10 knots, whichever is greater, advise ATC.

5. Block 5. Enter the departure airport identifier code or the airport name city and state if the identifier is unknown

NOTE-

Use of identifier codes will expedite the processing of your flight plan.

6. Block 6. Enter the proposed departure time in Coordinated Universal Time UTC. If airborne specify the actual or proposed departure time as appropriate.

7. Block 7. Enter the requested en route altitude or flight level

NOTE-

Enter only the initial requested altitude in this block. When more than one IFR altitude or flight level is desired along the route of flight, it is best to make a subsequent request direct to the controller.

8. Block 8. Define the route of flight by using NAVAID identifier codes or names if the code is unknown, airways, enroute routes, and waypoints for RNAV.

NOTE-

Use NAVAIDs or waypoints to define direct routes and radials/bearings to define other unpublished routes.

9. Block 9. Enter the destination airport identifier code or name if the identifier is unknown

10. Block 10. Enter your estimated time en route based on latest forecast inds

11. Block 11. Enter only those remarks pertinent to ATC or to the clarification of other flight plan information such as the appropriate radiotelephony call sign associated with the FAA assigned three letter company designator filed in Block 2 if the radiotelephony is new or has changed within the last 60 days. In cases where there is no three letter designator but only an assigned radiotelephony or an assigned three letter designator is used in a medical emergency the radiotelephony must be included in the remarks field. Items of a personal nature are not accepted.

NOTE—

1. *The pilot is responsible for knowing when it is appropriate to file the radiotelephony in remarks under the 60-day rule or when using FAA special radiotelephony assignments.*

2. *“DVRSN” should be placed in Block 11 only if the pilot/company is requesting priority handling to their original destination from ATC as a result of a diversion as defined in the Pilot/Controller Glossary.*

3. *Do not assume that remarks will be automatically transmitted to every controller. Specific ATC or en route requests should be made directly to the appropriate controller.*

12. Block 12. Specify the fuel on board computed from the departure point.

13. Block 13. Specify an alternate airport if desired or required but do not include routing to the alternate airport.

14. Block 14. Enter the complete name, address, and telephone number of pilot in command or in the case of a formation flight, the formation commander. Enter sufficient information to identify home base, airport, or operator.

NOTE—

This information would be essential in the event of search and rescue operation.

15. Block 15. Enter the total number of persons on board including crew.

16. Block 16. Enter the predominant colors.

NOTE—

Close IFR flight plans with tower, approach control, or ARTCC, or if unable, with FSS. When landing at an airport with a functioning control tower, IFR flight plans are automatically canceled.

g. The information transmitted to the ARTCC for IFR flight plans will consist of only flight plan blocks 2, 3, 4, 5, 6, 7, 8, 9, 10, and 11.

h. A description of the International Flight Plan Form is contained in the International Flight Information Manual (IFIM).

5–1–9. International Flight Plan (FAA Form 7233–4)– IFR Flights (For Domestic or International Flights)

a. General

Use of FAA Form 7233–4 is recommended for domestic IFR flights and is mandatory for all IFR flights that will depart U.S. domestic airspace.

NOTE—

1. *An abbreviated description of FAA Form 7233–4 (International Flight Plan) may be found in this section. A detailed description of FAA Form 7233–4 may be found on the FAA website at:*

http://www.faa.gov/about/office_org/headquarters_offices/ato/service_units/enroute/flight_plan_filing/

2. *Filers utilizing FAA Form 7233–1 (Flight Plan) may not be eligible for assignment of RNAV SIDs and STARs. Filers desiring assignment of these procedures should file using FAA Form 7233–4, as described in this section.*

3. *When filing an IFR flight plan using FAA Form 7233–4, it is recommended that filers include all operable navigation, communication, and surveillance equipment capabilities by adding appropriate equipment qualifiers as shown in Tables 5–1–3 and 5–1–4. These equipment qualifiers should be filed in Item 10 of FAA Form 7233–4.*

4. *ATC issues clearances based on equipment qualifiers filed in Items 10 and aircraft capabilities filed in Item 18 (NAV/) of FAA Form 7233–4. Operators should file all equipment qualifiers for which the aircraft is certified and capable. They should also file aircraft capabilities in Item 18 as described below.*

b. Explanation of Items Filed in FAA Form 7233–4

Procedures and other information provided in this section are designed to assist operators using FAA Form 7233–4 to file IFR flight plans for flights that will be conducted entirely within U.S. domestic airspace. Requirements and procedures for operating outside U.S. domestic airspace may vary significantly from country to country. It is therefore recommended that operators planning flights outside U.S. domestic airspace become familiar with

applicable international documents including Aeronautical Information Publications AIP International Flight Information Manuals IFIM and ICAO Document 4444 Procedures for Air Navigation Services/Air Traffic Management Appendix 2

NOTE—

FAA Form 7233-4 is shown in FIG 5-1-3. The filer is normally responsible for providing the information required in Items 3 through 19.

1. Item 7. Aircraft Identification. Insert the full registration number of the aircraft or the approved FAA/ICAO company or organizational designator followed by the flight number

EXAMPLE—

N235RA, AAL3342, BONGO33

NOTE—

Callsigns filed in this item must begin with a letter followed by 1-6 additional alphanumeric characters.

2. Item 8. Flight Rules and Type of Flight.

(a) Flight Rules. Insert the character I to indicate IFR

(b) Type of Flight. Insert one of the following letters to denote the type of flight

- (1) S** if scheduled air service
- (2) N** if non-scheduled air transport operation
- (3) G** if general aviation
- (4) M** if military
- (5) X** if other than any of the defined categories above

NOTE—

Type of flight is optional for flights that will be conducted entirely within U.S. domestic airspace.

3. Item 9. Number, Type of Aircraft, and Wake Turbulence Category.

(a) Number. Insert the number of aircraft if more than 1 maximum 99

(b) Type of Aircraft.

(1) Insert the appropriate designator as specified in ICAO Doc 8643 Aircraft Type Designators

(2) Or if no such designator has been assigned or in the case of formation flights consisting of more than one type

(3) Insert and specify in Item 18 the numbers and types of aircraft preceded by T P/

(c) Wake Turbulence Category. Insert an oblique stroke followed by one of the following letters to indicate the wake turbulence category of the aircraft

(1) H HEAVY to indicate an aircraft type with a maximum certificated takeoff weight of 300 000 pounds 136 000 kg or more

(2) M MEDIUM to indicate an aircraft type with a maximum certificated takeoff weight of less than 300 000 pounds 136 000 kg but more than 15 500 pounds 7 000 kg

(3) L LIGHT to indicate an aircraft type with a maximum certificated takeoff weight of 15 500 pounds 7 000 kg or less

4. Item 10. Equipment

FIG 5-1-3
FAA International Flight Plan Form 7233-4 (9-06)

Form Approved OMB No. 2120-0026
09/30/2006

[illegible]

Pre-Flight Pilot Checklist

Aircraft Identification			Time of Briefing			
Weather (Destination) (Alternate)	☐ Present	Remarks	Report Weather Conditions Aloft			
	☐ Forecast		<i>Report immediately weather conditions encountered---particularly cloud tops, upper cloud layers, thunderstorms, ice, turbulence, winds and temperature</i>			
			Position	Altitude	Time	Weather Conditions
Weather (En Route)	☐ Present					
	☐ Forecast					
	☐ Pireps					
Winds Aloft	☐ Best Crzg. Alt.					
Nav. Aid & Comm. Status.	☐ Destination					
	☐ En Route					
Airport Conditions	☐ Destination					
	☐ Alternate					
ADIZ	☐ Airspace Restrictions					
Civil Aircraft Pilots FAR Part 91 states that each person operating a civil aircraft of U.S. registry over the high seas shall comply with Annex 2 to the Convention of International Civil Aviation, International Standards - Rules of the Air. Annex 2 requires the submission of a flight plan containing items 1-19 prior to operating any flight across international waters. Failure to file could result in a civil penalty not to exceed \$1,000 for each violation (Section 901 of the Federal Aviation Act of 1958, as amended).						
<i>International briefing information may not be current or complete. Data should be secured, at the first opportunity, from the country in whose airspace the flight will be conducted.</i>						
Paperwork Reduction Act Statement: Flight Plan information is collected for the protection and identification of aircraft and property and persons on the ground. Air Traffic uses the information to provide control services and search and rescue services. An individual respondent would require about 2.5 minutes to provide the information. FAR Part 91 requires an Instrument Flight Rules (IFR) flight plan to operate under IFR in controlled airspace. Filing a Visual Flight Rules flight plan is recommended but not mandatory. It is FAA policy to make factual information available to persons properly and directly concerned except information held confidential for good cause, i.e., pilot's address/telephone number. All flight plan data is destroyed when 15 days old except for data retained due to an accident/incident investigation. An agency may not conduct or sponsor, and a person is not required to respond to, a collection of information unless it displays a currently valid OMB control number. The OMB control number associated with this collection is 2120-0026. Comments concerning the accuracy of this burden and suggestions for reducing the burden should be directed to the FAA at: 800 Independence Ave SW, Washington, DC 20591, Attn: Information Collection Clearance Officer, ABA-20						

TBL 5-1-4
Aircraft COM, NAV, and Approach Equipment Qualifiers

INSERT one letter as follows N if no COM/NAV/approach aid equipment for the route to be flown is carried or the equipment is unserviceable OR S if standard COM/NAV/approach aid equipment for the route to be flown is carried and serviceable see Note 1 AND/OR INSERT one or more of the following letters to indicate the COM/NAV/approach aid equipment available and serviceable NOTE— <i>The capabilities described below comprise the following elements:</i> <i>a. Presence of relevant serviceable equipment on board the aircraft.</i> <i>b. Equipment and capabilities commensurate with flight crew qualifications.</i> <i>c. Where applicable, authorization from the appropriate authority.</i>			
A	GBAS landing system	J7	CPDLC FANS 1/A SATCOM Iridium
B	LPV APV with SBAS	K	MLS
C	LORAN C	L	ILS
D	DME	M1	ATC RTF SATCOM INMARSAT
E1	FMC WPR ACARS	M2	ATC RTF MTSAT
E2	D FIS ACARS	M3	ATC RTF Iridium
E3	PDC ACARS	O	VOR
F	ADF	P1–P9	Reserved for RCP
G	GNSS see Note 2	R	PBN approved see Note 4
H	HF RTF	T	TACAN
I	Inertial navigation	U	UHF RTF
J1	CPDLC ATN VDL Mode 2 – see Note 3	V	VHF RTF
J2	CPDLC FANS 1/A HFDL	W	RVSM approved
J3	CPDLC FANS 1/A VDL Mode 4		MNPS approved
J4	CPDLC FANS 1/A VDL Mode 2		VHF with 8.33 kHz channel spacing capability
J5	CPDLC FANS 1/A SATCOM INMARSAT		Other equipment carried or other capabilities see Note 5
J6	CPDLC FANS 1/A SATCOM MTSAT		

NOTE—

1. If the letter S is used, standard equipment is considered to be VHF RTF, VOR, and ILS within U.S. domestic airspace.
2. If the letter G is used, the types of external GNSS augmentation, if any, are specified in Item 18 following the indicator NAV/ and separated by a space.
3. See RTCA/EUROCAE Interoperability Requirements Standard For ATN Baseline 1 (ATN B1 INTEROP Standard – DO-280B/ED-110B) for data link services air traffic control clearance and information/air traffic control communications management/air traffic control microphone check.
4. If the letter R is used, the performance based navigation levels that can be met are specified in Item 18 following the indicator PBN/. Guidance material on the application of performance based navigation to a specific route segment, route, or area is contained in the Performance Based Navigation Manual (Doc 9613). Note that FAA instructions for inclusion of

RNAV capability per Advisory Circular 90-100A in NAV/ also apply (additionally, see the Aeronautical Information Publication (AIP) ENR 1.10-12).

5. If the letter Z is used, specify in Item 18 the other equipment carried, preceded by COM/ and/or NAV/, as appropriate.
6. Information on navigation capability is provided to ATC for clearance and routing purposes.

TBL 5-1-5

Aircraft Surveillance Equipment, Including Designators for Transponder, ADS-B, ADS-C, and Capabilities

INSERT N if no surveillance equipment for the route to be flown is carried or the equipment is unserviceable OR INSERT one or more of the following descriptors to a maximum of 20 characters to describe the serviceable surveillance equipment and/or capabilities on board	
SSR Modes A and C	
A	Transponder Mode A 4 digits 4096 codes
C	Transponder Mode A 4 digits 4096 codes and Mode C
SSR Mode S	
E	Transponder Mode S including aircraft identification pressure altitude and extended squitter ADS-B capability
H	Transponder Mode S including aircraft identification pressure altitude and enhanced surveillance capability
I	Transponder Mode S including aircraft identification but no pressure altitude capability
L	Transponder Mode S including aircraft identification pressure altitude extended squitter ADS-B and enhanced surveillance capability
P	Transponder Mode S including pressure altitude but no aircraft identification capability
S	Transponder Mode S including both pressure altitude and aircraft identification capability
	Transponder Mode S with neither aircraft identification nor pressure altitude capability
NOTE— Enhanced surveillance capability is the ability of the aircraft to down-link aircraft derived data via a Mode S transponder.	
Followed by one or more of the following codes if the aircraft has ADS-B capability:	
B1	ADS-B with dedicated 1090 MHz ADS-B out capability
B2	ADS-B with dedicated 1090 MHz ADS-B out and in capability
U1	ADS-B out capability using UAT
U2	ADS-B out and in capability using UAT
V1	ADS-B out capability using VDL Mode 4
V2	ADS-B out and in capability using VDL Mode 4
NOTE— File no more than one code for each type of capability; for example, file B1 or B2, but not both.	
Followed by one or more of the following codes if the aircraft has ADS-C capability:	
D1	ADS-C with FANS 1/A capabilities
G1	ADS-C with ATN capabilities

EXAMPLE—

1. SDGW/SB1U1 {VOR, ILS, VHF, DME, GNSS, RVSM, Mode S transponder, ADS-B 1090 Extended Squitter out, ADS-B UAT out}
2. S/C {VOR, ILS, VHF, Mode C transponder}

NOTE—

The equipment qualifier Z indicates that additional equipment or capability information can be found in Item 18, following the NAV/ indicator. Operators requesting assignment of RNAV SIDs and/or STARs are required to include a Z in Item 10 and associated RNAV capabilities in Item 18 following the NAV/ indicator.

5. Item 13. Departure Aerodrome/Time

(a) Insert the ICAO four-letter location indicator of the departure aerodrome or

NOTE–

ICAO location indicators must consist of 4 letters. Airport identifiers such as 5IA7, 39LL and Z40 are not in ICAO standard format.

(b) If no four-letter location indicator has been assigned to the departure aerodrome insert and specify the non-ICAO location identifier or fix/radial/distance from a nearby navaid followed by the name of the aerodrome in Item 18 following characters DEP/

(c) Then without a space insert the estimated off-block time

EXAMPLE–

1. KSMF2215

2. ZZZZ0330

6. Item 15. Cruise Speed, Level and Route

(a) Cruise Speed maximum 5 characters Insert the true airspeed for the first or the whole cruising portion of the flight in terms of knots expressed as N followed by 4 digits e.g. N0485 or Mach number to the nearest hundredth of unit Mach expressed as M followed by 3 digits for example M082

(b) Cruising level maximum 5 characters Insert the planned cruising level for the first or the whole portion of the route to be flown in terms of flight level expressed as F followed by 3 figures for example F180 F330 or altitude in hundreds of feet expressed as A followed by 3 figures for example A040 A170

(c) Route Insert the requested route of flight in accordance with guidance below

NOTE–

Speed and/or altitude changes en route will be accepted by FAA computer systems, but will not be processed or forwarded to controllers. Pilots are expected to maintain the last assigned altitude and request revised altitude clearances directly from ATC.

(d) Insert the desired route of flight using a combination of published routes and/or fixes in the following formats

(1) Consecutive fixes navaids and waypoints should be separated by the characters DCT meaning direct

EXAMPLE–

FLACK DCT IRW DCT IRW125023

NOTE–

IRW125023 identifies the fix located on the Will Rogers VORTAC 125 radial at 23 DME.

(2) Combinations of published routes and fixes navaids or waypoints should be separated by a single space

EXAMPLE–

WORTH5 MQP V66 ABI V385

(3) Although it is recommended that filed airway junctions be identified using a named junction fix when possible there may be cases where it is necessary to file unnumbered airways without a named fix In these cases separate consecutive airways with a space

EXAMPLE–

V325 V49

NOTE–

This method of filing an airway junction may result in a processing ambiguity. This might cause the flight plan to be rejected in some cases.

7. Item 16. Destination Aerodrome, Total EET, Alternate and 2nd Alternate Aerodrome

(a) Destination Aerodrome and Total Estimated Elapsed Time EET

(1) Insert the ICAO four-letter location identifier for the destination aerodrome or if no ICAO location identifier has been assigned Location identifiers such as W 66 A08 and 5B1 are not an ICAO standard format

(2) Insert and specify the non-ICAO location identifier or fix/radial/distance from a nearby navaid followed by the name of the aerodrome in Item 18 following characters DEST/

(3) Then without a space insert the total estimated time en route to the destination

EXAMPLE–

1. KOKC0200

2. ZZZZ0330

(b) Alternate and 2nd Alternate Aerodrome Optional

(1) Following the intended destination insert the ICAO four-letter location identifier s of

alternate aerodromes or if no location identifier s have been assigned

(2) Insert and specify the name of the aerodrome in Item 18 follo ing the characters ALTN/

EXAMPLE–

1. KDFW0234 KPWA

2. KBOS0304 ZZZZ

NOTE–

Although alternate airport information filed in an FPL will be accepted by air traffic computer systems, it will not be presented to controllers. If diversion to an alternate airport becomes necessary, pilots are expected to notify ATC and request an amended clearance.

8. Item 18. Other Information

(a) Insert 0 ero if no other information or any other necessary information in the se uence sho n belo in the form of the appropriate indicator follo ed by an obli ue stroke and the information to be recorded

NOTE–

1. Operators are warned that the use of indicators not included in the provisions may result in data being rejected, processed incorrectly, or lost.

2. Hyphens “-” or oblique strokes “/” should only be used as described.

3. Avoid use of any other special characters in Field 18 information- use only letters and numbers.

4. An indicator without any associated information will result in flight plan rejection.

(b) STS/ Reason for special handling by ATS as follo s

(1) ALTRV For a flight operated in accordance ith an altitude reservation

(2) ATFM For a flight approved for exemption from ATFM measures by the appropriate ATS authority

(3) FFR Fire fighting

(4) FLTCK Flight check for calibration of nav aids

(5) HA MAT For a flight carrying ha ard ous material

(6) HEAD A flight ith Head of State status

(7) HOSP For a medical flight declared by medical authorities

(8) HUM For a flight operating on a humanitarian mission

(9) MARSA For a flight for hich a military entity assumes responsibility for separation of military aircraft

(10) MEDEVAC For a life critical medical emergency evacuation

(11) NONRVSM For a non RVSM capable flight intending to operate in RVSM airspace

(12) SAR For a flight engaged in a search and rescue mission

(13) STATE For a flight engaged in military customs or police services

NOTE–

Other reasons for special handling by ATS are denoted under the designator RMK/.

(c) PBN/ Indication of RNAV and/or RNP capabilities Include as many of the descriptors belo as apply to the flight up to a maximum of 8 entries that is a total of not more than 16 characters

TBL 5-1-6

PBN/RNAV Specifications

PBN/	RNAV SPECIFICATIONS
A1	<u>RNAV 10 RNP 10</u>
B1	RNAV 5 all permitted sensors
B2	RNAV 5 GNSS
B3	RNAV 5 DME/DME
B4	RNAV 5 VOR/DME
B5	RNAV 5 INS or IRS
B6	RNAV 5 LORAN C
C1	RNAV 2 all permitted sensors
C2	RNAV 2 GNSS
C3	RNAV 2 DME/DME
C4	RNAV 2 DME/DME/IRU
D1	RNAV 1 all permitted sensors
D2	RNAV 1 GNSS
D3	RNAV 1 DME/DME
D4	RNAV 1 DME/DME/IRU

	RNP SPECIFICATIONS
L1	RNP 4
O1	Basic RNP 1 all permitted sensors
O2	Basic RNP 1 GNSS
O3	Basic RNP 1 DME/DME
O4	Basic RNP 1 DME/DME/IRU
S1	RNP APCH
S2	RNP APCH with BARO VNAV
T1	RNP AR APCH with RF special authorization required
T2	RNP AR APCH without RF special authorization required

NOTE–

Combinations of alphanumeric characters not indicated above are reserved.

(d) NAV/ Significant data related to navigation equipment other than as specified in PBN/

(1) In addition to filing appropriate equipment qualifiers in Item 10 operators requesting assignment of RNAV departure and/or arrival procedures should file appropriate RNAV capabilities for each segment of flight following the NAV/ indicator

(2) Operators should file their maximum capabilities in order to qualify for the most advanced procedures

EXAMPLE–
NAV/RNVD1A1

(3) Explanation NAV/ Indicates the beginning of additional navigation information This includes

[a] RNP precedes RNAV capability for each phase of flight

[b] D – Departure segment RNAV capability

[c] E – En route segment RNAV capability

[d] A – Arrival segment RNAV capability

NOTE–

1. In the examples above, “#” indicates the numeric RNAV accuracy values, based on aircraft certification and capabilities.

2. Operators filing FAA Form 7233–4 may suppress application of RNAV procedures by omitting, or filing a 0 (zero) value in Item 18 data for any or all segments of flight.

3. Aircraft certification requirements for RNAV operations within U.S. airspace are defined in AC 90–45A, Approval of Area Navigation Systems for Use in the U.S. National Airspace System, and AC 90–100A, U.S. Terminal and En Route Area Navigation (RNAV) Operations, as amended.

(e) COM/ Indicate communications capabilities not specified in Item 10a when requested by an air navigation service provider

(f) DAT/ Indicate data applications or capabilities not specified in Item 10a when requested by an Air Navigation Service Provider

(g) SUR/ Indicate surveillance capabilities not specified in Item 10b when requested by an Air Navigation Service Provider If ADS-B capability filed in Item 10 is compliant with RTCA DO 260B include the item 260B in SUR/ If ADS-B capability filed in Item 10 is compliant with RTCA DO 282B include the item 282B in SUR/

EXAMPLE–

1. SUR/260B

2. SUR/260B 282B

(h) DEP/ Insert the non-ICAO identifier or fix/radial/distance from navaid or latitude/longitude if is inserted in Item 13 Optionally append the name of the departure point

EXAMPLE–

1. DEP/T23 ALBANY MUNI

2. DEP/T23

3. DEP/UKW197011 TICK HOLLER RANCH

4. DEP/4620N07805W

(i) DEST/ Insert the non-ICAO identifier or fix/radial/distance from navaid or latitude/longitude if is inserted in Item 16 Optionally append the name of the destination point

EXAMPLE–

1. DEST/T23 ALBANY MUNI

2. DEST/PIE335033 LEXI DUNES

3. DEST/4620N07805W

(j) DOF/ The date of flight departure in a six figure format MMDD here equals the year MM equals the month and DD equals the day. The FAA will not accept flight plans filed with Date of Flight resulting in more than a day in advance.

(k) REG/ The registration markings of the aircraft if different from the aircraft identification in Item 7. Note that the FAA uses this information in monitoring of RVSM and ADS-B performance.

(l) EET/ Significant points or FIR boundary designators and accumulated estimated elapsed times to such points or FIR boundaries.

EXAMPLE–
EET/KZLA0745 KZAB0830

(m) SEL/ SELCAL code

(n) TYP/ Insert the type of aircraft if as entered in Item 9. If necessary insert the number and type of aircraft in a formation.

EXAMPLE–
1. TYP/Homebuilt
2. TYP/2 P51 B17 B24

(o) CODE/ Aircraft address expressed in the form of an alphanumerical code of six hexadecimal characters when required by the appropriate ATS authority. Include CODE/ when ADS-B capability is filed in Item 10.

EXAMPLE–
“F00001” is the lowest aircraft address contained in the specific block administered by ICAO.

(p) DLE/ En route delay or holding insert the significant point on the route where a delay is planned to occur followed by the length of delay using four figure time in hours and minutes hhmm.

EXAMPLE–
DLE/MDG0030

(q) OPR/ Name of the operator if not obvious from the aircraft identification in Item 7.

(r) ORGN/ The originator's 8 letter AFTN address or other appropriate contact details in cases where the originator of the flight plan may not be readily identified as required by the appropriate ATS authority. The FAA does not require ORGN/ information.

NOTE–

In some areas, flight plan reception centers may insert the ORGN/ identifier and originator's AFTN address automatically.

(s) PER/ Aircraft performance data indicated by a single letter as specified in the Procedures for Air Navigation Services Aircraft Operations PANS OPS Doc 8168 Volume I Flight Procedures if so prescribed by the appropriate ATS authority. Note that the FAA does not require PER/ information.

(t) ALTN/ Name of destination alternate aerodrome(s) if inserted in Item 16.

EXAMPLE–
1. ALTN/F35 POSSUM KINGDOM
2. ALTN/TCC233016 LAZY S RANCH

(u) RALT/ ICAO 4 letter indicator(s) for en route alternate(s) as specified in Doc 7910 Location Indicators or name(s) of en route alternate aerodrome(s) if no indicator is allocated. For aerodromes not listed in the relevant Aeronautical Information Publication indicate location in LAT/LONG or bearing and distance from the nearest significant point as described in DEP/ above.

(v) TALT/ ICAO 4 letter indicator(s) for take off alternate as specified in Doc 7910 Location Indicators or name of take off alternate aerodrome if no indicator is allocated. For aerodromes not listed in the relevant Aeronautical Information Publication indicate location in LAT/LONG or bearing and distance from the nearest significant point as described in DEP/ above.

(w) RIF/ The route details to the revised destination aerodrome followed by the ICAO four letter location indicator of the aerodrome. The revised route is subject to reclearance in flight.

EXAMPLE–
1. RIF/DTA HEC KLAX
2. RIF/ESP G94 CLAYPPH

(x) RMK/ Any other plain-language remarks when required by the ATC or deemed necessary.

EXAMPLE–
1. RMK/NRP
2. RMK/DRVSN

(y) RVR/ The minimum RVR requirement of the flight in meters. This item is defined by

Eurocontrol not ICAO The FAA does not require or use this item but will accept it in a flight plan

NOTE–

This provision is detailed in the European Regional Supplementary Procedures (EUR SUPPs, Doc 7030), Chapter 2.

(z) RFP/ Q followed by a digit to indicate the sequence of the replacement flight plan being submitted This item is defined by Eurocontrol not ICAO The FAA will not use this item but will accept it in a flight plan

NOTE–

This provision is detailed in the European Regional Supplementary Procedures (EUR SUPPs, Doc 7030), chapter 2.

9. Item 19. Supplementary Information

NOTE–

Item 19 data must be included when completing FAA Form 7233–4. This information will be retained by the facility/organization that transmits the flight plan to Air Traffic Control (ATC), for Search and Rescue purposes, but it will not be transmitted to ATC as part of the FPL.

(a) E/ ENDURANCE Insert 4–digits group giving the fuel endurance in hours and minutes

(b) P/ PERSONS ON BOARD Insert the total number of persons passengers and crew on board

(c) Emergency and survival equipment

(1) R/ RADIO

[a] Cross out UHF if frequency 243.0 MHz is not available

[b] Cross out VHF frequency 121.5 MHz is not available

[c] Cross out ELBA if emergency locator transmitter ELT is not available

(2) S/ SURVIVAL EQUIPMENT

[a] Cross out POLAR if polar survival equipment is not carried

[b] Cross out DESERT if desert survival equipment is not carried

[c] Cross out MARITIME if maritime survival equipment is not carried

[d] Cross out J if JUNGLE survival equipment is not carried

(3) J/ JACKETS

[a] Cross out LIGHT if life jackets are not equipped with lights

[b] Cross out FLUORES if life jackets are not equipped with fluorescein

[c] Cross out UHF or VHF or both as in R/ above to indicate radio capability of jackets if any

(4) D/ DINGHIES

[a] NUMBER Cross out indicators NUMBER and CAPACITY if no dinghies are carried or insert number of dinghies carried and

[b] CAPACITY Insert total capacity in persons of all dinghies carried and

[c] COVER Cross out indicator COVER if dinghies are not covered and

[d] COLOR Insert color of dinghies if carried

(5) A/ AIRCRAFT COLOR AND MARKINGS Insert color of aircraft and significant markings

(6) N/ REMARKS Cross out indicator N if no remarks or indicate any other survival equipment carried and any other remarks regarding survival equipment

(7) C/ PILOT Insert name of pilot-in-command

5–1–10. IFR Operations to High Altitude Destinations

a. Pilots planning IFR flights to airports located in mountainous terrain are cautioned to consider the necessity for an alternate airport even when the forecast weather conditions could technically relieve them from the requirement to file one

REFERENCE–

14 CFR Section 91.167.

AIM, Tower En Route Control (TEC), Paragraph 4–1–19

b. The FAA has identified three possible situations where the failure to plan for an alternate airport when flying IFR to such a destination airport could result in a critical situation if the weather is less than forecast and sufficient fuel is not available to proceed to a suitable airport

1. An IFR flight to an airport where the Minimum Descent Altitudes (MDAs) or landing

visibility minimums for *all instrument approaches* are higher than the forecast weather minimums specified in 14 CFR Section 91.167 b. For example, there are 3 high altitude airports in the U.S. with approved instrument approach procedures where all of the MDAs are greater than 2,000 feet and/or the landing visibility minimums are greater than 3 miles. Bishop, California; South Lake Tahoe, California; and Aspen–Pitkin Co./Sardy Field, Colorado. In the case of these airports, it is possible for a pilot to elect on the basis of forecasts not to carry sufficient fuel to get to an alternate when the ceiling and/or visibility is actually lower than that necessary to complete the approach.

2. A small number of other airports in mountainous terrain have MDAs which are slightly 100 to 300 feet below 2,000 feet AGL. In situations where there is an option as to whether to plan for an alternate, pilots should bear in mind that just a slight worsening of the weather conditions from those forecast could place the airport below the published IFR landing minimums.

3. An IFR flight to an airport which requires special equipment (i.e., DME, glide slope, etc.) in order to make the available approaches to the lowest minimums. Pilots should be aware that all other minimums on the approach charts may require weather conditions better than those specified in 14 CFR Section 91.167 b. An inflight equipment malfunction could result in the inability to comply with the published approach procedures or, again, in the position of having the airport below the published IFR landing minimums for all remaining instrument approach alternatives.

5–1–11. Flights Outside the U.S. and U.S. Territories

a. When conducting flights, particularly extended flights, outside the U.S. and its territories, full account should be taken of the amount and quality of air navigation services available in the airspace to be traversed. Every effort should be made to secure information on the location and range of navigational aids, availability of communications and meteorological services, the provision of air traffic services including alerting service, and the existence of search and rescue services.

b. Pilots should remember that there is a need to continuously guard the VHF emergency frequency 121.5 MHz when on long overwater flights, except when communications on other VHF channels, equipment limitations, or cockpit duties prevent simultaneous guarding of two channels. Guarding of 121.5 MHz is particularly critical when operating in proximity to Flight Information Region (FIR) boundaries, for example, operations on Route R220 between Anchorage and Tokyo, since it serves to facilitate communications with regard to aircraft which may experience in-flight emergencies, communications, or navigational difficulties.

REFERENCE–

ICAO Annex 10, Vol II, Paras 5.2.2.1.1.1 and 5.2.2.1.1.2.

c. The filing of a flight plan always good practice takes on added significance for extended flights outside U.S. airspace and is, in fact, usually required by the laws of the countries being visited or overflown. It is also particularly important in the case of such flights that pilots leave a complete itinerary and schedule of the flight with someone directly concerned and keep that person advised of the flight's progress. If serious doubt arises as to the safety of the flight, that person should first contact the appropriate FSS. Round Robin Flight Plans to Mexico are not accepted.

d. All pilots should review the foreign airspace and entry restrictions published in the IFIM during the flight planning process. Foreign airspace penetration without official authorization can involve both danger to the aircraft and the imposition of severe penalties and inconvenience to both passengers and crew. A flight plan on file with ATC authorities does not necessarily constitute the prior permission required by certain other authorities. The possibility of fatal consequences cannot be ignored in some areas of the world.

e. Current NOTAMs for foreign locations must also be reviewed. The publication *Notices to Airmen Domestic/International* published bi-weekly contains considerable information pertinent to foreign flight. Current foreign NOTAMs are also available from the U.S. International NOTAM Office in Washington, D.C., through any local FSS.

f. When customs notification is required, it is the responsibility of the pilot to arrange for customs notification in a timely manner. The following guidelines are applicable:

1. When customs notification is required on flights to Canada and Mexico and a predeparture flight plan cannot be filed or an advise customs message ADCUS cannot be included in a predeparture flight plan call the nearest en route domestic or International FSS as soon as radio communication can be established and file a VFR or DVFR flight plan as required and include as the last item the advise customs information. The station with which such a flight plan is filed will forward it to the appropriate FSS who will notify the customs office responsible for the destination airport.

2. If the pilot fails to include ADCUS in the radioed flight plan it will be assumed that other arrangements have been made and FAA will not advise customs.

3. The FAA assumes no responsibility for any delays in advising customs if the flight plan is given too late for delivery to customs before arrival of the aircraft. **It is still the pilot's responsibility to give timely notice even though a flight plan is given to FAA.**

4. Air Commerce Regulations of the Treasury Department's Customs Service require all private aircraft arriving in the U.S. via

(a) The U.S./Mexican border or the Pacific Coast from a foreign place in the Western Hemisphere south of 33 degrees north latitude and between 97 degrees and 120 degrees west longitude or

(b) The Gulf of Mexico and Atlantic Coasts from a foreign place in the Western Hemisphere south of 30 degrees north latitude must furnish a notice of arrival to the Customs service at the nearest designated airport. This notice may be furnished directly to Customs by

(1) Radio through the appropriate FAA Flight Service Station

(2) Normal FAA flight plan notification procedures a flight plan filed in Mexico does not meet this requirement due to unreliable relay of data or

(3) Directly to the district Director of Customs or other Customs officer at place of first intended landing but must be furnished at least 1 hour prior to crossing the U.S./Mexican border or the U.S. coastline

(c) This notice will be valid as long as actual arrival is within 15 minutes of the original ETA. Otherwise a new notice must be given to Customs. Notices will be accepted up to 23 hours in advance. Unless an exemption has been granted by Customs private aircraft are required to make first landing in the U.S. at one of the following designated airports nearest to the point of border or coastline crossing.

Designated Airports

ARIZONA

Bisbee Douglas Intl Airport
Douglas Municipal Airport
Nogales Intl Airport
Tucson Intl Airport
Yuma MCAS—Yuma Intl Airport

CALIFORNIA

Calexico Intl Airport
Brown Field Municipal Airport San Diego

FLORIDA

Fort Lauderdale Executive Airport
Fort Lauderdale/Hollywood Intl Airport
Key West Intl Airport Miami Intl Airport
Opa Locka Airport Miami
Kendall-Tamiami Executive Airport Miami
St. Lucie County Intl Airport Fort Pierce
Tampa Intl Airport
Palm Beach Intl Airport West Palm Beach

LOUISIANA

New Orleans Intl Airport Moisant Field
New Orleans Lakefront Airport

NEW MEXICO

Las Cruces Intl Airport

NORTH CAROLINA

New Hanover Intl Airport Wilmington

TEXAS

Brownsville/South Padre Island Intl Airport
Corpus Christi Intl Airport
Del Rio Intl Airport
Eagle Pass Municipal Airport
El Paso Intl Airport
William P. Hobby Airport Houston
Laredo Intl Airport
McAllen Miller Intl Airport
Presidio Lely Intl Airport

5-1-12. Change in Flight Plan

In addition to altitude or flight level destination and/or route changes increasing or decreasing the speed of an aircraft constitutes a change in a flight plan Therefore at any time the average true airspeed at cruising altitude between reporting points varies or is expected to vary from that given in the flight plan by *plus or minus 5 percent, or 10 knots, whichever is greater*, ATC should be advised

5-1-13. Change in Proposed Departure Time

a. To prevent computer saturation in the en route environment parameters have been established to delete proposed departure flight plans which have not been activated Most centers have this parameter set so as to delete these flight plans a minimum of 1 hour after the proposed departure time To ensure that a flight plan remains active pilots whose actual departure time will be delayed 1 hour or more beyond their filed departure time are requested to notify ATC of their departure time

b. Due to traffic saturation control personnel frequently will be unable to accept these revisions via radio It is recommended that you forward these revisions to the nearest FSS

5-1-14. Closing VFR/DVFR Flight Plans

A pilot is responsible for ensuring that his/her VFR or DVFR flight plan is canceled You should close your flight plan with the nearest FSS or if one is not available you may request any ATC facility to relay your cancellation to the FSS Control towers do not automatically close VFR or DVFR flight plans since they do not know if a particular VFR aircraft is on a flight plan If you fail to report or cancel your flight plan within $\frac{1}{2}$ hour after your ETA search and rescue procedures are started

REFERENCE-

14 CFR Section 91.153.

14 CFR Section 91.169.

5-1-15. Canceling IFR Flight Plan

a. 14 CFR Sections 91.153 and 91.169 include the statement When a flight plan has been activated the pilot in command upon canceling or completing the flight under the flight plan must notify an FAA Flight Service Station or ATC facility

b. An IFR flight plan may be canceled at any time the flight is operating in VFR conditions outside Class A airspace by pilots stating CANCEL MY IFR FLIGHT PLAN to the controller or air/ground station with which they are communicating Immediately after canceling an IFR flight plan a pilot should take the necessary action to change to the appropriate air/ground frequency VFR radar beacon code and VFR altitude or flight level

c. ATC separation and information services will be discontinued including radar services where applicable Consequently if the canceling flight desires VFR radar advisory service the pilot must specifically request it

NOTE-

Pilots must be aware that other procedures may be applicable to a flight that cancels an IFR flight plan within an area where a special program, such as a designated TRSA, Class C airspace, or Class B airspace, has been established.

d. If a DVFR flight plan requirement exists the pilot is responsible for filing this flight plan to replace the canceled IFR flight plan If a subsequent IFR operation becomes necessary a new IFR flight plan must be filed and an ATC clearance obtained before operating in IFR conditions

e. If operating on an IFR flight plan to an airport with a functioning control tower the flight plan is automatically closed upon landing

f. If operating on an IFR flight plan to an airport where there is no functioning control tower the pilot must initiate cancellation of the IFR flight plan This can be done after landing if there is a functioning FSS or other means of direct communications with ATC In the event there is no FSS and/or air/ground communications with ATC is not possible below a certain altitude the pilot should weather conditions permitting cancel the IFR flight plan while still airborne and able to communicate with ATC by radio This will not only save the time and expense of canceling the flight plan by telephone but will quickly release the airspace for use by other aircraft

5-1-16. RNAV and RNP Operations

a. During the pre-flight planning phase the availability of the navigation infrastructure required for the intended operation including any non-RNAV contingencies must be confirmed for the period of intended operation Availability of the onboard

navigation equipment necessary for the route to be flown must be confirmed

b. If a pilot determines a specified RNP level cannot be achieved, revise the route or delay the operation until appropriate RNP level can be ensured

c. The onboard navigation database must be current and appropriate for the region of intended operation and must include the navigation aids, waypoints, and coded terminal airspace procedures for the departure, arrival, and alternate airfields

d. During system initialization, pilots of aircraft equipped with a Flight Management System or other RNAV-certified system must confirm that the navigation database is current and verify that the aircraft position has been entered correctly. Flight crews should crosscheck the cleared flight plan against charts or other applicable resources, as well as the navigation system textual display and the aircraft map display. This process includes confirmation of the waypoints, sequence, reasonableness of track angles and distances, any altitude or speed constraints, and identification of fly-by or fly-over waypoints. A procedure must not be used if validity of the navigation database is in doubt

e. Prior to commencing takeoff, the flight crew must verify that the RNAV system is operating correctly and the correct airport and runway data have been loaded

f. During the pre-flight planning phase, RAIM prediction must be performed if TSO-C129 equipment is used to solely satisfy the RNAV and RNP requirement. GPS RAIM availability must be confirmed for the intended route of flight, route, and time, using current GPS satellite information. In the event of a predicted continuous loss of RAIM of more than five (5) minutes for any part of the intended flight, the flight should be delayed, canceled, or re-routed where RAIM requirements can be met. Operators may satisfy the predictive RAIM requirement through any one of the following methods:

1. Operators may monitor the status of each satellite in its plane/slot position by accounting for the latest GPS constellation status, e.g., NOTAMs or NANUs, and compute RAIM availability using model-specific RAIM prediction software

2. Operators may use the FAA en route and terminal RAIM prediction website, raimprediction.net

3. Operators may contact a Flight Service Station (not DUATS) to obtain non-precision approach RAIM

4. Operators may use a third party interface incorporating FAA/VOLPE RAIM prediction data without altering performance values to predict RAIM outages for the aircraft's predicted flight path and times

5. Operators may use the receivers installed with RAIM prediction capability for TSO-C129a/Class A1/B1/C1 equipment to provide non-precision approach RAIM, accounting for the latest GPS constellation status, e.g., NOTAMs or NANUs. Receiver non-precision approach RAIM should be checked at airports spaced at intervals not to exceed 60 NM along the RNAV 1 procedure's flight track. Terminal or Approach RAIM must be available at the ETA over each airport checked for

6. Operators not using model-specific software or FAA/VOLPE RAIM data will need FAA operational approval

NOTE—

If TSO-C145/C146 equipment is used to satisfy the RNAV and RNP requirement, the pilot/operator need not perform the prediction if WAAS coverage is confirmed to be available along the entire route of flight. Outside the U.S. or in areas where WAAS coverage is not available, operators using TSO-C145/C146 receivers are required to check GPS RAIM availability.

Section 2. Departure Procedures

5-2-1. Pre-taxi Clearance Procedures

a. Certain airports have established pre taxi clearance programs whereby pilots of departing instrument flight rules (IFR) aircraft may elect to receive their IFR clearances before they start taxiing for takeoff. The following provisions are included in such procedures:

1. Pilot participation is not mandatory.
 2. Participating pilots call clearance delivery or ground control not more than 10 minutes before proposed taxi time.
 3. IFR clearance or delay information, if clearance cannot be obtained, is issued at the time of this initial call up.
 4. When the IFR clearance is received on clearance delivery frequency, pilots call ground control when ready to taxi.
 5. Normally, pilots need not inform ground control that they have received IFR clearance on clearance delivery frequency. Certain locations may, however, require that the pilot inform ground control of a portion of the routing or that the IFR clearance has been received.
 6. If a pilot cannot establish contact on clearance delivery frequency or has not received an IFR clearance before ready to taxi, the pilot should contact ground control and inform the controller accordingly.
- b. Locations where these procedures are in effect are indicated in the Airport/Facility Directory.

5-2-2. Pre-departure Clearance Procedures

a. Many airports in the National Airspace System are equipped with the Tower Data Link System (TDLS) that includes the Pre-departure Clearance (PDC) function. The PDC function automates the Clearance Delivery operations in the ATCT for participating users. The PDC function displays IFR clearances from the ARTCC to the ATCT. The Clearance Delivery controller in the ATCT can append local departure information and transmit the clearance via data link to participating airline/service provider computers. The airline/service provider will

then deliver the clearance via the Aircraft Communications Addressing and Reporting System (ACARS) or a similar data link system or, for nondata link equipped aircraft, via a printer located at the departure gate. PDC reduces frequency congestion, controller workload, and is intended to mitigate delivery/readback errors. Also, information from participating users indicates a reduction in pilot workload.

b. PDC is available only to participating aircraft that have subscribed to the service through an approved service provider.

c. Due to technical reasons, the following limitations currently exist in the PDC program:

1. Aircraft filing multiple flight plans are limited to one PDC clearance per departure airport within a 24-hour period. Additional clearances will be delivered verbally.
2. If the clearance is revised or modified prior to delivery, it will be re-issued from PDC and the clearance will need to be delivered verbally.
- d. No acknowledgment of receipt or readback is required for a PDC.
- e. In all situations, the pilot is encouraged to contact clearance delivery if a question or concern exists regarding an automated clearance.

5-2-3. Taxi Clearance

Pilots on IFR flight plans should communicate with the controller on the appropriate ground control or clearance delivery frequency prior to starting engines, to receive engine start time, taxi and/or clearance information.

5-2-4. Line Up and Wait (LUAW)

a. Line up and wait is an air traffic control (ATC) procedure designed to position an aircraft onto the runway for an imminent departure. The ATC instruction, LINE UP AND WAIT, is used to instruct a pilot to taxi onto the departure runway and line up and wait.

EXAMPLE—

Tower: “N234AR Runway 24L, line up and wait.”

b. This ATC instruction is not an authorization to takeoff. In instances where the pilot has been

instructed to line up and wait and has been advised of a reason/condition take turbulence traffic on an intersecting runway etc. or the reason/condition is clearly visible another aircraft that has landed on or is taking off on the same runway and the reason/condition is satisfied the pilot should expect an imminent takeoff clearance unless advised of a delay. If you are uncertain about any ATC instruction or clearance contact ATC immediately.

c. If a takeoff clearance is not received within a reasonable amount of time after clearance to line up and wait ATC should be contacted.

EXAMPLE–

Aircraft: Cessna 234AR holding in position Runway 24L.

Aircraft: Cessna 234AR holding in position Runway 24L at Bravo.

NOTE–

FAA analysis of accidents and incidents involving aircraft holding in position indicate that two minutes or more elapsed between the time the instruction was issued to line up and wait and the resulting event (for example, land-over or go-around). Pilots should consider the length of time that they have been holding in position whenever they HAVE NOT been advised of any expected delay to determine when it is appropriate to query the controller.

REFERENCE–

Advisory Circulars 91–73A, Part 91 and Part 135 Single-Pilot Procedures during Taxi Operations, and 120–74A, Parts 91, 121, 125, and 135 Flightcrew Procedures during Taxi Operations

d. Situational awareness during line up and wait operations is enhanced by monitoring ATC instructions/clearances issued to other aircraft. Pilots should listen carefully if another aircraft is on frequency that has a similar call sign and pay close attention to communications between ATC and other aircraft. If you are uncertain of an ATC instruction or clearance query ATC immediately. Care should be taken to not inadvertently execute a clearance/instruction for another aircraft.

e. Pilots should be especially vigilant when conducting line up and wait operations at night or during reduced visibility conditions. They should scan the full length of the runway and look for aircraft on final approach or landing roll out when taxiing onto a runway. ATC should be contacted anytime there is a concern about a potential conflict.

f. When two or more runways are active aircraft may be instructed to LINE UP AND WAIT on two or more runways. When multiple runway operations

are being conducted it is important to listen closely for your call sign and runway. Be alert for similar sounding call signs and acknowledge all instructions with your call sign. When you are holding in position and are not sure if the takeoff clearance is for you ask ATC before you begin takeoff roll. ATC prefers that you confirm a takeoff clearance rather than mistake another aircraft's clearance for your own.

g. When ATC issues intersection line up and wait and takeoff clearances the intersection designator will be used. If ATC omits the intersection designator call ATC for clarification.

EXAMPLE–

Aircraft: “Cherokee 234AR, Runway 24L at November 4, line up and wait.”

h. If landing traffic is a factor during line up and wait operations ATC will inform the aircraft in position of the closest traffic that has requested a full-stop touch-and-go stop-and-go or an unrestricted low approach to the same runway. Pilots should take care to note the position of landing traffic. ATC will also advise the landing traffic when an aircraft is authorized to line up and wait on the same runway.

EXAMPLE–

Tower: “Cessna 234AR, Runway 24L, line up and wait. Traffic a Boeing 737, six mile final.”

Tower: “Delta 1011, continue, traffic a Cessna 210 holding in position Runway 24L.”

NOTE–

ATC will normally withhold landing clearance to arrival aircraft when another aircraft is in position and holding on the runway.

i. Never land on a runway that is occupied by another aircraft even if a landing clearance is issued. Do not hesitate to ask the controller about the traffic on the runway and be prepared to execute a go-around.

NOTE–

Always clarify any misunderstanding or confusion concerning ATC instructions or clearances. ATC should be advised immediately if there is any uncertainty about the ability to comply with any of their instructions.

5–2–5. Abbreviated IFR Departure Clearance (Cleared. . .as Filed) Procedures

a. ATC facilities will issue an abbreviated IFR departure clearance based on the ROUTE of flight filed in the IFR flight plan provided the filed route can be approved with little or no revision. These abbreviated clearance procedures are based on the following conditions:

1. The aircraft is on the ground or it has departed visual flight rules (VFR) and the pilot is requesting IFR clearance while airborne

2. That a pilot will not accept an abbreviated clearance if the route or destination of a flight plan filed with ATC has been changed by the pilot or the company or the operations officer before departure

3. That it is the responsibility of the company or operations office to inform the pilot when they make a change to the filed flight plan

4. That it is the responsibility of the pilot to inform ATC in the initial call up for clearance when the filed flight plan has been either

(a) Amended or

(b) Canceled and replaced with a new filed flight plan

NOTE—

The facility issuing a clearance may not have received the revised route or the revised flight plan by the time a pilot requests clearance.

b. Controllers will issue a detailed clearance when they know that the original filed flight plan has been changed or when the pilot requests a full route clearance

c. The clearance as issued will include the destination airport filed in the flight plan

d. ATC procedures do not require the controller to state the DP name, the current number and the DP transition name after the phrase "Cleared to destination airport" and prior to the phrase "then as filed for ALL departure clearances" when the DP or DP transition is to be flown. The procedures apply whether or not the DP is filed in the flight plan

e. STARs when filed in a flight plan are considered a part of the filed route of flight and will not normally be stated in an initial departure clearance. If the ARTCC's jurisdictional airspace includes both the departure airport and the fix where a STAR or STAR transition begins, the STAR name, the current number and the STAR transition name MAY be stated in the initial clearance

f. "Cleared to destination airport as filed" does NOT include the en route altitude filed in a flight plan

An en route altitude will be stated in the clearance or the pilot will be advised to expect an assigned or filed altitude within a given time frame or at a certain point after departure. This may be done verbally in the departure instructions or stated in the DP

g. In both radar and nonradar environments, the controller will state "Cleared to destination airport as filed" or

1. If a DP or DP transition is to be flown, specify the DP name, the current DP number, the DP transition name, the assigned altitude/flight level, and any additional instructions, departure control frequency, beacon code assignment, etc., necessary to clear a departing aircraft via the DP or DP transition and the route filed

EXAMPLE—

National Seven Twenty cleared to Miami Airport Intercontinental one departure, Lake Charles transition then as filed, maintain Flight Level two seven zero.

2. When there is no DP or when the pilot cannot accept a DP, the controller will specify the assigned altitude or flight level, and any additional instructions necessary to clear a departing aircraft via an appropriate departure routing and the route filed

NOTE—

A detailed departure route description or a radar vector may be used to achieve the desired departure routing.

3. If it is necessary to make a minor revision to the filed route, the controller will specify the assigned DP or DP transition, or departure routing, the revision to the filed route, the assigned altitude or flight level, and any additional instructions necessary to clear a departing aircraft

EXAMPLE—

Jet Star One Four Two Four cleared to Atlanta Airport, South Boston two departure then as filed except change route to read South Boston Victor 20 Greensboro, maintain one seven thousand.

4. Additionally, in a nonradar environment, the controller will specify one or more fixes as necessary to identify the initial route of flight

EXAMPLE—

Cessna Three One Six Zero Foxtrot cleared to Charlotte Airport as filed via Brooke, maintain seven thousand.

h. To ensure success of the program pilots should

1. Avoid making changes to a filed flight plan until prior to departure

2. State the following information in the initial call up to the facility when no change has been made to the filed flight plan: Aircraft call sign, location, type operation, IFR, and the name of the airport or fix to which you expect clearance

EXAMPLE–

“Washington clearance delivery (or ground control if appropriate) American Seventy Six at gate one, IFR Los Angeles.”

3. If the flight plan has been changed, state the change and request a full route clearance

EXAMPLE–

“Washington clearance delivery, American Seventy Six at gate one, IFR San Francisco. My flight plan route has been amended (or destination changed). Request full route clearance.”

4. Request verification or clarification from ATC if any portion of the clearance is not clearly understood

5. When requesting clearance for the IFR portion of a VFR/IFR flight, request such clearance prior to the fix where IFR operation is proposed to commence in sufficient time to avoid delay. Use the following phraseology

EXAMPLE–

“Los Angeles center, Apache Six One Papa, VFR estimating Paso Robles VOR at three two, one thousand five hundred, request IFR to Bakersfield.”

5–2–6. Departure Restrictions, Clearance Void Times, Hold for Release, and Release Times

a. ATC may assign departure restrictions, clearance void times, hold for release, and release times when necessary to separate departures from other traffic or to restrict or regulate the departure flow

1. Clearance Void Times. A pilot may receive a clearance when operating from an airport without a control tower which contains a provision for the clearance to be void if not airborne by a specific time. A pilot who does not depart prior to the clearance void time must advise ATC as soon as possible of their intentions. ATC will normally advise the pilot of the time allotted to notify ATC that the aircraft did not de-

part prior to the clearance void time. This time cannot exceed 30 minutes. Failure of an aircraft to contact ATC within 30 minutes after the clearance void time will result in the aircraft being considered overdue and search and rescue procedures initiated.

NOTE–

1. Other IFR traffic for the airport where the clearance is issued is suspended until the aircraft has contacted ATC or until 30 minutes after the clearance void time or 30 minutes after the clearance release time if no clearance void time is issued.

2. Pilots who depart at or after their clearance void time are not afforded IFR separation and may be in violation of 14 CFR Section 91.173 which requires that pilots receive an appropriate ATC clearance before operating IFR in controlled airspace.

EXAMPLE–

Clearance void if not off by (clearance void time) and, if required, if not off by (clearance void time) advise (facility) not later than (time) of intentions.

2. Hold for Release. ATC may issue hold for release instructions in a clearance to delay an aircraft's departure for traffic management reasons, i.e., weather, traffic volume, etc. When ATC states in the clearance hold for release, the pilot may not depart utilizing that IFR clearance until a release time or additional instructions are issued by ATC. In addition, ATC will include departure delay information in conjunction with hold for release instructions. The ATC instruction hold for release applies to the IFR clearance and does not prevent the pilot from departing under VFR. However, prior to takeoff, the pilot should cancel the IFR flight plan and operate the transponder on the appropriate VFR code. An IFR clearance may not be available after departure.

EXAMPLE–

(Aircraft identification) cleared to (destination) airport as filed, maintain (altitude), and, if required (additional instructions or information), hold for release, expect (time in hours and/or minutes) departure delay.

3. Release Times. A release time is a departure restriction issued to a pilot by ATC specifying the earliest time an aircraft may depart. ATC will use release times in conjunction with traffic management procedures and/or to separate a departing aircraft from other traffic.

EXAMPLE–

(Aircraft identification) released for departure at (time in hours and/or minutes).

4. Expect Departure Clearance Time (EDCT). The EDCT is the runway release time assigned to an aircraft included in traffic management programs. Aircraft are expected to depart no earlier than 5 minutes before and no later than 5 minutes after the EDCT.

b. If practical, pilots departing uncontrolled airports should obtain IFR clearances prior to becoming airborne. Then, to any communications with the controlling ATC facility is available.

5-2-7. Departure Control

a. Departure Control is an approach control function responsible for ensuring separation between departures. So as to expedite the handling of departures, Departure Control may suggest a takeoff direction other than that which may normally have been used under VFR handling. Many times it is preferred to offer the pilot a runway that will require the fewest turns after takeoff to place the pilot on course or selected departure route as quickly as possible. At many locations, particular attention is paid to the use of preferential runways for local noise abatement programs and route departures away from congested areas.

b. Departure Control utilizing radar will normally clear aircraft out of the terminal area using DPs via radio navigation aids.

1. When a departure is to be vectored immediately following takeoff, the pilot will be advised prior to takeoff of the initial heading to be flown but may not be advised of the purpose of the heading.

2. At some airports, when a departure will fly an RNAV SID that begins at the runway, ATC may advise aircraft of the initial fix/waypoint on the RNAV route. The purpose of the advisory is to remind pilots to verify the correct procedure is programmed in the FMS before takeoff. Pilots must immediately advise ATC if a different RNAV SID is entered in the aircraft's FMC. When this advisory is absent, pilots are still required to fly the assigned SID as published.

EXAMPLE-

Delta 345 RNAV to MPASS, Runway 26L, cleared for takeoff.

NOTE-

1. The SID transition is not restated as it is contained in the ATC clearance.

2. Aircraft cleared via RNAV SIDs designed to begin with a vector to the initial waypoint are assigned a heading before departure.

3. Pilots operating in a radar environment are expected to associate departure headings or an RNAV departure advisory with vectors or the flight path to their planned route or flight. When given a vector taking the aircraft off a previously assigned nonradar route, the pilot will be advised briefly that the vector is to achieve. Thereafter, radar service will be provided until the aircraft has been reestablished on course using an appropriate navigation aid and the pilot has been advised of the aircraft's position or a handoff is made to another radar controller with further surveillance capabilities.

c. Controllers will inform pilots of the departure control frequencies and, if appropriate, the transponder code before takeoff. Pilots must ensure their transponder is adjusted to the on or normal operating position as soon as practical and remain on during all operations unless otherwise requested to change to standby by ATC. Pilots should not change to the departure control frequency until requested. Controllers may omit the departure control frequency if a DP has or will be assigned and the departure control frequency is published on the DP.

5-2-8. Instrument Departure Procedures (DP) – Obstacle Departure Procedures (ODP) and Standard Instrument Departures (SID)

Instrument departure procedures are preplanned instrument flight rule (IFR) procedures which provide obstruction clearance from the terminal area to the appropriate en route structure. There are two types of DPs: Obstacle Departure Procedures (ODPs), printed either textually or graphically, and Standard Instrument Departures (SIDs), always printed graphically. All DPs, either textual or graphic, may be designed using either conventional or RNAV criteria. RNAV procedures will have RNAV printed in the title, e.g., *SHEAR TWO DEPARTURE RNAV*. ODPs provide obstruction clearance via the least onerous route from the terminal area to the appropriate en route structure. ODPs are recommended for obstruction clearance and may be flown without ATC clearance unless an alternate departure procedure (SID or radar vector) has been specifically assigned by ATC. Graphic ODPs will have **OBSTACLE** printed in the procedure title, e.g., *GEORGETOWN THREE*.

DEPARTURE OBSTACLE or CROWN ONE DEPARTURE RNAV OBSTACLE Standard Instrument Departures are air traffic control ATC procedures printed for pilot/controller use in graphic form to provide obstruction clearance and a transition from the terminal area to the appropriate en route structure. SIDs are primarily designed for system enhancement and to reduce pilot/controller workload. ATC clearance must be received prior to flying a SID. All DPs provide the pilot with a way to depart the airport and transition to the en route structure safely. Pilots operating under 14 CFR Part 91 are strongly encouraged to file and fly a DP at night during marginal Visual Meteorological Conditions (VMC) and Instrument Meteorological Conditions (IMC) when one is available. The following paragraphs will provide an overview of the DP program. Why DPs are developed, what criteria are used here to find them, how they are to be flown, and finally pilot and ATC responsibilities.

a. Why are DPs necessary? The primary reason is to provide obstacle clearance protection information to pilots. A secondary reason, at busier airports, is to increase efficiency and reduce communications and departure delays through the use of SIDs. When an instrument approach is initially developed for an airport, the need for DPs is assessed. The procedure designer conducts an obstacle analysis to support departure operations. If an aircraft may turn in any direction from a runway within the limits of the assessment area (see paragraph 5-2-8b3) and remain clear of obstacles that the runway passes, that is called a diverse departure assessment and no ODP will be published. A SID may be published if needed for air traffic control purposes. However, if an obstacle penetrates, that is called the 40:1 obstacle identification surface, then the procedure designer chooses whether to

1. Establish a steeper than normal climb gradient or
2. Establish a steeper than normal climb gradient with an alternative that increases takeoff minima to allow the pilot to visually remain clear of the obstacles or
3. Design and publish a specific departure route or
4. A combination or all of the above

b. What criteria is used to provide obstruction clearance during departure?

1. Unless specified otherwise, required obstacle clearance for all departures, including diverse, is based on the pilot crossing the departure end of the runway at least 35 feet above the departure end of runway elevation, climbing to 400 feet above the departure end of runway elevation before making the initial turn, and maintaining a minimum climb gradient of 200 feet per nautical mile (FPNM), unless required to level off by a crossing restriction until the minimum IFR altitude. A greater climb gradient may be specified in the DP to clear obstacles or to achieve an ATC crossing restriction. If an initial turn higher than 400 feet above the departure end of runway elevation is specified in the DP, the turn should be commenced at the higher altitude. If a turn is specified at a fix, the turn must be made at that fix. Fixes may have minimum and/or maximum crossing altitudes that must be adhered to prior to passing the fix. In rare instances, obstacles that exist on the extended runway centerline may make an early turn more desirable than proceeding straight ahead. In these cases, the published departure instructions will include the language "turn left/right as soon as practicable." These departures will also include a ceiling and visibility minimum of at least 300 and 1. Pilots encountering one of these DPs should preplan the climb out to gain altitude and begin the turn as quickly as possible within the bounds of safe operating practices and operating limitations. This type of departure procedure is being phased out.

NOTE—

"Practical" or "feasible" may exist in some existing departure text instead of "practicable."

2. ODPs and SIDs assume normal aircraft performance, and that all engines are operating. Development of contingency procedures is required to cover the case of an engine failure or other emergency in flight that may occur after liftoff; it is the responsibility of the operator. More detailed information on this subject is available in Advisory Circular AC 120-91, Airport Obstacle Analysis, and in the Departure Procedures section of chapter 2 in the Instrument Procedures Handbook, FAA-H-8261-1.

3. The 40:1 obstacle identification surface (OIS) begins at the departure end of runway (DER) and slopes upward at 152 FPNM until reaching the minimum IFR altitude or entering the en route structure.


ture This assessment area is limited to 25 NM from the airport in nonmountainous areas and 46 NM in designated mountainous areas. Beyond this distance the pilot is responsible for obstacle clearance if not operating on a published route. If below having not reached the MEA or MOCA of a published route or an ATC assigned altitude. See FIG 5-2-1. Ref 14

CFR 91.177 for further information on en route altitudes.

NOTE—

ODPs are normally designed to terminate within these distance limitations, however, some ODPs will contain routes that may exceed 25/46 NM; these routes will ensure obstacle protection until reaching the end of the ODP.

**FIG 5-2-1
Diverse Departure Obstacle Assessment to 25/46 NM**

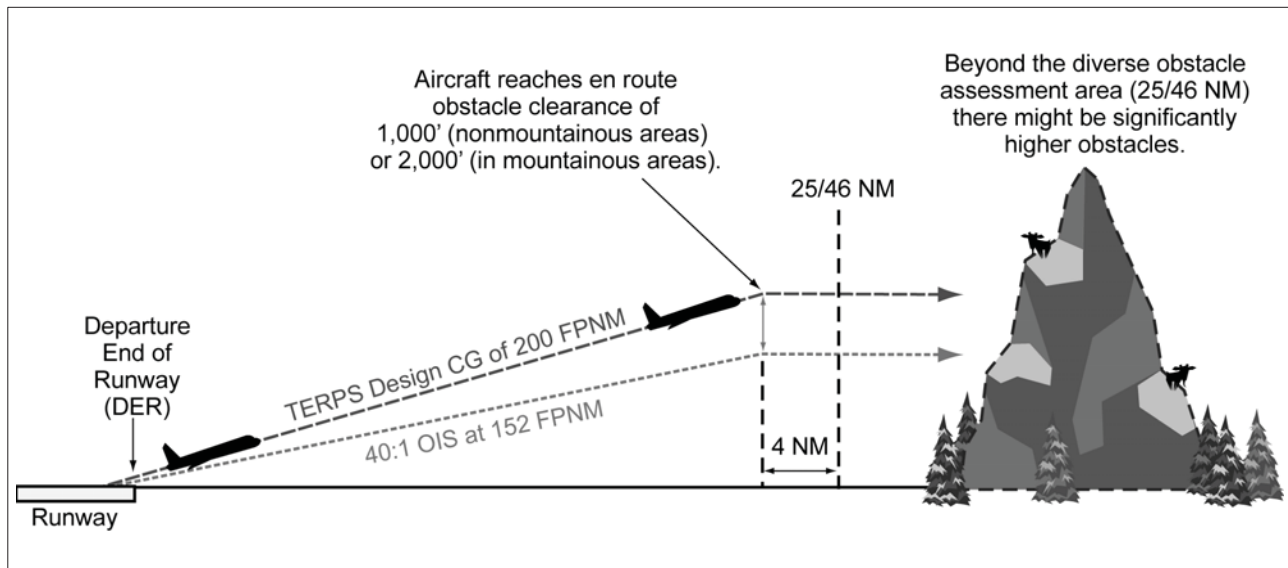

4. Obstacles that are located within 1 NM of the DER and penetrate the 40:1 OCS are referred to as close-in obstacles. The standard required obstacle clearance (ROC) of 48 feet per NM to clear these obstacles could require a climb gradient greater than 200 feet per NM for a very short distance only until the aircraft is 200 feet above the DER. To eliminate publishing an excessive climb gradient, the obstacle AGL/MSL height and location relative to the DER is noted in the Take-off Minimums and OBSTACLE Departure Procedures section of a given Terminal Procedures Publication (TPP) booklet. The purpose of this note is to identify the obstacles and alert the pilot to the height and location of the obstacles so they can be avoided. This can be accomplished in a variety of ways. e.g. the pilot may be able to see the obstruction and maneuver around the obstacles if necessary. early liftoff/climb performance may allow the aircraft to cross well above the obstacles or if the obstacles cannot be visually acquired during departure, preflight planning should take into account that turns or other maneuver may be necessary immediately after takeoff to avoid the obstructions.

5. Climb gradients greater than 200 FPNM are specified when required to support procedure design constraints, obstacle clearance, and/or airspace restrictions. Compliance with a climb gradient for these purposes is mandatory when the procedure is part of the ATC clearance unless increased takeoff minimums are provided and weather conditions allow compliance with these minimums. Additionally, ATC required crossing restrictions may also require climb gradients greater than 200 FPNM. These climb gradients may be amended or canceled at ATC's discretion. Multiple ATC climb gradients are permitted. An ATC climb gradient will not be used on an ODP.

EXAMPLE—

“Cross ALPHA intersection at or below 4000; maintain 6000.” The pilot climbs at least 200 FPNM to 6000. If 4000 is reached before ALPHA, the pilot levels off at 4000 until passing ALPHA; then immediately resumes at least 200 FPNM climb.

EXAMPLE—

“TAKEOFF MINIMUMS: RWY 27, Standard with a minimum climb of 280' per NM to 2500, ATC climb of 310' per NM to 4000 ft.” A climb of at least 280 FPNM is required to 2500 and is mandatory when the departure procedure is

included in the ATC clearance. ATC requires a climb gradient of 310 FPNM to 4000, however, this ATC climb gradient may be amended or canceled.

6. Climb gradients may be specified only to an altitude/fix above which the normal gradient applies

EXAMPLE–

“Minimum climb 340 FPNM to ALPHA.” The pilot climbs at least 340 FPNM to ALPHA, then at least 200 FPNM to MIA.

7. Some DPs established solely for obstacle avoidance require a climb in visual conditions to cross the airport or an on-airport NAVAID in a specified direction at or above a specified altitude. These procedures are called Visual Climb Over the Airport (VCOA)

EXAMPLE–

“Climb in visual conditions so as to cross the McElory Airport southbound, at or above 6000, then climb via Keemling radial zero three three to Keemling VORTAC.”

c. Who is responsible for obstacle clearance? DPs are designed so that adherence to the procedure by the pilot will ensure obstacle protection. Additionally

1. Obstacle clearance responsibility also rests with the pilot when he/she chooses to climb in visual conditions in lieu of flying a DP and/or depart under increased takeoff minima rather than fly the climb gradient. Standard takeoff minima are one statute mile for aircraft having two engines or less and one-half statute mile for aircraft having more than two engines. Specified ceiling and visibility minima, VCOA or increased takeoff minima will allow visual avoidance of obstacles until the pilot enters the standard obstacle protection area. Obstacle avoidance is not guaranteed if the pilot maneuvers farther from the airport than the specified visibility minimum prior to reaching the specified altitude. DPs may also contain what are called Low Close in Obstacles. These obstacles are less than 200 feet above the departure end of runway elevation and within one NM of the runway end and do not require increased takeoff minimums. These obstacles are identified on the SID chart or in the Take-off Minimums and Obstacle Departure Procedures section of the U.S. Terminal Procedure booklet. These obstacles are especially critical to aircraft that do not lift off until close to the departure end of the runway or which climb at the minimum rate. Pilots should also consider drift following lift-off to ensure sufficient

clearance from these obstacles. That segment of the procedure that requires the pilot to see and avoid obstacles ends when the aircraft crosses the specified point at the required altitude. In all cases, continued obstacle clearance is based on having climbed a minimum of 200 feet per nautical mile to the specified point and then continuing to climb at least 200 feet per nautical mile during the departure until reaching the minimum enroute altitude, unless specified otherwise.

2. ATC may assume responsibility for obstacle clearance by vectoring the aircraft prior to reaching the minimum vectoring altitude by using a Diverse Vector Area (DVA). The DVA has been assessed for departures which do not follow a specific ground track. ATC may also vector an aircraft off a previously assigned DP. In all cases, the 200 FPNM climb gradient is assumed and obstacle clearance is not provided by ATC until the controller begins to provide navigational guidance in the form of radar vectors.

NOTE–

When used by the controller during departure, the term “radar contact” should not be interpreted as relieving pilots of their responsibility to maintain appropriate terrain and obstruction clearance which may include flying the obstacle DP.

3. Pilots must preplan to determine if the aircraft can meet the climb gradient expressed in feet per nautical mile required by the departure procedure and be aware that flying at a higher than anticipated ground speed increases the climb rate requirement in feet per minute. Higher than standard climb gradients are specified by a note on the departure procedure chart for graphic DPs or in the Take-Off Minimums and Obstacle Departure Procedures section of the U.S. Terminal Procedures booklet for textual ODPs. The required climb gradient or higher must be maintained to the specified altitude or fix; then the standard climb gradient of 200 ft/NM can be resumed. A table for the conversion of climb gradient (feet per nautical mile) to climb rate (feet per minute) at a given ground speed is included on the inside of the back cover of the U.S. Terminal Procedures booklets.

d. Where are DPs located? DPs will be listed by airport in the IFR Takeoff Minimums and Obstacle Departure Procedures Section L of the Terminal Procedures Publications (TPPs). If the DP is textual, it will be described in TPP Section L. SIDs and complex ODPs will be published graphically and

named. The name will be listed by airport name and run way in Section L. Graphic ODPs will also have the term OBSTACLE printed in the charted procedure title differentiating them from SIDs.

1. An ODP that has been developed solely for obstacle avoidance will be indicated with the symbol T on appropriate Instrument Approach Procedure (IAP) charts and DP charts for that airport. The T symbol will continue to refer users to TPP Section C. In the case of a graphic ODP, the TPP Section C will only contain the name of the ODP. Since there may be both a textual and a graphic DP, Section C should still be checked for additional information. The nonstandard takeoff minimums and minimum climb gradients found in TPP Section C also apply to charted DPs and radar vector departures unless different minimums are specified on the charted DP. Takeoff minimums and departure procedures apply to all run ways unless otherwise specified. Neither graphic DPs will have all the information printed on the graphic depiction. As a general rule, ATC will only assign an ODP from a non towered airport when compliance with the ODP is necessary for aircraft to aircraft separation. Pilots may use the ODP to help ensure separation from terrain and obstacles.

e. Responsibilities

1. Each pilot prior to departing an airport on an IFR flight should

- (a) Consider the type of terrain and other obstacles on or in the vicinity of the departure airport.
- (b) Determine whether an ODP is available.
- (c) Determine if obstacle avoidance can be maintained visually or if the ODP should be flown and
- (d) Consider the effect of degraded climb performance and the actions to take in the event of an engine loss during the departure. Pilots should notify ATC as soon as possible of reduced climb capability in that circumstance.

NOTE—

Guidance concerning contingency procedures that address an engine failure on takeoff after V_1 speed on a large or turbine-powered transport category airplane may be found in AC 120-91, Airport Obstacle Analysis.

2. Pilots should not exceed a published speed restriction associated with a SID waypoint until passing that waypoint.

3. After an aircraft is established on an SID and subsequently vectored or cleared off of the SID or SID transition, pilots must consider the SID canceled unless the controller adds expect to resume SID. Pilots should then be prepared to rejoin the SID at a subsequent fix or procedure leg. ATC may also interrupt the vertical navigation of a SID and provide alternate altitude instructions while the aircraft remains established on the published lateral path. Aircraft may not be vectored off of an ODP or issued an altitude lower than a published altitude on an ODP until at or above the MVA/MIA at which time the ODP is canceled.

4. Aircraft instructed to resume a procedure such as a DP or SID which contains speed and/or altitude restrictions must be

- (a) Issued/reissued all applicable restrictions or
- (b) Advised to comply with restrictions or resume published speed.

EXAMPLE—

“Resume the Solar One departure, comply with restrictions.”

“Proceed direct CIROS, resume the Solar One departure, comply with restrictions.”

5. A clearance for a SID which contains published altitude restrictions may be issued using the phraseology climb via. Climb via is an abbreviated clearance that requires compliance with the procedure lateral path, associated speed and altitude restrictions along the cleared route or procedure. Clearance to climb via authorizes the pilot to

- (a) When used in the IFR departure clearance in a PDC, DCL or when cleared to a waypoint depicted on a SID to join the procedure after departure or to resume the procedure.
- (b) When vertical navigation is interrupted and an altitude is assigned to maintain which is not contained on the published procedure to climb from that previously assigned altitude at pilot's discretion to the altitude depicted for the next waypoint.

(c) Once established on the depicted departure to navigate laterally and climb to meet all published or assigned altitude and speed restrictions.

NOTE—

1. When otherwise cleared along a route or procedure that contains published speed restrictions, the pilot must comply with those speed restrictions independent of a climb via clearance.

2. ATC anticipates pilots will begin adjusting speed the minimum distance necessary prior to a published speed restriction so as to cross the waypoint/fix at the published speed. Once at the published speed ATC expects pilots will maintain the published speed until additional adjustment is required to comply with further published or ATC assigned speed restrictions or as required to ensure compliance with 14 CFR Section 91.117.

3. If ATC interrupts lateral/vertical navigation while an aircraft is flying a SID, ATC must ensure obstacle clearance. When issuing a “climb via” clearance to join or resume a procedure ATC must ensure obstacle clearance until the aircraft is established on the lateral and vertical path of the SID.

4. ATC will assign an altitude to cross if no altitude is depicted at a waypoint/fix or when otherwise necessary/required, for an aircraft on a direct route to a waypoint/fix where the SID will be joined or resumed.

5. SIDs will have a “top altitude;” the “top altitude” is the charted “maintain” altitude contained in the procedure description or assigned by ATC.

REFERENCE–

FAAJO 7110.65, Para 5-6-2, Methods
PCG, Climb Via, Top Altitude

EXAMPLE–

1. Lateral route clearance:

“Cleared Loop Six departure.”

NOTE–

The aircraft must comply with the SID lateral path, and any published speed restrictions.

2. Routing with assigned altitude:

“Cleared Loop Six departure, climb and maintain four thousand.”

NOTE–

The aircraft must comply with the SID lateral path, and any published speed restriction while climbing unrestricted to four thousand.

3. (A pilot filed a flight plan to the Johnston Airport using the Scott One departure, Jonez transition, then Q-145. The pilot filed for FL350. The Scott One includes altitude restrictions, a top altitude and instructions to expect the filed altitude ten minutes after departure). Before departure ATC uses PDC, DCL or clearance delivery to issue the clearance:

“Cleared to Johnston Airport, Scott One departure, Jonez transition, Q-OneForty-five. Climb via SID.”

NOTE–

In Example 3, the aircraft must comply with the Scott One departure lateral path and any published speed and altitude restrictions while climbing to the SID top altitude.

4. (Using the Example 3 flight plan, ATC determines the top altitude must be changed to FL180). The clearance will read:

“Cleared to Johnston Airport, Scott One departure, Jonez transition, Q-One Forty-five, Climb via SID except maintain flight level one eight zero.”

NOTE–

In Example 4, the aircraft must comply with the Scott One departure lateral path and any published speed and altitude restrictions while climbing to FL180. The aircraft must stop climb at FL180 until issued further clearance by ATC.

5. (An aircraft was issued the Suzan Two departure, “climb via SID” in the IFR departure clearance. After departure ATC must change a waypoint crossing restriction). The clearance will be:

“Climb via SID except cross Mkala at or above seven thousand.”

NOTE–

In Example 5, the aircraft will comply with the Suzan Two departure lateral path and any published speed and altitude restrictions and climb so as to cross Mkala at or above 7,000; remainder of the departure must be flown as published.

6. (An aircraft was issued the Teddd One departure, “climb via SID” in the IFR departure clearance. An interim altitude of 10,000 was issued instead of the published top altitude of FL 230). After departure ATC is able to issue the published top altitude. The clearance will be:

“Climb via SID.”

NOTE–

In Example 6, the aircraft will track laterally and vertically on the Teddd One departure and initially climb to 10,000; Once re-issued the “climb via” clearance the interim altitude is canceled aircraft will continue climb to FL230 while complying with published restrictions.

7. (An aircraft was issued the Bbear Two departure, “climb via SID” in the IFR departure clearance. An interim altitude of 16,000 was issued instead of the published top altitude of FL 190). After departure, ATC is able to issue a top altitude of FL300 and still requires compliance with the published SID restrictions. The clearance will be:

“Climb via SID except maintain flight level three zero zero.”

NOTE–

In Example 7, the aircraft will track laterally and vertically on the Bbear Two departure and initially climb to 16,000; Once re-issued the “climb via” clearance the interim altitude is canceled and the aircraft will continue climb to FL300 while complying with published restrictions.

8. (An aircraft was issued the Bizze Two departure, “climb via SID.” After departure, ATC vectors the aircraft off of the SID, and then issues a direct routing to rejoin the SID at Rockr waypoint which does not have a published altitude restriction. ATC wants the aircraft to cross at or above 10,000). The clearance will read:

“Proceed direct Rockr, cross Rockr at or above one-zero thousand, climb via the Bizze Two departure.”

NOTE—

In Example 8, the aircraft will join the Bizze Two SID at Rockr at or above 10,000 and then comply with the published lateral path and any published speed or altitude restrictions while climbing to the SID top altitude.

9. (An aircraft was issued the Suzan Two departure, “climb via SID” in the IFR departure clearance. After departure ATC vectors the aircraft off of the SID, and then clears the aircraft to rejoin the SID at Dvine waypoint, which has a published crossing restriction). The clearance will read:

“Proceed direct Dvine, Climb via the Suzan Two departure.”

NOTE—

In Example 9, the aircraft will join the Suzan Two departure at Dvine, at the published altitude, and then comply with the published lateral path and any published speed or altitude restrictions.

6. Pilots cleared for vertical navigation using the phraseology climb via must inform ATC upon initial contact of the altitude leaving and any assigned restrictions not published on the procedure

EXAMPLE—

1. (Cactus 711 is cleared to climb via the Laura Two departure. The Laura Two has a top altitude of FL190):
“Cactus Seven Eleven leaving two thousand, climbing via the Laura Two departure.”

2. (Cactus 711 is cleared to climb via the Laura Two departure, but ATC changed the top altitude to 16,000):
“Cactus Seven Eleven leaving two thousand for one-six thousand, climbing via the Laura Two departure.”

7. If prior to or after takeoff an altitude restriction is issued by ATC all previously issued ATC altitude restrictions are canceled including those published on a SID. Pilots must still comply with all speed restrictions and lateral path requirements published on the SID unless canceled by ATC

EXAMPLE—

Prior to takeoff or after departure ATC issues an altitude change clearance to an aircraft cleared to climb via a SID but ATC no longer requires compliance with published altitude restrictions:

“Climb and maintain flight level two four zero.”

NOTE—

The published SID altitude restrictions are canceled; The aircraft should comply with the SID lateral path and begin an unrestricted climb to FL240. Compliance with published speed restrictions is still required unless specifically deleted by ATC.

8. Altitude restrictions published on an ODP are necessary for obstacle clearance and/or design constraints. Compliance with these restrictions is mandatory and CANNOT be lowered or cancelled by ATC

f. RNAV Departure Procedures

All public RNAV SIDs and graphic ODPs are RNAV 1. These procedures generally start with an initial RNAV or heading leg near the departure end of runway DER. In addition these procedures require system performance currently met by GPS or DME/DME/IRU RNAV systems that satisfy the criteria discussed in AC 90-100A U.S. Terminal and En Route Area Navigation RNAV Operations. RNAV 1 procedures must maintain a total system error of not more than 1 NM for 95% of the total flight time.

REFERENCE—

AIM, Global Positioning System (GPS)

Paragraph 1-1-18l, Impact of magnetic Variation on RNAV Systems

Section 3. En Route Procedures

5-3-1. ARTCC Communications

a. Direct Communications, Controllers and Pilots.

1. ARTCCs are capable of direct communications with IFR air traffic on certain frequencies. Maximum communications coverage is possible through the use of Remote Center Air/Ground (RCAG) sites comprised of both VHF and UHF transmitters and receivers. These sites are located throughout the U.S. Although they may be several hundred miles away from the ARTCC, they are remoted to the various ARTCCs by land lines or microwave links. Since IFR operations are expedited through the use of direct communications, pilots are requested to use these frequencies strictly for communications pertinent to the control of IFR aircraft. Flight plan filing en route, weather forecasts, and similar data should be requested through FSSs, company radio, or appropriate military facilities capable of performing these services.

2. An ARTCC is divided into sectors. Each sector is handled by one or a team of controllers and has its own sector discrete frequency. As a flight progresses from one sector to another, the pilot is requested to change to the appropriate sector discrete frequency.

3. Controller Pilot Data Link Communications (CPDLC) is a system that supplements air/ground voice communications. As a result, it expands the air traffic control air/ground communications capabilities. Consequently, the air traffic system's operational capacity is increased and any associated air traffic delays become minimized. A related safety benefit is that pilot/controller read-back and hear-back errors will be significantly reduced. The CPDLC's principal operating criteria are:

(a) Voice remains the primary and controlling air/ground communications means.

(b) Participating aircraft will need to have the appropriate CPDLC avionics equipment in order to receive uplink or transmit downlink messages.

(c) CPDLC Build 1 offers four ATC data link services. These are altimeter setting (AS), transfer of

communications (TC), initial contact (IC), and menu text messages (MT).

(1) Altimeter settings are usually transmitted automatically when a CPDLC session and eligibility has been established with an aircraft. A controller may also manually send an altimeter setting message.

NOTE—

When conducting instrument approach procedures, pilots are responsible to obtain and use the appropriate altimeter setting in accordance with 14 CFR Section 97.20. CPDLC issued altimeter settings are excluded for this purpose.

(2) Initial contact is a safety validation transaction that compares a pilot's initiated altitude downlink message with an aircraft's ATC host computer stored altitude. If an altitude mismatch is detected, the controller will verbally provide corrective action.

(3) Transfer of communications automatically establishes data link contact with a succeeding sector.

(4) Menu text transmissions are scripted, nontrajectory altering uplink messages.

NOTE—

Initial use of CPDLC will be at the Miami Air Route Traffic Control Center (ARTCC). Air carriers will be the first users. Subsequently, CPDLC will be made available to all NAS users. Later versions will include trajectory altering services and expanded clearance and advisory message capabilities.

b. ATC Frequency Change Procedures.

1. The following phraseology will be used by controllers to effect a frequency change:

EXAMPLE—

(Aircraft identification) contact (facility name or location name and terminal function) (frequency) at (time, fix, or altitude).

NOTE—

Pilots are expected to maintain a listening watch on the transferring controller's frequency until the time, fix, or altitude specified. ATC will omit frequency change restrictions whenever pilot compliance is expected upon receipt.

2. The following phraseology should be utilized by pilots for establishing contact with the designated facility

(a) When operating in a radar environment On initial contact the pilot should inform the controller of the aircraft's assigned altitude preceded by the words level or climbing to or descending to as appropriate and the aircraft's present vacating altitude if applicable

EXAMPLE–

1. (Name) CENTER, (aircraft identification), LEVEL (altitude or flight level)

2. (Name) CENTER, (aircraft identification), LEAVING (exact altitude or flight level), CLIMBING TO OR DESCENDING TO (altitude of flight level)

NOTE–

Exact altitude or flight level means to the nearest 100 foot increment. Exact altitude or flight level reports on initial contact provide ATC with information required prior to using Mode C altitude information for separation purposes.

(b) When operating in a nonradar environment

(1) On initial contact the pilot should inform the controller of the aircraft's present position altitude and time estimate for the next reporting point

EXAMPLE–

(Name) CENTER, (aircraft identification), (position), (altitude), ESTIMATING (reporting point) AT (time)

(2) After initial contact when a position report will be made the pilot should give the controller a complete position report

EXAMPLE–

(Name) CENTER, (aircraft identification), (position), (time), (altitude), (type of flight plan), (ETA and name of next reporting point), (the name of the next succeeding reporting point), AND (remarks)

REFERENCE–

AIM, Position Reporting, Paragraph 5–3–2

3. At times controllers will ask pilots to verify that they are at a particular altitude. The phraseology used will be VERIF AT altitude. In climbing or descending situations controllers may ask pilots to VERIFY ASSIGNED ALTITUDE AS (altitude). Pilots should confirm that they are at the altitude

stated by the controller or that the assigned altitude is correct as stated. If this is not the case they should inform the controller of the actual altitude being maintained or the different assigned altitude.

CAUTION–

Pilots should not take action to change their actual altitude or different assigned altitude to the altitude stated in the controllers verification request unless the controller specifically authorizes a change.

c. **ARTCC Radio Frequency Outage.** ARTCCs normally have at least one back up radio receiver and transmitter system for each frequency which can usually be placed into service quickly with little or no disruption of ATC service. Occasionally technical problems may cause a delay but switchover seldom takes more than 60 seconds. When it appears that the outage will not be quickly remedied the ARTCC will usually request a nearby aircraft if there is one to switch to the affected frequency to broadcast communications instructions. It is important therefore that the pilot wait at least 1 minute before deciding that the ARTCC has actually experienced a radio frequency failure. When such an outage does occur the pilot should if workload and equipment capability permit maintain a listening watch on the affected frequency while attempting to comply with the following recommended communications procedures

1. If two way communications cannot be established with the ARTCC after changing frequencies a pilot should attempt to recontact the transferring controller for the assignment of an alternative frequency or other instructions

2. When an ARTCC radio frequency failure occurs after two way communications have been established the pilot should attempt to reestablish contact with the center on any other known ARTCC frequency preferably that of the next responsible sector when practicable and ask for instructions. However when the next normal frequency change along the route is known to involve another ATC facility the pilot should contact that facility if feasible for instructions. If communications cannot be reestablished by either method the pilot is expected to request communications instructions from the FSS appropriate to the route of flight

NOTE—

The exchange of information between an aircraft and an ARTCC through an FSS is quicker than relay via company radio because the FSS has direct interphone lines to the responsible ARTCC sector. Accordingly, when circumstances dictate a choice between the two, during an ARTCC frequency outage, relay via FSS radio is recommended.

5-3-2. Position Reporting

The safety and effectiveness of traffic control depends to a large extent on accurate position reporting. In order to provide the proper separation and expedite aircraft movements, ATC must be able to make accurate estimates of the progress of every aircraft operating on an IFR flight plan.

a. Position Identification.

1. When a position report is to be made passing a VOR radio facility, the time reported should be the time at which the first complete reversal of the to/from indicator is accomplished.

2. When a position report is made passing a facility by means of an airborne ADF, the time reported should be the time at which the indicator makes a complete reversal.

3. When an aural or a light panel indication is used to determine the time passing a reporting point, such as a fan marker, marker cone of silence, or intersection of range courses, the time should be noted when the signal is first received and again when it ceases. The mean of these two times should then be taken as the actual time over the fix.

4. If a position is given with respect to distance and direction from a reporting point, the distance and direction should be computed as accurately as possible.

5. Except for terminal area transition purposes, position reports or navigation with reference to aids not established for use in the structure in which flight is being conducted will not normally be required by ATC.

b. Position Reporting Points. CFRs require pilots to maintain a listening watch on the appropriate frequency and, unless operating under the provisions of subparagraph c, to furnish position reports passing certain reporting points. Reporting points are indicated by symbols on en route charts. The

designated compulsory reporting point symbol is a solid triangle  and the on request reporting point symbol is the open triangle . Reports passing an on request reporting point are only necessary when requested by ATC.

c. Position Reporting Requirements.

1. Flights Along Airways or Routes. A position report is required by all flights regardless of altitude, including those operating in accordance with an ATC clearance specifying “VFR-on-top,” over each designated compulsory reporting point along the route being flown.

2. Flights Along a Direct Route. Regardless of the altitude or flight level being flown, including flights operating in accordance with an ATC clearance specifying “VFR-on-top,” pilots must report over each reporting point used in the flight plan to define the route of flight.

3. Flights in a Radar Environment. When informed by ATC that their aircraft are in Radar Contact, pilots should discontinue position reports over designated reporting points. They should resume normal position reporting when ATC advises “RADAR CONTACT LOST” or “RADAR SERVICE TERMINATED.”

4. Flights in an Oceanic (Non-radar) Environment. Pilots must report over each point used in the flight plan to define the route of flight, even if the point is depicted on aeronautical charts as an on request non-compulsory reporting point. For aircraft providing automatic position reporting via an Automatic Dependent Surveillance Contract (ADS-C) logon, pilots should discontinue voice position reports.

NOTE—

ATC will inform pilots that they are in “radar contact”:

(a) when their aircraft is initially identified in the ATC system; and

(b) when radar identification is reestablished after radar service has been terminated or radar contact lost. Subsequent to being advised that the controller has established radar contact, this fact will not be repeated to the pilot when handed off to another controller. At times, the aircraft identity will be confirmed by the receiving controller; however, this should not be construed to mean that radar contact has been lost. The identity of transponder-equipped aircraft will be confirmed by asking the pilot to “ident,” “squawk standby,” or to change codes. Aircraft without transponders will be advised of their position to confirm identity. In this case, the pilot is

expected to advise the controller if in disagreement with the position given. Any pilot who cannot confirm the accuracy of the position given because of not being tuned to the NAVAID referenced by the controller, should ask for another radar position relative to the tuned in NAVAID.

d. Position Report Items:

1. Position reports should include the following items:

- (a) Identification
- (b) Position
- (c) Time
- (d) Altitude or flight level include actual altitude or flight level when operating on a clearance specifying VFR-on-top
- (e) Type of flight plan not required in IFR position reports made directly to ARTCCs or approach control
- (f) ETA and name of next reporting point
- (g) The name only of the next succeeding reporting point along the route of flight and
- (h) Pertinent remarks

5-3-3. Additional Reports

a. The following reports should be made to ATC or FSS facilities without a specific ATC request:

1. At all times.

- (a) When vacating any previously assigned altitude or flight level for a newly assigned altitude or flight level
- (b) When an altitude change will be made if operating on a clearance specifying VFR-on-top
- (c) When *unable* to climb/descend at a rate of at least 500 feet per minute
- (d) When approach has been missed
Request clearance for specific action i.e. to alternative airport another approach etc
- (e) Change in the average true airspeed at cruising altitude when it varies by 5 percent or 10 knots whichever is greater from that filed in the flight plan
- (f) The time and altitude or flight level upon reaching a holding fix or point to which cleared

- (g) When leaving any assigned holding fix or point

NOTE-

The reports in subparagraphs (f) and (g) may be omitted by pilots of aircraft involved in instrument training at military terminal area facilities when radar service is being provided.

(h) Any loss in controlled airspace of VOR TACAN ADF low frequency navigation receiver capability GPS anomalies while using installed IFR-certified GPS/GNSS receivers complete or partial loss of ILS receiver capability or impairment of air/ground communications capability Reports should include aircraft identification equipment affected degree to which the capability to operate under IFR in the ATC system is impaired and the nature and extent of assistance desired from ATC

NOTE-

1. *Other equipment installed in an aircraft may effectively impair safety and/or the ability to operate under IFR. If such equipment (e.g., airborne weather radar) malfunctions and in the pilot's judgment either safety or IFR capabilities are affected, reports should be made as above.*
2. *When reporting GPS anomalies, include the location and altitude of the anomaly. Be specific when describing the location and include duration of the anomaly if necessary.*

- (i) Any information relating to the safety of flight

2. When not in radar contact.

- (a) When leaving final approach fix inbound on final approach nonprecision approach or when leaving the outer marker or fix used in lieu of the outer marker inbound on final approach precision approach
- (b) A corrected estimate at anytime it becomes apparent that an estimate as previously submitted is in error in excess of 3 minutes For flights in the North Atlantic NAT a revised estimate is required if the error is 3 minutes or more

b. Pilots encountering weather conditions which have not been forecast or hazardous conditions which have been forecast are expected to forward a report of such weather to ATC

REFERENCE-

*AIM, Pilot Weather Reports (PIREPs), Paragraph 7-1-20
14 CFR Section 91.183(B) and (C).*

5-3-4. Airways and Route Systems

a. Three fixed route systems are established for air navigation purposes. They are the Federal airway system consisting of VOR and L/MF routes, the jet route system, and the RNAV route system. To the extent possible, these route systems are aligned in an overlying manner to facilitate transition between each.

1. The VOR and L/MF nondirectional radio beacons. Airway System consists of airways designated from 1 200 feet above the surface, or in some instances higher, up to but not including 18 000 feet MSL. These airways are depicted on IFR Enroute Low Altitude Charts.

NOTE-

The altitude limits of a victor airway should not be exceeded except to effect transition within or between route structures.

(a) Except in Alaska, the VOR airways are predicated solely on VOR or VORTAC navigation aids depicted in black on aeronautical charts and identified by a V. Victor followed by the airway number, for example, V12.

NOTE-

Segments of VOR airways in Alaska are based on L/MF navigation aids and charted in brown instead of black on en route charts.

(1) A segment of an airway which is common to two or more routes carries the numbers of all the airways which coincide for that segment. When such is the case, pilots filing a flight plan need to indicate only that airway number for the route filed.

NOTE-

A pilot who intends to make an airway flight, using VOR facilities, will simply specify the appropriate "victor" airway(s) in the flight plan. For example, if a flight is to be made from Chicago to New Orleans at 8,000 feet, using omniranges only, the route may be indicated as "departing from Chicago-Midway, cruising 8,000 feet via Victor 9 to Moisant International." If flight is to be conducted in part by means of L/MF navigation aids and in part on omniranges, specifications of the appropriate airways in the flight plan will indicate which types of facilities will be used along the described routes, and, for IFR flight, permit ATC to issue a traffic clearance accordingly. A route may also be described by specifying the station over which the flight will pass, but in this case since many VORs and L/MF aids have the same name, the pilot must be careful to indicate which aid will be used at a particular location.

This will be indicated in the route of flight portion of the flight plan by specifying the type of facility to be used after the location name in the following manner: Newark L/MF, Allentown VOR.

(2) With respect to position reporting, reporting points are designated for VOR Airway Systems. Flights using Victor Airways will report over these points unless advised otherwise by ATC.

(b) The L/MF airways, colored airways, are predicated solely on L/MF navigation aids and are depicted in brown on aeronautical charts and are identified by color name and number, e.g., Amber One, Green, and Red airways are plotted east and west. Amber and Blue airways are plotted north and south.

NOTE-

Except for G13 in North Carolina, the colored airway system exists only in the state of Alaska. All other such airways formerly so designated in the conterminous U.S. have been rescinded.

(c) The use of TSO-C145, as revised, or TSO-C146, as revised, GPS/WAAS navigation systems is allowed in Alaska as the only means of navigation on published air traffic service (ATS) routes, including those Victor T-Routes, and colored airway segments designated with a second minimum en route altitude (MEA) depicted in blue and followed by the letter G at those lower altitudes. The altitudes so depicted are below the minimum reception altitude (MRA) of the land-based navigation facility defining the route segment and guarantee standard en route obstacle clearance and two-way communications. Air carrier operators requiring operations specifications are authorized to conduct operations on those routes in accordance with FAA operations specifications.

2. The jet route system consists of jet routes established from 18 000 feet MSL to FL 450 inclusive.

(a) These routes are depicted on Enroute High Altitude Charts. Jet routes are depicted in black on aeronautical charts and are identified by a J. Jet followed by the airway number, e.g., J12. Jet routes, as VOR airways, are predicated solely on VOR or VORTAC navigation facilities, except in Alaska.

NOTE-

Segments of jet routes in Alaska are based on L/MF navigation aids and are charted in brown color instead of black on en route charts.

(b) With respect to position reporting reporting points are designated for en route systems. Flights using en route systems will report over these points unless otherwise advised by ATC.

3. Area Navigation (RNAV) Routes.

(a) Published RNAV routes including Q-Routes and T-Routes can be flight planned for use by aircraft with RNAV capability subject to any limitations or requirements noted on en route charts in applicable Advisory Circulars or by NOTAM. RNAV routes are depicted in blue on aeronautical charts and are identified by the letter Q or T followed by the airway number for example Q-13 T-205. Published RNAV routes are RNAV-2 except when specifically charted as RNAV-1. These routes require system performance currently met by GPS/GPS/WAAS or DME/DME/IRU RNAV systems that satisfy the criteria discussed in AC 90-100A U.S. Terminal and En Route Area Navigation RNAV Operations.

NOTE-

AC 90-100A does not apply to over water RNAV routes (reference 14 CFR 91.511, including the Q-routes in the Gulf of Mexico and the Atlantic routes) or Alaska VOR/DME RNAV routes ("JxxxR"). The AC does not apply to off-route RNAV operations, Alaska GPS routes or Caribbean routes.

(1) Q-routes are available for use by RNAV equipped aircraft between 18 000 feet MSL and FL 450 inclusive. Q-routes are depicted on Enroute High Altitude Charts.

NOTE-

Aircraft in Alaska may only operate on GNSS Q-routes with GPS (TSO-C129 (as revised) or TSO-C196 (as revised)) equipment while the aircraft remains in Air Traffic Control (ATC) radar surveillance or with GPS/WAAS which does not require ATC radar surveillance.

(2) T-routes are available for use by GPS or GPS/WAAS equipped aircraft from 1 200 feet above the surface or in some instances higher up to but not including 18 000 feet MSL. T-routes are depicted on Enroute Low Altitude Charts.

NOTE-

Aircraft in Alaska may only operate on GNSS T-routes with GPS/WAAS (TSO-C145 (as revised) or TSO-C146 (as revised)) equipment.

(b) Unpublished RNAV routes are direct routes based on area navigation capability between waypoints defined in terms of latitude/longitude coordinates degree-distance fixes or offsets from established routes/airways at a specified distance and direction. Radar monitoring by ATC is required on all unpublished RNAV routes except for GNSS-equipped aircraft cleared via filed published waypoints recallable from the aircraft's navigation database.

(c) Magnetic Reference Bearing (MRB) is the published bearing between two waypoints on an RNAV/GPS/GNSS route. The MRB is calculated by applying magnetic variation at the waypoint to the calculated true course between two waypoints. The MRB enhances situational awareness by indicating a reference bearing (magnetic heading) that a pilot should see on the compass/HSI/RMI etc when turning prior to/over a waypoint en route to another waypoint. Pilots should use this bearing as a reference only because their RNAV/GPS/GNSS navigation system will fly the true course between the waypoints.

b. Operation above FL 450 may be conducted on a point to point basis. Navigational guidance is provided on an area basis utilizing those facilities depicted on the enroute high altitude charts.

c. **Radar Vectors.** Controllers may vector aircraft within controlled airspace for separation purposes, noise abatement considerations when an operational advantage will be realized by the pilot or the controller or when requested by the pilot. Vectors outside of controlled airspace will be provided only on pilot request. Pilots will be advised as to what the vector is to achieve when the vector is controller initiated and will take the aircraft off a previously assigned nonradar route. To the extent possible, aircraft operating on RNAV routes will be allowed to remain on their own navigation.

d. When flying in Canadian airspace, pilots are cautioned to review Canadian Air Regulations.

1. Special attention should be given to the parts which differ from U.S. CFRs.

(a) The Canadian Airways Class B airspace restriction is an example. Class B airspace is all controlled low level airspace above 12 500 feet MSL or the MEA whichever is higher within which only IFR and controlled VFR flights are permitted. Low

level airspace means an airspace designated and defined as such in the Designated Airspace Handbook

(b) Unless issued a VFR flight clearance by ATC regardless of the weather conditions or the height of the terrain no person may operate an aircraft under VMC within Class B airspace


(c) The requirement for entry into Class B

airspace is a student pilot permit under the guidance or control of a flight instructor

(d) VFR flight requires visual contact with the ground or water at all times

2. Segments of VOR airways and high level routes in Canada are based on L/MF navigation aids and are charted in brown color instead of blue on en route charts

FIG 5-3-1
Adhering to Airways or Routes

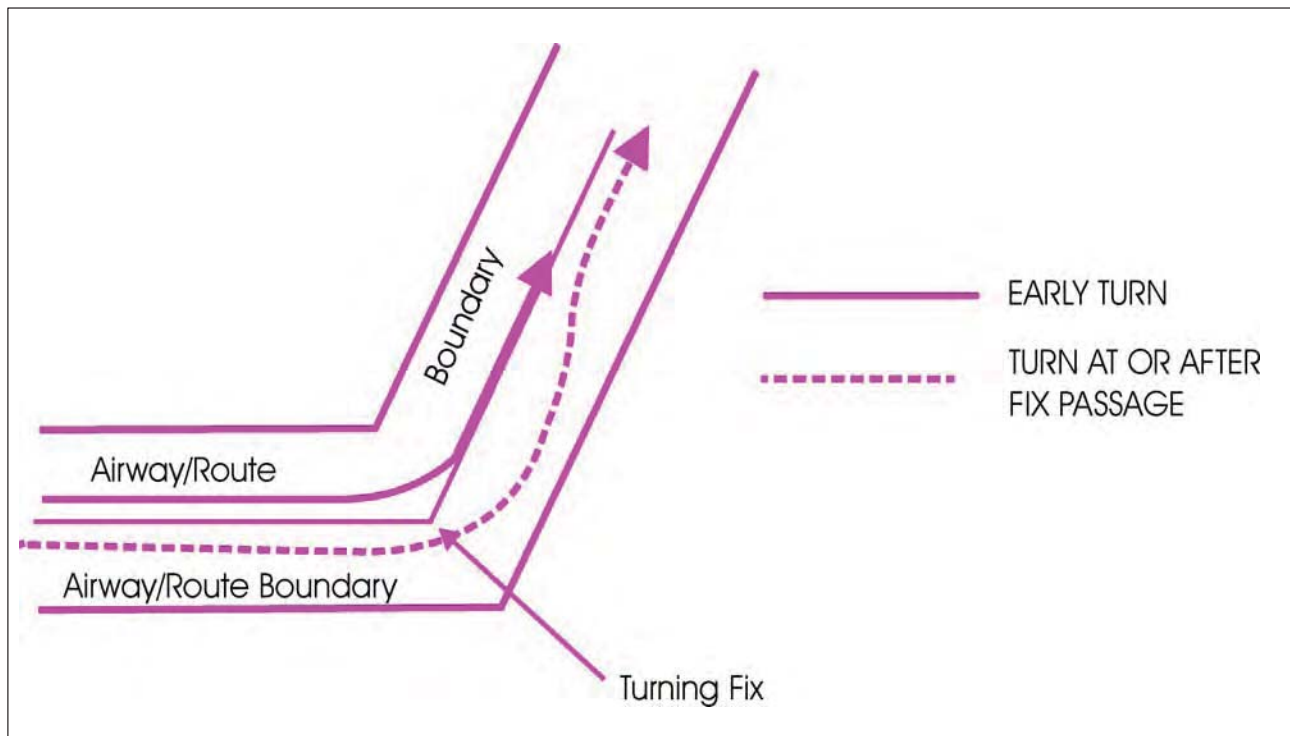

5-3-5. Airway or Route Course Changes

a. Pilots of aircraft are required to adhere to airways or routes being flown. Special attention must be given to this requirement during course changes. Each course change consists of variables that make the technique applicable in each case a matter only the pilot can resolve. Some variables which must be considered are turn radius, wind effect, airspeed, degree of turn, and cockpit instrumentation. An early turn, as illustrated below, is one method of adhering to airways or routes. The use of any available cockpit

instrumentation, such as Distance Measuring Equipment, may be used by the pilot to lead the turn when making course changes. This is consistent with the intent of 14 CFR Section 91.181, which requires pilots to operate along the centerline of an airway and along the direct course between navigational aids or fixes.

b. Turns which begin at or after fix passage may exceed airway or route boundaries. FIG 5-3-1 contains an example flight track depicting this together with an example of an early turn.

c. Without such actions as leading a turn aircraft operating in excess of 290 knots true air speed TAS can exceed the normal airway or route boundaries depending on the amount of course change required and direction and velocity the character of the turn fix DME overhead navigation aid or intersection and the pilot's technique in making a course change. For example, a flight operating at 17 000 feet MSL with a TAS of 400 knots at a 25 degree bank and a course change of more than 40 degrees could exceed the width of the airway or route i.e. 4 nautical miles each side of centerline. However, in the airspace below 18 000 feet MSL, operations in excess of 290 knots TAS are not prevalent and the provision of additional IFR separation in all course change situations for the occasional aircraft making a turn in excess of 290 knots TAS creates an unacceptable waste of airspace and imposes a penalty upon the preponderance of traffic which operate at low speeds. Consequently, the FAA expects pilots to lead turns and take other actions they consider necessary during course changes to adhere as closely as possible to the airways or route being flown.

5-3-6. Changeover Points (COPs)

a. COPs are prescribed for Federal airways, set routes, area navigation routes, or other direct routes for which an MEA is designated under 14 CFR Part 95. The COP is a point along the route or airway segment between two adjacent navigation facilities or waypoints where changeover in navigation guidance should occur. At this point, the pilot should change navigation receiver frequency from the station behind the aircraft to the station ahead.

b. The COP is normally located midway between the navigation facilities for straight route segments or at the intersection of radials or courses forming a dogleg in the case of dogleg route segments. When the COP is NOT located at the midway point, aeronautical charts will depict the COP location and give the mileage to the radio aids.

c. COPs are established for the purpose of preventing loss of navigation guidance, to prevent frequency interference from other facilities, and to prevent use of different facilities by different aircraft in the same airspace. Pilots are urged to observe COPs to the fullest extent.

5-3-7. Minimum Turning Altitude (MTA)

Due to increased airspeeds at 10 000 ft MSL or above, the published minimum enroute altitude (MEA) may not be sufficient for obstacle clearance when a turn is required over a fix, NAVAID, or waypoint. In these instances, an expanded area in the vicinity of the turn point is examined to determine whether the published MEA is sufficient for obstacle clearance. In some locations, normally mountainous terrain/obstacles in the expanded search area may necessitate a higher minimum altitude while conducting the turning maneuver. Turning fixes requiring a higher minimum turning altitude (MTA) will be denoted on government charts by the minimum crossing altitude (MCA) icon, a flag, and an accompanying note describing the MTA restriction. An MTA restriction will normally consist of the air traffic service (ATS) route leading to the turn point, the ATS route leading from the turn point, and the required altitude, e.g., MTA V330 E TO V520 W 16000. When an MTA is applicable for the intended route of flight, pilots must ensure they are at or above the charted MTA not later than the turn point and maintain at or above the MTA until joining the centerline of the ATS route following the turn point. Once established on the centerline following the turning fix, the MEA/MOCA determines the minimum altitude available for assignment. An MTA may also preclude the use of a specific altitude or a range of altitudes during a turn. For example, the MTA may restrict the use of 10 000 through 11 000 ft MSL. In this case, any altitude greater than 11 000 ft MSL is unrestricted, as are altitudes less than 10 000 ft MSL provided MEA/MOCA requirements are satisfied.

5-3-8. Holding

a. Whenever an aircraft is cleared to a fix other than the destination airport and delay is expected, it is the responsibility of the ATC controller to issue complete holding instructions, unless the pattern is charted, an EFC time, and best estimate of any additional enroute/terminal delay.

NOTE-

Only those holding patterns depicted on U.S. government or commercially produced (meeting FAA requirements) low/high altitude enroute, and area or STAR charts should be used.

b. If the holding pattern is charted and the controller doesn't issue complete holding instructions, the pilot is expected to hold as depicted on the

appropriate chart. When the pattern is charted, the controller may omit all holding instructions except the charted holding direction and the statement *AS PUBLISHED*; e.g., *HOLD EAST AS PUBLISHED*. Controllers must always issue complete holding instructions when pilots request them.

c. If no holding pattern is charted and holding instructions have not been issued, the pilot should ask ATC for holding instructions prior to reaching the fix. This procedure will eliminate the possibility of an aircraft entering a holding pattern other than that desired by ATC. If unable to obtain holding instructions prior to reaching the fix due to frequency congestion, stuck microphone, etc., then enter a standard pattern on the course on which the aircraft approached the fix and request further clearance as soon as possible. In this event, the altitude/flight level of the aircraft at the clearance limit will be protected so that separation will be provided as required.

d. When an aircraft is 3 minutes or less from a clearance limit and a clearance beyond the fix has not been received, the pilot is expected to start a speed reduction so that the aircraft will cross the fix initially at or below the maximum holding airspeed.

e. When no delay is expected, the controller should issue a clearance beyond the fix as soon as possible and whenever possible, at least 5 minutes before the aircraft reaches the clearance limit.

f. Pilots should report to ATC the time and altitude/flight level at which the aircraft reaches the clearance limit and report leaving the clearance limit.

NOTE—

In the event of two-way communications failure, pilots are required to comply with 14 CFR Section 91.185.

g. When holding at a VOR station, pilots should begin the turn to the outbound leg at the time of the first complete reversal of the to/from indicator.

h. Patterns at the most generally used holding fixes are depicted charted on U.S. Government or commercially produced meeting FAA requirements. Low or High Altitude Enroute Area and STAR Charts. Pilots are expected to hold in the pattern depicted unless specifically advised otherwise by ATC.

NOTE—

Holding patterns that protect for a maximum holding airspeed other than the standard may be depicted by an icon, unless otherwise depicted. The icon is a standard holding pattern symbol (racetrack) with the airspeed restriction shown in the center. In other cases, the airspeed restriction will be depicted next to the standard holding pattern symbol.

REFERENCE—

AIM, Holding, Paragraph 5-3-8j2.

i. An ATC clearance requiring an aircraft to hold at a fix where the pattern is not charted will include the following information. See FIG 5-3-2.

1. Direction of holding from the fix in terms of the eight cardinal compass points, i.e., N, NE, E, SE, etc.

2. Holding fix; the fix may be omitted if included at the beginning of the transmission as the clearance limit.

3. Radial, course, bearing, airway or route on which the aircraft is to hold.


4. Leg length in miles if DME or RNAV is to be used; leg length will be specified in minutes on pilot request or if the controller considers it necessary.

5. Direction of turn if left turns are to be made; the pilot requests or the controller considers it necessary.


6. Time to expect further clearance and any pertinent additional delay information.

FIG 5-3-2
Holding Patterns


EXAMPLES OF HOLDING

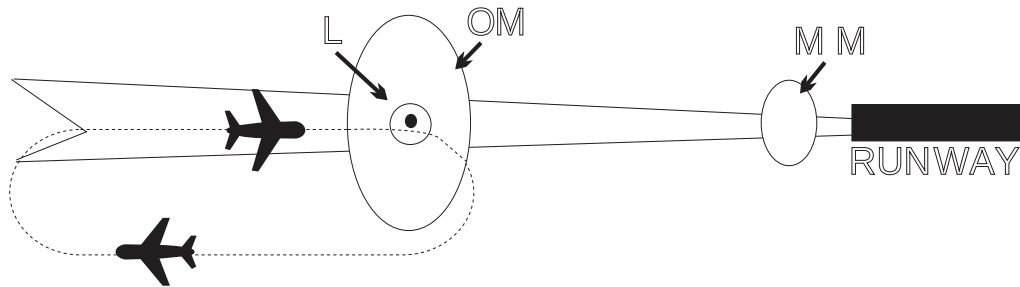

TYPICAL PROCEDURE ON AN ILS OUTER MARKER

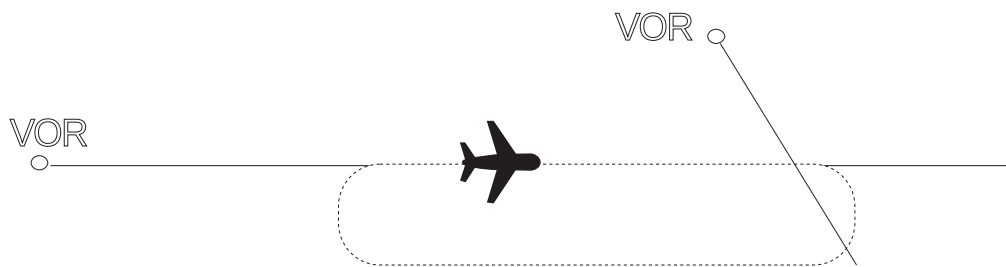


TYPICAL PROCEDURE AT INTERSECTION
OF VOR RADIALS

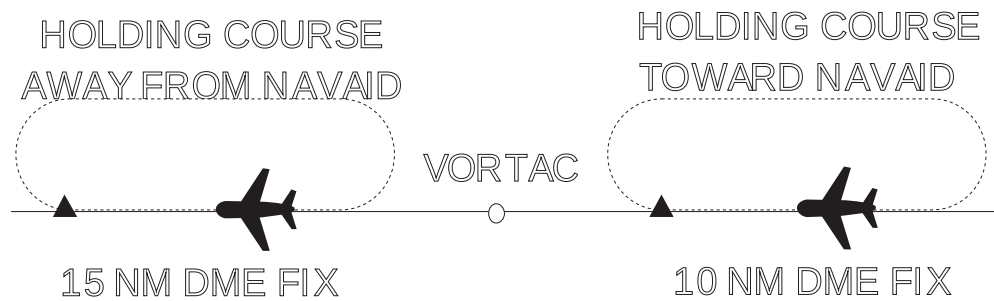

TYPICAL PROCEDURE AT DME FIX

FIG 5-3-3
Holding Pattern Descriptive Terms

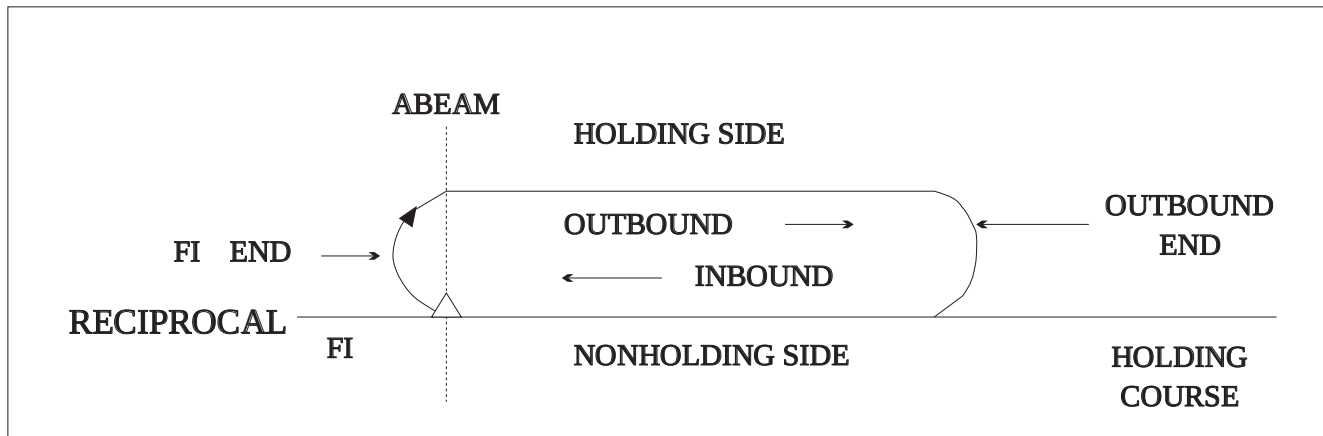

j. Holding pattern airspace protection is based on the following procedures

1. Descriptive Terms.

(a) **Standard Pattern.** Right turns
See FIG 5-3-3

(b) **Nonstandard Pattern.** Left turns

2. Airspeeds.

(a) All aircraft may hold at the following altitudes and maximum holding airspeeds

TBL 5-3-1

Altitude (MSL)	Airspeed (KIAS)
MHA - 6 000	200
6 001 - 14 000	230
14 001 and above	265

(b) The following are exceptions to the maximum holding airspeeds

(1) Holding patterns from 6 001 to 14 000 may be restricted to a maximum airspeed of 210 KIAS. This nonstandard pattern will be depicted by an icon.

(2) Holding patterns may be restricted to a maximum speed. The speed restriction is depicted in parenthesis inside the holding pattern on the chart, e.g., 175. The aircraft should be at or below the maximum speed prior to initially crossing the holding fix to avoid exiting the protected airspace. Pilots unable to comply with the maximum airspeed restriction should notify ATC.

(3) Holding patterns at USAF airfields only - 310 KIAS maximum unless otherwise depicted.

(4) Holding patterns at Navy fields only - 230 KIAS maximum unless otherwise depicted.


(5) When a climb-in hold is specified by a **published procedure**, e.g., Climb-in holding pattern to depart VORTAC at or above 10 000 or All aircraft climb-in TRUCK holding pattern to cross TRUCK Int at or above 11 500 before proceeding on course, additional obstacle protection area has been provided to allow for greater airspeeds in the climb for those aircraft requiring them. The holding pattern template for a maximum airspeed of 310 KIAS has been used for the holding pattern if there are no airspeed restrictions on the holding pattern as specified in subparagraph 2 b 2 of this paragraph. Where the holding pattern is restricted to a maximum airspeed of 175 KIAS, the 200 KIAS holding pattern template has been applied for published climb-in hold procedures for altitudes 6 000 feet and below, and the 230 KIAS holding pattern template has been applied for altitudes above 6 000 feet. The airspeed limitations in 14 CFR Section 91.117, Aircraft Speed, still apply.

(c) The following phraseology may be used by an ATIS to advise a pilot of the maximum holding airspeed for a holding pattern airspace area:

PHRASEOLOGY-

(AIRCRAFT IDENTIFICATION) (holding instructions, when needed) MAXIMUM HOLDING AIRSPEED IS (speed in knots).

FIG 5-3-4
Holding Pattern Entry Procedures

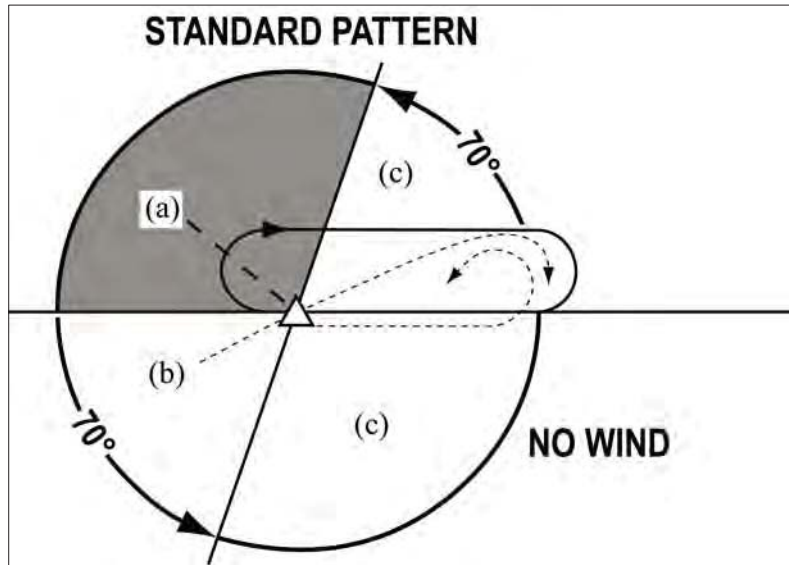

3. Entry Procedures. See FIG 5-3-4

(a) Parallel Procedure. When approaching the holding fix from any here in sector a the parallel entry procedure could be to turn to a heading to parallel the holding course outbound on the nonholding side for one minute turn in the direction of the holding pattern through more than 180 degrees and return to the holding fix or intercept the holding course inbound

(b) Teardrop Procedure. When approaching the holding fix from any here in sector b the teardrop entry procedure could be to fly to the fix turn outbound to a heading for a 30 degree teardrop entry within the pattern on the holding side for a period of one minute then turn in the direction of the holding pattern to intercept the inbound holding course

(c) Direct Entry Procedure. When approaching the holding fix from any here in sector c the direct entry procedure could be to fly directly to the fix and turn to follow the holding pattern

(d) While other entry procedures may enable the aircraft to enter the holding pattern and remain within protected airspace the parallel teardrop and direct entries are the procedures for entry and holding recommended by the FAA

4. Timing.

(a) Inbound Leg.

- (1) At or below 14 000 feet MSL 1 minute
- (2) Above 14 000 feet MSL 1½ minutes

NOTE—

The initial outbound leg should be flown for 1 minute or 1 ½ minutes (appropriate to altitude). Timing for subsequent outbound legs should be adjusted, as necessary, to achieve proper inbound leg time. Pilots may use any navigational means available; i.e., DME, RNAV, etc., to ensure the appropriate inbound leg times.


(b) Outbound leg timing begins over/abeam the fix whichever occurs later. If the abeam position cannot be determined start timing when turn to outbound is completed

5. Distance Measuring Equipment (DME)/GPS Along-Track Distance (ATD). DME/GPS holding is subject to the same entry and holding procedures except that distances nautical miles are used in lieu of time values. The outbound course of the DME/GPS holding pattern is called the outbound leg of the pattern. The controller or the instrument approach procedure chart will specify the length of the outbound leg. The end of the outbound leg is determined by the DME or ATD readout. The holding fix on conventional procedures or controller defined holding based on a conventional navigation aid with DME is a specified course or radial and distances are from the DME station for both the inbound and

outbound ends of the holding pattern. When flying published GPS overlay or stand alone procedures with distance specified, the holding fix will be a waypoint in the database and the end of the outbound leg will be determined by the ATD. Some GPS

overlay and early stand alone procedures may have timing specified. See FIG 5-3-5, FIG 5-3-6, and FIG 5-3-7. See paragraph 1-1-18, Global Positioning System (GPS), for requirements and restrictions on using GPS for IFR operations.


FIG 5-3-5
Inbound Toward NAVAID

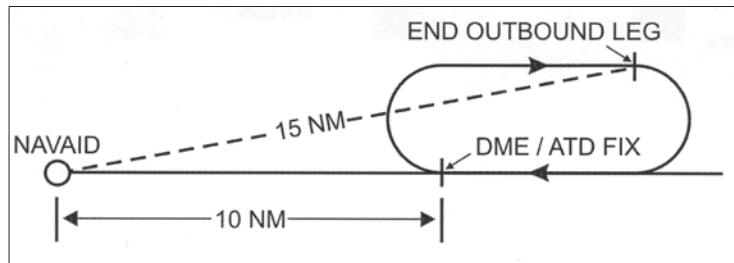

NOTE—

When the inbound course is toward the NAVAID, the fix distance is 10 NM, and the leg length is 5 NM, then the end of the outbound leg will be reached when the DME/ATD reads 15 NM.


FIG 5-3-6
Inbound Leg Away from NAVAID

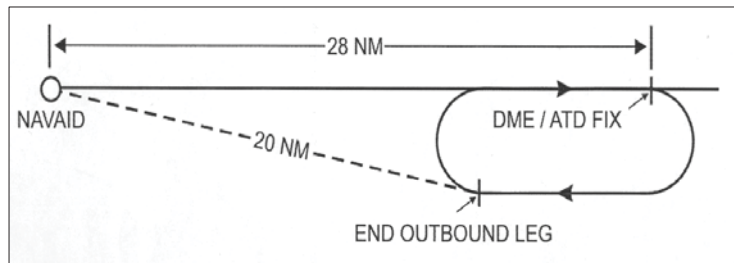

NOTE—

When the inbound course is away from the NAVAID and the fix distance is 28 NM, and the leg length is 8 NM, then the end of the outbound leg will be reached when the DME/ATD reads 20 NM.

FIG 5-3-7
GPS/RNAV Holding

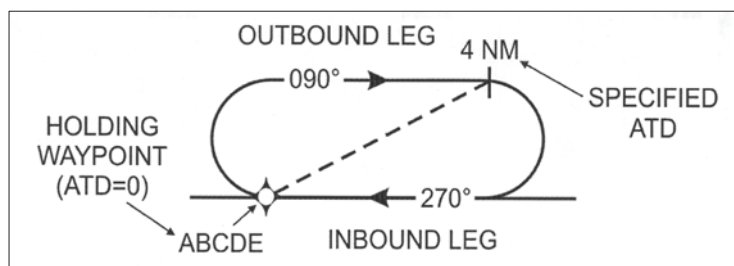

NOTE—

The inbound course is always toward the waypoint and the ATD is zero at the waypoint. The end of the outbound leg of the holding pattern is reached when the ATD reads the specified distance.

6. Pilot Action.

(a) Start speed reduction when 3 minutes or less from the holding fix. Cross the holding fix initially at or below the maximum holding airspeed.

(b) **Make all turns during entry and while holding at:**

(1) 3 degrees per second or

(2) 30 degree bank angle or

(3) 25 degree bank provided a flight director system is used

NOTE—

Use whichever requires the least bank angle.

(c) Compensate for wind effect primarily by drift correction on the inbound and outbound legs. When outbound, triple the inbound drift correction to avoid major turning adjustments. e.g., if correcting left by 8 degrees when inbound, correct right by 24 degrees when outbound.

(d) Determine entry turn from aircraft heading upon arrival at the holding fix. ± 5 degrees in heading is considered to be within allowable good operating limits for determining entry.

(e) Advise ATC immediately that increased airspeed is necessary if any due to turbulence, icing, etc., or if unable to accomplish any part of the holding procedures. When such higher speeds become no longer necessary, operate according to the appropriate published holding speed and notify ATC.

7. Nonstandard Holding Pattern. Fix end and outbound end turns are made to the left. Entry procedures to a nonstandard pattern are oriented in relation to the 70 degree line on the holding side, just as in the standard pattern.

k. When holding at a fix and instructions are received specifying the time of departure from the fix, the pilot should adjust the aircraft's flight path within the limits of the established holding pattern in order to leave the fix at the exact time specified. After departing the holding fix, normal speed is to be resumed with respect to other governing speed requirements, such as terminal area speed limits.

specific ATC requests, etc. Where the fix is associated with an instrument approach and timed approaches are in effect, a procedure turn must not be executed unless the pilot advises ATC, since aircraft holding are expected to proceed inbound on final approach directly from the holding pattern when approach clearance is received.

l. Radar surveillance of outer fix holding pattern airspace areas.

1. Whenever aircraft are holding at an outer fix, ATC will usually provide radar surveillance of the outer fix holding pattern airspace area or any portion of it if it is shown on the controller's radar scope.

2. The controller will attempt to detect any holding aircraft that stray outside the holding pattern airspace area and will assist any detected aircraft to return to the assigned airspace area.

NOTE—

Many factors could prevent ATC from providing this additional service, such as workload, number of targets, precipitation, ground clutter, and radar system capability. These circumstances may make it unfeasible to maintain radar identification of aircraft to detect aircraft straying from the holding pattern. The provision of this service depends entirely upon whether controllers believe they are in a position to provide it and does not relieve a pilot of their responsibility to adhere to an accepted ATC clearance.

3. If an aircraft is established in a published holding pattern at an assigned altitude above the published minimum holding altitude and subsequently cleared for the approach, the pilot may descend to the published minimum holding altitude. The holding pattern could only be a segment of the IAP if it is published on the instrument procedure chart and is used in lieu of a procedure turn.

m. For those holding patterns where there are no published minimum holding altitudes, the pilot upon receiving an approach clearance must maintain the last assigned altitude until leaving the holding pattern and established on the inbound course. Thereafter, the published minimum altitude of the route segment being flown will apply. It is expected that the pilot will be assigned a holding altitude that will permit a normal descent on the inbound course.

Section 4. Arrival Procedures

5-4-1. Standard Terminal Arrival (STAR) Procedures

a. A STAR is an ATC coded IFR arrival route established for application to arriving IFR aircraft destined for certain airports. STARs simplify clearance delivery procedures and also facilitate transition between en route and instrument approach procedures.

1. STAR procedures may have mandatory speeds and/or crossing altitudes published. Other STARs may have planning information depicted to inform pilots that clearances or restrictions to **expect**. **Expect** altitudes/speeds are not considered STAR procedures crossing restrictions unless verbally issued by ATC. Published speed restrictions are independent of altitude restrictions and are mandatory unless modified by ATC. Pilots should plan to cross waypoints with a published speed restriction at the published speed and should not exceed this speed past the associated waypoint unless authorized by ATC or a published note to do so.

NOTE—

The “**expect**” altitudes/speeds are published so that pilots may have the information for planning purposes. These altitudes/speeds must not be used in the event of lost communications unless ATC has specifically advised the pilot to expect these altitudes/speeds as part of a further clearance.

REFERENCE—

14 CFR Section 91.185(c)(2)(iii).

2. Pilots navigating on STAR procedures must maintain last assigned altitude until receiving authorization to descend so as to comply with all published/issued restrictions. This authorization will contain the phraseology **DESCEND VIA**.

(a) Clearance to descend via authorizes pilots to

(1) Descend at pilot's discretion to meet published restrictions and laterally navigate on a STAR.

(2) When cleared to a waypoint depicted on a STAR to descend from a previously assigned altitude at pilot's discretion to the altitude depicted at that waypoint.

(3) Once established on the depicted arrival to descend and to meet all published or assigned altitude and/or speed restrictions.

NOTE—

1. When otherwise cleared along a route or procedure that contains published speed restrictions, the pilot must comply with those speed restrictions independent of any descend via clearance.

2. ATC anticipates pilots will begin adjusting speed the minimum distance necessary prior to a published speed restriction so as to cross the waypoint/fix at the published speed. Once at the published speed, ATC expects pilots will maintain the published speed until additional adjustment is required to comply with further published or ATC assigned speed restrictions or as required to ensure compliance with 14 CFR Section 91.117.

3. The “descend via” is used in conjunction with STARs to reduce phraseology by not requiring the controller to restate the altitude at the next waypoint/fix to which the pilot has been cleared.

4. Air traffic will assign an altitude to cross the waypoint/fix, if no altitude is depicted at the waypoint/fix, for aircraft on a direct routing to a STAR. Air traffic must ensure obstacle clearance when issuing a “descend via” instruction to the pilot.

5. Minimum en route altitudes (MEA) are not considered restrictions; however, pilots must remain above all MEAs, unless receiving an ATC instruction to descend below the MEA.

EXAMPLE—

1. Lateral/routing clearance only.

“Cleared Tyler One arrival.”

NOTE—

In Example 1, pilots are cleared to fly the lateral path of the procedure. Compliance with any published speed restrictions is required. No descent is authorized.

2. Routing with assigned altitude.

“Cleared Tyler One arrival, descend and maintain flight level two four zero.”

“Cleared Tyler One arrival, descend at pilot's discretion, maintain flight level two four zero.”

NOTE—

In Example 2, the first clearance requires the pilot to descend to FL 240 as directed, comply with any published speed restrictions, and maintain FL 240 until cleared for further vertical navigation with a newly assigned altitude or a “descend via” clearance.

The second clearance authorizes the pilot to descend to

FL 240 at his discretion, to comply with any published speed restrictions, and then maintain FL 240 until issued further instructions.

3. Lateral/routing and vertical navigation clearance.

“Descend via the Eagul Five arrival.”

“Descend via the Eagul Five arrival, except, cross Vnnom at or above one two thousand.”

NOTE—

In Example 3, the first clearance authorized the aircraft to descend at pilot’s discretion on the Eagul Five arrival; the pilot must descend so as to comply with all published altitude and speed restrictions.

The second clearance authorizes the same, but requires the pilot to descend so as to cross at Vnnom at or above 12,000.

4. Lateral/routing and vertical navigation clearance when assigning altitude not published on procedure.

“Descend via the Eagul Five arrival, except after Geeno, maintain one zero thousand.”

“Descend via the Eagul Five arrival, except cross Geeno at one one thousand then maintain seven thousand.”

NOTE—

In Example 4, the first clearance authorized the aircraft to track laterally on the Eagul Five Arrival and to descend at pilot’s discretion so as to comply with all altitude and speed restrictions until reaching Geeno and then maintain 10,000. Upon reaching 10,000, aircraft should maintain 10,000 until cleared by ATC to continue to descend.

The second clearance requires the same, except the aircraft must cross Geeno at 11,000 and is then authorized to continue descent to and maintain 7,000.

5. Direct routing to intercept a STAR and vertical navigation clearance.

“Proceed direct Leoni, descend via the Leoni One arrival.”

“Proceed direct Denis, cross Denis at or above flight level two zero zero, then descend via the Mmell One arrival.”

NOTE—

In Example 5, in the first clearance an altitude is published at Leoni; the aircraft proceeds to Leoni, crosses Leoni at the published altitude and then descends via the arrival. If a speed restrictions is published at Leoni, the aircraft will slow to comply with the published speed.

In the second clearance, there is no altitude published at Denis; the aircraft must cross Denis at or above FL200, and then descends via the arrival.

(b) Pilots cleared for vertical navigation using the phraseology *descend via* must inform

ATC upon initial contact with a new frequency of the altitude leaving *descending via* procedure name the runway transition or landing direction if assigned and any assigned restrictions not published on the procedure

EXAMPLE—

1. Delta 121 is cleared to descend via the Eagul Five arrival, runway 26 transition: *“Delta One Twenty One leaving flight level one niner zero, descending via the Eagul Five arrival runway two-six transition.”*

2. Delta 121 is cleared to descend via the Eagul Five arrival, but ATC has changed the bottom altitude to 12,000: *“Delta One Twenty One leaving flight level one niner zero for one two thousand, descending via the Eagul Five arrival, runway two-six transition.”*

3. (JetBlue 602 is cleared to descend via the Ivane Two arrival, landing south): *“JetBlue six zero two leaving flight level two one zero descending via the Ivane Two arrival landing south.”*

b. Pilots of IFR aircraft destined to locations for which STARs have been published may be issued a clearance containing a STAR whenever ATC deems it appropriate

c. Use of STARs requires pilot possession of at least the approved chart RNAV STARs must be retrievable by the procedure name from the aircraft database and conform to charted procedure. As with any ATC clearance or portion thereof it is the responsibility of each pilot to accept or refuse an issued STAR. Pilots should notify ATC if they do not wish to use a STAR by placing *NO STAR* in the remarks section of the flight plan or by the less desirable method of verbally stating the same to ATC

d. STAR charts are published in the Terminal Procedures Publications (TPP) and are available on subscription from the National Aeronautical Charting Office

e. RNAV STAR.

1. All public RNAV STARs are RNAV1. These procedures require system performance currently met by GPS or DME/DME/IRU RNAV systems that satisfy the criteria discussed in AC 90-100A. U.S. Terminal and En Route Area Navigation (RNAV) Operations. RNAV1 procedures must maintain a total system error of not more than 1 NM for 95% of the total flight time

2. For procedures requiring GPS, if the navigation system does not automatically alert the

flight crew of a loss of GPS the operator must develop procedures to verify correct GPS operation

REFERENCE—

AIM, *Global Positioning System (GPS)*

Paragraph 1–1–18, *Impact of Magnetic Variation on RNAV Systems*

5–4–2. Local Flow Traffic Management Program

a. This program is a continuing effort by the FAA to enhance safety minimize the impact of aircraft noise and conserve aviation fuel. The enhancement of safety and reduction of noise is achieved in this program by minimizing low altitude maneuvering of arriving turbojet and turboprop aircraft weighing more than 12,500 pounds and by permitting departure aircraft to climb to higher altitudes sooner as arrivals are operating at higher altitudes at the points where their flight paths cross. The application of these procedures also reduces exposure time between controlled aircraft and uncontrolled aircraft at the lower altitudes in and around the terminal environment. Fuel conservation is accomplished by absorbing any necessary arrival delays for aircraft included in this program operating at the higher and more fuel efficient altitudes.

b. A fuel efficient descent is basically an uninterrupted descent except where level flight is required for speed adjustment from cruising altitude to the point where level flight is necessary for the pilot to stabilize the aircraft on final approach. The procedure for a fuel efficient descent is based on an altitude loss which is most efficient for the majority of aircraft being served. This will generally result in a descent gradient of 250–350 feet per nautical mile.

c. When crossing altitudes and speed restrictions are issued verbally or are depicted on a chart, ATC will expect the pilot to descend first to the crossing altitude and then reduce speed. Verbal clearances for descent will normally permit an uninterrupted descent in accordance with the procedure as described in paragraph b above. Acceptance of a charted fuel efficient descent. Runway Profile Descent clearance requires the pilot to adhere to the altitudes, speeds, and headings depicted on the charts unless otherwise instructed by ATC. PILOTS RECEIVING A CLEARANCE FOR A FUEL EFFICIENT DESCENT ARE EXPECTED TO

ADVISE ATC IF THEY DO NOT HAVE RUNWAY PROFILE DESCENT CHARTS PUBLISHED FOR THAT AIRPORT OR ARE UNABLE TO COMPLY WITH THE CLEARANCE.

5–4–3. Approach Control

a. Approach control is responsible for controlling all instrument flight operating within its area of responsibility. Approach control may serve one or more airfields and control is exercised primarily by direct pilot and controller communications. Prior to arriving at the destination radio facility, instructions will be received from ARTCC to contact approach control on a specified frequency.

b. Radar Approach Control.

1. Where radar is approved for approach control service, it is used not only for radar approaches. Airport Surveillance Radar (ASR) and Precision Approach Radar (PAR) but is also used to provide vectors in conjunction with published nonradar approaches based on radio NAVAIDs (ILS, MLS, VOR, NDB, TACAN). Radar vectors can provide course guidance and expedite traffic to the final approach course of any established IAP or to the traffic pattern for a visual approach. Approach control facilities that provide this radar service will operate in the following manner:

(a) Arriving aircraft are either cleared to an outer fix most appropriate to the route being flown with vertical separation and, if required, given holding information or, when radar handoffs are effected between the ARTCC and approach control or between two approach control facilities, aircraft are cleared to the airport or to a fix so located that the handoff will be completed prior to the time the aircraft reaches the fix. When radar handoffs are utilized, successive arriving flights may be handed off to approach control with radar separation in lieu of vertical separation.

(b) After release to approach control, aircraft are vectored to the final approach course (ILS, MLS, VOR, ADF, etc.). Radar vectors and altitude or flight levels will be issued as required for spacing and separating aircraft. *Therefore, pilots must not deviate from the headings issued by approach control.* Aircraft will normally be informed when it is necessary to vector across the final approach course for spacing or other reasons. If approach course crossing is imminent and the pilot has not been

informed that the aircraft will be vectored across the final approach course the pilot should query the controller

(c) The pilot is not expected to turn inbound on the final approach course unless an approach clearance has been issued. This clearance will normally be issued with the final vector for interception of the final approach course and the vector will be such as to enable the pilot to establish the aircraft on the final approach course prior to reaching the final approach fix.

(d) In the case of aircraft already inbound on the final approach course approach clearance will be issued prior to the aircraft reaching the final approach fix. When established inbound on the final approach course radar separation will be maintained and the pilot will be expected to complete the approach utilizing the approach aid designated in the clearance (ILS, MLS, VOR, radio beacons, etc.) as the primary means of navigation. Therefore, once established on the final approach course, pilots must not deviate from it unless a clearance to do so is received from ATC.

(e) After passing the final approach fix on final approach, aircraft are expected to continue inbound on the final approach course and complete the approach or effect the missed approach procedure published for that airport.

2. ARTCCs are approved for and may provide approach control services to specific airports. The radar systems used by these centers do not provide the same precision as an ASR/PAR used by approach control facilities and towers and the update rate is not as fast. Therefore, pilots may be requested to report established on the final approach course.

3. Whether aircraft are vectored to the appropriate final approach course or provide their own navigation on published routes to it, radar service is automatically terminated when the landing is completed or when instructed to change to advisory frequency at uncontrolled airports, whichever occurs first.

5-4-4. Advance Information on Instrument Approach

a. When landing at airports with approach control services and where two or more IAPs are published, pilots will be provided in advance of their arrival with

the type of approach to expect or that they may be vectored for a visual approach. This information will be broadcast either by a controller or on ATIS. It will not be furnished when the visibility is three miles or better and the ceiling is at or above the highest initial approach altitude established for any low altitude IAP for the airport.

b. The purpose of this information is to aid the pilot in planning arrival actions, however, it is not an ATC clearance or commitment and is subject to change. Pilots should bear in mind that fluctuating weather, shifting winds, blocked runway, etc., are conditions which may result in changes to approach information previously received. It is important that pilots advise ATC immediately they are unable to execute the approach ATC advised, will be used, or if they prefer another type of approach.

c. Aircraft destined to uncontrolled airports which have automated weather data with broadcast capability should monitor the ASOS/AWSS/AWOS frequency to ascertain the current weather for the airport. The pilot must advise ATC when he/she has received the broadcast weather and state his/her intentions.

NOTE-

1. ASOS/AWSS/AWOS should be set to provide one-minute broadcast weather updates at uncontrolled airports that are without weather broadcast capability by a human observer.

2. Controllers will consider the long line disseminated weather from an automated weather system at an uncontrolled airport as trend and planning information only and will rely on the pilot for current weather information for the airport. If the pilot is unable to receive the current broadcast weather, the last long line disseminated weather will be issued to the pilot. When receiving IFR services, the pilot/aircraft operator is responsible for determining if weather/visibility is adequate for approach/landing.

d. When making an IFR approach to an airport not served by a tower or FSS, after ATC advises CHANGE TO ADVISOR FREQUENCY APPROVED, you should broadcast your intentions, including the type of approach being executed, your position, and when over the final approach fix inbound nonprecision approach or when over the outer marker or fix used in lieu of the outer marker inbound precision approach. Continue to monitor the appropriate frequency (UNICOM, etc.) for reports from other pilots.

5-4-5. Instrument Approach Procedure Charts

a. 14 CFR Section 91.175 a. Instrument approaches to civil airports requires the use of SIAPs prescribed for the airport in 14 CFR Part 97 unless otherwise authorized by the Administrator including ATC. If there are military procedures published at a civil airport, aircraft operating under 14 CFR Part 91 must use the civil procedures. Civil procedures are defined with FAA in parenthesis e.g. FAA at the top center of the procedure chart. DOD procedures are defined using the abbreviation of the applicable military service in parenthesis e.g. USAF, USN, USA. 14 CFR Section 91.175 g. Military airports requires civil pilots flying into or out of military airports to comply with the IAPs and takeoff and landing minimums prescribed by the authority having jurisdiction at those airports. Unless an emergency exists, civil aircraft operating at military airports normally require advance authorization commonly referred to as Prior Permission Required or PPR. Information on obtaining a PPR for a particular military airport can be found in the Airport/Facility Directory.

NOTE-

Civil aircraft may conduct practice VFR approaches using DOD instrument approach procedures when approved by the air traffic controller.

1. IAPs standard and special civil and military are based on joint civil and military criteria contained in the U.S. Standard for TERPS. The design of IAPs based on criteria contained in TERPS takes into account the interrelationship between airports, facilities, and the surrounding environment, terrain, obstacles, noise sensitivity, etc. Appropriate altitudes, courses, headings, distances, and other limitations are specified and, once approved, the procedures are published and distributed by government and commercial cartographers as instrument approach charts.

2. Not all IAPs are published in chart form. Radar IAPs are established where requirements and facilities exist but they are printed in tabular form in appropriate U.S. Government Flight Information Publications.

3. The navigation equipment required to join and fly an instrument approach procedure is indicated by the title of the procedure and notes on the chart.

(a) Straight-in IAPs are identified by the navigational system providing the final approach guidance and the runway to which the approach is aligned e.g. VOR RW 13. Circling only approaches are identified by the navigational system providing final approach guidance and a letter e.g. VOR A. More than one navigational system separated by a slash indicates that more than one type of equipment must be used to execute the final approach e.g. VOR/DME RW 31. More than one navigational system separated by the word or indicates either type of equipment may be used to execute the final approach e.g. VOR or GPS RW 15.

(b) In some cases, other types of navigation systems including radar may be required to execute other portions of the approach or to navigate to the IAF e.g. an NDB procedure turn to an ILS, an NDB in the missed approach, or radar required to join the procedure or identify a fix. When radar or other equipment is required for procedure entry from the en route environment, a note will be charted in the planview of the approach procedure chart e.g. RADAR REQUIRED or ADF REQUIRED. When radar or other equipment is required on portions of the procedure outside the final approach segment, including the missed approach, a note will be charted in the notes box of the pilot briefing portion of the approach chart e.g. RADAR REQUIRED or DME REQUIRED. Notes are not charted when VOR is required outside the final approach segment. Pilots should ensure that the aircraft is equipped with the required NAVAIDs in order to execute the approach, including the missed approach.

NOTE-

Some military, i.e. U.S. Air Force and U.S. Navy IAPs have these additional equipment required notes charted only in the planview of the approach procedure and do not conform to the same application standards used by the FAA.

(c) The FAA has initiated a program to provide a new notation for LOC approaches when charted on an ILS approach requiring other navigational aids to fly the final approach course. The LOC minimums will be annotated with the NAVAID required e.g. DME Required or RADAR Required. During the transition period, ILS approaches will still exist without the annotation.

(d) Many ILS approaches having minima based on RVR are eligible for a landing minimum of

RVR 1800 Some of these approaches are to run ways that have touchdown and centerline lights. For many runways that do not have touchdown and centerline lights, it is still possible to allow a landing minimum of RVR 1800. For these runways, the normal ILS minimum of RVR 2400 can be annotated with a single or double asterisk or the dagger symbol † for example 696/24 200 200/1/2. A note is included on the chart stating RVR 1800 authorized with use of FD or AP or HUD to DA. The pilot must use the flight director or autopilot with an approved approach coupler or head up display to decision altitude or to the initiation of a missed approach. In the interest of safety, single pilot operators should not fly approaches to 1800 RVR minimums on runways without touchdown and centerline lights using only a flight director unless accompanied by the use of an autopilot with an approach coupler.

(e) The naming of multiple approaches of the same type to the same runway is also changing. Multiple approaches with the same guidance will be annotated with an alphabetical suffix beginning at the end of the alphabet and working back wards for subsequent procedures, e.g., ILS RW 28 ILS RW 28 etc. The existing annotations such as ILS 2 RW 28 or Silver ILS RW 28 will be phased out and replaced with the new designation. The Cat II and Cat III designations are used to differentiate between multiple ILSs to the same runway unless there are multiples of the same type.

(f) RNAV GPS approaches to LNAV LP LNAV/VNAV and LPV lines of minima using WAAS and RNAV GPS approaches to LNAV and LNAV/VNAV lines of minima using GPS are charted as RNAV GPS RW Number, e.g., RNAV GPS RW 21. VOR/DME RNAV approaches will continue to be identified as VOR/DME RNAV RW Number, e.g., VOR/DME RNAV RW 21. VOR/DME RNAV procedures which can be flown by GPS will be annotated with or GPS, e.g., VOR/DME RNAV or GPS RW 31.

4. Approach minimums are based on the local altimeter setting for that airport unless annotated otherwise, e.g., Oklahoma City/Will Rogers World approaches are based on having a Will Rogers World altimeter setting. When a different altimeter source is required or more than one source is authorized, it will be annotated on the approach chart, e.g., use Sidney

altimeter setting if not received, use Scottsbluff altimeter setting. Approach minimums may be raised

when a nonlocal altimeter source is authorized. When more than one altimeter source is authorized and the minima are different, they will be shown by separate lines in the approach minima box or a note, e.g., use Manhattan altimeter setting when not available, use Salina altimeter setting and increase all MDAs 40 feet. When the altimeter must be obtained from a source other than air traffic, a note will indicate the source, e.g., Obtain local altimeter setting on CTAF. When the altimeter setting shown which the approach is based on is not available, the approach is not authorized. Baro-VNAV must be flown using the local altimeter setting only. Where no local altimeter is available, the LNAV/VNAV line will still be published for use by WAAS receivers with a note that Baro-VNAV is not authorized. When a local and at least one other altimeter setting source is authorized and the local altimeter is not available, Baro-VNAV is not authorized, however, the LNAV/VNAV minima can still be used by WAAS receivers using the alternate altimeter setting source.

NOTE—

Barometric Vertical Navigation (baro-VNAV). An RNAV system function which uses barometric altitude information from the aircraft's altimeter to compute and present a vertical guidance path to the pilot. The specified vertical path is computed as a geometric path, typically computed between two waypoints or an angle based computation from a single waypoint. Further guidance may be found in Advisory Circular 90-105.

5. A pilot adhering to the altitudes, flight paths, and weather minimums depicted on the IAP chart or vectors and altitudes issued by the radar controller is assured of terrain and obstruction clearance and runway or airport alignment during approach for landing.

6. IAPs are designed to provide an IFR descent from the en route environment to a point where a safe landing can be made. They are prescribed and approved by appropriate civil or military authority to ensure a safe descent during instrument flight conditions at a specific airport. It is important that pilots understand these procedures and their use prior to attempting to fly instrument approaches.

7. TERPS criteria are provided for the following types of instrument approach procedures:

(a) Precision Approach (PA). An instrument approach based on a navigation system that provides

course and glidepath deviation information meeting the precision standards of ICAO Annex 10. For example, PAR, ILS, and GLS are precision approaches.

(b) Approach with Vertical Guidance (APV)
An instrument approach based on a navigation system that is not required to meet the precision approach standards of ICAO Annex 10 but provides course and glidepath deviation information. For example, Baro-VNAV, LDA with glidepath, LNAV/VNAV, and LPV are APV approaches.

(c) Nonprecision Approach (NPA)
An instrument approach based on a navigation system which provides course deviation information but no glidepath deviation information. For example, VOR, NDB, and LNAV. As noted in subparagraph i, Vertical Descent Angle (VDA) on Nonprecision Approaches, some approach procedures may provide a Vertical Descent Angle as an aid in flying a stabilized approach without requiring its use in order to fly the procedure. This does not make the approach an APV procedure since it must still be flown to an MDA and has not been evaluated with a glidepath.

b. The method used to depict prescribed altitudes on instrument approach charts differs according to techniques employed by different chart publishers. Prescribed altitudes may be depicted in four different configurations: minimum, maximum, mandatory, and recommended. The U.S. Government distributes charts produced by National Geospatial-Intelligence Agency (NGA) and FAA. Altitudes are depicted on these charts in the profile view with underscore, overscore, both, or none to identify them as minimum, maximum, mandatory, or recommended.

1. Minimum altitude will be depicted with the altitude value underscored. Aircraft are required to maintain altitude at or above the depicted value. e.g., 3000

2. Maximum altitude will be depicted with the altitude value overscored. Aircraft are required to maintain altitude at or below the depicted value. e.g., 4000

3. Mandatory altitude will be depicted with the altitude value both underscored and overscored. Aircraft are required to maintain altitude at the depicted value. e.g., 5000

4. Recommended altitude will be depicted with no overscore or underscore. These altitudes are depicted for descent planning. e.g., 6000

NOTE—

1. Pilots are cautioned to adhere to altitudes as prescribed because, in certain instances, they may be used as the basis for vertical separation of aircraft by ATC. When a depicted altitude is specified in the ATC clearance, that altitude becomes mandatory as defined above.

2. The ILS glide slope is intended to be intercepted at the published glide slope intercept altitude. This point marks the PFAF and is depicted by the "lightning bolt" symbol on U.S. Government charts. Intercepting the glide slope at this altitude marks the beginning of the final approach segment and ensures required obstacle clearance during descent from the glide slope intercept altitude to the lowest published decision altitude for the approach. Interceptation and tracking of the glide slope prior to the published glide slope interception altitude does not necessarily ensure that minimum, maximum, and/or mandatory altitudes published for any preceding fixes will be complied with during the descent. If the pilot chooses to track the glide slope prior to the glide slope interception altitude, they remain responsible for complying with published altitudes for any preceding stepdown fixes encountered during the subsequent descent.

c. Minimum Safe/Sector Altitudes (MSA) are published for emergency use on IAP charts. For conventional navigation systems, the MSA is normally based on the primary omnidirectional facility on which the IAP is predicated. The MSA depiction on the approach chart contains the facility identifier of the NAVAID used to determine the MSA altitudes. For RNAV approaches, the MSA is based on the runway waypoint (RWY WP) for straight-in approaches or the airport waypoint (APT WP) for circling approaches. For GPS approaches, the MSA center will be the missed approach waypoint (MAWP). MSAs are expressed in feet above mean sea level and normally have a 25 NM radius; however, this radius may be expanded to 30 NM if necessary to encompass the airport landing surfaces. Ideally, a single sector altitude is established and depicted on the plan view of approach charts; however, when necessary to obtain relief from obstructions, the area may be further sectorized and as many as four MSAs established. When established, sectors may be no less than 90° in spread. MSAs provide 1,000 feet clearance over all obstructions but

do not necessarily assure acceptable navigation signal coverage

d. Terminal Arrival Area (TAA)

1. The objective of the TAA is to provide a seamless transition from the en route structure to the terminal environment for arriving aircraft equipped with Flight Management System (FMS) and/or Global Positioning System (GPS) navigational equipment. The underlying instrument approach procedure is an area navigation (RNAV) procedure described in this section. The TAA provides the pilot and air traffic controller with a very efficient method for routing traffic into the terminal environment with little required air traffic control interface and with minimum altitudes depicted that provide standard obstacle clearance compatible with the instrument procedure associated with it. The TAA will not be found on all RNAV procedures, particularly in areas of heavy concentration of air traffic. When the TAA is published, it replaces the MSA for that approach procedure. See FIG 5-4-9 for a depiction of a RNAV approach chart with a TAA.

2. The RNAV procedure underlying the TAA will be the T design, also called the Basic T, or a modification of the T. The T design incorporates from one to three IAFs, an intermediate fix (IF) that serves as a dual purpose IF/IAF, a final approach fix (FAF), and a missed approach point (MAP) usually located at the runway threshold. The three IAFs are normally aligned in a straight line perpendicular to the intermediate course, which is an extension of the final course leading to the runway, forming a T. The initial segment is normally from 3-6 NM in length, the intermediate 5-7 NM, and the final segment 5 NM. Specific segment length may be varied to accommodate specific aircraft categories for which the procedure is designed. However, the published segment lengths will reflect the highest category of aircraft normally expected to use the procedure.

(a) A standard racetrack holding pattern may be provided at the center IAF, and if present may be necessary for course reversal and for altitude adjustment for entry into the procedure. In the latter case, the pattern provides an extended distance for the descent required by the procedure. Depiction of this pattern in U.S. Government publications will utilize the hold-in-lieu-of-PT holding pattern symbol.

(b) The published procedure will be annotated to indicate when the course reversal is not necessary when flying within a particular TAA area, e.g., NoPT. Otherwise, the pilot is expected to execute the course reversal under the provisions of 14 CFR Section 91.175. The pilot may elect to use the course reversal pattern when it is not required by the procedure, but must inform air traffic control and receive clearance to do so. See FIG 5-4-1, FIG 5-4-2, FIG 5-4-9, and paragraph 5-4-9 Procedure Turn and Hold-in-lieu of Procedure Turn.

3. The T design may be modified by the procedure designers here required by terrain or air traffic control considerations. For instance, the T design may appear more like a regularly or irregularly shaped T, or may even have one or both outboard IAFs eliminated, resulting in an upside down L, or an I configuration. See FIG 5-4-3 and FIG 5-4-10. Further, the leg lengths associated with the outboard IAFs may differ. See FIG 5-4-5 and FIG 5-4-6.

4. Another modification of the T design may be found at airports with parallel runway configurations. Each parallel runway may be served by its own T, IAF, IF, and FAF combination, resulting in parallel final approach courses. See FIG 5-4-4. However, a common IAF may serve all parallel runways, with each runway requiring its own unique IF fix. Only one initial, intermediate, and final segment combination will be depicted on the approach chart. See FIG 5-4-5 and FIG 5-4-6.

FIG 5-4-1
Basic “T” Design

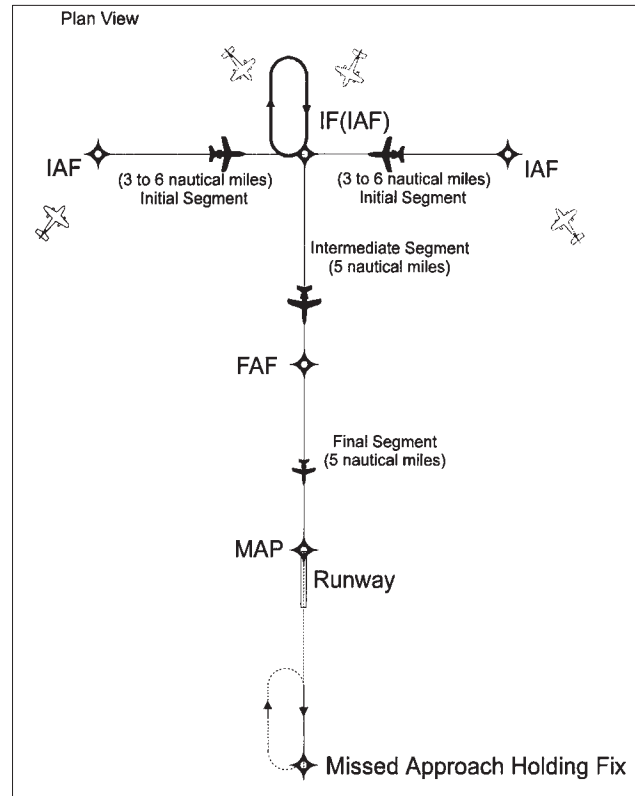


FIG 5-4-2
Basic “T” Design

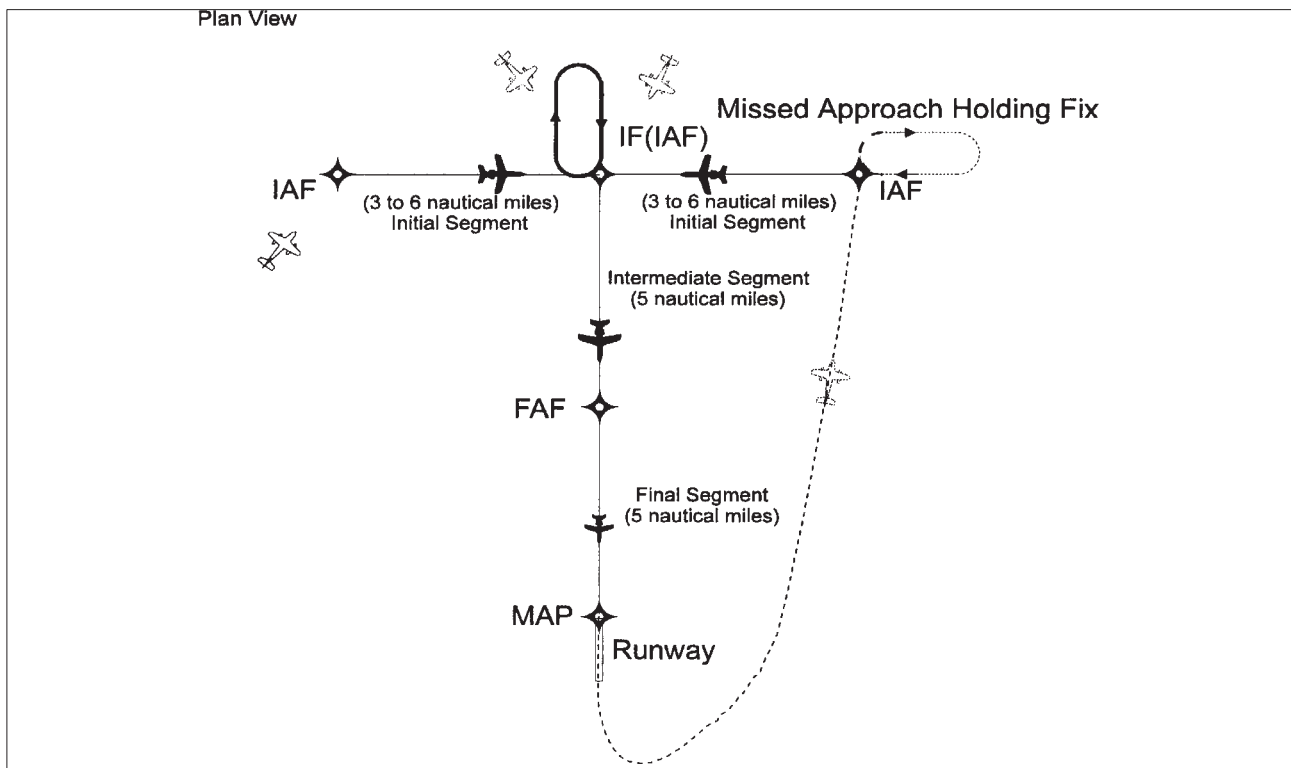


FIG 5-4-3
Modified Basic "T"

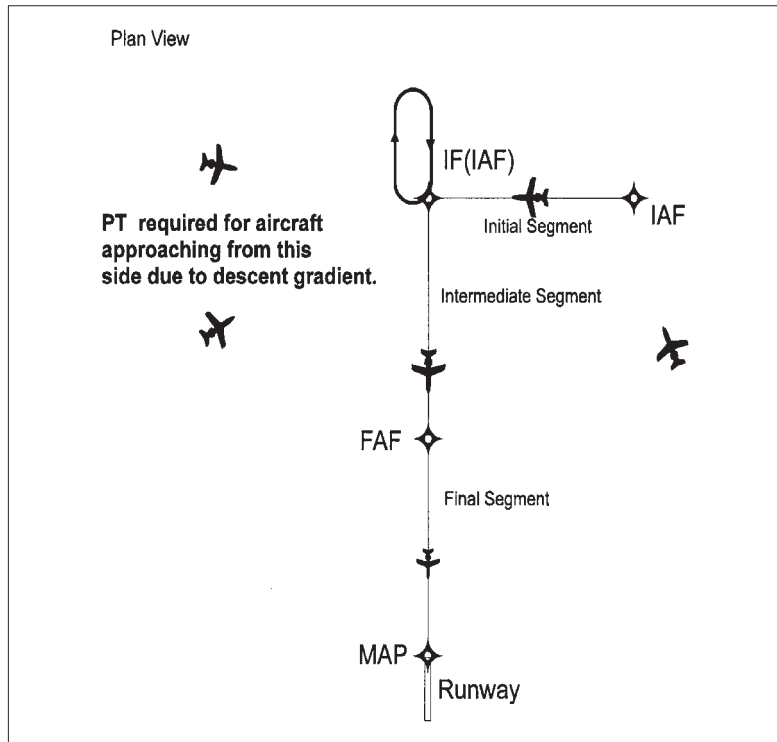


FIG 5-4-4
Modified "T" Approach to Parallel Runways

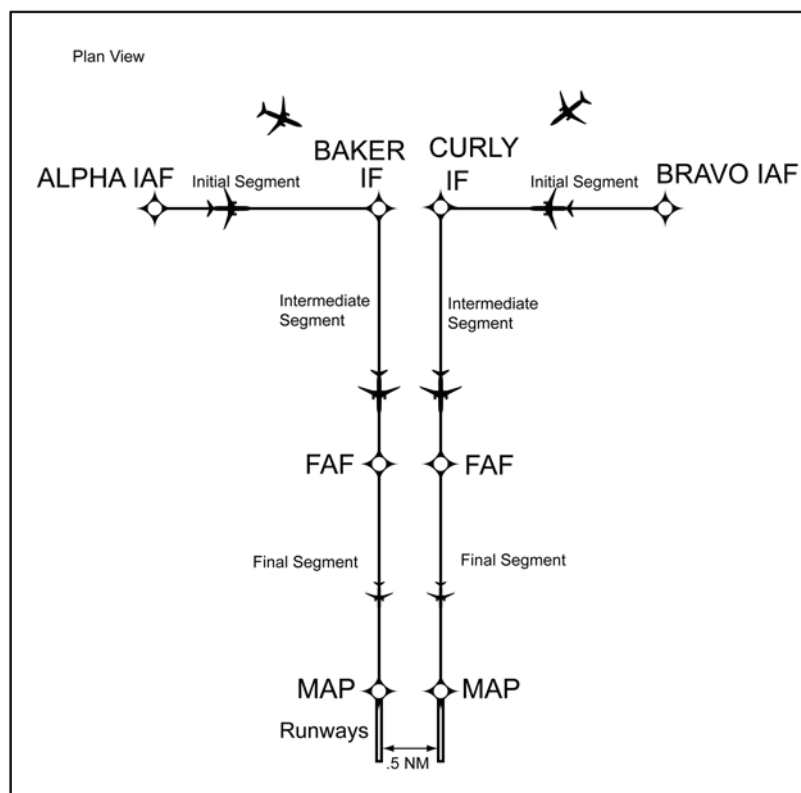


FIG 5-4-5

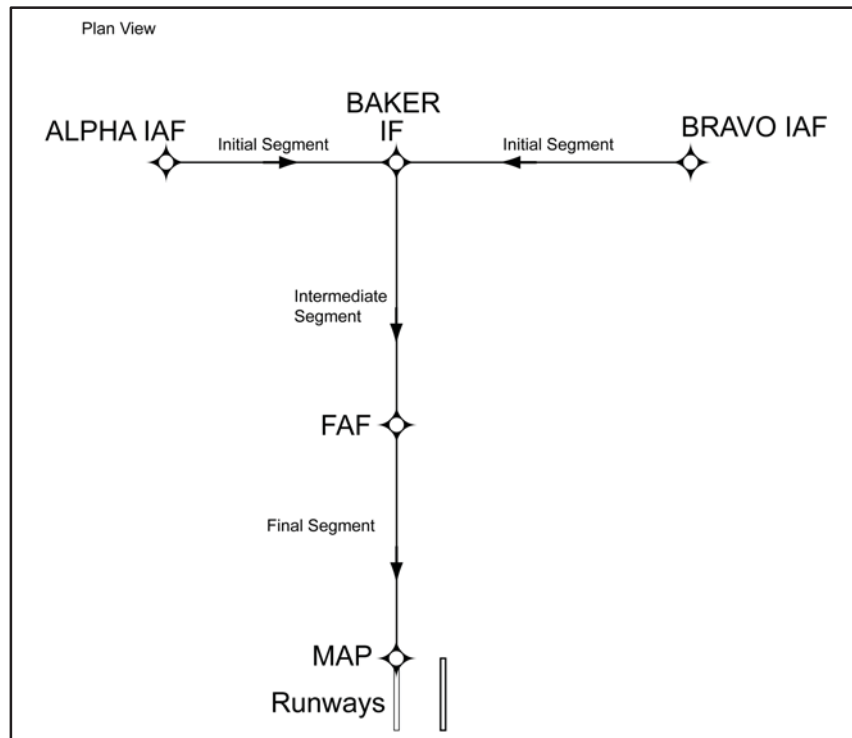
“T” Approach with Common IAFs to Parallel Runways

FIG 5-4-6


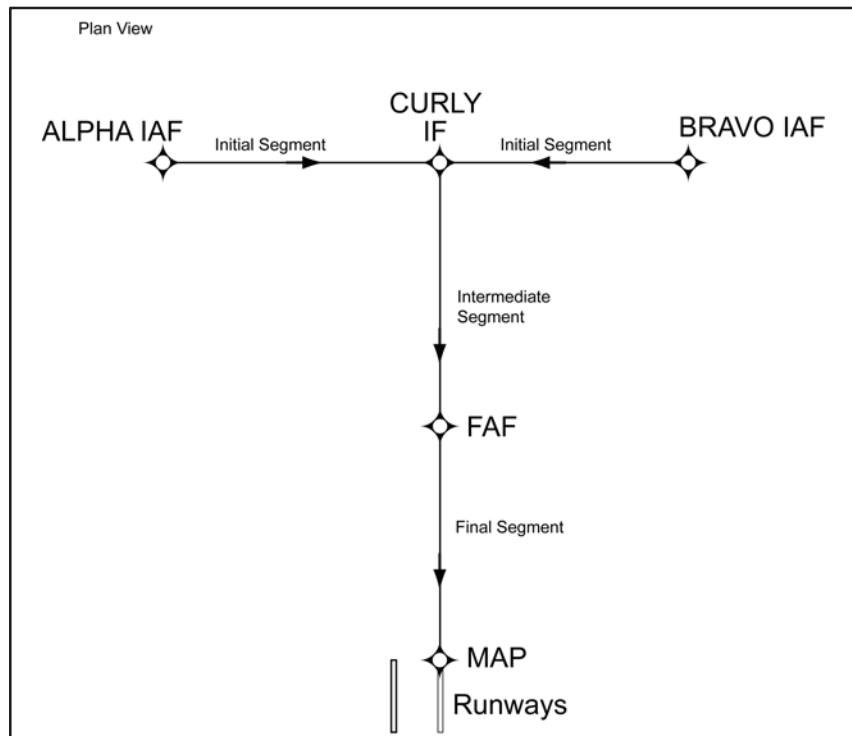
“T” Approach with Common IAFs to Parallel Runways

FIG 5-4-7
TAA Area

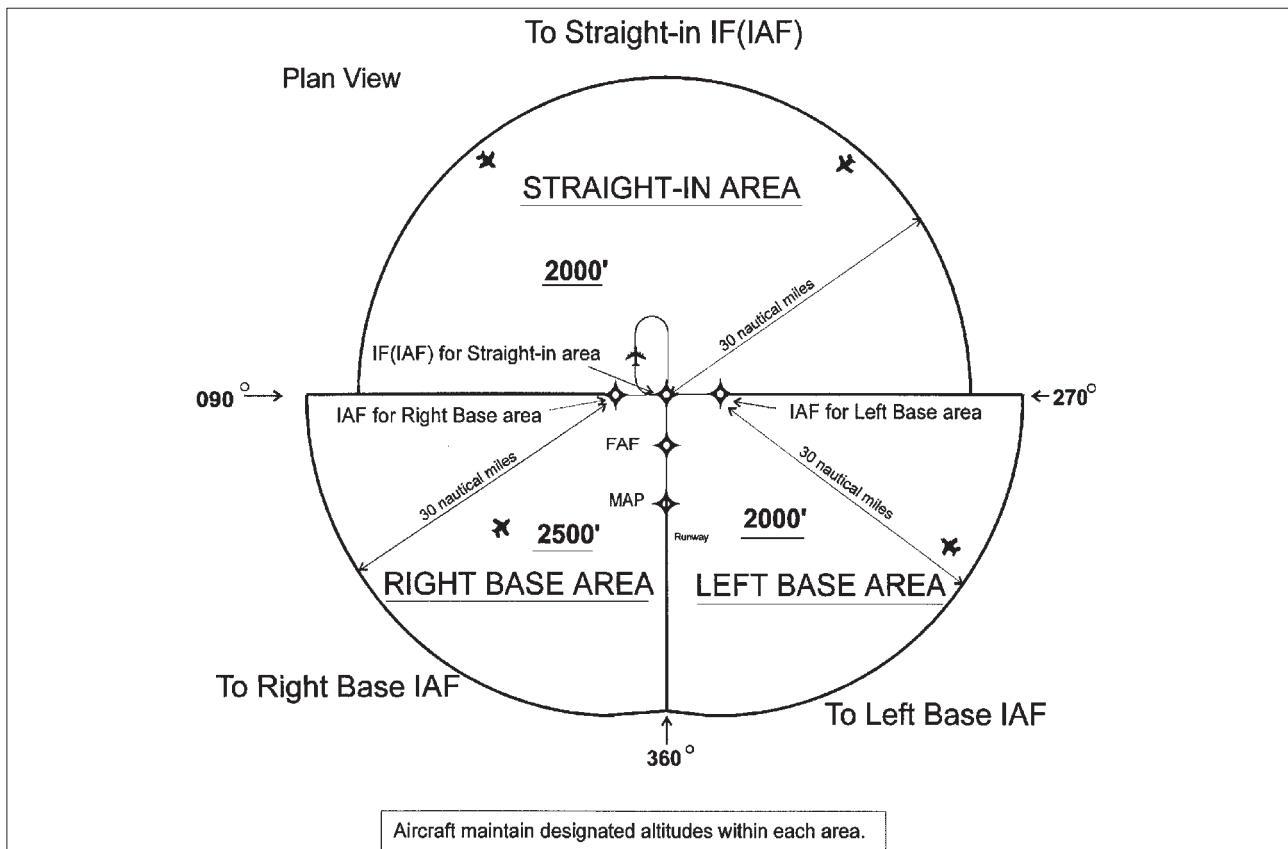


5. The standard TAA consists of three areas defined by the extension of the IAF legs and the intermediate segment course. These areas are called the straight-in, left-base, and right-base areas. See FIG 5-4-7. TAA area lateral boundaries are identified by magnetic courses TO the IF/IAF. The straight-in area can be further divided into pie-shaped sectors with the boundaries identified by magnetic courses TO the IF/IAF and may contain stepdown sections defined by arcs based on RNAV distances DME or ATD from the IF/IAF. The right/left-base areas can only be subdivided using arcs based on RNAV distances from the IAFs for those areas. Minimum MSL altitudes are charted within each of these defined areas/subdivisions that provide at least 1,000 feet of obstacle clearance or more as necessary in mountainous areas.

(a) Prior to arriving at the TAA boundary, the pilot can determine which area of the TAA the aircraft will enter by selecting the IF/IAF to determine the magnetic bearing TO the center IF/IAF. That bearing should then be compared with the published bearings that define the lateral boundaries of the TAA

areas. Using the end IAFs may give a false indication of which area the aircraft will enter. This is critical when approaching the TAA near the extended boundary between the left and right-base areas, especially where these areas contain different minimum altitude requirements.

(b) Pilots entering the TAA and cleared by air traffic control are expected to proceed directly to the IAF associated with that area of the TAA at the altitude depicted unless otherwise cleared by air traffic control. Cleared direct to an Initial Approach Fix (IAF) without a clearance for the procedure does not authorize a pilot to descend to a lower TAA altitude. If a pilot desires a lower altitude without an approach clearance, request the lower TAA altitude. If a pilot is not sure of what they are authorized or expected to do by air traffic, they should ask air traffic or request a specific clearance. Pilots entering the TAA with two-way radio communications failure (14 CFR Section 91.185 IFR Operations Two-Way Radio Communications Failure) must maintain the highest altitude prescribed by Section 91.185(c)(2) until arriving at the appropriate IAF.

FIG 5-4-8
Sectored TAA Areas

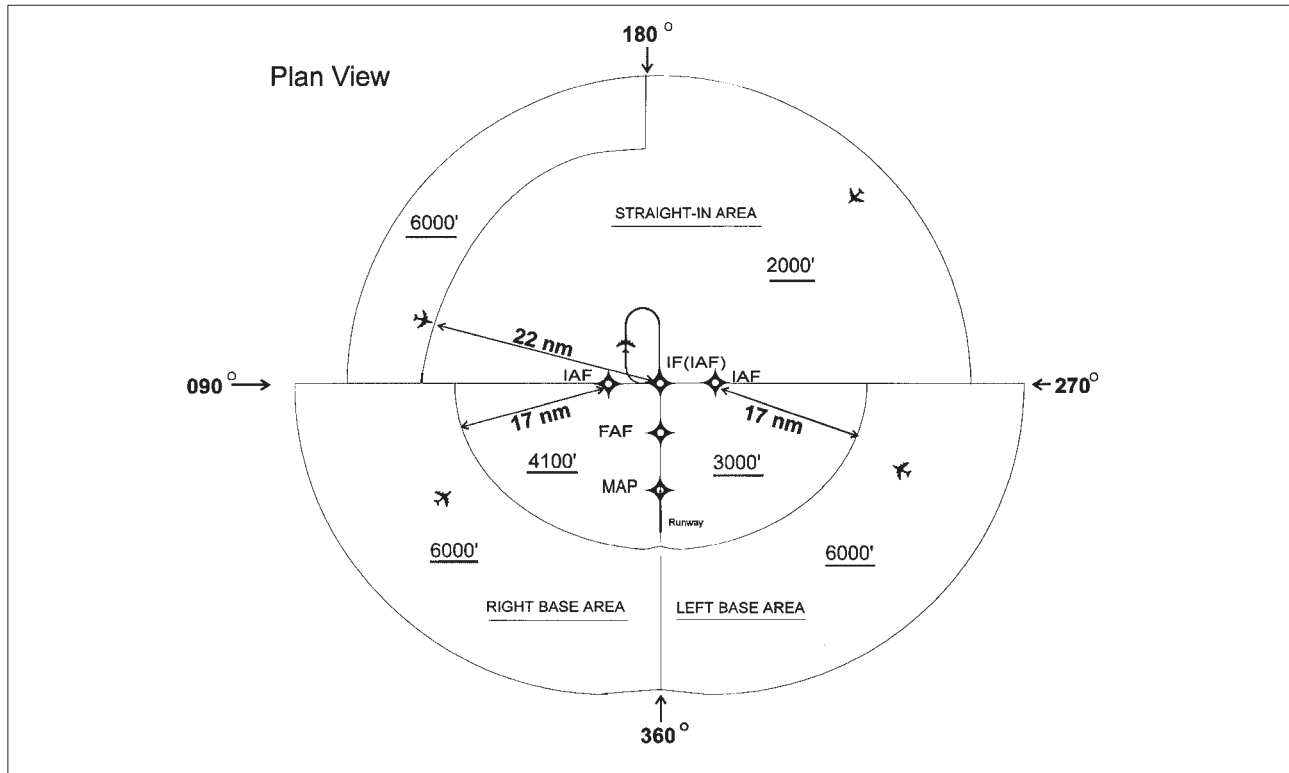


(c) Depiction of the TAA on U.S. Government charts will be through the use of icons located in the plan view outside the depiction of the actual approach procedure. See FIG 5-4-9. Use of icons is necessary to avoid obscuring any portion of the T procedure, altitudes, courses, minimum altitudes, etc. The icon for each TAA area will be located and oriented on the plan view with respect to the direction of arrival to the approach procedure and will show all TAA minimum altitudes and sector/radius subdivisions for that area. The IAF for each area of the TAA is included on the icon where it appears on the approach to help the pilot orient the icon to the approach procedure. The IAF name and the distance of the TAA area boundary from the IAF are included on the outside arc of the TAA area icon. Examples here are shown with the TAA around the approach to aid pilots in visualizing how the TAA corresponds to the approach and should not be confused with the actual approach chart depiction.

(d) Each approach point on the T except the missed approach approach point is assigned a pronounceable 5-character name used in air traffic control communications and which is found in the RNAV databases for the procedure. The missed approach approach point is assigned a pronounceable name when it is not located at the runway threshold.

6. Once cleared to fly the TAA, pilots are expected to obey minimum altitudes depicted within the TAA icons unless instructed otherwise by air traffic control. In FIG 5-4-8, pilots within the left or right-base areas are expected to maintain a minimum altitude of 6,000 feet until within 17 NM of the associated IAF. After crossing the 17 NM arc, descent is authorized to the lower charted altitudes. Pilots approaching from the northeast are expected to maintain a minimum altitude of 6,000 feet and then within 22 NM of the IF/IAF descend to a minimum altitude of 2,000 feet MSL until reaching the IF/IAF.


FIG 5-4-9
RNAV (GPS) Approach Chart

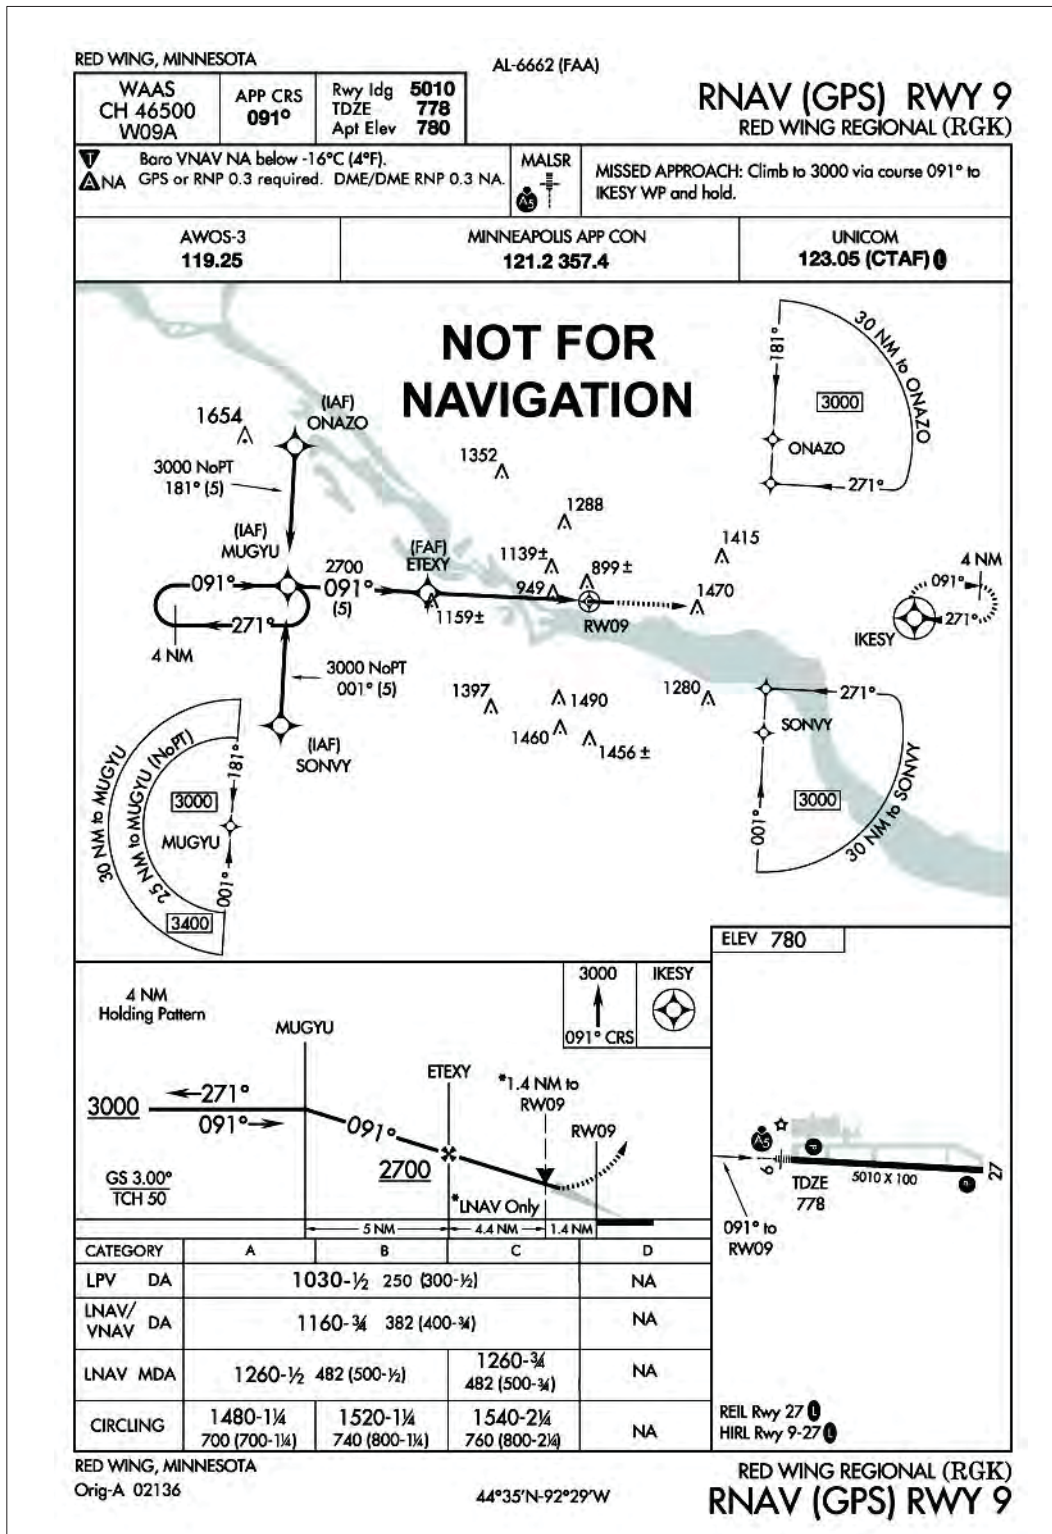

NOTE-

This chart has been modified to depict new concepts and may not reflect actual approach minima.


FIG 5-4-10
TAA with Left and Right Base Areas Eliminated

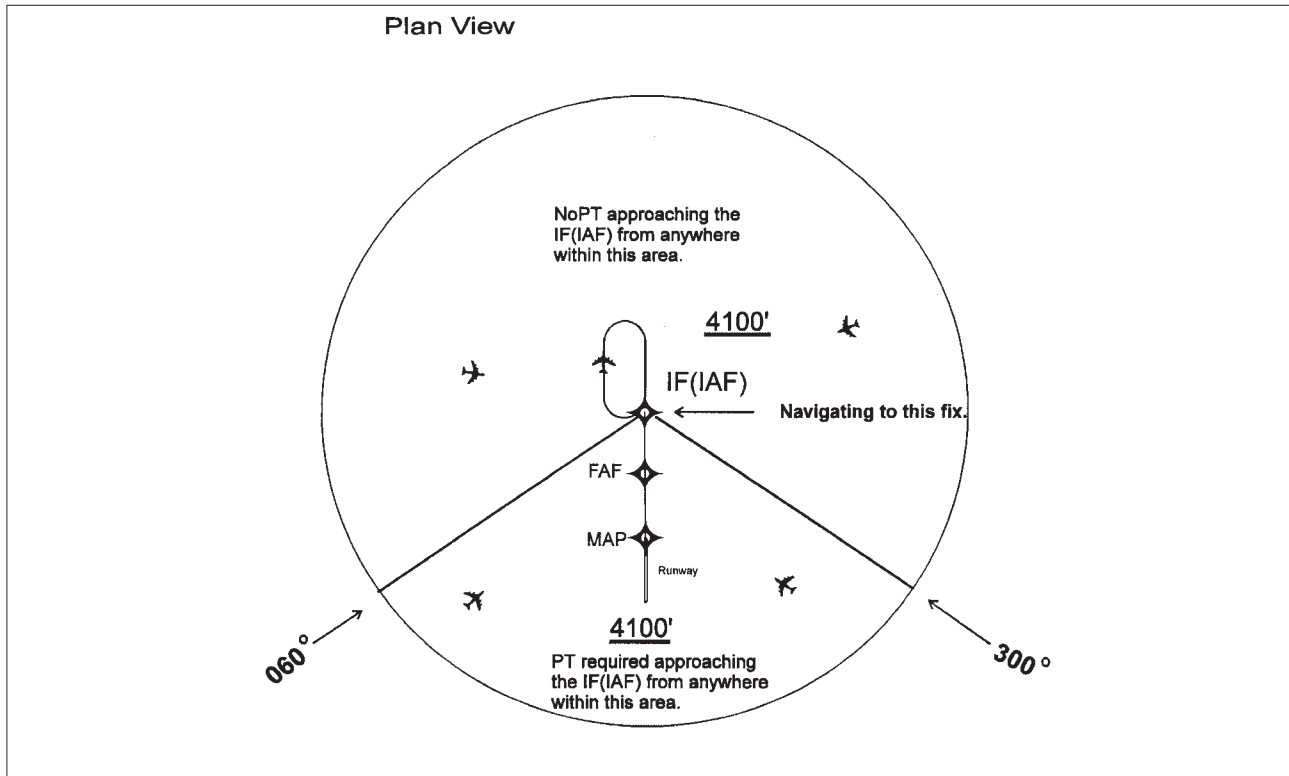

7. Just as the underlying T approach procedure may be modified in shape the TAA may contain modifications to the defined area shapes and sizes. Some areas may even be eliminated with other areas expanded as needed. FIG 5-4-10 is an example of a design limitation where a course reversal is necessary when approaching the IF IAF from certain directions due to the amount of turn required at the IF

IAF. Design criteria require a course reversal whenever this turn exceeds 120 degrees. In this generalized example, pilots approaching on a bearing TO the IF IAF from 300° clockwise through 060° are expected to execute a course reversal. The term NoPT will be annotated on the boundary of the TAA icon for the other portion of the TAA.


FIG 5-4-11
TAA with Right Base Eliminated

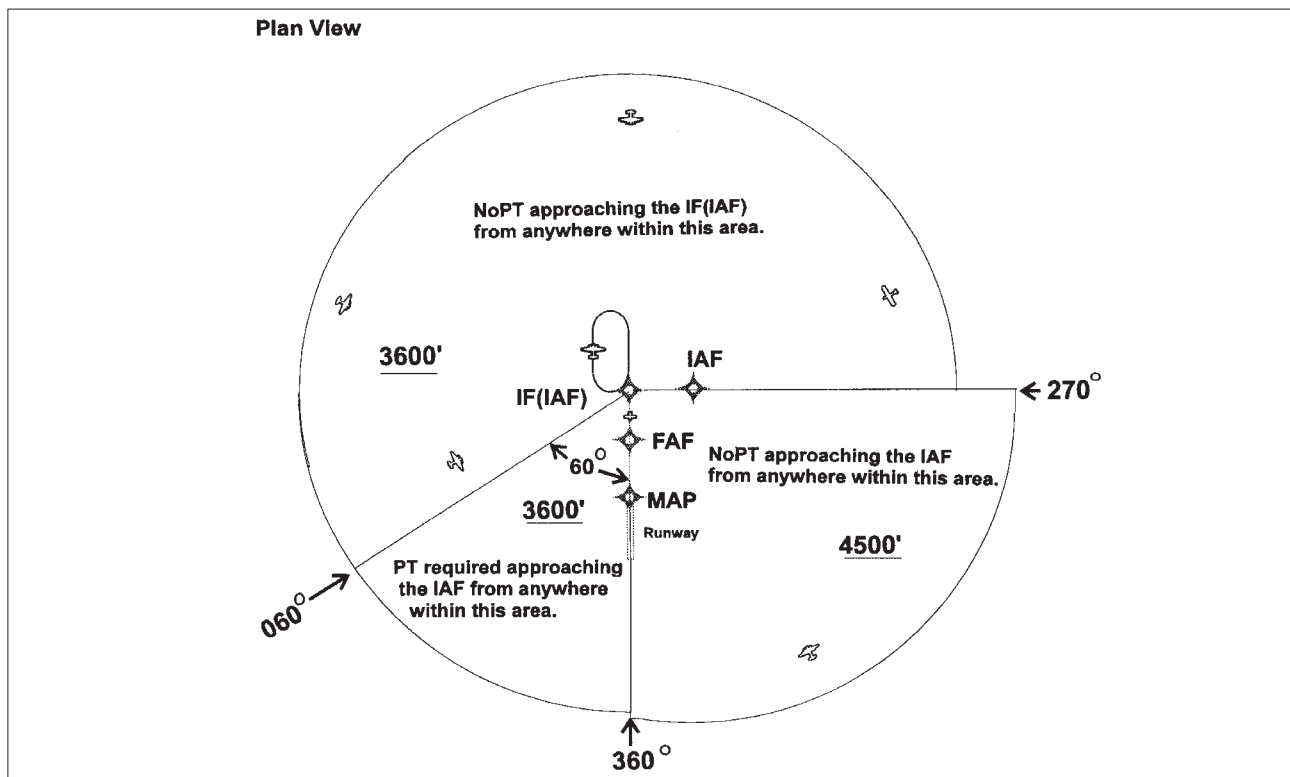

8. FIG 5-4-11 depicts another TAA modification that pilots may encounter. In this generalized example, the right-base area has been eliminated. Pilots operating within the TAA between 360° clockwise to 060° bearing TO the IF/IAF are expected to execute the course reversal in order to properly align the aircraft for entry onto the intermediate segment.

Aircraft operating in all other areas from 060° clockwise to 360° bearing TO the IF/IAF need not perform the course reversal, and the term "NoPT" will be annotated on the TAA boundary of the icon in these areas. TAAs are no longer being produced with sections removed, however, some may still exist on previously published procedures.


FIG 5-4-12
Examples of a TAA with Feeders from an Airway

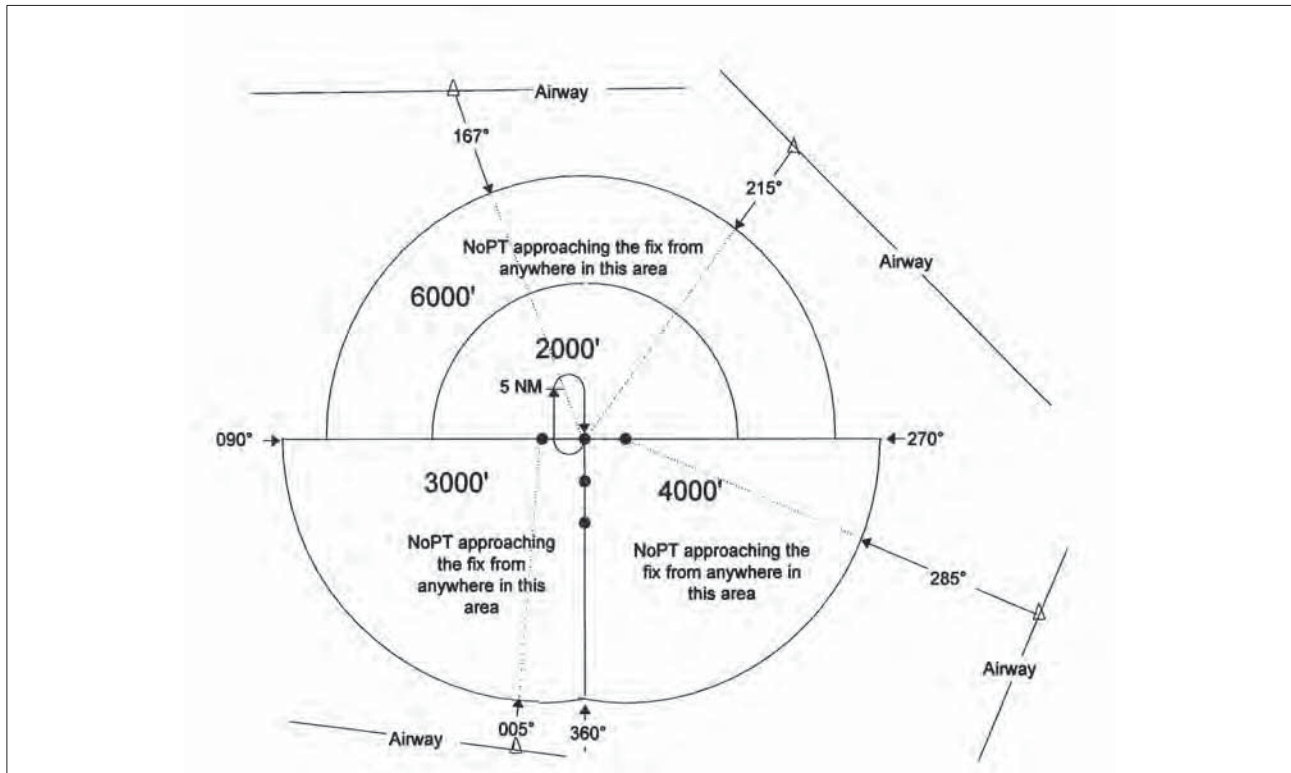

9. When an airway does not cross the lateral TAA boundaries a feeder route will be established to provide a transition from the en route structure to the appropriate IAF. Each feeder route will terminate at

the TAA boundary and will be aligned along a path pointing to the associated IAF. Pilots should descend to the TAA altitude after crossing the TAA boundary and cleared by air traffic control. See FIG 5-4-12.

FIG 5-4-13
Minimum Vectoring Altitude Charts

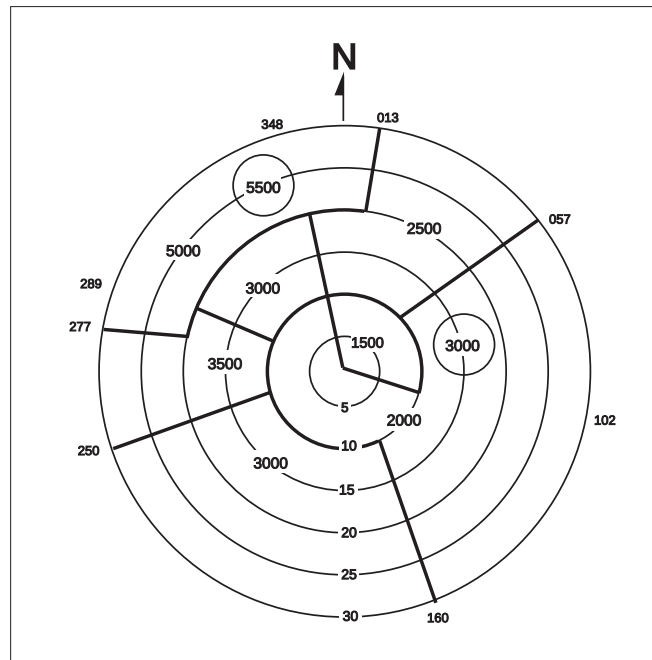

e. Minimum Vectoring Altitudes (MVAs) are established for use by ATC when radar ATC is exercised. MVA charts are prepared by air traffic facilities at locations where there are numerous different minimum IFR altitudes. Each MVA chart has sectors large enough to accommodate vectoring of aircraft within the sector at the MVA. Each sector boundary is at least 3 miles from the obstruction determining the MVA. To avoid a large sector with an excessively high MVA due to an isolated prominent obstruction, the obstruction may be enclosed in a buffer area whose boundaries are at least 3 miles from the obstruction. This is done to facilitate vectoring around the obstruction. See FIG 5-4-13.

1. The minimum vectoring altitude in each sector provides 1,000 feet above the highest obstacle in nonmountainous areas and 2,000 feet above the highest obstacle in designated mountainous areas. Where lower MVAs are required in designated mountainous areas to achieve compatibility with terminal routes or to permit vectoring to an IAP, 1,000 feet of obstacle clearance may be authorized with the use of Airport Surveillance Radar (ASR). The minimum vectoring altitude will provide at least 300 feet above the floor of controlled airspace.

NOTE—

OROCA is an off-route altitude which provides obstruction clearance with a 1,000 foot buffer in nonmountainous terrain areas and a 2,000 foot buffer in designated mountainous areas within the U.S. This altitude may not provide signal coverage from ground-based navigational aids, air traffic control radar, or communications coverage.

2. Because of differences in the areas considered for MVA and those applied to other minimum altitudes, and the ability to isolate specific obstacles, some MVAs may be lower than the nonradar Minimum En Route Altitudes (MEAs), Minimum Obstruction Clearance Altitudes (MOCAs), or other minimum altitudes depicted on charts for a given location. While being radar vectored, IFR altitude assignments by ATC will be at or above MVA.

f. Visual Descent Points (VDPs) are being incorporated in nonprecision approach procedures. The VDP is a defined point on the final approach course of a nonprecision straight-in approach procedure from which normal descent from the MDA to the runway touchdown point may be commenced provided visual reference required by 14 CFR Section 91.175(c)(3) is established. The VDP will normally be identified by DME on VOR and LOC.

procedures and by along-track distance to the next appoint for RNAV procedures. The VDP is identified on the profile view of the approach chart by the symbol **V**.

1. VDPs are intended to provide additional guidance where they are implemented. No special technique is required to fly a procedure with a VDP. The pilot should not descend below the MDA prior to reaching the VDP and acquiring the necessary visual reference.

2. Pilots not equipped to receive the VDP should fly the approach procedure as though no VDP had been provided.

g. Visual Segment of a Published Instrument Approach Procedure. Instrument procedure designers perform a visual area obstruction evaluation off the approach end of each runway authorized for instrument landing: straight-in or circling. Restrictions to instrument operations are imposed if penetrations of the obstruction clearance surfaces exist. These restrictions vary based on the severity of the penetrations and may include increasing required visibility, denying VDPs, prohibiting night instrument operations to the runway and/or provide a Fly Visual option to the landing surface.

1. In isolated cases due to procedure design peculiarities, an IAP may contain a published visual flight path. These procedures are annotated Fly Visual to Airport or Fly Visual. A dashed arrow indicating the visual flight path will be included in the profile and plan views with an approximate heading and distance to the end of the runway. The depicted ground track associated with the visual segment should be flown as a DR course. When executing the visual segment, the flight visibility must not be less than that prescribed in the IAP; the pilot must remain clear of clouds and proceed to the airport maintaining visual contact with the ground. Altitude on the visual flight path is at the discretion of the pilot.

2. Since missed approach obstacle clearance is assured only if the missed approach is commenced at the published MAP or above the DA/MDA, the pilot should have preplanned climb-out options based on aircraft performance and terrain features. Obstacle clearance is the sole responsibility of the pilot when the approach is continued beyond the MAP.

NOTE—

The FAA Administrator retains the authority to approve instrument approach procedures where the pilot may not necessarily have one of the visual references specified in CFR 14, part 91.175 and related rules. It is not a function of procedure design to ensure compliance with part 91.175. The annotation “Fly Visual to Airport” provides relief from part 91.175 requirements that the pilot have distinctly visible and identifiable visual references prior to descent below MDA/DA.

h. Charting of Close in Obstacles on Instrument Procedure Charts. Obstacles that are close to the airport may be depicted in either the plan view of the instrument approach chart or the airport sketch. Obstacles are charted in only one of the areas based on space available and distance from the runway. These obstacles could be in the visual segment of the instrument approach procedure. On nonprecision approaches, these obstacles should be considered when determining where to begin descent from the MDA (see Pilot Operational Considerations When Flying Nonprecision Approaches in this paragraph).

i. Vertical Descent Angle (VDA) on Nonprecision Approaches. FAA policy is to publish VDAs on all nonprecision approaches. Published along with VDA is the threshold crossing height (TCH) that is used to compute the angle. The descent angle may be computed from either the final approach fix (FAF) or a stepdown fix to the runway threshold at the published TCH. A stepdown fix is only used as the start point when an angle computed from the FAF would place the aircraft below the stepdown fix altitude. The descent angle and TCH information are charted on the profile view of the instrument approach chart following the fix; the angle is based on. The optimum descent angle is 3.00 degrees, and whenever possible the approach will be designed using this angle.

1. The VDA provides the pilot with information not previously available on nonprecision approaches. It provides a means for the pilot to establish a stabilized descent from the FAF or stepdown fix to the MDA. Stabilized descent is a key factor in the reduction of controlled flight into terrain (CFIT) incidents. However, pilots should be aware that **the published angle is for information only** – it is strictly advisory in nature. There is no implicit additional obstacle protection below the MDA. Pilots must still respect the published minimum descent altitude (MDA) unless the visual cues stated 14 CFR Section 91.175 are present and they can visually

acquire and avoid obstacles once below the MDA. The presence of a VDA does not guarantee obstacle protection in the visual segment and does not change any of the requirements for flying a nonprecision approach.

2. Additional protection for the visual segment below the MDA is provided if a VDP is published and descent below the MDA is started at or after the VDP. Protection is also provided if a Visual Glide Slope Indicator (VGSI) (e.g., VASI or PAPI) is installed and the aircraft remains on the VGSI glide path angle from the MDA. In either case, a chart note will indicate if the VDP or VGSI are not coincident with the VDA. On RNAV approach charts, a small shaded arrowhead-shaped symbol (see the legend of the U.S. Terminal Procedures books, page H1) from the end of the VDA to the runway indicates that the 34:1 visual surface is clear.

3. Pilots may use the published angle and estimated/actual groundspeed to find a target rate of descent from the rate of descent table published in the back of the U.S. Terminal Procedures Publication. This rate of descent can be flown with the Vertical Velocity Indicator (VVI) in order to use the VDA as an aid to flying a stabilized descent. No special equipment is required.

4. Since one of the reasons for publishing a circling only instrument landing procedure is that the descent rate required exceeds the maximum allowed for a straight-in approach, circling only procedures may have VDAs which are considerably steeper than the standard 3 degree angle on final. In this case, the VDA provides the crew with information about the descent rate required to land straight in from the FAF or step down fix to the threshold. This is not intended to imply that landing straight ahead is recommended or even possible, since the descent rate may exceed the capabilities of many aircraft. The pilot must determine how to best maneuver the aircraft within the circling obstacle clearance area in order to land.

5. In rare cases the LNAV minima may have a lower HAT than minima with a glide path due to the location of the obstacles. This should be a clear indication to the pilot that obstacles exist below the MDA which the pilot must see in order to ensure adequate clearance. In those cases, the glide path may be treated as a VDA and used to descend to the LNAV MDA as long as all the rules for a nonprecision approach are applied at the MDA. However, the pilot

must keep in mind the information in this paragraph and in paragraph 5-4-5.

j. Pilot Operational Considerations When Flying Nonprecision Approaches. The missed approach point (MAP) on a nonprecision approach is not designed with any consideration to where the aircraft must begin descent to execute a safe landing. It is developed based on terrain obstructions, NAVAID location and possibly air traffic considerations. Because the MAP may be located anywhere from well prior to the runway threshold to past the opposite end of the runway, the descent from the Minimum Descent Altitude (MDA) to the runway threshold cannot be determined based on the MAP location. Descent from MDA at the MAP when the MAP is located close to the threshold could require an excessively steep descent gradient to land in the normal touchdown zone. Any turn from the final approach course to the runway heading may also be a factor in when to begin the descent.

1. Pilots are cautioned that descent to a straight-in landing from the MDA at the MAP may be inadvisable or impossible on a nonprecision approach even if current weather conditions meet the published ceiling and visibility. Aircraft speed, height above the runway, descent rate, amount of turn and runway length are some of the factors which must be considered by the pilot to determine if a landing can be accomplished.

2. Visual descent points (VDPs) provide pilots with a reference for the optimal location to begin descent from the MDA based on the designed vertical descent angle (VDA) for the approach procedure assuming required visual references are available. Approaches without VDPs have not been assessed for terrain clearance below the MDA and may not provide a clear vertical path to the runway at the normally expected descent angle. Therefore, pilots must be especially vigilant when descending below the MDA at locations without VDPs. This does not necessarily prevent flying the normal angle; it only means that obstacle clearance in the visual segment could be less and greater care should be exercised in looking for obstacles in the visual segment. Use of visual glide slope indicator (VGSI) systems can aid the pilot in determining if the aircraft is in a position to make the descent from the MDA. However, when the visibility is close to minimums, the VGSI may not be visible at the start descent point.

for a normal glidepath due to its location down the runway

3. Accordingly pilots are advised to carefully review approach procedures prior to initiating the approach to identify the optimum positions and any unacceptable positions from which a descent to landing can be initiated in accordance with 14 CFR Section 91.175(c).

k. Area Navigation (RNAV) Instrument Approach Charts. Reliance on RNAV systems for instrument operations is becoming more commonplace as new systems such as GPS and augmented GPS such as the Wide Area Augmentation System (WAAS) are developed and deployed. In order to support full integration of RNAV procedures into the National Airspace System (NAS), the FAA developed a new charting format for IAPs. See FIG 5-4-9. This format avoids unnecessary duplication and proliferation of instrument approach charts. The original stand-alone GPS charts, titled simply GPS, are being converted to the new format as the procedures are revised. One reason for the revision is the addition of WAAS-based minima to the approach chart. The reformatted approach chart is titled RNAV GPS RW. Up to four lines of minima are included on these charts. Ground Based Augmentation System (GBAS) Landing System (GLS) as a placeholder for future WAAS and LAAS minima and the minima as always listed as N/A. The GLS minima line has now been replaced by the WAAS LPV (Localizer Performance with Vertical Guidance) minima on most RNAV GPS charts. LNAV/VNAV (lateral navigation/vertical navigation) was added to support both WAAS electronic vertical guidance and Barometric VNAV. LPV and LNAV/VNAV are both APV procedures as described in paragraph 5-4-5a7. The original GPS minima, titled S— for straight-in runway, is retitled LNAV (lateral navigation). Circling minima may also be published. A new type of nonprecision WAAS minima will also be published on this chart and titled LP (localizer performance). LP will be published in locations where vertically guided minima cannot be provided due to terrain and obstacles and therefore no LPV or LNAV/VNAV minima will be published. GBAS procedures are published on a separate chart and the GLS minima line is to be used only for GBAS. ATC clearance for the RNAV procedure authorizes a properly certified pilot to utilize any minimums for which the aircraft is certified.

For example, a WAAS-equipped aircraft utilizes the LPV or LP minima, but a GPS-only aircraft may not. The RNAV chart includes information formatted for quick reference by the pilot or flight crew at the top of the chart. This portion of the chart developed based on a study by the Department of Transportation Volpe National Transportation System Center is commonly referred to as the pilot briefing.

1. The minima lines are

(a) GLS. GLS is the acronym for GBAS Landing System. The U.S. version of GBAS has traditionally been referred to as LAAS. The world-wide community has adopted GBAS as the official term for this type of navigation system. To coincide with international terminology, the FAA is also adopting the term GBAS to be consistent with the international community. This line was originally published as a placeholder for both WAAS and LAAS minima and marked as N/A since no minima was published. As the concepts for GBAS and WAAS procedure publication have evolved, GLS will now be used only for GBAS minima, which will be on a separate approach chart. Most RNAV GPS approach charts have had the GLS minima line replaced by a WAAS LPV line of minima.

(b) LPV. LPV is the acronym for localizer performance with vertical guidance. RNAV GPS approaches to LPV lines of minima take advantage of the improved accuracy of WAAS lateral and vertical guidance to provide an approach that is very similar to a Category I Instrument Landing System (ILS). The approach to LPV line of minima is designed for angular guidance with increasing sensitivity as the aircraft gets closer to the runway. The sensitivities are nearly identical to those of the ILS at similar distances. This was done intentionally to allow the skills required to proficiently fly an ILS to readily transfer to flying RNAV GPS approaches to the LPV line of minima. Just as with an ILS, the LPV has vertical guidance and is flown to a DA. Aircraft can fly this minima line with a statement in the Aircraft Flight Manual that the installed equipment supports LPV approaches. This includes Class 3 and 4 TSO-C146 GPS/WAAS equipment.

(c) LNAV/VNAV. LNAV/VNAV identifies APV minimums developed to accommodate an RNAV IAP with vertical guidance, usually provided by approach-certified Baro-VNAV, but with lateral and vertical integrity limits larger than a precision approach or LPV. LNAV stands for Lateral

Navigation VNAV stands for Vertical Navigation. This minima line can be flown by aircraft with a statement in the Aircraft Flight Manual that the installed equipment supports GPS approaches and has an approach-approved barometric VNAV or if the aircraft has been demonstrated to support LNAV/VNAV approaches. This includes Class 2, 3, and 4 TSO-C146 GPS/WAAS equipment. Aircraft using LNAV/VNAV minimums will descend to landing via an internally generated descent path based on satellite or other approach approved VNAV systems. Since electronic vertical guidance is provided, the minima will be published as a DA. Other navigation systems may be specifically authorized to use this line of minima. See Section A, Terms/Landing Minima Data, of the U.S. Terminal Procedures books.

(d) LP. LP is the acronym for localizer performance. Approaches to LP lines of minima take advantage of the improved accuracy of WAAS to provide approaches with lateral guidance and angular guidance. Angular guidance does not refer to a glideslope angle but rather to the increased lateral sensitivity as the aircraft gets closer to the runway similar to localizer approaches. However, the LP line of minima is a Minimum Descent Altitude (MDA) rather than a DA. H. Procedures with LP lines of minima will not be published with another approach that contains approved vertical guidance (LNAV/VNAV or LPV). It is possible to have LP and LNAV published on the same approach chart but LP will only be published if it provides lower minima than an LNAV line of minima. LP is not a fail-safe mode for LPV. LP will only be published if terrain obstructions or some other reason prevent publishing a vertically guided procedure. WAAS avionics may provide GNSS-based advisory vertical guidance during an approach to an LP line of minima. Barometric altimeter information remains the primary altitude reference for complying with any altitude restrictions. WAAS equipment may not support LP even if it supports LPV if it was approved before TSO-C145b and TSO-C146b. Receivers approved under previous TSOs may require an upgrade by the manufacturer in order to be used to fly to LP minima. Receivers approved for LP must have a statement in the approved Flight Manual or Supplemental Flight Manual including LP as one of the approved approach types.

(e) LNAV. This minima is for lateral navigation only and the approach minimum altitude will be published as a minimum descent altitude (MDA). LNAV provides the same level of service as the present GPS stand-alone approaches. LNAV minimums support the following navigation systems: WAAS. When the navigation solution will not support vertical navigation and GPS navigation systems which are presently authorized to conduct GPS approaches.

NOTE—

GPS receivers approved for approach operations in accordance with: AC 20-138, Airworthiness Approval of Positioning and Navigation Systems, qualify for this minima. WAAS navigation equipment must be approved in accordance with the requirements specified in TSO-C145() or TSO-C146() and installed in accordance with Advisory Circular AC 20-138.

2. Other systems may be authorized to utilize these approaches. See the description in Section A of the U.S. Terminal Procedures books for details. Operational approval must also be obtained for Baro-VNAV systems to operate to the LNAV/VNAV minimums. Baro-VNAV may not be authorized on some approaches due to other factors such as no local altimeter source being available. Baro-VNAV is not authorized on LPV procedures. Pilots are directed to their local Flight Standards District Office (FSDO) for additional information.

NOTE—

RNAV and Baro-VNAV systems must have a manufacturer supplied electronic database which must include the waypoints, altitudes, and vertical data for the procedure to be flown. The system must be able to retrieve the procedure by name from the aircraft navigation database, not just as a manually entered series of waypoints.

3. ILS or RNAV (GPS) charts.

(a) Some RNAV (GPS) charts will also contain an ILS line of minima to make use of the ILS precision final in conjunction with the RNAV (GPS) capabilities for the portions of the procedure prior to the final approach segment and for the missed approach. Obstacle clearance for the portions of the procedure other than the final approach segment is still based on GPS criteria.

NOTE—

Some GPS receiver installations inhibit GPS navigation whenever ANY ILS frequency is tuned. Pilots flying aircraft with receivers installed in this manner must wait until they are on the intermediate segment of the procedure.

prior to the PFAF (PFAF is the active waypoint) to tune the ILS frequency and must tune the ILS back to a VOR frequency in order to fly the GPS based missed approach.

(b) Charting There are charting differences between ILS RNAV GPS and GLS approaches

(1) The LAAS procedure is titled GLS RW on the approach chart

(2) The VDB provides information to the airborne receiver where the guidance is synthesized

(3) The LAAS procedure is identified by a four alpha-numeric character field referred to as the RPI or approach ID and is similar to the IDENT feature of the ILS

(4) The RPI is charted

(5) Most RNAV GPS approach charts have had the GLS NA minima line replaced by an LPV line of minima

(6) Since the concepts for LAAS and WAAS procedure publication have evolved GLS will no longer be used only for LAAS minima which will be on a separate approach chart

4. Required Navigation Performance (RNP)

(a) Pilots are advised to refer to the TERMS/LANDING MINIMUMS DATA Section A of the U.S. Government Terminal Procedures books for aircraft approach eligibility requirements by specific RNP level requirements

(b) Some aircraft have RNP approval in their AFM without a GPS sensor. The lowest level of sensors that the FAA will support for RNP service is DME/DME. However, necessary DME signal may not be available at the airport of intended operations. For those locations having an RNAV chart published with LNAV/VNAV minimums, a procedure note may be provided such as DME/DME RNP-0.3 NA. This means that RNP aircraft dependent on DME/DME to achieve RNP-0.3 are not authorized to conduct this approach. Where DME facility availability is a factor, the note may read DME/DME RNP-0.3 Authorized ABC and Rejected. This means that ABC and facilities have been determined by flight inspection to be required in the navigation solution to assure RNP-0.3. VOR/DME updating must not be used for approach procedures.

5. Chart Terminology

(a) Decision Altitude (DA) replaces the familiar term Decision Height (DH). DA conforms to the international convention where altitudes relate to MSL and heights relate to AGL. DA will eventually be published for other types of instrument approach procedures with vertical guidance as well. DA indicates to the pilot that the published descent profile is flown to the DA MSL. Where a missed approach will be initiated if visual references for landing are not established. Obstacle clearance is provided to allow a momentary descent below DA while transitioning from the final approach to the missed approach. The aircraft is expected to follow the missed instructions while continuing along the published final approach course to at least the published runway threshold endpoint or MAP if not at the threshold before executing any turns.

(b) Minimum Descent Altitude (MDA) has been in use for many years and will continue to be used for the LNAV only and circling procedures.

(c) Threshold Crossing Height (TCH) has been traditionally used in precision approaches as the height of the glide slope above threshold. With publication of LNAV/VNAV minimums and RNAV descent angles including graphically depicted descent profiles, TCH also applies to the height of the descent angle or glidepath at the threshold. Unless otherwise required for larger type aircraft, which may be using the IAP, the typical TCH is 30 to 50 feet.

6. The MINIMA FORMAT will also change slightly.

(a) Each line of minima on the RNAV IAP is titled to reflect the level of service available, e.g., GLS, LPV, LNAV/VNAV, LP, and LNAV CIRCLING minima will also be provided.

(b) The minima title box indicates the nature of the minimum altitude for the IAP. For example:

(1) DA will be published next to the minima line title for minimums supporting vertical guidance such as for GLS, LPV, or LNAV/VNAV.

(2) MDA will be published as the minima line on approaches with lateral guidance only (LNAV or LP). Descent below the MDA must meet the conditions stated in 14 CFR Section 91.175.

(3) Where two or more systems such as LPV and LNAV/VNAV share the same minima, each line of minima will be displayed separately.

7. Chart Symbolology changed slightly to include

(a) Descent Profile. The published descent profile and a graphical depiction of the vertical path to the runway will be shown. Graphical depiction of the RNAV vertical guidance will differ from the traditional depiction of an ILS glide slope feather through the use of a shorter vertical track beginning at the decision altitude.

(1) It is FAA policy to design IAPs with minimum altitudes established at fixes/waypoints to achieve optimum stabilized constant rate descents within each procedure segment. This design can enhance the safety of the operations and contribute to a reduction in the occurrence of controlled flight into terrain (CFIT) accidents. Additionally, the National Transportation Safety Board (NTSB) recently emphasized that pilots could benefit from publication of the appropriate IAP descent angle for a stabilized descent on final approach. The RNAV IAP format includes the descent angle to the hundredth of a degree, e.g., 3.00 degrees. The angle will be provided in the graphically depicted descent profile.

(2) The stabilized approach may be performed by reference to vertical navigation information provided by WAAS or LNAV/VNAV systems or for LNAV-only systems by the pilot determining the appropriate aircraft attitude/groundspeed combination to attain a constant rate descent which best emulates the published angle. To aid the pilot, U.S. Government Terminal Procedures Publication charts publish an expanded Rate of Descent Table on the inside of the back hard cover for use in planning and executing precision descents under known or approximate groundspeed conditions.

(b) Visual Descent Point (VDP). A VDP will be published on most RNAV IAPs. VDPs apply only to aircraft utilizing LP or LNAV minima, not LPV or LNAV/VNAV minimums.

(c) Missed Approach Symbolology. In order to make missed approach guidance more readily understood, a method has been developed to display missed approach guidance in the profile view through the use of quick reference icons. Due to limited space in the profile area, only four or fewer icons can be shown. However, the icons may not provide

representation of the entire missed approach procedure. The entire set of textual missed approach instructions are provided at the top of the approach chart in the pilot briefing. See FIG 5-4-9.

(d) Waypoints. All RNAV or GPS stand-alone IAPs are flown using data pertaining to the particular IAP obtained from an onboard database, including the sequence of all WPs used for the approach and missed approach, except that step down waypoints may not be included in some TSO-C129 receiver databases. Included in the database in most receivers is coding that informs the navigation system of which WPs are fly-over (FO) or fly-by (FB). The navigation system may provide guidance appropriately – including leading the turn prior to a fly-by WP or causing overflight of a fly-over WP. Where the navigation system does not provide such guidance, the pilot must accomplish the turn lead or waypoint overflight manually. Chart symbolology for the FB WP provides pilot awareness of expected actions. Refer to the legend of the U.S. Terminal Procedures books.

(e) TAAs are described in paragraph 5-4-5d, Terminal Arrival Area (TAA). When published, the RNAV chart depicts the TAA areas through the use of icons representing each TAA area associated with the RNAV procedure. See FIG 5-4-9. These icons are depicted in the plan view of the approach chart, generally arranged on the chart in accordance with their position relative to the aircraft's arrival from the en route structure. The WP to which navigation is appropriate and expected within each specific TAA area will be named and depicted on the associated TAA icon. Each depicted named WP is the IAF for arrivals from within that area. TAAs may not be used on all RNAV procedures because of airspace congestion or other reasons.

(f) Hot and Cold Temperature Limitations. A minimum and maximum temperature limitation is published on procedures which authorize Baro-VNAV operation. These temperatures represent the airport temperature above or below which Baro-VNAV is not authorized to LNAV/VNAV minimums. As an example, the limitation will read: Uncompensated Baro-VNAV NA below -8°C (18°F) or above 47°C (117°F). This information will be found in the upper left hand box of the pilot briefing. When the temperature is above the high temperature or below the low temperature limit, Baro-VNAV may be used to

provide a stabilized descent to the LNAV MDA. However, extra caution should be used in the visual segment to ensure a vertical correction is not required. If the VGSI is aligned with the published glidepath and the aircraft instruments indicate on glidepath, an above or below glidepath indication on the VGSI may indicate that temperature error is causing deviations to the glidepath. These deviations should be considered if the approach is continued below the MDA.

NOTE—

Many systems which apply Baro-VNAV temperature compensation only correct for cold temperature. In this case, the high temperature limitation still applies. Also, temperature compensation may require activation by maintenance personnel during installation in order to be functional, even though the system has the feature. Some systems may have a temperature correction capability, but correct the Baro-altimeter all the time, rather than just on the final, which would create conflicts with other aircraft if the feature were activated. Pilots should be aware of compensation capabilities of the system prior to disregarding the temperature limitations.

NOTE—

Temperature limitations do not apply to flying the LNAV/VNAV line of minima using approach certified WAAS receivers when LPV or LNAV/VNAV are annunciated to be available.

(g) WAAS Channel Number/Approach ID.

The WAAS Channel Number is an optional equipment capability that allows the use of a 5-digit number to select a specific final approach segment without using the menu method. The Approach ID is an airport unique 4-character combination for verifying the selection and extraction of the correct final approach segment information from the aircraft database. It is similar to the ILS ident but displayed visually rather than aurally. The Approach ID consists of the letter W for WAAS, the runway number, and a letter other than L, C, or R which could be confused with Left, Center, and Right. e.g., W35A. Approach IDs are assigned in the order that WAAS approaches are built to that runway number at that airport. The WAAS Channel Number and Approach ID are displayed in the upper left corner of the approach procedure pilot briefing.

(h) At locations where outages of WAAS vertical guidance may occur daily due to initial system limitations, a negative W symbol **W** will be placed on RNAV GPS approach charts. Many of

these outages will be very short in duration but may result in the disruption of the vertical portion of the approach. The **W** symbol indicates that NOTAMs or Air Traffic advisories are not provided for outages

which occur in the WAAS LNAV/VNAV or LPV vertical service. Use LNAV or circling minima for flight planning at these locations whether as a destination or alternate. For flight operations at these locations when the WAAS avionics indicate that LNAV/VNAV or LPV service is available, then vertical guidance may be used to complete the approach using the displayed level of service. Should an outage occur during the procedure, reversion to LNAV minima may be required. As the WAAS coverage is expanded, the **W** will be removed.

NOTE—

Properly trained and approved, as required, TSO-C145() and TSO-C146() equipped users (WAAS users) with and using approved baro-VNAV equipment may plan for LNAV/VNAV DA at an alternate airport. Specifically authorized WAAS users with and using approved baro-VNAV equipment may also plan for RNP 0.3 DA at the alternate airport as long as the pilot has verified RNP availability through an approved prediction program.

5-4-6. Approach Clearance

a. An aircraft which has been cleared to a holding fix and subsequently cleared approach has not received new routing. Even though clearance for the approach may have been issued prior to the aircraft reaching the holding fix, ATC could expect the pilot to proceed via the holding fix, his/her last assigned route, and the feeder route associated with that fix, if a feeder route is published on the approach chart to the initial approach fix (IAF) to commence the approach. *WHEN CLEARED FOR THE APPROACH, THE PUBLISHED OFF AIRWAY (FEEDER) ROUTES THAT LEAD FROM THE EN ROUTE STRUCTURE TO THE IAF ARE PART OF THE APPROACH CLEARANCE.*

b. If a feeder route to an IAF begins at a fix located along the route of flight prior to reaching the holding fix, and clearance for an approach is issued, a pilot should commence the approach via the published feeder route, i.e., the aircraft could not be expected to overfly the feeder route and return to it. The pilot is expected to commence the approach in a similar manner at the IAF if the IAF for the procedure is located along the route of flight to the holding fix.

c. If a route of flight directly to the initial approach fix is desired it should be so stated by the controller with phraseology to include the words direct proceed direct or a similar phrase which the pilot can interpret without question. When uncertain of the clearance immediately query ATC as to what route of flight is desired.

d. The name of an instrument approach as published is used to identify the approach even though a component of the approach aid such as the glideslope on an Instrument Landing System is inoperative or unreliable. The controller will use the name of the approach as published but must advise the aircraft at the time an approach clearance is issued that the inoperative or unreliable approach aid component is unusable except when the title of the published approach procedures otherwise allows for example ILS Rwy 05 or LOC Rwy 05.

e. The following applies to aircraft on radar vectors and/or cleared direct to in conjunction with an approach clearance:

1. Maintain the last altitude assigned by ATC until the aircraft is established on a published segment of a transition route or approach procedure segment or other published route for which a lower altitude is published on the chart. If already on an established route or approach or arrival segment you may descend to whatever minimum altitude is listed for that route or segment.

2. Continue on the vector heading until intercepting the next published ground track applicable to the approach clearance.

3. Once reaching the final approach fix via the published segments the pilot may continue on approach to a landing.

4. If proceeding to an IAF with a published course reversal procedure turn or hold in lieu of PT pattern except when cleared for a straight in approach by ATC the pilot must execute the procedure turn/hold in lieu of PT and complete the approach.

5. If cleared to an IAF/IF via a NoPT route or no procedure turn/hold in lieu of PT is published continue with the published approach.

6. In addition to the above RNAV aircraft may be issued a clearance direct to the IAF/IF at intercept angles not greater than 90 degrees for both conventional and RNAV instrument approaches. Controllers

may issue a heading or a course direct to a fix between the IF and FAF at intercept angles not greater than 30 degrees for both conventional and RNAV instrument approaches. In all cases controllers will assign altitudes that ensure obstacle clearance and will permit a normal descent to the FAF. When clearing aircraft direct to the IF ATC will radar monitor the aircraft until the IF and will advise the pilot to expect clearance direct to the IF at least 5 miles from the fix. ATC must issue a straight in approach clearance.

When clearing an aircraft direct to an IAF/IF with a procedure turn or hold-in-lieu of a procedure turn and ATC does not want the aircraft to execute the course reversal:

NOTE—

Refer to 14 CFR 91.175 (i).

7. RNAV aircraft may be issued a clearance direct to the FAF that is also charted as an IAF in which case the pilot is expected to execute the depicted procedure turn or hold in lieu of procedure turn. ATC will not issue a straight in approach clearance. If the pilot desires a straight in approach they must request vectors to the final approach course outside of the FAF or fly a published NoPT route. When visual approaches are in use ATC may clear an aircraft direct to the FAF.

NOTE—

1. In anticipation of a clearance by ATC to any fix published on an instrument approach procedure, pilots of RNAV aircraft are advised to select an appropriate IAF or feeder fix when loading an instrument approach procedure into the RNAV system.

2. Selection of “Vectors-to-Final” or “Vectors” option for an instrument approach may prevent approach fixes located outside of the FAF from being loaded into an RNAV system. Therefore, the selection of these options is discouraged due to increased workload for pilots to reprogram the navigation system.

f. An RF leg is defined as a constant radius circular path around a defined turn center that starts and terminates at a fix. An RF leg may be published as part of a procedure. Since not all aircraft have the capability to fly these leg types pilots are responsible for knowing if they can conduct an RNAV approach with an RF leg. Requirements for RF legs will be indicated on the approach chart in the notes section or at the applicable initial approach fix. Controllers will clear RNAV equipped aircraft for instrument approach procedures containing RF legs.

1. Via published transitions or
2. On a heading or course direct to the IAF when a hold in lieu of procedure turn is published and the pilot will execute the procedure or
3. On a heading or course direct to the IAF/IF at intercept angles no greater than 90 degrees and the distance to the waypoint beginning the RF leg is 6NM or greater or
4. With radar monitoring on a heading or course direct to any waypoint 3 miles or more from the waypoint that begins the RF leg at an intercept angle not greater than 30 degrees See FIG 5-4-14

EXAMPLE–

1. Controllers will not clear aircraft direct to *THIRD* because that waypoint begins the RF leg, and aircraft cannot be vectored or cleared to *TURNN* or vectored to intercept the approach segment at any point between *THIRD* and *FORTH* because this is the RF leg.
2. Controllers can clear Aircraft 1 direct to *SCOND* because the distance to *THIRD*, where the RF leg begins is 3NM or greater and the intercept angle will be 30 degrees or less and is radar monitored. Controllers can clear Aircraft 2 direct to *FIRST* because the intercept angle is 90 degrees or less, and the distance from *FIRST* to *THIRD* is 6NM or greater.

5-4-7. Instrument Approach Procedures

a. Aircraft approach category means a grouping of aircraft based on a speed of V_{REF} if specified or if V_{REF} is not specified $1.3 V_{SO}$ at the maximum certified landing weight V_{REF} V_{SO} and the maximum certified landing weight are those values as established for the aircraft by the certification authority of the country of registry. A pilot must use the minima corresponding to the category determined during certification or higher. Helicopters may use Category A minima. If it is necessary to operate at a speed in excess of the upper limit of the speed range for an aircraft's category the minimums for the higher category must be used. For example, an airplane which fits into Category B but is circling to land at a speed of 145 knots must use the approach Category D minimums. As an additional example, a Category A airplane or helicopter which is operating at 130 knots on a straight-in approach must use the approach Category C minimums. See the following category limits:

1. Category A Speed less than 91 knots

2. Category B Speed 91 knots or more but less than 121 knots
3. Category C Speed 121 knots or more but less than 141 knots
4. Category D Speed 141 knots or more but less than 166 knots
5. Category E Speed 166 knots or more

NOTE–

V_{REF} in the above definition refers to the speed used in establishing the approved landing distance under the airworthiness regulations constituting the type certification basis of the airplane, regardless of whether that speed for a particular airplane is $1.3 V_{SO}$, $1.23 V_{SR}$, or some higher speed required for airplane controllability. This speed, at the maximum certificated landing weight, determines the lowest applicable approach category for all approaches regardless of actual landing weight.

b. When operating on an unpublished route or while being radar vectored the pilot when an approach clearance is received must in addition to complying with the minimum altitudes for IFR operations 14 CFR Section 91.177 maintain the last assigned altitude unless a different altitude is assigned by ATC or until the aircraft is established on a segment of a published route or IAP. After the aircraft is so established published altitudes apply to descent within each succeeding route or approach segment unless a different altitude is assigned by ATC. Notwithstanding this pilot responsibility for aircraft operating on unpublished routes or while being radar vectored ATC will except when conducting a radar approach issue an IFR approach clearance only after the aircraft is established on a segment of a published route or IAP or assign an altitude to maintain until the aircraft is established on a segment of a published route or instrument approach procedure. For this purpose the procedure turn of a published IAP must not be considered a segment of that IAP until the aircraft reaches the initial fix or navigation facility upon which the procedure turn is predicated.

EXAMPLE–

Cross Redding VOR at or above five thousand, cleared VOR runway three four approach.

or

Five miles from outer marker, turn right heading three three zero, maintain two thousand until established on the localizer, cleared ILS runway three six approach.

NOTE—

The altitude assigned will assure IFR obstruction clearance from the point at which the approach clearance is issued until established on a segment of a published route or IAP. If uncertain of the meaning of the clearance, immediately request clarification from ATC.

c. Several IAPs using various navigation and approach aids may be authorized for an airport. ATC may advise that a particular approach procedure is being used primarily to expedite traffic. If issued a clearance that specifies a particular approach procedure, notify ATC immediately if a different one is desired. In this event it may be necessary for ATC to withhold clearance for the different approach until such time as traffic conditions permit. However, a pilot involved in an emergency situation will be given priority. If the pilot is not familiar with the specific approach procedure, ATC should be advised and they will provide detailed information on the execution of the procedure.

REFERENCE—

AIM, Advance Information on Instrument Approach, Paragraph 5-4-4

d. The name of an instrument approach as published is used to identify the approach, even though a component of the approach aid, such as the glideslope on an Instrument Landing System, is inoperative or unreliable. The controller will use the name of the approach as published, but must advise the aircraft at the time an approach clearance is issued that the inoperative or unreliable approach aid component is unusable, except when the title of the published approach procedures otherwise allows for example, ILS or LOC.

e. Except when being radar vectored to the final approach course, when cleared for a specifically prescribed IAP, i.e., cleared ILS run, any one, nine, or when cleared approach, i.e., execution of any procedure prescribed for the airport, pilots must execute the entire procedure commencing at an IAF or an associated feeder route as described on the IAP chart unless an appropriate new or revised ATC clearance is received or the IFR flight plan is canceled.

f. Pilots planning flights to locations which are private airfields or which have instrument approach procedures based on private navigation aids should obtain approval from the owner. In addition, the pilot must be authorized by the FAA to fly special instrument approach procedures associated with private navigation aids (see paragraph 5-4-8).

Owners of navigation aids that are not for public use may elect to turn off the signal for whatever reason they may have, e.g., maintenance, energy conservation, etc. Air traffic controllers are not required to question pilots to determine if they have permission to land at a private airfield or to use procedures based on privately owned navigation aids, and they may not know the status of the navigation aid. Controllers presume a pilot has obtained approval from the owner and the FAA for use of special instrument approach procedures and is aware of any details of the procedure if an IFR flight plan is filed to that airport.

g. Pilots should not rely on radar to identify a fix unless the fix is indicated as RADAR on the IAP. Pilots may request radar identification of an OM, but the controller may not be able to provide the service due either to workload or not having the fix on the video map.

h. If a missed approach is required, advise ATC and include the reason, unless initiated by ATC. Comply with the missed approach instructions for the instrument approach procedure being executed unless otherwise directed by ATC.

REFERENCE—

AIM, Missed Approach, Paragraph 5-4-21

AIM, Missed Approach, Paragraph 5-5-5

5-4-8. Special Instrument Approach Procedures

Instrument Approach Procedure (IAP) charts reflect the criteria associated with the U.S. Standard for Terminal Instrument Approach Procedures (TERPs), which prescribes standardized methods for use in developing IAPs. Standard IAPs are published in the Federal Register (FR) in accordance with Title 14 of the Code of Federal Regulations, Part 97, and are available for use by appropriately qualified pilots operating properly equipped and airworthy aircraft in accordance with operating rules and procedures acceptable to the FAA. Special IAPs are also developed using TERPs but are not given public notice in the FR. The FAA authorizes only certain individual pilots and/or pilots in individual organizations to use special IAPs and may require additional crew training and/or aircraft equipment or performance and may also require the use of landing aids, communications, or weather services not available for public use. Additionally, IAPs that service private use airports or heliports are generally special IAPs.

5-4-9. Procedure Turn and Hold-in-lieu of Procedure Turn

a. A procedure turn is the maneuver prescribed when it is necessary to reverse direction to establish the aircraft inbound on an intermediate or final approach course. The procedure turn or hold-in-lieu-of-PT is a required maneuver when it is depicted on the approach chart unless cleared by ATC for a straight-in approach. Additionally, the procedure turn or hold-in-lieu-of-PT is not permitted when the symbol "No PT" is depicted on the initial segment being used when a RADAR VECTOR to the final approach course is provided or when conducting a timed approach from a holding fix. The altitude prescribed for the procedure turn is a minimum altitude until the aircraft is established on the inbound course. The maneuver must be completed within the distance specified in the profile view. For a hold-in-lieu-of-PT, the holding pattern direction must be flown as depicted and the specified leg length/timing must not be exceeded.

NOTE-

The pilot may elect to use the procedure turn or hold-in-lieu-of-PT when it is not required by the procedure, but must first receive an amended clearance from ATC. If the pilot is uncertain whether the ATC clearance intends for a procedure turn to be conducted or to allow for a straight-in approach, the pilot must immediately request clarification from ATC (14 CFR Section 91.123).

1. On U.S. Government charts, a barbed arrow indicates the maneuvering side of the outbound course on which the procedure turn is made. Headings are provided for course reversal using the

45 degree type procedure turn. However, the point at which the turn may be commenced and the type and rate of turn is left to the discretion of the pilot, limited by the charted remain within xx NM distance. Some of the options are the 45 degree procedure turn, the racetrack pattern, the teardrop procedure turn, or the 80 degree ↔ 260 degree course reversal. Racetrack entries should be conducted on the maneuvering side where the majority of protected airspace resides. If an entry places the pilot on the non-maneuvering side of the PT, correction to intercept the outbound course ensures remaining within protected airspace. Some procedure turns are specified by procedural track. These turns must be flown exactly as depicted.

2. Descent to the procedure turn PT completion altitude from the PT fix altitude when one has been published or assigned by ATC must not begin until crossing over the PT fix or abeam and proceeding outbound. Some procedures contain a note in the chart profile view that says "Maintain altitude or above until established outbound for procedure turn." See FIG 5-4-15. Neither procedures will simply depict an at or above altitude at the PT fix without a chart note. See FIG 5-4-16. Both are there to ensure required obstacle clearance is provided in the procedure turn entry zone. See FIG 5-4-17. Absence of a chart note or specified minimum altitude adjacent to the PT fix is an indication that descent to the procedure turn altitude can commence immediately upon crossing over the PT fix regardless of the direction of flight. This is because the minimum altitudes in the PT entry zone and the PT maneuvering zone are the same.

FIG 5-4-14
Example of an RNAV Approach with RF Leg

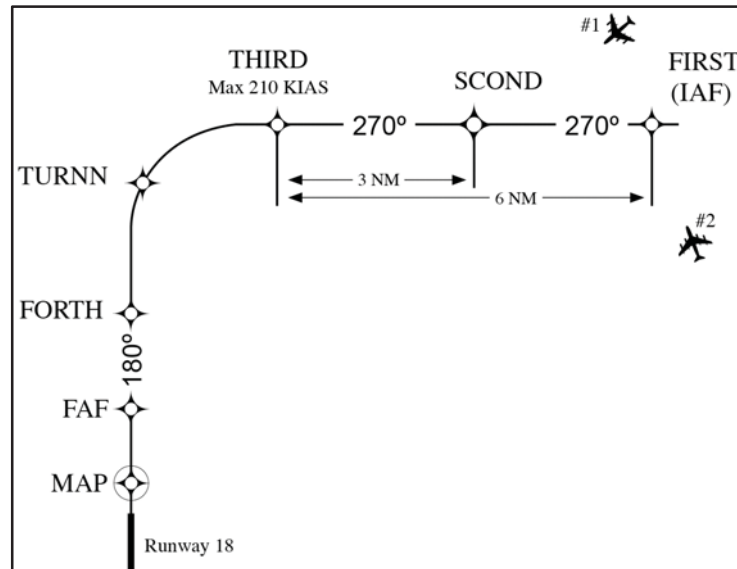


FIG 5-4-15

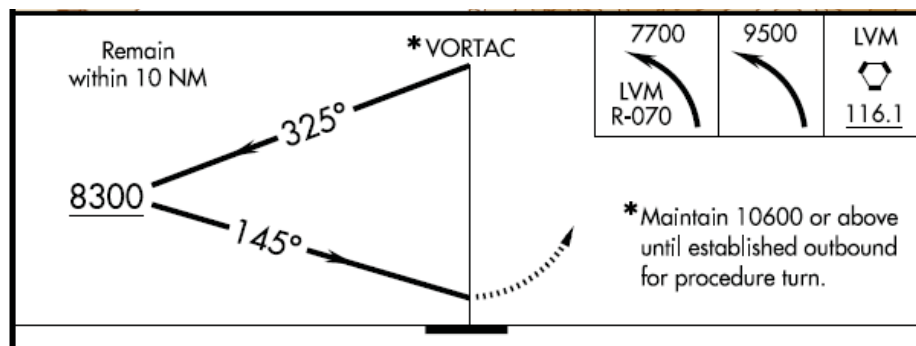


FIG 5-4-16


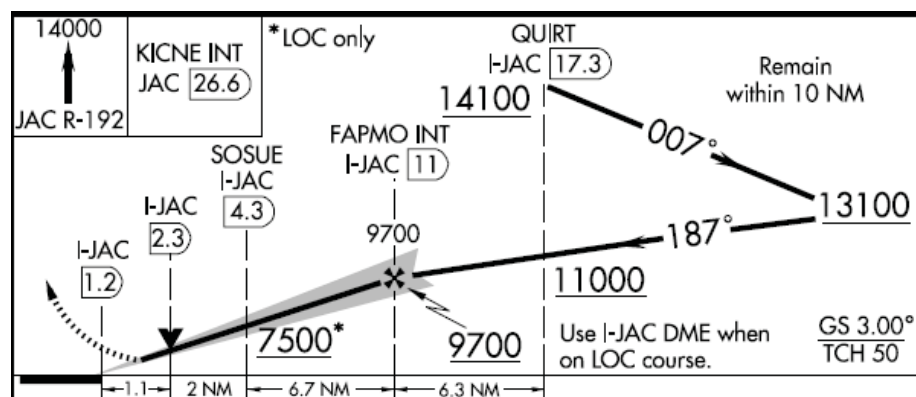


FIG 5-4-17

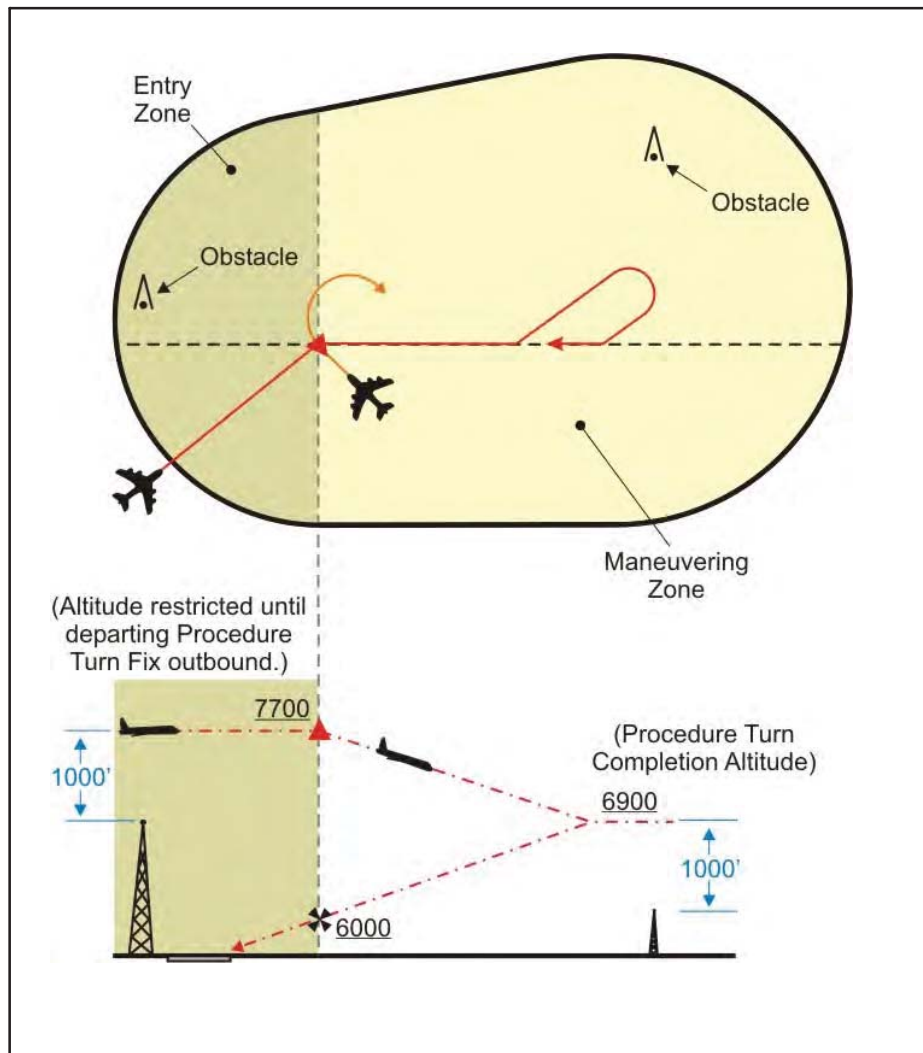

3. When the approach procedure involves a procedure turn a maximum speed of not greater than 200 knots IAS should be observed from first overhauling the course reversal IAF through the procedure turn maneuver to ensure containment within the obstruction clearance area. Pilots should begin the outbound turn immediately after passing the procedure turn fix. The procedure turn maneuver must be executed within the distance specified in the profile view. The normal procedure turn distance is 10 miles. This may be reduced to a minimum of 5 miles where only Category A or helicopter aircraft are to be operated or increased to as much as 15 miles to accommodate high performance aircraft.

4. A teardrop procedure or penetration turn may be specified in some procedures for a required course reversal. The teardrop procedure consists of departure from an initial approach fix on an outbound course followed by a turn to head and intercepting the inbound course at or prior to the intermediate fix or point. Its purpose is to permit an aircraft to reverse direction and lose considerable altitude within reasonably limited airspace. Where no fix is available to mark the beginning of the intermediate segment it must be assumed to commence at a point 10 miles prior to the final approach fix. When the facility is located on the airport an aircraft is considered to be on final approach upon completion of the penetration turn. However the final approach segment begins on the final approach course 10 miles from the facility.

5. A holding pattern in lieu of procedure turn may be specified for course reversal in some procedures. In such cases, the holding pattern is established over an intermediate fix or a final approach fix. The holding pattern distance or time specified in the profile view must be observed. For a hold-in-lieu-of-PT, the holding pattern direction must be flown as depicted and the specified leg length/timing must not be exceeded. Maximum holding airspeed limitations as set forth for all holding patterns apply. The holding pattern maneuver is completed when the aircraft is established on the inbound course after executing the appropriate entry. If cleared for the approach prior to returning to the holding fix, and the aircraft is at the prescribed altitude, additional circuits of the holding pattern are not necessary nor expected by ATC. If pilots elect to make additional circuits to lose excessive altitude or to become better established on course, it is their responsibility to so advise ATC upon receipt of their approach clearance.

NOTE—

Some approach charts have an arrival holding pattern depicted at the IAF using a “thin line” holding symbol. It is charted where holding is frequently required prior to starting the approach procedure so that detailed holding instructions are not required. The arrival holding pattern is not authorized unless assigned by Air Traffic Control. Holding at the same fix may also be depicted on the enroute chart. A hold-in-lieu of procedure turn is depicted by a “thick line” symbol, and is part of the instrument approach procedure as described in paragraph 5-4-9 (See U. S. Terminal Procedures booklets page E1 for both examples.)

6. A procedure turn is not required when an approach can be made directly from a specified intermediate fix to the final approach fix. In such cases, the term NoPT is used with the appropriate course and altitude to denote that the procedure turn is not required. If a procedure turn is desired and then cleared to do so by ATC, descent below the procedure turn altitude should not be made until the aircraft is established on the inbound course, since some NoPT altitudes may be lower than the procedure turn altitudes.

b. Limitations on Procedure Turns

1. In the case of a radar initial approach to a final approach fix or position, or a timed approach from a holding fix, or where the procedure specifies NoPT, no pilot may make a procedure turn unless, when final approach clearance is received, the pilot so advises

ATC and a clearance is received to execute a procedure turn.

2. When a teardrop procedure turn is depicted and a course reversal is required, this type turn must be executed.

3. When a holding pattern replaces a procedure turn, the holding pattern must be followed except when RADAR VECTORING is provided or when NoPT is shown on the approach course. The recommended entry procedures will ensure the aircraft remains within the holding pattern's protected airspace. As in the procedure turn, the descent from the minimum holding pattern altitude to the final approach fix altitude, when lower, may not commence until the aircraft is established on the inbound course. Where a holding pattern is established in-lieu-of a procedure turn, the maximum holding pattern airspeeds apply.

REFERENCE—

AIM, Holding, Paragraph 5-3-§2.

4. The absence of the procedure turn barb in the plan view indicates that a procedure turn is not authorized for that procedure.

5-4-10. Timed Approaches from a Holding Fix

a. TIMED APPROACHES may be conducted when the following conditions are met:

1. A control tower is in operation at the airport where the approaches are conducted.
2. Direct communications are maintained between the pilot and the center or approach controller until the pilot is instructed to contact the tower.
3. If more than one missed approach procedure is available, none require a course reversal.
4. If only one missed approach procedure is available, the following conditions are met:

(a) Course reversal is not required, and


(b) Reported ceiling and visibility are equal to or greater than the highest prescribed circling minimums for the IAP.

5. When cleared for the approach, pilots must not execute a procedure turn. 14 CFR Section 91.175.

b. Although the controller will not specifically state that timed approaches are in progress the assigning of a time to depart the final approach fix inbound nonprecision approach or the outer marker or fix used in lieu of the outer marker inbound precision approach is indicative that timed approach procedures are being utilized or in lieu of holding the controller may use radar vectors to the Final Approach Course to establish a mileage interval between aircraft that will ensure the appropriate time sequence between the final approach fix/outer marker or fix used in lieu of the outer marker and the airport

c. Each pilot in an approach sequence will be given advance notice as to the time they should leave the holding point on approach to the airport When a time to leave the holding point has been received the pilot should adjust the flight path to leave the fix as closely as possible to the designated time See FIG 5-4-18

FIG 5-4-18
Timed Approaches from a Holding Fix

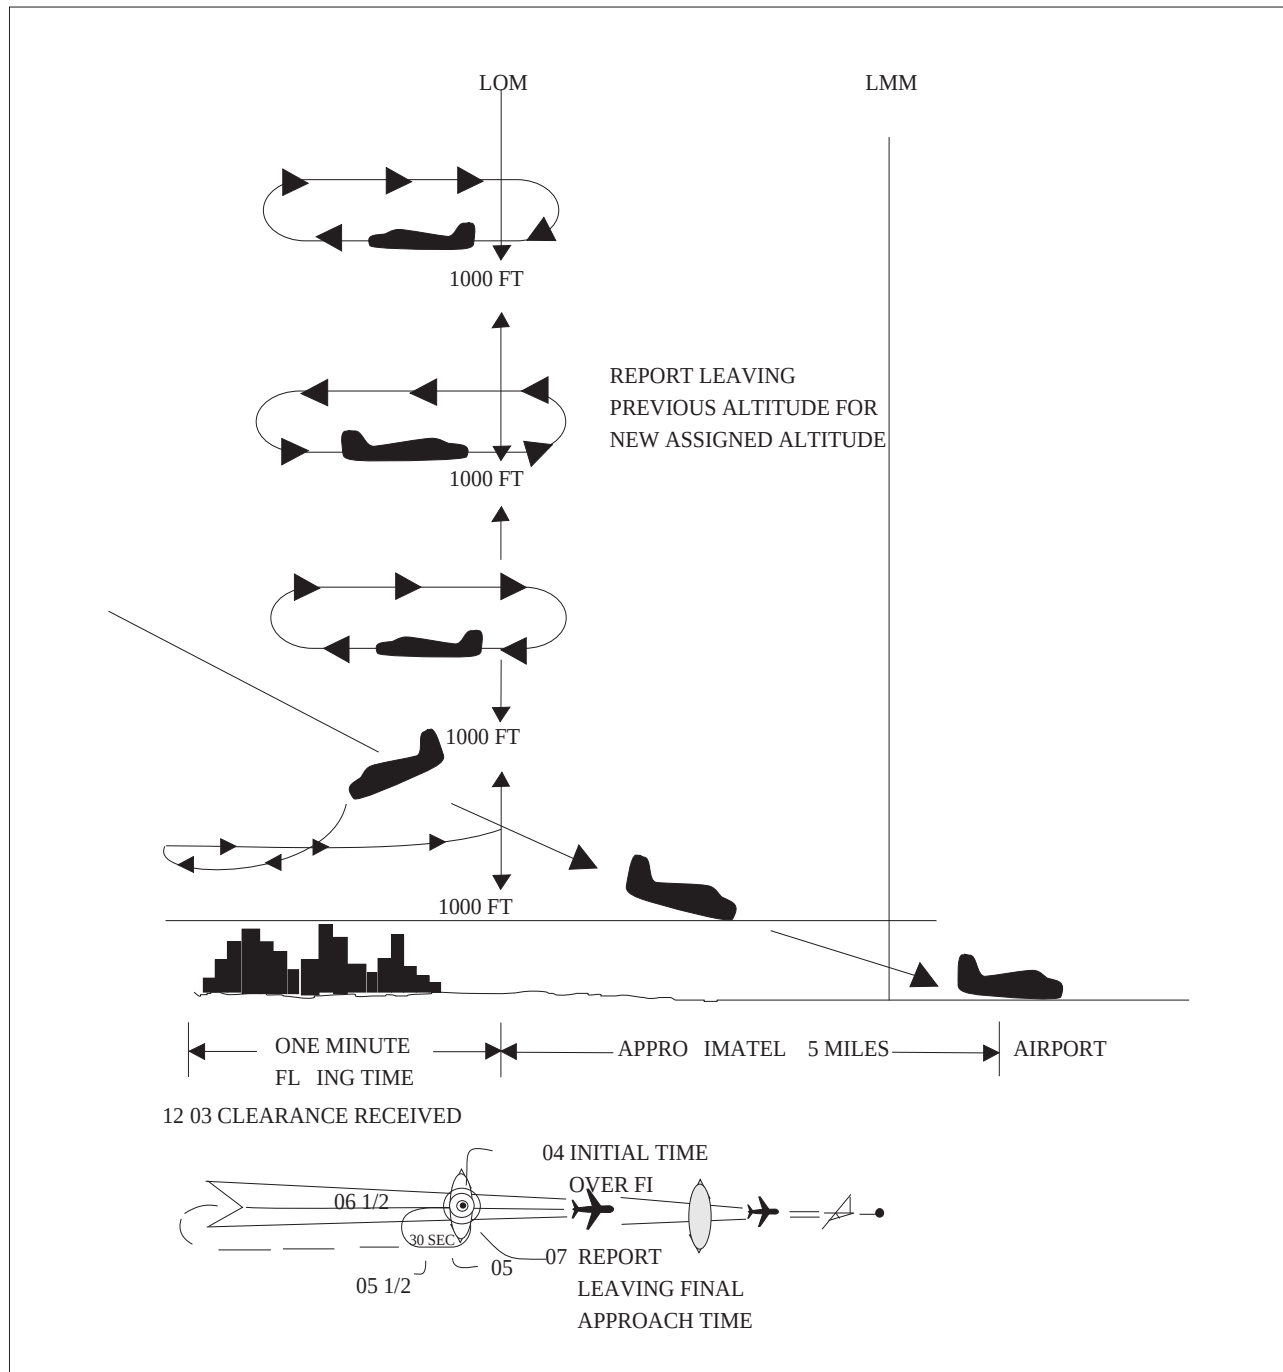

EXAMPLE-

At 12:03 local time, in the example shown, a pilot holding, receives instructions to leave the fix inbound at 12:07. These instructions are received just as the pilot has completed turn at the outbound end of the holding pattern and is proceeding inbound towards the fix. Arriving back over the fix, the pilot notes that the time is 12:04 and that there are 3 minutes to lose in order to leave the fix at the assigned time. Since the time remaining is more than two minutes, the pilot plans to fly a race track pattern rather than a 360 degree turn, which would use up 2 minutes. The turns at the ends of the race track pattern will consume approximately 2 minutes. Three minutes to go, minus 2 minutes required for the turns, leaves 1 minute for level flight. Since two portions of level flight will be required to get back to the fix inbound, the pilot halves the 1 minute remaining

and plans to fly level for 30 seconds outbound before starting the turn back to the fix on final approach. If the winds were negligible at flight altitude, this procedure would bring the pilot inbound across the fix precisely at the specified time of 12:07. However, if expecting headwind on final approach, the pilot should shorten the 30 second outbound course somewhat, knowing that the wind will carry the aircraft away from the fix faster while outbound and decrease the ground speed while returning to the fix. On the other hand, compensating for a tailwind on final approach, the pilot should lengthen the calculated 30 second outbound heading somewhat, knowing that the wind would tend to hold the aircraft closer to the fix while outbound and increase the ground speed while returning to the fix.

5-4-11. Radar Approaches

a. The only airborne radio equipment required for radar approaches is a functioning radio transmitter and receiver. The radar controller vectors the aircraft to align it with the runway centerline. The controller continues the vectors to keep the aircraft on course until the pilot can complete the approach and landing by visual reference to the surface. There are two types of radar approaches: Precision (PAR) and Surveillance (ASR).

b. A radar approach may be given to any aircraft upon request and may be offered to pilots of aircraft in distress or to expedite traffic. However, an ASR might not be approved unless there is an ATC operational requirement or in an unusual or emergency situation. Acceptance of a PAR or ASR by a pilot does not waive the prescribed weather minimums for the airport or for the particular aircraft operator concerned. The decision to make a radar approach when the reported weather is below the established minimums rests with the pilot.

c. PAR and ASR minimums are published on separate pages in the FAA Terminal Procedures Publication (TPP).

1. A PRECISION APPROACH (PAR) is one in which a controller provides highly accurate navigational guidance in azimuth and elevation to a pilot. Pilots are given headings to fly to direct them to and keep their aircraft aligned with the extended centerline of the landing runway. They are told to anticipate glidepath interception approximately 10 to 30 seconds before it occurs and when to start descent. The published Decision Height will be given only if the pilot requests it. If the aircraft is observed to deviate above or below the glidepath, the pilot is given the relative amount of deviation by use of terms slightly or well and is expected to adjust the aircraft's rate of descent/ascent to return to the glidepath. Trend information is also issued with respect to the elevation of the aircraft and may be modified by the terms rapidly and slowly. e.g., well above glidepath coming down rapidly.

Range from touchdown is given at least once each mile. If an aircraft is observed by the controller to proceed outside of specified safety zone limits in azimuth and/or elevation and continue to operate outside these prescribed limits, the pilot will be directed to execute a missed approach or to fly a specified course unless the pilot has the runway environment (runway approach lights, etc.) in sight. Navigational guidance in azimuth and elevation is provided to the pilot until the aircraft reaches the published Decision Height (DH). Advisory course and glidepath information is furnished by the controller until the aircraft passes over the landing threshold, at which point the pilot is advised of any deviation from the runway centerline. Radar service is automatically terminated upon completion of the approach.

2. A SURVEILLANCE APPROACH (ASR) is one in which a controller provides navigational guidance in azimuth only. The pilot is furnished headings to fly to align the aircraft with the extended centerline of the landing runway. Since the radar information used for a surveillance approach is considerably less precise than that used for a precision approach, the accuracy of the approach will not be as great and higher minimums will apply. Guidance in elevation is not possible, but the pilot will be advised when to commence descent to the Minimum Descent Altitude (MDA) or, if appropriate, to an intermediate step-down fix (Minimum Crossing Altitude) and subsequently to the prescribed MDA. In addition, the pilot will be advised of the location of the Missed Approach Point (MAP) prescribed for the procedure and the aircraft's position each mile on final from the runway airport or heliport or MAP as appropriate. If requested by the pilot, recommended altitudes will be issued at each mile based on the descent gradient established for the procedure down to the last mile that is at or above the MDA. Normally, navigational guidance will be provided until the aircraft reaches the MAP. Controllers will terminate guidance and instruct the pilot to execute a missed approach unless, at the MAP, the pilot has the runway

airport or heliport in sight or for a helicopter point-in-space approach the prescribed visual reference with the surface is established. Also if at any time during the approach the controller considers that safe guidance for the remainder of the approach cannot be provided the controller will terminate guidance and instruct the pilot to execute a missed approach. Similarly guidance termination and missed approach will be effected upon pilot request and for civil aircraft only controllers may terminate guidance when the pilot reports the runway airport/heliport or visual surface route point-in-space approach in sight or otherwise indicates that continued guidance is not required. Radar service is automatically terminated at the completion of a radar approach.

NOTE—

1. *The published MDA for straight-in approaches will be issued to the pilot before beginning descent. When a surveillance approach will terminate in a circle-to-land maneuver, the pilot must furnish the aircraft approach category to the controller. The controller will then provide the pilot with the appropriate MDA.*

2. **ASR APPROACHES ARE NOT AVAILABLE WHEN AN ATC FACILITY IS USING CENRAP.**

3. **A NO-GYRO APPROACH** is available to a pilot under radar control who experiences circumstances wherein the directional gyro or other stabilized compass is inoperative or inaccurate. When this occurs the pilot should so advise ATC and request a No-Gyro vector or approach. Pilots of aircraft not equipped with a directional gyro or other stabilized compass who desire radar handling may also request a No-Gyro vector or approach. The pilot should make all turns at standard rate and should execute the turn immediately upon receipt of instructions. For example TURN RIGHT STOP TURN. When a surveillance or precision approach is made the pilot will be advised after the aircraft has been turned onto final approach to make turns at half standard rate.

5-4-12. Radar Monitoring of Instrument Approaches

a. PAR facilities operated by the FAA and the military services at some joint-use civil and military and military installations monitor aircraft on instrument approaches and issue radar advisories to the pilot whenever the aircraft is below VFR minimums of 1 000 and 3 000 feet at night or whenever requested by a pilot. This service is provided only when the PAR Final Approach Course coincides with the final approach of the navigational aid and only during the operational hours of the PAR. The radar advisories serve only as a secondary aid since the pilot has selected the navigational aid as the primary aid for the approach.

b. Prior to starting final approach the pilot will be advised of the frequency on which the advisories will be transmitted. If for any reason radar advisories cannot be furnished the pilot will be so advised.

c. Advisory information derived from radar observations includes information on

1. Passing the final approach fix inbound nonprecision approach or passing the outer marker or fix used in lieu of the outer marker inbound precision approach.

NOTE—

At this point, the pilot may be requested to report sighting the approach lights or the runway.

2. Trend advisories with respect to elevation and/or azimuth radar position and movement will be provided.

NOTE—

Whenever the aircraft nears the PAR safety limit, the pilot will be advised that the aircraft is well above or below the glidepath or well left or right of course. Glidepath information is given only to those aircraft executing a precision approach, such as ILS or MLS. Altitude information is not transmitted to aircraft executing other than precision approaches because the descent portions of these approaches generally do not coincide with the depicted PAR glidepath. At locations where the MLS glidepath and PAR glidepath are not coincidental, only azimuth monitoring will be provided.

3. If after repeated advisories the aircraft proceeds outside the PAR safety limit or if a radical deviation is observed the pilot will be advised to execute a missed approach unless the prescribed visual reference with the surface is established

d. Radar service is automatically terminated upon completion of the approach

5-4-13. ILS/MLS Approaches to Parallel Runways

a. ATC procedures permit ILS instrument approach operations to dual or triple parallel runway configurations. ILS/MLS approaches to parallel runways are grouped into three classes: Parallel dependent ILS/MLS Approaches, Simultaneous Parallel independent ILS/MLS Approaches, and Simultaneous Close Parallel independent ILS Precision Runway Monitor PRM Approaches. See FIG 5-4-19. The classification of a parallel runway approach procedure is dependent on adjacent parallel runway centerline separation, ATC procedures, and airport ATC radar monitoring and communications capabilities. At some airports one or more parallel localizer courses may be offset up to 3 degrees. Offset localizer configurations result in loss of Category II capabilities and an increase in decision height 50

b. Parallel approach operations demand heightened pilot situational awareness. A thorough Approach Procedure Chart review should be conducted with as a minimum emphasis on the following approach chart information: name and number of the approach localizer frequency, inbound localizer/alignment course, glide slope, intercept altitude, decision height, missed approach instructions, special notes/procedures, and the assigned runway location/proximity to adjacent runways. Pilots will be advised that simultaneous ILS/MLS or simultaneous close parallel ILS PRM approaches are in use. This information may be provided through the ATIS.

c. The close proximity of adjacent aircraft conducting simultaneous parallel ILS/MLS and simultaneous close parallel ILS PRM approaches mandates strict pilot compliance with all ATC clearances. ATC assigned airspeeds, altitudes, and headings must be complied with in a timely manner. Autopilot coupled ILS/MLS approaches require pilot knowledge of procedures necessary to comply with ATC instructions. Simultaneous parallel ILS/MLS and simultaneous close parallel ILS PRM approaches necessitate precise localizer tracking to minimize final monitor controller intervention and unwanted No Transgression (NT) penetration. In the unlikely event of a breakout, ATC will not assign altitudes lower than the minimum vectoring altitude. Pilots should notify ATC immediately if there is a degradation of aircraft or navigation systems.

d. Strict radio discipline is mandatory during parallel ILS/MLS approach operations. This includes an alert listening watch and the avoidance of lengthy unnecessary radio transmissions. Attention must be given to proper call sign usage to prevent the inadvertent execution of clearances intended for another aircraft. Use of abbreviated call signs must be avoided to preclude confusion of aircraft with similar sounding call signs. Pilots must be alert to unusually long periods of silence or any unusual background sounds in their radio receiver. A stuck microphone may block the issuance of ATC instructions by the final monitor controller during simultaneous parallel ILS/MLS and simultaneous close parallel ILS PRM approaches.

REFERENCE-


AIM, Chapter 4, Section 2, Radio Communications Phraseology and Techniques, gives additional communications information.

e. Use of Traffic Collision Avoidance Systems. TCAS provides an additional element of safety to parallel approach operations. Pilots should follow recommended TCAS operating procedures presented in approved flight manuals, original equipment manufacturer recommendations, professional newsletters, and FAA publications.

FIG 5-4-19
Parallel Approaches

DEPENDENT PARALLEL APPROACHES


- Runway centerlines spaced between 2500'* and 9000'
- STAGGERED Approaches
- Final Monitor Controller NOT required
- * less than 2500' when specifically authorized

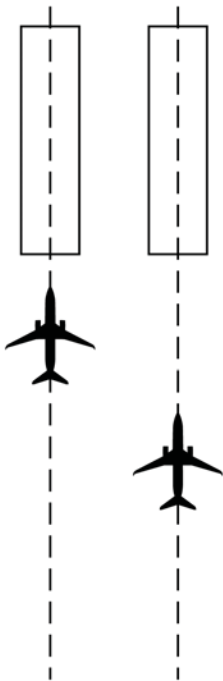

INDEPENDENT PARALLEL APPROACHES


SIMULTANEOUS PARALLEL APPROACHES

- Runway centerlines spaced between 4300' and 9000' (Duals & Trips)
- Final Monitor Controllers required

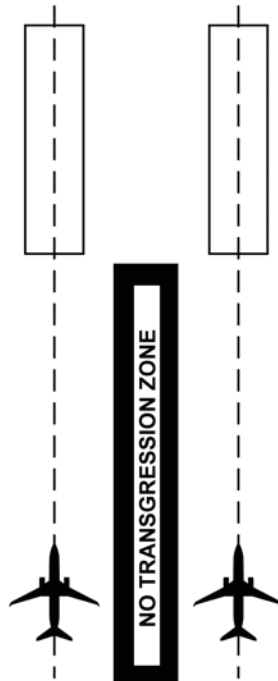

PRM APPROACHES (SIMULTANEOUS CLOSE PARALLEL)


- Runway centerlines spaced between 3000' and 4299' (Duals & Trips)
- Final Monitor Controllers required
- PRM required when spacing less than 3600'
- Attention All Users Page (AAUP) required

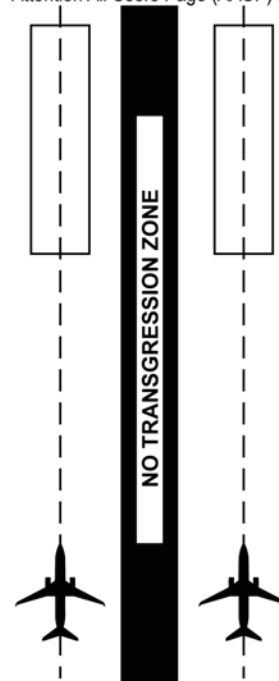

5-4-14. Parallel ILS/MLS Approaches (Dependent)

See FIG 5-4-20

FIG 5-4-20
Staggered Approaches

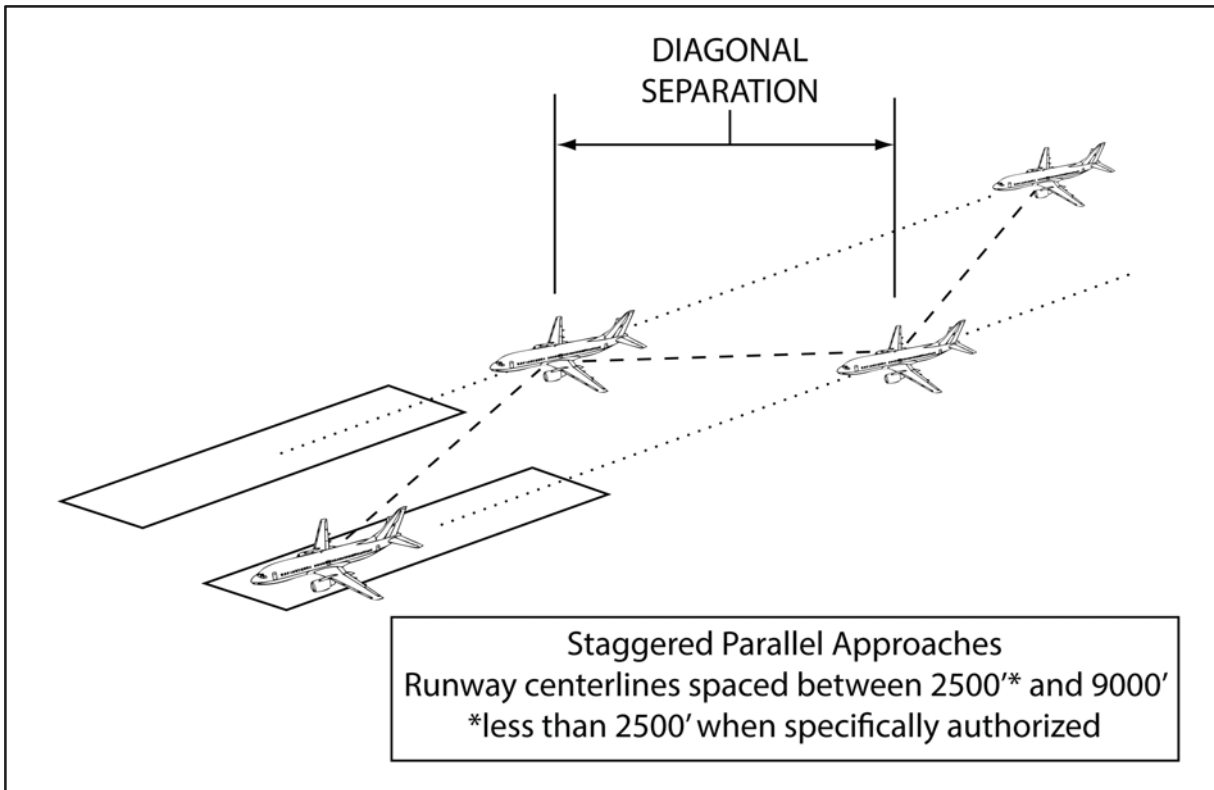

a. Parallel approaches are an ATC procedure permitting approaches to airports having parallel runway centerlines separated by between 2 500 feet and 9 000 feet. Integral parts of a total system are ILS, radar, communications, ATC procedures, and required airborne equipment. RNAV or GLS equipment may replace the required airborne ILS equipment.

b. A parallel dependent approach differs from a simultaneous independent approach in that the minimum distance between parallel runway centerlines is reduced; there is no requirement for radar monitoring or advisories, and a staggered separation of aircraft on the adjacent final course is required.

c. A minimum of 1.5 NM radar separation diagonal is required between successive aircraft on the adjacent final approach course when runway

centerlines are at least 2 500 feet but no more than 4 300 feet apart. When runway centerlines are more than 4 300 feet but no more than 9 000 feet apart, a minimum of 2 miles diagonal radar separation is provided. Aircraft on the same localizer/altitude course within 10 miles of the runway end are provided a minimum of 2.5 miles radar separation. In addition, a minimum of 1 000 feet vertical or a minimum of three miles radar separation is provided between aircraft during turn on to the parallel final approach course.


d. Whenever parallel approaches are in progress, pilots are informed that approaches to both runways are in use. The charted IAP also notes which runways may be used simultaneously. In addition, the radar controller will have the interphone capability of communicating with the tower controller where separation responsibility has not been delegated to the tower.

5-4-15. Simultaneous Parallel ILS/RNAV/GLS Approaches (Independent)

See FIG 5-4-21

FIG 5-4-21

Simultaneous Parallel ILS/RNAV/GLS Approaches

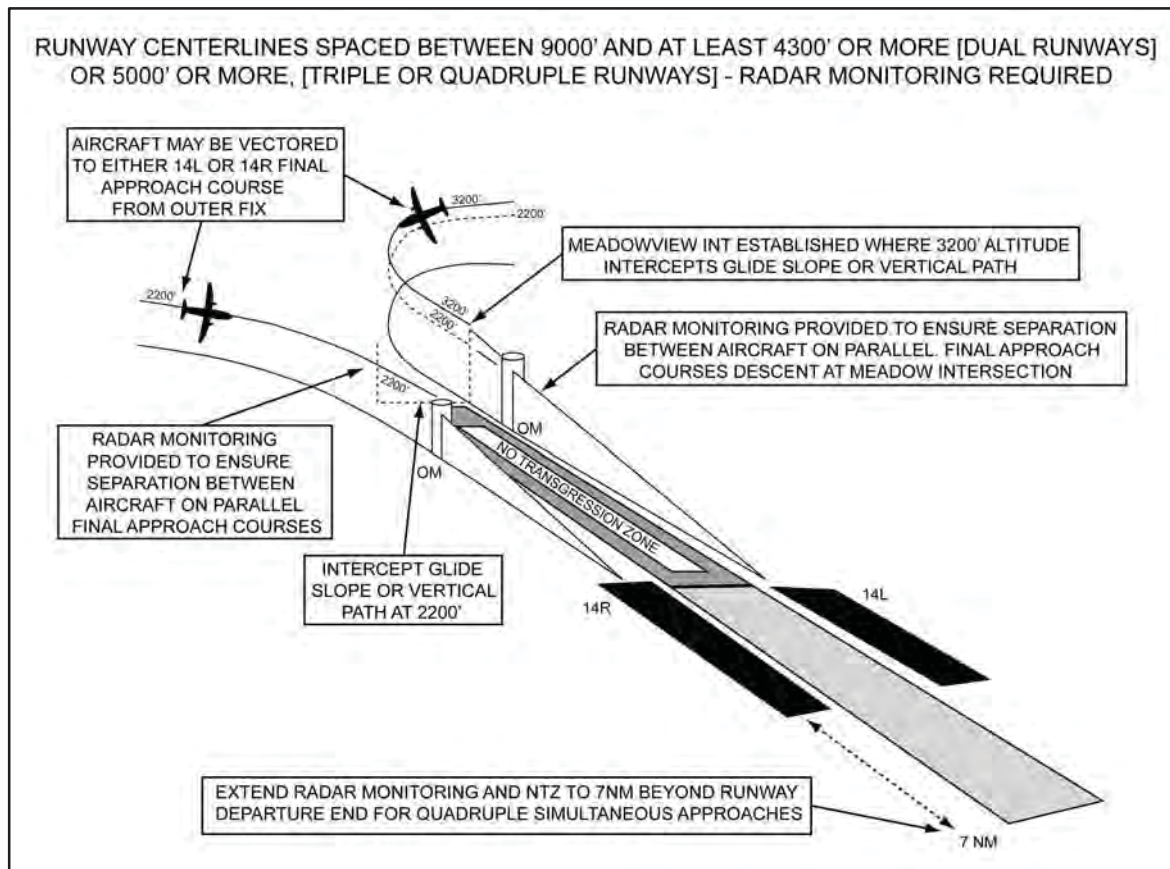

a. System. An approach system permitting simultaneous ILS/RNAV/GLS approaches to parallel run ways with centerlines separated by 4 300 to 9 000 feet and equipped with final monitor controllers. Simultaneous parallel approaches require NT radar monitoring to ensure separation between aircraft on the adjacent parallel approach course. Aircraft position is tracked by final monitor controllers who will issue instructions to aircraft observed deviating from the assigned final approach course. Staggered radar separation procedures are not utilized. Integral parts of a total system are ILS radar communications, ATC procedures, and required airborne equipment. The Approach Procedure Chart permitting simultaneous approaches will contain a note identifying the other run ways or approaches that may be used simultaneously. When advised that simultaneous approaches are in progress, pilots must advise approach control immediately of

malfunctioning or inoperative receivers or if a simultaneous approach is not desired.

b. NTZ Radar Monitoring. This service is provided for each simultaneous approach to ensure aircraft do not deviate from the final approach course. Radar monitoring includes instructions if an aircraft nears or penetrates the prescribed NT an area 2 000 feet wide located equidistant between final approach courses. This service will be provided as follows:

1. During turn on to parallel final approach, aircraft will be provided 3 miles radar separation or a minimum of 1 000 feet vertical separation. The assigned altitude must be maintained until intercepting the glide path unless cleared otherwise by ATC. Aircraft will not be vectored to intercept the final approach course at an angle greater than thirty degrees.

2. The final monitor controller will have the capability of overriding the tower controller on the tower frequency

3. Aircraft observed to overshoot the turn-on or to continue on a track which will penetrate the NT will be instructed to return to the correct final approach course immediately. The final monitor controller may also issue missed approach or breakout instructions to the deviating aircraft.

PHRASEOLOGY–

“(Aircraft call sign) YOU HAVE CROSSED THE FINAL APPROACH COURSE. TURN (left/right) IMMEDIATELY AND RETURN TO THE FINAL APPROACH COURSE,”

or

“(aircraft call sign) TURN (left/right) AND RETURN TO THE FINAL COURSE.”

4. If a deviating aircraft fails to respond to such instructions or is observed penetrating the NT, the aircraft on the adjacent final approach course will be issued a breakout instruction.

PHRASEOLOGY–


“TRAFFIC ALERT (aircraft call sign) TURN (left/right) IMMEDIATELY HEADING (degrees), (climb/descend) AND MAINTAIN (altitude).”

5. Radar monitoring will automatically be terminated when visual separation is applied. The aircraft reports the approach lights or runway in sight or the aircraft is 1 mile or less from the runway threshold. Final monitor controllers will **not** advise pilots when radar monitoring is terminated.

5-4-16. Simultaneous Close Parallel ILS/RNAV/GLS PRM Approaches (Independent) and Simultaneous Offset Instrument Approaches (SOIA)

See FIG 5-4-22

FIG 5-4-22
PRM Approaches
(Simultaneous Close Parallel)

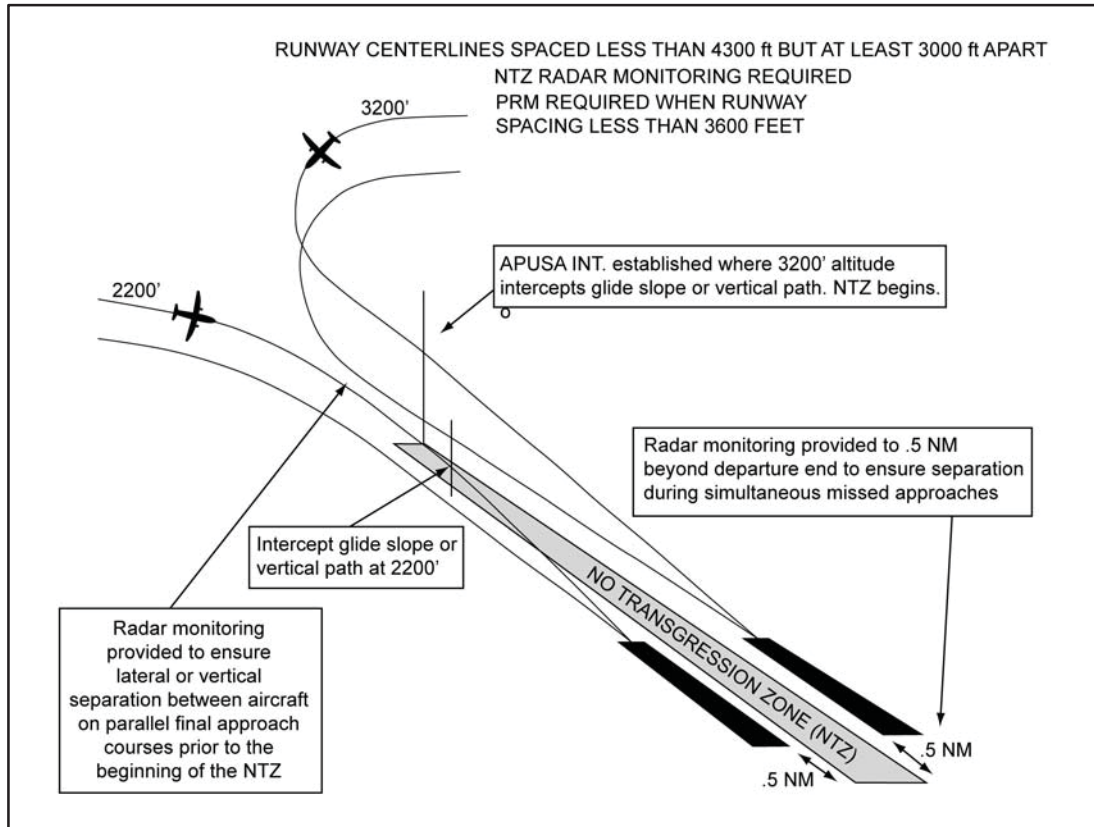

a. System.

1. A Precision Runway Monitor (PRM) is a no transgression zone (NTZ) radar monitoring system that is required to conduct closely spaced simultaneous PRM approaches to parallel runways with centerlines separated by **less** than 3 600 feet but at least 3 400 feet for parallel approach courses and at least 3 000 feet if one approach course is offset by 2.5 to 3.0 degrees. The NTZ is monitored by two PRM monitor controllers, one for each approach course. The PRM system provides high resolution ATC radar displays, automated aircraft tracking software which provides aircraft identification, position, speed, and a ten second projected position, as well as visual and aural controller alerts. Simultaneous close parallel approaches below 3 600 feet require the PRM system to supplement requirements for simultaneous parallel

approaches described in Paragraph 5-4-15 Simultaneous Parallel ILS/RNAV/GLS Approaches Independent.

(a) RNAV and GLS PRM approaches utilize the same applicable notations and the same fixes, crossing altitudes, and missed approach procedures as the ILS PRM or LDA PRM approach. It overlays vertical guidance for an RNAV or GLS PRM approach must be used when substituting for an ILS PRM or LDA PRM approach.

(b) RNAV and GLS PRM approaches may be substituted for

(1) one or both of the ILS PRM approaches in a simultaneous close parallel operation, or

(2) the ILS PRM and/or LDA PRM approach in a Simultaneous Offset Instrument Approach (SOIA) operation

(c) The pilot may request to fly the RNAV or GLS PRM approach in lieu of either the ILS PRM and LDA PRM approaches. ATIS may advertise RNAV or GLS PRM approaches to the effected runway or runways in the event of the loss of ground based NAVAIDS. The Attention All Users Page will address ILS PRM, LDA PRM, and RNAV PRM or GLS PRM approaches as applicable. In the remainder of this section

(1) The RNAV or GLS PRM approaches may be substituted when reference is made to an ILS LOC or SOIA offset LDA PRM approach

(2) The RNAV or GLS PRM Missed Approach Point (MAP) in SOIA operations may be substituted when reference is made to the LDA PRM MAP

2. Flight Management System (FMC) coding of a SOIA offset RNAV or GLS approach is different than other RNAV and GLS approach coding. The charted MAP and the FMC coded MAP (fictitious threshold, waypoint, FTP) are not collocated. The FTP is designated in the approach coding as the MAP so that vertical guidance is available to the runway threshold, as does the LDA glideslope. This vertical guidance may be utilized for situational awareness in the visual segment of the approach between the charted MAP and runway threshold.

As a result of coding the FTP as the MAP, a heading must initially be flown either by hand or autopilot in heading mode before engaging LNAV when executing a missed approach at or past the charted MAP. Notes on the charted IAP and in the Attention All Users Page (AAUP) make specific reference to this procedure.

The charted MAP is coded as a stepdown fix in the FMC approach coding because the FTP WP is coded as the MAP. Some FMCs will not display stepdown fixes inside the FAF. For those FMCs, the charted MAP will not appear when the approach is line selected from the FMC. Use the distance from the FTP as shown on the charted IAP or other approved method to identify the location of the charted MAP.

Because the offset RNAV or GLS approach FTP is coded as the MAP, the FMC map display will depict

the initial missed approach course as beginning at the FTP. This depiction will not match the initial missed approach procedure depiction as charted on the IAP. Pilots are reminded that charted IAP guidance is to be followed, not the map display. When commencing a missed approach or go-around after the aircraft completes the initial charted missed approach turn, the remainder of the procedure coding is standard and can be navigated as with any other IAP.

NOTE—

All simultaneous independent approaches to runways or approach courses less than 4,300 feet apart are categorized as simultaneous close parallel and include PRM in the approach name. Between 4,299 feet and 3,600 feet runway spacing, PRM or other high update rate surveillance system to monitor the NTZ is not required.

(a) Simultaneous close parallel ILS PRM approaches are depicted on a separate Approach Procedure Chart titled ILS PRM Runway Simultaneous Close Parallel.

SOIA is an acronym for Simultaneous Offset Instrument Approach, a procedure used to conduct simultaneous approaches to runways spaced less than 3,000 feet but at least 750 feet apart. The SOIA procedure utilizes an ILS PRM approach to one runway and an offset Localizer Type Directional Aid (LDA) PRM approach with glide slope to the adjacent runway. In SOIA operations, aircraft are paired with the aircraft conducting the ILS PRM approach always positioned slightly ahead of the aircraft conducting the LDA PRM approach.

(b) The ILS PRM approach plates used in SOIA operations are identical to other ILS PRM approach plates with an additional note which provides the separation between the two runways used for simultaneous approaches. The LDA PRM approach plate displays the required notations for closely spaced approaches as well as depicting the visual segment of the approach.

(c) When course centerline spacing is less than 3,600 feet but at least 3,000 feet, controllers monitor the SOIA ILS PRM and LDA PRM approaches with a PRM system using high update radar and high resolution ATC radar displays in exactly the same manner as is done for ILS PRM approaches. The procedures and system requirements for SOIA ILS PRM and LDA PRM approaches are identical with those used for simultaneous close parallel ILS PRM approaches until near the LDA PRM approach missed approach point (MAP) — here visual acuity

ition of the ILS aircraft by the aircraft conducting the LDA PRM approach occurs. Since the ILS PRM and LDA PRM approaches are identical except for the visual segment in the SOIA concept, an understanding of the procedures for conducting ILS PRM approaches is essential before conducting a SOIA ILS PRM or LDA PRM operation.

(d) In SOIA, the approach course separation instead of the runway separation meets established close parallel approach criteria. Refer to FIG 5-4-23 for the generic SOIA approach geometry. A visual segment of the LDA PRM approach is established between the LDA MAP and the runway threshold. Aircraft transition in visual conditions from the LDA course beginning at the LDA MAP to align with the runway and can be stabilized by 500 feet above ground level (AGL) on the extended runway centerline. Aircraft will be paired in SOIA operations with the ILS aircraft ahead of the LDA aircraft prior to the LDA aircraft reaching the LDA MAP. A cloud ceiling for the approach is established so that the LDA aircraft has nominally 30 seconds to acquire the leading ILS aircraft prior to the LDA aircraft reaching the LDA MAP. If visual acquisition is not accomplished, a missed approach must be executed at the LDA MAP.

b. Requirements.

Besides system requirements as identified in subparagraph a above, all pilots must have completed special training before accepting a clearance to conduct ILS PRM or LDA PRM Simultaneous Close Parallel Approaches.

1. Pilot Training Requirement. Pilots must complete **special pilot training** as outlined below before accepting a clearance for a simultaneous close parallel ILS PRM or LDA PRM approach.

(a) For operations under 14 CFR Parts 121, 129, and 135, pilots must comply with FAA approved company training as identified in their Operations Specifications. Training at a minimum must require pilots to view the FAA video ILS PRM AND SOIA APPROACHES INFORMATION FOR AIR CARRIER PILOTS. Refer to http://www.faa.gov/training_testing/training/prm/ for additional information and to view or download the video.

(b) For operations under Part 91

(1) Pilots operating **transport category** aircraft must be familiar with PRM operations as contained in this section of the AIM. In addition, **pilots operating transport category aircraft** must view the FAA video ILS PRM AND SOIA APPROACHES INFORMATION FOR AIR CARRIER PILOTS. Refer to http://www.faa.gov/training_testing/training/prm/ for additional information and to view or download the video.

(2) Pilots **not** operating **transport category** aircraft must be familiar with PRM and SOIA operations as contained in this section of the AIM. The FAA strongly recommends that pilots **not** involved in **transport category** aircraft operations view the FAA video ILS PRM AND SOIA APPROACHES INFORMATION FOR GENERAL AVIATION PILOTS. Refer to http://www.faa.gov/training_testing/training/prm/ for additional information and to view or download the video.

2. ATC Directed Breakout. An ATC directed breakout is defined as a vector off the ILS or LDA approach course in response to another aircraft penetrating the NT the 2 000 foot side area located a distance between the two approach courses that is monitored by the PRM monitor controllers.

3. Dual Communications. The aircraft flying the ILS PRM or LDA PRM approach must have the capability of enabling the pilot/s to listen to two communications frequencies simultaneously.

c. Radar Monitoring. Simultaneous close parallel ILS PRM and LDA PRM approaches require that final monitor controllers utilize the PRM system when runways or in the case of SOIA, the final approach course separation are spaced less than 3 600 feet but at least 3 000 feet apart to ensure prescribed separation standards are met. Procedures and communications phraseology are also described in Paragraph 5-4-15 Simultaneous Parallel ILS/ RNAV/GLS Approaches Independent. A minimum of 3 miles radar separation or 1 000 feet vertical separation will be provided during the turn on to close parallel final approach courses. To ensure separation is maintained and in order to avoid an imminent situation during simultaneous close parallel ILS PRM or SOIA ILS PRM and LDA PRM approaches, pilots must immediately comply with PRM monitor controller instructions. In the event of a missed approach, radar monitoring is provided to one half mile beyond the more distant of the two runway departure ends for ILS PRM approaches. In SOIA, PRM radar monitor


ing terminates at the LDA MAP. Final monitor controllers will **not** notify pilots when radar monitoring is terminated.

d. Attention All Users Page (AAUP). Multiple PRM approach charts at the same airport have a single AAUP associated with them that must be referred to in preparation for conducting the approach. This page contains the following instructions that must be followed if the pilot is unable to accept an ILS PRM or

LDA PRM approach

1. At airports that conduct PRM operations ILS PRM and the case of airports where SOIAs are conducted ILS PRM and LDA PRM approaches pilots who are unable to participate will be afforded appropriate arrival services as operational conditions permit and must notify the controlling ARTCC as soon as practical but at least 100 miles from destination.

FIG 5-4-23
SOIA Approach Geometry

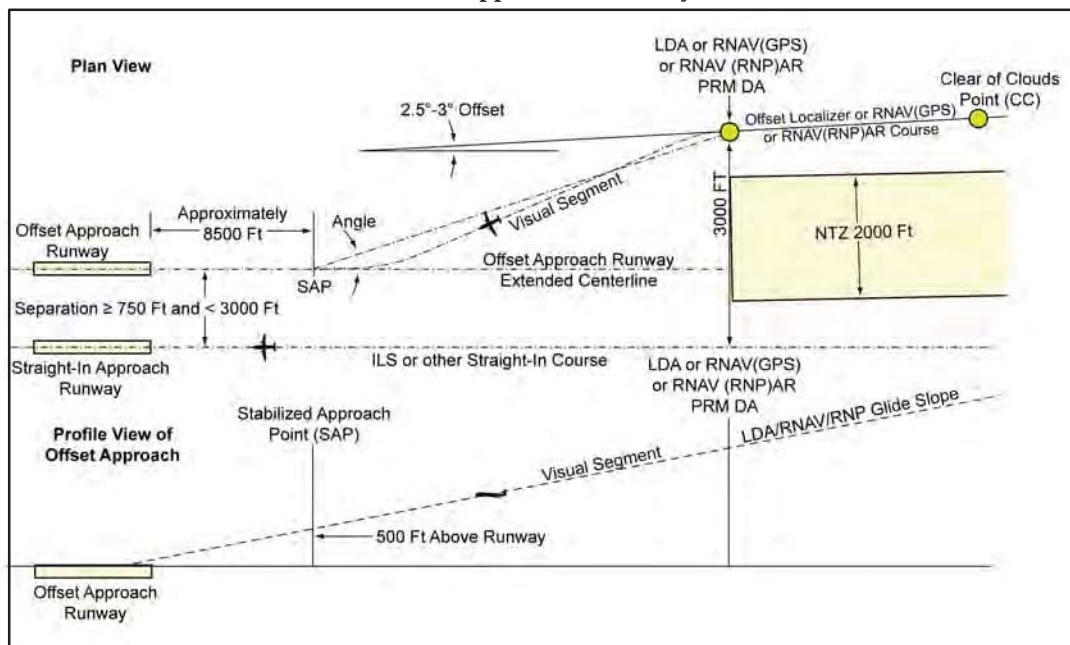

NOTE—

- SAP** The SAP is a design point along the extended centerline of the intended landing runway on the glide slope at 500 feet above the landing threshold. It is used to verify a sufficient distance is provided for the visual maneuver after the missed approach point (MAP) to permit the pilots to conform to approved, stabilized approach criteria.
- MAP** The point along the LDA where the course separation with the adjacent ILS reaches 3,000 feet. The altitude of the glide slope at that point determines the approach minimum descent altitude and is where the NTZ terminates. Maneuvering inside the MAP is done in visual conditions.
- Angle** The angle formed at the intersection of the extended LDA runway centerline and a line drawn between the LDA MAP and the SAP. The size of the angle is determined by the FAA SOIA computer design program, and is dependent on whether CAT D aircraft use the LDA and the spacing between the runways.
- Visibility** Distance from MAP to runway threshold in statute miles (light credit applies).
- Procedure** LDA aircraft must see the runway landing environment and, if less than standard radar separation exists between the aircraft on the adjacent ILS course, the LDA aircraft must visually acquire the ILS aircraft and report it in sight to ATC prior to the LDA MAP.
- CC** Clear of Clouds.

2. The AAUP covers the following operational topics

Bullet points are published which summarize the PRM procedures which apply to each approach. The following information may be summarized in the bullet points or published in more detail in the Expanded Procedures section of the AAUP

(a) ATIS. When the ATIS broadcast advises ILS PRM approaches are in progress or ILS PRM and LDA PRM approaches in the case of SOIA pilots should brief to fly the ILS PRM or LDA PRM approach. If later advised to expect the ILS or LDA approach should one be published the ILS PRM or LDA PRM chart may be used after completing the following briefing items. The pilot may also request to fly the RNAV GPS PRM approach in lieu of either the ILS PRM and LDA PRM approach. In the event of the loss of ground based NAVAIDS the ATIS may advertise RNAV GPS PRM approaches to the effected runway or runways

(1) Minimums and missed approach procedures are unchanged

(2) PRM Monitor frequency no longer required

(3) ATC may assign a lower altitude for glide slope intercept

NOTE–

In the case of the LDA PRM approach, this briefing procedure only applies if an LDA-DME approach is also published.

In the case of the SOIA ILS PRM and LDA PRM procedure the AAUP describes the weather conditions in which simultaneous approaches are authorized

Simultaneous approach weather minimums are
feet ceiling x miles visibility

(b) Dual VHF Communications Required. To avoid blocked transmissions each runway will have two frequencies a primary and a PRM monitor frequency. The tower controller will transmit on both frequencies. The monitor controller's transmissions if needed will override both frequencies. Pilots will ONLY transmit on the tower controller's frequency but will listen to both frequencies. Select the PRM monitor frequency audio only when instructed by ATC to contact the tower. The volume levels should be set about the same on both radios so that the

pilots will be able to hear transmissions on at least one frequency if the other is blocked. Site specific procedures take precedence over the general information presented in this paragraph. Refer to the AAUP for applicable procedures at specific airports

NOTE–

At SFO, pilots conducting SOIA operations select the monitor frequency audio when communicating with the final radar controller. In this special case, the monitor controller's transmissions, if required, override the final controller's frequency.

(c) Breakouts. Breakouts differ from other types of abandoned approaches in that they can happen anywhere and unexpectedly. Pilots directed by ATC to break off an approach must assume that an aircraft is blundering toward them and a breakout must be initiated **immediately**

(1) Hand-fly breakouts. All breakouts are to be hand flown to ensure the maneuver is accomplished in the shortest amount of time

(2) ATC Directed "Breakouts." ATC directed breakouts will consist of a turn and a climb or descent. Pilots must always initiate the breakout in response to an air traffic controller's instruction. Controllers will give a descending breakout only when there are no other reasonable options available but in no case will the descent be below the minimum vectoring altitude (MVA) which provides at least 1,000 feet required obstruction clearance. The AAUP may provide the MVA in the final approach segment as _____ feet at _____ Name Airport

NOTE–

"TRAFFIC ALERT." If an aircraft enters the "NO TRANSGRESSION ZONE" (NTZ), the controller will breakout the threatened aircraft on the adjacent approach. The phraseology for the breakout will be:

PHRASEOLOGY–

TRAFFIC ALERT, (aircraft call sign) TURN (left/right) IMMEDIATELY, HEADING (degrees), CLIMB/DESCEND AND MAINTAIN (altitude).

(d) ILS PRM Navigation. The pilot may find crossing altitudes published along the final approach course. If the approach geometry warrants it the pilot is advised that descending on the ILS glideslope ensures complying with any charted crossing restrictions

(e) SOIA and ILS PRM differences as noted on the AAUP

(1) ILS PRM, LDA Traffic (only published on the AAUP when the ILS PRM approach

is used in conjunction with an LDA PRM approach to the adjacent runway). To provide better situational awareness and because traffic on the LDA may be visible on the ILS aircraft's TCAS, pilots are reminded of the fact that aircraft will be maneuvering behind them to align with the adjacent runway. While conducting the ILS PRM approach to Runway, other aircraft may be conducting the offset LDA PRM approach to Runway. These aircraft will approach from the left/right rear and will realign with Runway after making visual contact with the ILS traffic. Under normal circumstances, these aircraft will not pass the ILS traffic.

(2) SOIA LDA PRM Items. The AAUP section for the SOIA LDA PRM approach contains most information found in the ILS PRM section. It replaces certain information as seen below and provides pilots with the procedures to be used in the visual segment of the LDA PRM approach from the LDA MAP until landing.

(3) SOIA LDA PRM Navigation (replaces ILS PRM (d) and (1) above). The pilot may find crossing altitudes published along the final approach course. The pilot is advised that descending on the LDA glideslope ensures complying with any charted crossing restrictions. Remain on the LDA course until passing the LDA MAP name in intersection prior to maneuvering to align with the centerline of Runway.

(4) SOIA (Name) Airport Visual Segment (replaces ILS PRM (1) above). Pilot procedures for navigating beyond the LDA MAP are spelled out. If ATC advises that there is traffic on the adjacent ILS, pilots are authorized to continue past the LDA MAP to align with runway centerline when:

[a] the ILS traffic is in sight and is expected to remain in sight

[b] ATC has been advised that traffic is in sight. ATC is not required to acknowledge this transmission.

[c] the runway environment is in sight.

Otherwise, a missed approach must be executed. Between the LDA MAP and the runway threshold, pilots conducting the LDA PRM approach are responsible for separating themselves visually from traffic conducting the ILS PRM approach to the adjacent runway, which means maneuvering the aircraft

as necessary to avoid that traffic until landing and providing wake turbulence avoidance if applicable. Pilots maintaining visual separation should advise ATC as soon as practical if visual contact with the aircraft conducting the ILS PRM approach is lost and execute a missed approach unless otherwise instructed by ATC.

(f) Differences between ILS and ILS PRM approaches of importance to the pilot.

(1) Runway Spacing. Prior to simultaneous close parallel approaches, most ATC directed breakouts were the result of two aircraft in trail on the same final approach course getting too close together. Two aircraft going in the same direction did not mandate quick reaction times. With PRM closely spaced approaches, two aircraft could be alongside each other navigating on courses that are separated by less than 4,300 feet. In the unlikely event that an aircraft blunders off its course and makes a first case turn of 30 degrees to ward the adjacent final approach course, closing speeds of 135 feet per second could occur that constitute the need for quick reaction. A blunder has to be recognized by the monitor controller and breakout instructions issued to the endangered aircraft. The pilot will not have any warning that a breakout is imminent because the blundering aircraft will be on another frequency. It is important that when a pilot receives breakout instructions, he/she assumes that a blundering aircraft is about to or has penetrated the NT and is heading to ward his/her approach course. The pilot must initiate a breakout as soon as safety allows. While conducting PRM approaches, pilots must maintain an increased sense of awareness in order to immediately react to an ATC instruction **breakout** and maneuver as instructed by ATC away from a blundering aircraft.

(2) Communications. To help in avoiding communication problems caused by stuck microphones and two parties talking at the same time, two frequencies for each runway will be in use during ILS PRM and LDA PRM approach operations: the primary tower frequency and the PRM monitor frequency. The tower controller transmits and receives in a normal fashion on the primary frequency and also transmits on the PRM monitor frequency. The monitor controller's transmissions override on both frequencies. The pilots flying the approach will listen to both frequencies but only transmit on the primary tower frequency. If the PRM monitor controller initiates

ates a breakout and the primary frequency is blocked by another transmission the breakout instruction will still be heard on the PRM monitor frequency

NOTE—

At some airports, the override capability may be on other than the tower frequency (KSFO overrides the final radar controller frequency). Pilots should carefully review the dual communications requirements on the AAUP prior to accepting a PRM approach.

(3) Hand-flown Breakouts. The use of the autopilot is encouraged while flying an ILS PRM or LDA PRM approach but the autopilot must be disengaged in the rare event that a breakout is issued. Simulation studies of breakouts have shown that a hand flown breakout can be initiated consistently faster than a breakout performed using the autopilot.

(4) TCAS. The ATC breakout instruction is the primary means of conflict resolution. TCAS, if installed, provides another form of conflict resolution in the unlikely event other separation standards could fail. TCAS is not required to conduct a closely spaced approach.

The TCAS provides only vertical resolution of aircraft conflicts while the ATC breakout instruction provides both vertical and horizontal guidance for conflict resolutions. Pilots should always immediately follow the TCAS Resolution Advisory (RA).

Whenever it is received, Should a TCAS RA be received before, during, or after an ATC breakout instruction is issued, the pilot should follow the RA even if it conflicts with the climb/descent portion of the breakout maneuver. If following an RA requires deviating from an ATC clearance, the pilot must advise ATC as soon as practical. While following an RA, it is **extremely important** that the pilot also comply with the turn portion of the ATC breakout instruction unless the pilot determines safety to be a factor. Adhering to these procedures assures the pilot that acceptable breakout separation margins will always be provided even in the face of a normal procedural or system failure.

(5) Breakouts. The probability is extremely low that an aircraft will blunder from its assigned approach course and enter the NT, causing ATC to breakout the aircraft approaching on the adjacent ILS or LDA course. However, because of the close proximity of the final approach courses, it is essential that pilots follow the ATC breakout

instructions precisely and expeditiously. The controller's breakout instructions provide conflict resolution for the threatened aircraft with the turn portion of the breakout being the single most important element in achieving maximum protection. A descending breakout will only be issued when it is the only controller option. In no case will the controller descend an aircraft below the MVA which will provide at least 1 000 feet clearance above obstacles. The pilot is not expected to exceed 1 000 feet per minute rate of descent in the event a descending breakout is issued.

5-4-17. Simultaneous Converging Instrument Approaches

a. ATC may conduct instrument approaches simultaneously to converging runways, i.e., runways having an included angle from 15 to 100 degrees at airports where a program has been specifically approved to do so.

b. The basic concept requires that dedicated separate standard instrument approach procedures be developed for each converging runway included. Missed Approach Points must be at least 3 miles apart and missed approach procedures ensure that missed approach protected airspace does not overlap.

c. Other requirements are radar availability, nonintersecting final approach courses, precision ILS approach systems on each runway, and if runways intersect, controllers must be able to apply visual separation as well as intersecting runway separation criteria. Intersecting runways also require minimums of at least 700 foot ceilings and 2 miles visibility. Straight-in approaches and landings must be made.

d. Whenever simultaneous converging approaches are in progress, aircraft will be informed by the controller as soon as feasible after initial contact or via ATIS. Additionally, the radar controller will have direct communications capability with the tower controller where separation responsibility has not been delegated to the tower.

5-4-18. RNP AR Instrument Approach Procedures

These procedures require authorization analogous to the special authorization required for Category II or III ILS procedures. Authorization required for RNP AR procedures are to be conducted by aircrews meeting

special training requirements in aircraft that meet the specified performance and functional requirements

a. Unique characteristics of RNP AR Approaches

1. RNP value. Each published line of minima has an associated RNP value. The indicated value defines the lateral and vertical performance requirements. A minimum RNP type is documented as part of the RNP AR authorization for each operator and may vary depending on aircraft configuration or operational procedures (e.g., GPS inoperative, use of flight director, or autopilot).

2. Curved path procedures. Some RNP approaches have a curved path, also called a radius-to-a-fix (RF) leg. Since not all aircraft have the capability to fly these arcs, pilots are responsible for knowing if they can conduct an RNP approach with an arc or not. Aircraft speeds, winds, and bank angles have been taken into consideration in the development of the procedures.

3. RNP required for extraction or not. Where required, the missed approach procedure may use RNP values less than RNP-1. The reliability of the navigation system has to be very high in order to conduct these approaches. Operation on these procedures generally requires redundant equipment as no single point of failure can cause loss of both approach and missed approach navigation.

4. Non-standard speeds or climb gradients. RNP AR approaches are developed based on standard approach speeds and a 200 ft/NM climb gradient in the missed approach. Any exceptions to these standards will be indicated on the approach procedure, and the operator should ensure they can comply with any published restrictions before conducting the operation.

5. Temperature Limits. For aircraft using barometric vertical navigation without temperature compensation to conduct the approach, low and high-temperature limits are identified on the procedure. Cold temperatures reduce the glidepath angle, while high temperatures increase the glidepath angle. Aircraft using barometric VNAV with temperature compensation or aircraft using an alternate means for vertical guidance (e.g., SBAS) may disregard the temperature restrictions. The charted temperature limits are evaluated for the final approach segment only. Regardless of charted temperature limits or temperature compensation by the FMS, the pilot may need to manually compensate for cold temperature on minimum altitudes and the decision altitude.

6. Aircraft size. The achieved minimums may be dependent on aircraft size. Large aircraft may require higher minimums due to gear height and/or wingspan. Approach procedure charts will be annotated with applicable aircraft size restrictions.

b. Types of RNP AR Approach Operations


1. RNP Stand-alone Approach Operations.

RNP AR procedures can provide access to runways regardless of the ground-based NAVAID infrastructure and can be designed to avoid obstacles, terrain, airspace, or resolve environmental constraints.

2. RNP Parallel Approach (RPA)


Operations. RNP AR procedures can be used for parallel approaches where the runway separation is adequate. See FIG 5-4-24. Parallel approach procedures can be used either simultaneously or as stand-alone operations. They may be part of either independent or dependent operations depending on the ATC ability to provide radar monitoring.

FIG 5-4-24

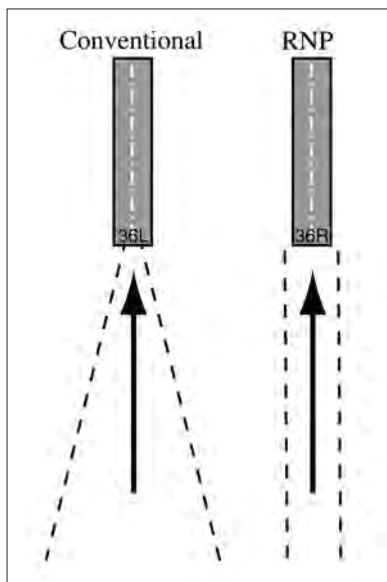


3. RNP Parallel Approach Runway Transitions (RPAT) Operations. RPAT approaches begin as a parallel IFR approach operation using simultaneous independent or dependent procedures. See FIG 5-4-25. Visual separation standards are used in the final segment of the approach after the final approach fix to permit the RPAT aircraft to transition in visual conditions along a predefined lateral and vertical path to align with the runway centerline.

FIG 5-4-25

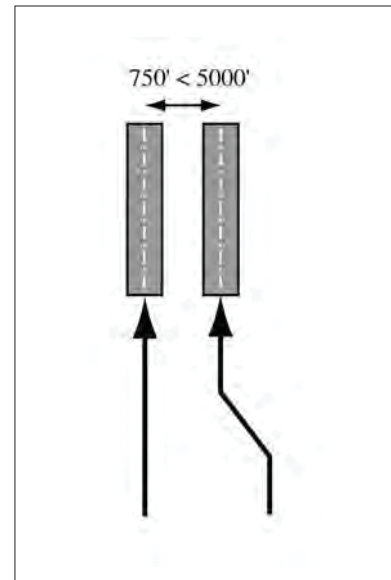

4. RNP Converging Runway Operations. At airports where runways converge but may or may not intersect, an RNP AR approach can provide a precise curved missed approach path that conforms to aircraft separation minimums for simultaneous operations. See FIG 5-4-26. By flying this curved missed approach path with high accuracy and containment provided by RNP, dual runway operations may continue to be used to lower ceiling and visibility values than currently available. This type of operation allows greater capacity at airports where it can be applied.

FIG 5-4-26

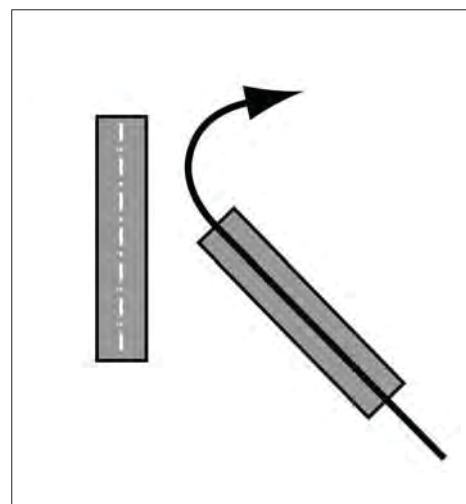

5-4-19. Side-step Maneuver

a. ATC may authorize a standard instrument approach procedure which serves either one of parallel runways that are separated by 1 200 feet or less followed by a straight-in landing on the adjacent runway.

b. Aircraft that will execute a side-step maneuver will be cleared for a specified approach procedure and landing on the adjacent parallel runway. Example: cleared ILS runway 7 left approach side-step to runway 7 right. Pilots are expected to commence the side-step maneuver as soon as possible after the runway or runway environment is in sight. Compliance with minimum altitudes associated with stepdown fixes is expected even after the side-step maneuver is initiated.

NOTE—

Side-step minima are flown to a Minimum Descent Altitude (MDA) regardless of the approach authorized.

c. Landing minimums to the adjacent runway will be based on nonprecision criteria and therefore higher than the precision minimums to the primary runway but will normally be lower than the published circling minimums.

5-4-20. Approach and Landing Minimums

a. **Landing Minimums.** The rules applicable to landing minimums are contained in 14 CFR Section 91.175. TBL 5-4-1 may be used to convert RVR to ground or flight visibility. For converting RVR values that fall between listed values, use the next higher RVR value; do not interpolate. For example, when converting 1800 RVR, use 2400 RVR with the resultant visibility of $1\frac{1}{2}$ mile.

b. **Obstacle Clearance.** Final approach obstacle clearance is provided from the start of the final segment to the runway or missed approach point, whichever occurs last. Side-step obstacle protection is provided by increasing the width of the final approach obstacle clearance area.


TBL 5-4-1

RVR Value Conversions

RVR	Visibility (statute miles)
1600	$\frac{1}{4}$
2400	$\frac{1}{2}$
3200	$\frac{5}{8}$
4000	$\frac{3}{4}$
4500	$\frac{7}{8}$
5000	1
6000	$1\frac{1}{4}$

1. Circling approach protected areas are defined by the tangential connection of arcs drawn from each runway end (see FIG 5-4-27). Circling approach protected areas developed prior to late 2012 used fixed radius distances dependent on aircraft approach category as shown in the table on page B2 of the U.S. TPP. The approaches using standard circling approach areas can be identified by the absence of the negative C symbol on the circling line of minima. Circling approach protected areas developed after late 2012 use the radius distance shown in the table on page B2 of the U.S. TPP dependent on aircraft approach category and the altitude of the circling MDA, which accounts for true airspeed increase with altitude. The approaches using expanded circling approach areas can be identified by the presence of the negative C symbol on the circling line of minima (see FIG 5-4-28). Because of obstacles near the airport, a portion of the circling area may be restricted by a procedural note; for example, Circling NAE of RW 17-35. Obstacle clearance is provided at the published minimums MDA for the pilot who makes a straight-in approach, side-steps, or circles. Once below the MDA, the pilot must see and avoid obstacles. Executing the missed approach after starting to maneuver usually places the aircraft beyond the MAP. The aircraft is clear of obstacles when at or above the MDA while inside the circling area but simply joining the missed approach ground track from the circling maneuver may not provide vertical obstacle clearance once the aircraft exits the circling area. Additional climb inside the circling area may be required before joining the missed approach track. See Paragraph 5-4-21 Missed Approach for additional considerations when starting a missed approach at other than the MAP.

FIG 5-4-27
Final Approach Obstacle Clearance

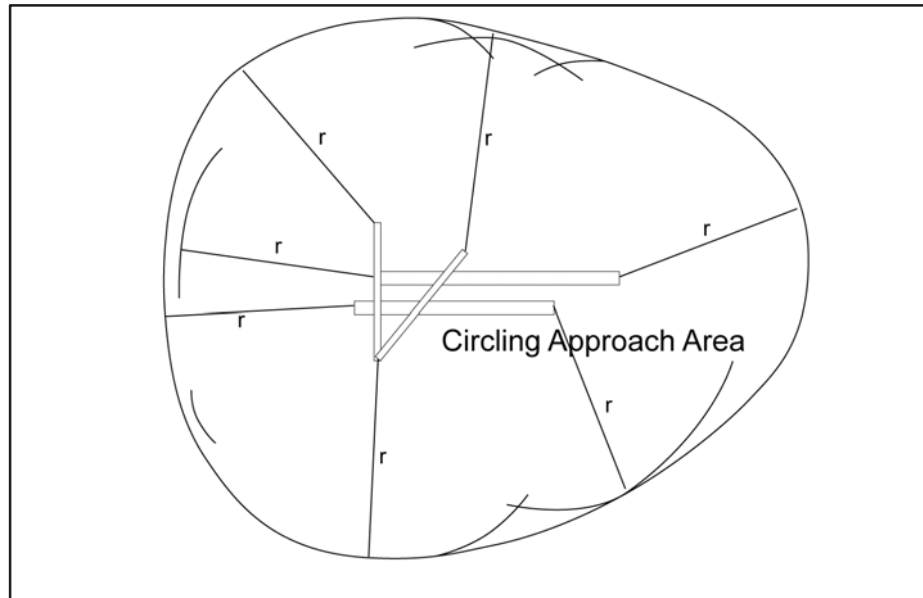

NOTE—

Circling approach area radii vary according to approach category and MSL circling altitude due to TAS changes – see FIG 5-4-28.

FIG 5-4-28
Standard and Expanded Circling Approach Radii in the U.S. TPP

STANDARD CIRCLING APPROACH MANEUVERING RADIUS

Circling approach protected areas developed prior to late 2012 used the radius distances shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category. The approaches using standard circling approach areas can be identified by the absence of the **C** symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
All Altitudes	1.3	1.5	1.7	2.3	4.5

****C** EXPANDED CIRCLING APPROACH MANEUVERING AIRSPACE RADIUS**


Circling approach protected areas developed after late 2012 use the radius distance shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category, and the altitude of the circling MDA, which accounts for true airspeed increase with altitude. The approaches using expanded circling approach areas can be identified by the presence of the **C** symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
1000 or less	1.3	1.7	2.7	3.6	4.5
1001-3000	1.3	1.8	2.8	3.7	4.6
3001-5000	1.3	1.8	2.9	3.8	4.8
5001-7000	1.3	1.9	3.0	4.0	5.0
7001-9000	1.4	2.0	3.2	4.2	5.3
9001 and above	1.4	2.1	3.3	4.4	5.5

2. **Precision Obstacle Free Zone (POFZ)** The POFZ is a volume of airspace above an area beginning at the runway threshold at the threshold elevation and centered on the extended runway centerline. The POFZ is 200 feet (60m) long and 800 feet (240m) wide. The POFZ must be clear when an aircraft on a vertically guided final approach is within 2 nautical miles of the runway threshold and the reported ceiling is below 250 feet or visibility less than $\frac{3}{4}$ statute mile

SM or runway visual range below 4,000 feet. If the POFZ is not clear, the MINIMUM authorized height above touchdown (HAT) and visibility is 250 feet and $\frac{3}{4}$ SM. The POFZ is considered clear even if the wing of the aircraft holding on a taxiway waiting for runway clearance penetrates the POFZ, however, neither the fuselage nor the tail may infringe on the POFZ. The POFZ is applicable at all runway ends including displaced thresholds.

FIG 5-4-29
Precision Obstacle Free Zone (POFZ)

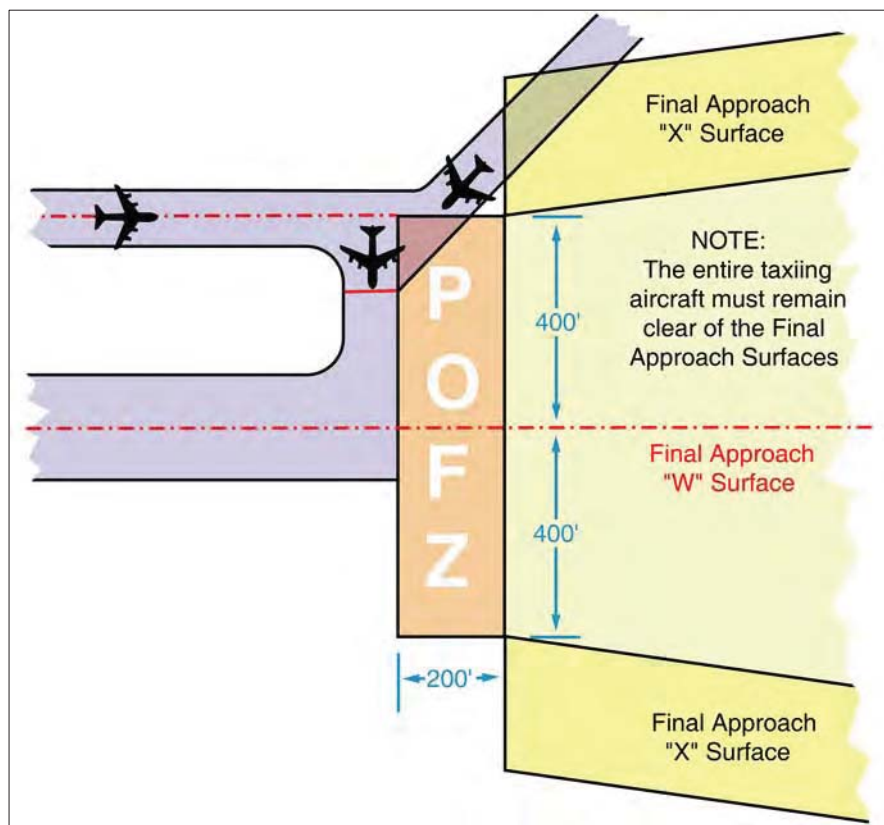

c. **Straight-in Minimums** are shown on the IAP when the final approach course is within 30 degrees of the runway alignment. 15 degrees for GPS IAPs and a normal descent can be made from the IFR altitude shown on the IAP to the runway surface. When either the normal rate of descent or the runway alignment factor of 30 degrees is exceeded, a straight-in minimum is not published and a circling minimum applies. The fact that a straight-in minimum is not published does not preclude pilots from landing straight-in if they have the active runway in sight and have sufficient time to

make a normal approach for landing. Under such conditions and when ATC has cleared them for landing on that runway, pilots are not expected to circle even though only circling minimums are published. If they desire to circle, they should advise ATC.

d. **Side-Step Maneuver Minimums.** Landing minimums for a side-step maneuver to the adjacent runway will normally be higher than the minimums to the primary runway.

e. Published Approach Minimums. Approach minimums are published for different aircraft categories and consist of a minimum altitude DA, DH, MDA, and required visibility. These minimums are determined by applying the appropriate TERPS criteria. When a fix is incorporated in a nonprecision final segment, two sets of minimums may be published: one for the pilot that is able to identify the fix, and a second for the pilot that cannot. Two sets of minimums may also be published when a second altimeter source is used in the procedure. When a nonprecision procedure incorporates both a stepdown fix in the final segment and a second altimeter source, two sets of minimums are published to account for the stepdown fix and a note addresses minimums for the second altimeter source.

f. Circling Minimums. In some busy terminal areas, ATC may not allow circling and circling minimums will not be published. Published circling minimums provide obstacle clearance when pilots remain within the appropriate area of protection. Pilots should remain at or above the circling altitude until the aircraft is continuously in a position from which a descent to a landing on the intended runway can be made at a normal rate of descent using normal maneuvers. Circling may require maneuvers at low altitude, at low airspeed, and in marginal weather conditions. Pilots must use sound judgment, have an in-depth knowledge of their capabilities, and fully understand the aircraft performance to determine the exact circling maneuver since weather, unique airport design, and the aircraft position, altitude, and airspeed must all be considered. The following basic rules apply:

1. Maneuver the shortest path to the base or downwind leg as appropriate, considering existing weather conditions. There is no restriction from passing over the airport or other runways.

2. It should be recognized that circling maneuvers may be made while VFR or other flying is in progress at the airport. Standard left turns or specific instruction from the controller for maneuvering must be considered when circling to land.

3. At airports without a control tower, it may be desirable to fly over the airport to observe wind and turn indicators and other traffic which may be on the runway or flying in the vicinity of the airport.

REFERENCE—

AC 90–66A, *Recommended Standards Traffic patterns for Aeronautical Operations at Airports without Operating Control Towers.*

4. The missed approach point (MAP) varies depending upon the approach flown. For vertically guided approaches, the MAP is at the decision altitude/decision height. Non-vertically guided and circling procedures share the same MAP and the pilot determines this MAP by timing from the final approach fix, by a fix, a NAVAID, or a waypoint. Circling from a GLS, an ILS, without a localizer line of minima, or an RNAV (GPS) approach without an LNAV line of minima is prohibited.

g. Instrument Approach at a Military Field. When instrument approaches are conducted by civil aircraft at military airports, they must be conducted in accordance with the procedures and minimums approved by the military agency having jurisdiction over the airport.

5–4–21. Missed Approach

- a. When a landing cannot be accomplished, advise ATC and, upon reaching the missed approach point defined on the approach procedure chart, the pilot must comply with the missed approach instructions for the procedure being used or with an alternate missed approach procedure specified by ATC.

- b. Obstacle protection for missed approach is predicated on the missed approach being initiated at the decision altitude/height (DA/H) or at the missed approach point and not lower than minimum descent altitude (MDA). A climb gradient of at least 200 feet per nautical mile is required, except for Copter approaches where a climb of at least 400 feet per nautical mile is required, unless a higher climb gradient is published in the notes section of the approach procedure chart. When higher than standard climb gradients are specified, the end point of the non-standard climb will be specified at either an altitude or a fix. Pilots must preplan to ensure that the aircraft can meet the climb gradient, expressed in feet per nautical mile, required by the procedure in the event of a missed approach, and be aware that flying at a higher than anticipated ground speed increases the climb rate requirement (feet per minute). Tables for the conversion of climb gradients (feet per nautical mile) to climb rate (feet per minute) based on ground speed are included on page D1 of the U.S. Terminal Procedures booklets. Reasonable buffers are provided for normal maneuvers. However, no

consideration is given to an abnormally early turn. Therefore, when an early missed approach is executed, pilots should, unless otherwise cleared by ATC, fly the IAP as specified on the approach plate to the missed approach point at or above the MDA or DH before executing a turning maneuver.

c. If visual reference is lost while circling-to-land from an instrument approach, the missed approach specified for that particular procedure must be followed, unless an alternate missed approach procedure is specified by ATC. To become established on the prescribed missed approach course, the pilot should make an initial climbing turn toward the landing runway and continue the turn until established on the missed approach course. Inasmuch as the circling maneuver may be accomplished in more than one direction, different patterns will be required to become established on the prescribed missed approach course, depending on the aircraft position at the time visual reference is lost. Adherence to the procedure will help assure that an aircraft will remain laterally within the circling and missed approach obstruction clearance areas. Refer to paragraph h concerning vertical obstruction clearance when starting a missed approach at other than the MAP. See FIG 5-4-30.

d. At locations where ATC radar service is provided, the pilot should conform to radar vectors when provided by ATC in lieu of the published missed approach procedure. See FIG 5-4-31.

e. Some locations may have a preplanned alternate missed approach procedure for use in the event the primary NAVAID used for the missed approach procedure is unavailable. To avoid confusion, the alternate missed approach instructions are not published on the chart. However, the alternate missed

approach holding pattern will be depicted on the instrument approach chart for pilot situational awareness and to assist ATC by not having to issue detailed holding instructions. The alternate missed approach may be based on NAVAIDs not used in the approach procedure or the primary missed approach. When the alternate missed approach procedure is implemented by NOTAM, it becomes a mandatory part of the procedure. The NOTAM will specify both the textual instructions and any additional equipment requirements necessary to complete the procedure. Air traffic may also issue instructions for the alternate missed approach when necessary, such as when the primary missed approach NAVAID fails during the approach. Pilots may request an ATC clearance for an alternate missed approach that requires equipment not necessary for the published approach procedure when the alternate missed approach is issued after beginning the approach. However, when the alternate missed approach is issued prior to beginning the approach, the pilot must either accept the entire procedure, including the alternate missed approach, or request a different approach procedure, or coordinate with ATC for alternative action to be taken, i.e., proceed to an alternate airport, etc.

f. When approach has been missed, request clearance for specific action, i.e., to alternative airport, another approach, etc.

g. Pilots must ensure that they have climbed to a safe altitude prior to proceeding off the published missed approach, especially in nonradar environments. Abandoning the missed approach prior to reaching the published altitude may not provide adequate terrain clearance. Additional climb may be required after reaching the holding pattern before proceeding back to the IAF or to an alternate

FIG 5-4-30
Circling and Missed Approach Obstruction Clearance Areas


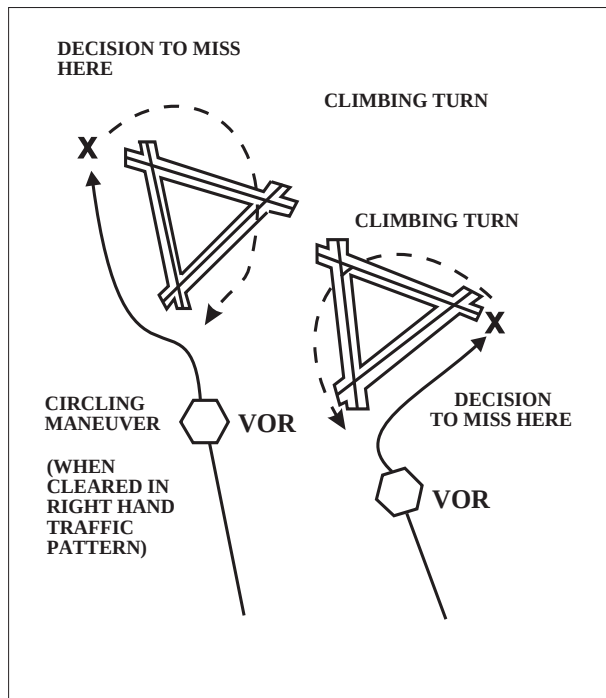


FIG 5-4-31
Missed Approach

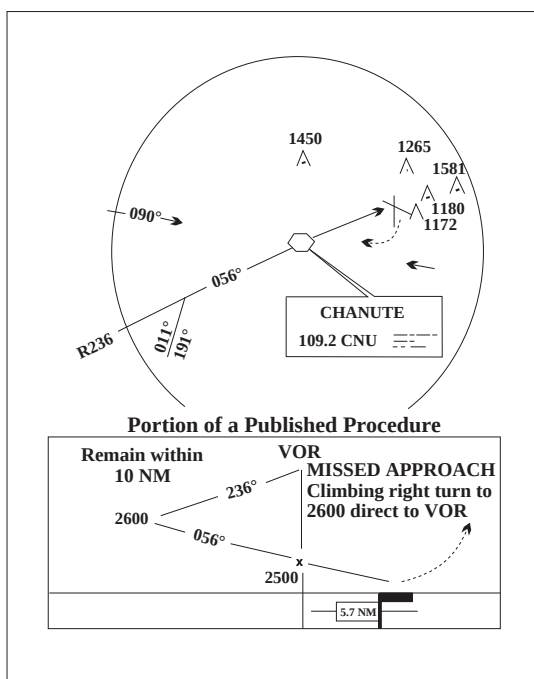

h. A clearance for an instrument approach procedure includes a clearance to fly the published missed approach procedure unless otherwise instructed by ATC. The published missed approach procedure provides obstacle clearance only when the missed approach is conducted on the missed approach segment from or above the missed approach point and assumes a climb rate of 200 feet/NM or higher as published. If the aircraft initiates a missed approach at a point other than the missed approach point (see paragraph 5-4-5b from below MDA or DA H) or on a circling approach, obstacle clearance is not necessarily provided by following the published missed approach procedure, nor is separation assured from other air traffic in the vicinity.

In the event a balked rejected landing occurs at a position other than the published missed approach point, the pilot should contact ATC as soon as possible to obtain an amended clearance. If unable to contact ATC for any reason, the pilot should attempt to re-intercept a published segment of the missed approach and comply with route and altitude instructions. If unable to contact ATC and in the pilot's judgment it is no longer appropriate to fly the published missed approach procedure, then consider either maintaining visual conditions if practicable and reattempt a landing, or a circle-climb over the airport. Should a missed approach become necessary,

when operating to an airport that is not served by an operating control tower, continuous contact with an air traffic facility may not be possible. In this case, the pilot should execute the appropriate go-around/missed approach procedure without delay and contact ATC when able to do so.

Prior to initiating an instrument approach procedure, the pilot should assess the actions to be taken in the event of a balked rejected landing beyond the missed approach point or below the MDA or DA H, considering the anticipated weather conditions and available aircraft performance. 14 CFR 91.175 e authorizes the pilot to fly an appropriate missed approach procedure that ensures obstruction clearance, but it does not necessarily consider separation from other air traffic. The pilot must consider other factors such as the aircraft's geographical location with respect to the prescribed missed approach point, direction of flight, and/or minimum turning altitudes in the prescribed missed approach procedure. The pilot must also consider aircraft performance, visual

climb restrictions charted obstacles published obstacle departure procedure takeoff visual climb requirements as expressed by nonstandard takeoff minima other traffic expected to be in the vicinity or other factors not specifically expressed by the approach procedures

5-4-22. Use of Enhanced Flight Vision Systems (EFVS) on Instrument Approaches

An EFVS is an installed airborne system which uses an electronic means to provide a display of the forward external scene topography the applicable natural or manmade features of a place or region especially in a way to show their relative positions and elevation through the use of imaging sensors such as forward looking infrared millimeter wave radiometry millimeter wave radar and/or low light level image intensifying. The EFVS imagery is displayed along with the additional flight information and aircraft flight symbology required by 14 CFR 91.175 on a head-up display HUD or an equivalent display in the same scale and alignment as the external view and includes the display element sensors computers and power supplies indications and controls. The display is typically presented to the pilot by means of an approved HUD.

a. Basic Strategy Using EFVS. When flying an instrument approach procedure IAP if the runway environment cannot be visually acquired at decision altitude DA or minimum descent altitude MDA using natural vision then a pilot may use an EFVS to continue descending down to 100 feet above the Touchdown Elevation TDE provided all of the visibility requirements of 14 CFR part 91.175 are met. The primary reference for maneuvering the aircraft is based on what the pilot sees through the EFVS. At 100 feet above the TDE a pilot can continue to descend only when the visual reference requirements for descent below 100 feet can be seen using natural vision without the aid of the EFVS. In other words a pilot may not continue to rely on the EFVS sensor image to identify the required visual references below 100 feet above the TDE. Supporting information is provided by the flight path vector FPV flight path angle FPA reference cue on board navigation system and other imagery and flight symbology displayed on the EFVS. The FPV and FPA reference cue along with the EFVS imagery of the Touchdown Elevation TDE provide the primary

vertical path reference for the pilot when vertical guidance from a precision approach or approach with vertical guidance is not available.

1. Straight-In Instrument Approach Procedures. An EFVS may be used to descend below DA or MDA from any straight-in IAP other than Category II or Category III approaches provided all of the requirements of 14 CFR part 91.175 are met. This includes straight-in precision approaches approaches with vertical guidance for example LPV or LNAV/VNAV and non-precision approaches for example VOR NDB LOC RNAV GPS LDA SDF etc.

2. Circling Approach Procedure. An IAP with a circle-to-land maneuver or circle-to-land minimums does not meet criteria for straight-in landing minimums. While the regulations do not prohibit EFVS from being used during any phase of flight they do prohibit it from being used for operational credit on anything but a straight-in IAP with straight-in landing minima. EFVS must only be used during a circle-to-land maneuver provided the visual references required throughout the circling maneuver are distinctly visible using natural vision. An EFVS cannot be used to satisfy the requirement that an identifiable part of the airport be distinctly visible to the pilot during a circling maneuver at or above MDA or while descending below MDA from a circling maneuver.

3. Enhanced Flight Visibility. Flight visibility is determined by using natural vision and enhanced flight visibility EFV is determined by using an EFVS. 14 CFR part 91.175 requires that the EFV observed by using an EFVS cannot be less than the visibility prescribed in the IAP to be used in order to continue to descend below the DA or MDA.

b. EFVS Operations At or Below DA or MDA Down to 100 Feet Above the TDZE. The visual segment of an IAP begins at DA or MDA and continues to the runway. There are two means of operating in the visual segment—one is by using natural vision and the other is by using an EFVS. If the pilot determines that the EFV observed by using the EFVS is not less than the minimum visibility prescribed in the IAP being flown and the pilot acquires the required visual references prescribed in 14 CFR part 91.175 using the EFVS then the pilot can continue the approach to 100 feet above the TDE. To continue the approach the pilot uses the EFVS image to visually acquire the runway environment the approach

light system ALS if installed or both the runway threshold and the TD confirm lateral alignment maneuver to the extended runway centerline earlier than would otherwise be possible and continue a normal descent from the DA or MDA to 100 feet above the TD E

1. Required Visual References. In order to descend below DA or MDA the following visual references specified in 14 CFR part 91.175 (b)(3) for the runway of intended landing must be distinctly visible and identifiable to the pilot using the EFVS

- (a) The ALS if installed or
- (b) The following visual references in both (b)(1) and (b)(2) below
 - (1) The runway threshold identified by at least one of the following: the beginning of the runway landing surface, the threshold lights, or the runway end identifier lights (REIL).
 - (2) The TD identified by at least one of the following: the runway TD landing surface, the TD lights, the TD markings, or the runway lights.

2. Comparison of Visual Reference Requirements for EFVS and Natural Vision. The EFVS visual reference requirements of 14 CFR part 91.175 (b)(3) comprise a more stringent standard than the visual reference requirements prescribed under 14 CFR part 91.175 (c)(3) when using natural vision. The more stringent standard is needed because an EFVS might not display the color of the lights used to identify specific portions of the runway or might not be able to consistently display the runway markings. The main differences for EFVS operations are that the visual glide slope indicator (VGSI) lights cannot be used as a visual reference and specific visual references from both the threshold and TD must be distinctly visible and identifiable. However, when using natural vision, only one of the specified visual references must be visible and identifiable.

3. Visual References and Offset Approaches. Pilots must be especially knowledgeable of the approach conditions and approach course alignment when considering whether to rely on EFVS during a non-precision approach with an offset final approach course. Depending upon the combination of crosswind correction and the lateral field of view provided by a particular EFVS, the required visual references may or may not be within the pilot's view

looking through the EFVS display. Pilots conducting any non-precision approach must verify lateral alignment with the runway centerline when determining when to descend from MDA.

4. When to Go Around. Any pilot operating an aircraft with an EFVS installed should be aware that the requirements of 14 CFR part 91.175 (c) for using natural vision and the requirements of 14 CFR part 91.175 (b) for using an EFVS are different. A pilot would therefore first have to determine whether an approach will be commenced using natural vision or using an EFVS. While these two sets of requirements provide a parallel decisionmaking process, the requirements for when a missed approach must be executed differ. Using EFVS, a missed approach must be initiated at or below DA or MDA down to 100 feet above TD E whenever the pilot determines that

(a) The EFV is less than the visibility minimum prescribed for the IAP being used

(b) The required visual references for the runway of intended landing are no longer distinctly visible and identifiable to the pilot using the EFVS imagery

(c) The aircraft is not continuously in a position from which a descent to a landing can be made on the intended runway at a normal rate of descent using normal maneuvers, or

(d) For operations under 14 CFR parts 121 and 135, the descent rate of the aircraft could not allow touchdown to occur within the TD of the runway of intended landing.

5. Missed Approach Considerations. It should be noted that a missed approach after passing the DA or beyond the missed approach point (MAP) involves additional risk until established on the published missed approach segment. Initiating a go-around after passing the published MAP may result in loss of obstacle clearance. As with any approach, pilot planning should include contingencies between the published MAP and touchdown with reference to obstacle clearance, aircraft performance, and alternate escape plans.

c. EFVS Operations At and Below 100 Feet Above the TDZE. At and below 100 feet above the TD E, the regulations do not require the EFVS to be turned off or the display to be stored in order to continue to a landing. A pilot may continue the approach

below this altitude using an EFVS as long as the required visual references can be seen through the display using natural vision. An operator may not continue to descend beyond this point by relying solely on the sensor image displayed on the EFVS.

1. Required Visual References. In order to descend below 100 feet above the TD, the flight visibility—assessed using natural vision—must be sufficient for the following visual references to be distinctly visible and identifiable to the pilot without reliance on the EFVS to continue to a landing:

- (a) The lights or markings of the threshold or
- (b) The lights or markings of the TD

It is important to note that from 100 feet above the TD, the flight visibility does not have to be equal to or greater than the visibility prescribed for the IAP in order to continue descending. It only has to be sufficient for the visual references required by 14 CFR part 91.175 (b)(4) to be distinctly visible and identifiable to the pilot without reliance on the EFVS.

2. Comparison of Visual Reference Requirements for EFVS and Natural Vision. Again, the visual reference requirements for EFVS in 14 CFR part 91.175 (b)(4) are more stringent than those required for natural vision in 14 CFR part 91.175 (c)(3). The main differences for EFVS operations are that the ALS and red terminating bars or red side row bars, the REIL, and the VASI cannot be used as visual references. Only very specific visual references from the threshold or the TD can be used—that is, the lights or markings of the threshold or the lights or markings of the TD.

3. When to Go Around. A missed approach must be initiated when the pilot determines that:

- (a) The flight visibility is no longer sufficient to distinctly see and identify the required visual references listed in 14 CFR part 91.175 (b)(4) using natural vision.
- (b) The aircraft is not continuously in a position from which a descent to a landing can be made on the intended runway at a normal rate of descent using normal maneuvers, or
- (c) For operations under 14 CFR parts 121 and 135, the descent rate of the aircraft would not allow touchdown to occur within the TD of the runway of intended landing.

While touchdown within the TD is not specifically addressed in the regulations for operators other than 14 CFR parts 121 and 135, operators' continued operations below DA or MDA where touchdown in the TD is not assured where a high sink rate occurs, or where the decision to conduct a missed approach procedure is not executed in a timely manner, all create a significant risk to the operation.

4. Missed Approach Considerations. As noted earlier, a missed approach initiated after the DA or MAP involves additional risk. At 100 feet or less above the runway, it is likely that an aircraft is significantly below the TERPS missed approach obstacle clearance surface. Prior planning is recommended and should include contingencies between the published MAP and touchdown with reference to obstacle clearance, aircraft performance, and alternate escape plans.

d. Light Emitting Diode (LED) Airport Lighting Impact on EFVS Operations. The FAA has recently begun to replace incandescent lamps with LEDs at some airports in threshold lights, taxiway edge lights, taxiway centerline lights, low intensity runway edge lights, windcone lights, beacons, and some obstruction lighting. Pilots should be aware that LED lights cannot be sensed by current EFVS systems.

5-4-23. Visual Approach

a. A visual approach is conducted on an IFR flight plan and authorizes a pilot to proceed visually and clear of clouds to the airport. The pilot must have either the airport or the preceding identified aircraft in sight. This approach must be authorized and controlled by the appropriate air traffic control facility. Reported weather at the airport must have a ceiling at or above 1,000 feet and visibility 3 miles or greater. ATC may authorize this type approach when it will be operationally beneficial. Visual approaches are an IFR procedure conducted under IFR in visual meteorological conditions. Cloud clearance requirements of 14 CFR Section 91.155 are not applicable unless required by operation specifications.

b. Operating to an Airport Without Weather Reporting Service. ATC will advise the pilot when weather is not available at the destination airport. ATC may initiate a visual approach provided there is a reasonable assurance that weather at the airport is a

ceiling at or above 1 000 feet and visibility 3 miles or greater e.g. area weather reports PIREPs etc

c. Operating to an Airport With an Operating Control Tower. Aircraft may be authorized to conduct a visual approach to one runway while other aircraft are conducting IFR or VFR approaches to another parallel intersecting or converging runway. When operating to airports with parallel runways separated by less than 2 500 feet the succeeding aircraft must report sighting the preceding aircraft unless standard separation is being provided by ATC. When operating to parallel runways separated by at least 2 500 feet but less than 4 300 feet controllers will clear/vector aircraft to the final at an angle not greater than 30 degrees unless radar vertical or visual separation is provided during the turn-on. The purpose of the 30 degree intercept angle is to reduce the potential for overshoots of the final and to preclude side-by-side operations with one or both aircraft in a belly-up configuration during the turn-on. Once the aircraft are established within 30 degrees of final or on the final these operations may be conducted simultaneously. When the parallel runways are separated by 4 300 feet or more or intersecting/converging runways are in use ATC may authorize a visual approach after advising all aircraft involved that other aircraft are conducting operations to the other runway. This may be accomplished through use of the ATIS.

d. Separation Responsibilities. If the pilot has the airport in sight but cannot see the aircraft to be followed ATC may clear the aircraft for a visual approach. However ATC retains both separation and wake vortex separation responsibility. When visually following a preceding aircraft acceptance of the visual approach clearance constitutes acceptance of pilot responsibility for maintaining a safe approach interval and adequate wake turbulence separation.

e. A visual approach is not an IAP and therefore has no missed approach segment. If a go around is necessary for any reason aircraft operating at controlled airports will be issued an appropriate advisory/clearance/instruction by the tower. At uncontrolled airports aircraft are expected to remain clear of clouds and complete a landing as soon as possible. If a landing cannot be accomplished the aircraft is expected to remain clear of clouds and contact ATC as soon as possible for further clearance.

Separation from other IFR aircraft will be maintained under these circumstances.

f. Visual approaches reduce pilot/controller workload and expedite traffic by shortening flight paths to the airport. It is the pilot's responsibility to advise ATC as soon as possible if a visual approach is not desired.

g. Authorization to conduct a visual approach is an IFR authorization and does not alter IFR flight plan cancellation responsibility.

REFERENCE—

AIM, Canceling IFR Flight Plan, Paragraph 5-1-15

h. Radar service is automatically terminated without advising the pilot when the aircraft is instructed to change to advisory frequency.

5-4-24. Charted Visual Flight Procedure (CVFP)

a. CVFPs are charted visual approaches established for environmental/noise considerations and/or when necessary for the safety and efficiency of air traffic operations. The approach charts depict prominent landmarks, courses, and recommended altitudes to specific runways. CVFPs are designed to be used primarily for turbojet aircraft.

b. These procedures will be used only at airports with an operating control tower.

c. Most approach charts will depict some NAVAID information which is for supplemental navigational guidance only.

d. Unless indicating a Class B airspace floor, all depicted altitudes are for noise abatement purposes and are recommended only. Pilots are not prohibited from flying other than recommended altitudes if operational requirements dictate.

e. When landmarks used for navigation are not visible at night the approach will be annotated **PROCEDURE NOT AUTHORIZED AT NIGHT**.

f. CVFPs usually begin within 20 flying miles from the airport.

g. Published weather minimums for CVFPs are based on minimum vectoring altitudes rather than the recommended altitudes depicted on charts.

h. CVFPs are not instrument approaches and do not have missed approach segments.

i. ATC will not issue clearances for CVFPs when the weather is less than the published minimum.

j. ATC will clear aircraft for a CVFP after the pilot reports sighting a charted landmark or a preceding aircraft. If instructed to follow a preceding aircraft, pilots are responsible for maintaining a safe approach interval and wake turbulence separation.

k. Pilots should advise ATC if at any point they are unable to continue an approach or lose sight of a preceding aircraft. Missed approaches will be handled as a go-around.

5-4-25. Contact Approach

a. Pilots operating in accordance with an IFR flight plan, provided they are clear of clouds and have at least 1 mile flight visibility and can reasonably expect to continue to the destination airport in those conditions, may request ATC authorization for a contact approach.

b. Controllers may authorize a contact approach, provided:

1. The contact approach is specifically requested by the pilot. ATC cannot initiate this approach.

EXAMPLE—

Request contact approach.

2. The reported ground visibility at the destination airport is at least 1 statute mile.

3. The contact approach will be made to an airport having a standard or special instrument approach procedure.

4. Approved separation is applied between aircraft so cleared and between these aircraft and other IFR or special VFR aircraft.

EXAMPLE—

Cleared contact approach (and, if required) at or below (altitude) (routing) if not possible (alternative procedures) and advise.

c. A contact approach is an approach procedure that may be used by a pilot with prior authorization from ATC in lieu of conducting a standard or special IAP to an airport. It is not intended for use by a pilot on an IFR flight clearance to operate to an airport not having a published and functioning IAP. Nor is it intended for an aircraft to conduct an instrument approach to one airport and then, when in the clear, discontinue that approach and proceed to another airport. In the execution of a contact approach, the

pilot assumes the responsibility for obstruction clearance. If radar service is being received, it will automatically terminate when the pilot is instructed to change to advisory frequency.

5-4-26. Landing Priority

A clearance for a specific type of approach (ILS, MLS, ADF, VOR, or Straight-in Approach) to an aircraft operating on an IFR flight plan does not mean that landing priority will be given over other traffic. ATCTs handle all aircraft regardless of the type of flight plan on a first-come, first-served basis. Therefore, because of local traffic or runway in use, it may be necessary for the controller, in the interest of safety, to provide a different landing sequence. In any case, a landing sequence will be issued to each aircraft as soon as possible to enable the pilot to properly adjust the aircraft's flight path.

5-4-27. Overhead Approach Maneuver

a. Pilots operating in accordance with an IFR flight plan in Visual Meteorological Conditions (VMC) may request ATC authorization for an overhead maneuver. An overhead maneuver is not an instrument approach procedure. Overhead maneuver patterns are developed at airports where aircraft have an operational need to conduct the maneuver. An aircraft conducting an overhead maneuver is considered to be VFR, and the IFR flight plan is cancelled when the aircraft reaches the initial point on the initial approach portion of the maneuver.

See FIG 5-4-32. The existence of a standard overhead maneuver pattern does not eliminate the possible requirement for an aircraft to conform to conventional rectangular patterns if an overhead maneuver cannot be approved. Aircraft operating to an airport without a functioning control tower must initiate cancellation of an IFR flight plan prior to executing the overhead maneuver. Cancellation of the IFR flight plan must be accomplished after crossing the landing threshold on the initial portion of the maneuver or after landing. Controllers may authorize an overhead maneuver and issue the following to arriving aircraft:

1. Pattern altitude and direction of traffic. This information may be omitted if either is standard.

PHRASEOLOGY—

PATTERN ALTITUDE (altitude). **RIGHT TURNS.**

2. Request for a report on initial approach


PHRASEOLOGY–
REPORT INITIAL.

3. Break information and a request for the pilot to report The Break Point will be specified if

nonstandard Pilots may be requested to report break if required for traffic or other reasons

PHRASEOLOGY–
BREAK AT (specified point).
REPORT BREAK.

FIG 5-4-32
Overhead Maneuver

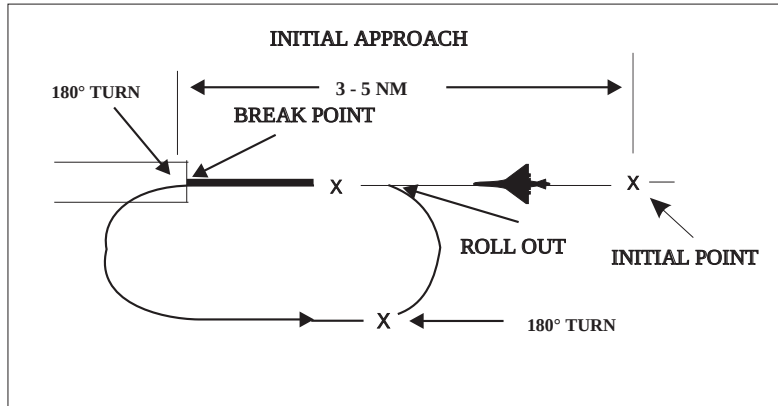

Section 5. Pilot/Controller Roles and Responsibilities

5-5-1. General

a. The roles and responsibilities of the pilot and controller for effective participation in the ATC system are contained in several documents. Pilot responsibilities are in the CFRs and the air traffic controllers are in the FAA Order JO 7110.65, Air Traffic Control, and supplemental FAA directives. Additional and supplemental information for pilots can be found in the current Aeronautical Information Manual, AIM, Notices to Airmen, Advisory Circulars, and aeronautical charts. Since there are many other excellent publications produced by nongovernment organizations as well as other government organizations with various updating cycles, questions concerning the latest or most current material can be resolved by cross checking with the above mentioned documents.

b. The pilot-in-command of an aircraft is directly responsible for and is the final authority as to the safe operation of that aircraft. In an emergency requiring immediate action, the pilot-in-command may deviate from any rule in the General Subpart A and Flight Rules Subpart B in accordance with 14 CFR Section 91.3.

c. The air traffic controller is responsible to give first priority to the separation of aircraft and to the issuance of radar safety alerts; second priority to other services that are required but do not involve separation of aircraft; and third priority to additional services to the extent possible.

d. In order to maintain a safe and efficient air traffic system, it is necessary that each party fulfill their responsibilities to the fullest.

e. The responsibilities of the pilot and the controller intentionally overlap in many areas, providing a degree of redundancy. Should one or the other fail in any manner, this overlapping responsibility is expected to compensate in many cases for failures that may affect safety.

f. The following, while not intended to be all inclusive, is a brief listing of pilot and controller responsibilities for some commonly used procedures

or phases of flight. More detailed explanations are contained in other portions of this publication, the appropriate CFRs, ACs, and similar publications. The information provided is an overview of the principles involved and is not meant as an interpretation of the rules nor is it intended to extend or diminish responsibilities.

5-5-2. Air Traffic Clearance

a. Pilot.

1. Acknowledges receipt and understanding of an ATC clearance.

2. Reads back any hold short of runway instructions issued by ATC.

3. Requests clarification or amendment as appropriate any time a clearance is not fully understood or considered unacceptable from a safety standpoint.

4. Promptly complies with an air traffic clearance upon receipt except as necessary to cope with an emergency. Advises ATC as soon as possible and obtains an amended clearance if deviation is necessary.

NOTE—

A clearance to land means that appropriate separation on the landing runway will be ensured. A landing clearance does not relieve the pilot from compliance with any previously issued altitude crossing restriction.

b. Controller.

1. Issues appropriate clearances for the operation to be conducted or being conducted in accordance with established criteria.

2. Assigns altitudes in IFR clearances that are at or above the minimum IFR altitudes in controlled airspace.

3. Ensures acknowledgment by the pilot for issued information, clearances, or instructions.

4. Ensures that readbacks by the pilot of altitude, heading, or other items are correct. If incorrect, distorted, or incomplete, makes corrections as appropriate.

5-5-3. Contact Approach

a. Pilot.

1. Must request a contact approach and makes it in lieu of a standard or special instrument approach

2. By requesting the contact approach indicates that the flight is operating clear of clouds has at least one mile flight visibility and reasonably expects to continue to the destination airport in those conditions

3. Assumes responsibility for obstruction clearance while conducting a contact approach

4. Advises ATC immediately if unable to continue the contact approach or if encounters less than 1 mile flight visibility

5. Is aware that if radar service is being received it may be automatically terminated when told to contact the tower

REFERENCE-

Pilot/Controller Glossary Term- Radar Service Terminated.

b. Controller.

1. Issues clearance for a contact approach only when requested by the pilot. Does not solicit the use of this procedure

2. Before issuing the clearance ascertains that reported ground visibility at destination airport is at least 1 mile

3. Provides approved separation between the aircraft cleared for a contact approach and other IFR or special VFR aircraft. When using vertical separation does not assign a fixed altitude but clears the aircraft at or below an altitude which is at least 1 000 feet below any IFR traffic but not below Minimum Safe Altitudes prescribed in 14 CFR Section 91.119

4. Issues alternative instructions if, in their judgment, weather conditions may make completion of the approach impracticable

5-5-4. Instrument Approach

a. Pilot.

1. Be aware that the controller issues clearance for approach based only on known traffic

2. Follows the procedure as shown on the IAP including all restrictive notations such as

(a) Procedure not authorized at night

(b) Approach not authorized when local area altimeter not available

(c) Procedure not authorized when control tower not in operation

(d) Procedure not authorized when glide slope not used

(e) Straight in minimums not authorized at night, etc

(f) Radar required or

(g) The circling minimums published on the instrument approach chart provide adequate obstruction clearance and pilots should not descend below the circling altitude until the aircraft is in a position to make final descent for landing. Sound judgment and knowledge of the pilot's and the aircraft's capabilities are the criteria for determining the exact maneuver in each instance since airport design and the aircraft position, altitude and airspeed must all be considered

REFERENCE-

AIM, Approach and Landing Minimums, Paragraph 5-4-20

3. Upon receipt of an approach clearance while on an unpublished route or being radar vectored

(a) Complies with the minimum altitude for IFR and

(b) Maintains the last assigned altitude until established on a segment of a published route or IAP at which time published altitudes apply

b. Controller.

1. Issues an approach clearance based on known traffic

2. Issues an IFR approach clearance only after the aircraft is established on a segment of published route or IAP or assigns an appropriate altitude for the aircraft to maintain until so established

5-5-5. Missed Approach

a. Pilot.

1. Executes a missed approach when one of the following conditions exist

(a) Arrival at the Missed Approach Point (MAP) or the Decision Height (DH) and visual reference to the runway environment is insufficient to complete the landing

(b) Determines that a safe approach or landing is not possible (see subparagraph 5-4-21h)

(c) Instructed to do so by ATC

2. Advises ATC that a missed approach will be made. Include the reason for the missed approach unless the missed approach is initiated by ATC.

3. Complies with the missed approach instructions for the IAP being executed from the MAP unless other missed approach instructions are specified by ATC.

4. If executing a missed approach prior to reaching the MAP, fly the lateral navigation path of the instrument procedure to the MAP. Climb to the altitude specified in the missed approach procedure except when a maximum altitude is specified between the final approach fix (FAF) and the MAP. In that case, comply with the maximum altitude restriction. Note: this may require a continued descent on the final approach.

5. Following a missed approach, requests clearance for specific action, i.e., another approach, hold for improved conditions, proceed to an alternate airport, etc.

b. Controller.

1. Issues an approved alternate missed approach procedure if it is desired that the pilot execute a procedure other than as depicted on the instrument approach chart.

2. May vector a radar identified aircraft executing a missed approach when operationally advantageous to the pilot or the controller.

3. In response to the pilot's stated intentions, issues a clearance to an alternate airport, to a holding fix, or for reentry into the approach sequence as traffic conditions permit.

5-5-6. Radar Vectors**a. Pilot.**

1. Promptly complies with headings and altitudes assigned to you by the controller.

2. Questions any assigned heading or altitude believed to be incorrect.

3. If operating VFR and compliance with any radar vector or altitude would cause a violation of any CFR, advises ATC and obtains a revised clearance or instructions.

b. Controller.

1. Vectors aircraft in Class A, Class B, Class C, Class D, and Class E airspace.

(a) For separation.

(b) For noise abatement.

(c) To obtain an operational advantage for the pilot or controller.

2. Vectors aircraft in Class A, Class B, Class C, Class D, Class E, and Class G airspace when requested by the pilot.

3. Vectors IFR aircraft at or above minimum vectoring altitudes.

4. May vector VFR aircraft not at an ATC assigned altitude at any altitude. In these cases, terrain separation is the pilot's responsibility.

5-5-7. Safety Alert**a. Pilot.**

1. Initiates appropriate action if a safety alert is received from ATC.

2. Be aware that this service is not always available and that many factors affect the ability of the controller to be aware of a situation in which unsafe proximity to terrain, obstructions, or another aircraft may be developing.

b. Controller.

1. Issues a safety alert if aware of an aircraft under their control is at an altitude which, in the controller's judgment, places the aircraft in unsafe proximity to terrain, obstructions, or another aircraft. Types of safety alerts are:

(a) **Terrain or Obstruction Alert.** Immediately issued to an aircraft under their control if aware the aircraft is at an altitude believed to place the aircraft in unsafe proximity to terrain or obstructions.

(b) **Aircraft Conflict Alert.** Immediately issued to an aircraft under their control if aware of an aircraft not under their control at an altitude believed to place the aircraft in unsafe proximity to each other. With the alert, they offer the pilot an alternative, if feasible.

2. Discontinue further alerts if informed by the pilot action is being taken to correct the situation or that the other aircraft is in sight.

5-5-8. See and Avoid

a. Pilot. When meteorological conditions permit regardless of type of flight plan or whether or not under control of a radar facility the pilot is responsible to see and avoid other traffic terrain or obstacles

b. Controller.

1. Provides radar traffic information to radar identified aircraft operating outside positive control airspace on a workload permitting basis

2. Issues safety alerts to aircraft under their control if aware the aircraft is at an altitude believed to place the aircraft in unsafe proximity to terrain obstructions or other aircraft

5-5-9. Speed Adjustments

a. Pilot.

1. Advises ATC any time cruising airspeed varies plus or minus 5 percent or 10 knots whichever is greater from that given in the flight plan

2. Complies with speed adjustments from ATC unless

(a) The minimum or maximum safe airspeed for any particular operation is greater or less than the requested airspeed. In such cases advises ATC

NOTE—

It is the pilot's responsibility and prerogative to refuse speed adjustments considered excessive or contrary to the aircraft's operating specifications.

(b) Operating at or above 10 000 feet MSL on an ATC assigned SPEED ADJUSTMENT of more than 250 knots IAS and subsequent clearance is received for descent below 10 000 feet MSL. In such cases pilots are expected to comply with 14 CFR Section 91.117 a

3. When complying with speed adjustment assignments maintains an indicated airspeed within plus or minus 10 knots or 0.02 Mach number of the specified speed

b. Controller.

1. Assigns speed adjustments to aircraft when necessary but not as a substitute for good vectoring technique

2. Adheres to the restrictions published in the FAAO JO 7110.65 Air Traffic Control as to when speed adjustment procedures may be applied

3. Avoids speed adjustments requiring alternate decreases and increases

4. Assigns speed adjustments to a specified IAS KNOTS /Mach number or to increase or decrease speed using increments of 10 knots or multiples thereof

5. Terminates ATC assigned speed adjustments when no longer required by issuing further instructions to pilots in the following manner

(a) Advises pilots to resume normal speed when the aircraft is on a heading random routing charted procedure or route without published speed restrictions

(b) Instructs pilots to comply with speed restrictions when the aircraft is joining or resuming a charted procedure or route with published speed restrictions

CAUTION—

The phraseology "comply with restrictions" requires compliance with all altitude and/or speed restrictions depicted on the procedure.

(c) Instructs pilots to resume published speed when aircraft are cleared via a charted instrument flight procedure that contains published speed restrictions

(d) Advises aircraft to delete speed restrictions when ATC assigned or published speed restrictions on a charted procedure are no longer required

(e) Clears pilots for approach without restating previously issued speed adjustments

REFERENCE—

PCG, Resume Normal Speed, Resume Published Speed

6. Gives due consideration to aircraft capabilities to reduce speed while descending

7. Does not assign speed adjustments to aircraft at or above FL 390 without pilot consent

5-5-10. Traffic Advisories (Traffic Information)

a. Pilot.

1. Acknowledges receipt of traffic advisories

2. Informs controller if traffic in sight
3. Advises ATC if a vector to avoid traffic is desired
4. Does not expect to receive radar traffic advisories on all traffic. Some aircraft may not appear on the radar display. Be aware that the controller may be occupied with higher priority duties and unable to issue traffic information for a variety of reasons
5. Advises controller if service is not desired

b. Controller.

1. Issues radar traffic to the maximum extent consistent with higher priority duties except in Class A airspace
2. Provides vectors to assist aircraft to avoid observed traffic when requested by the pilot
3. Issues traffic information to aircraft in the Class B, Class C, and Class D surface areas for sequencing purposes
4. Controllers are required to issue to each aircraft operating on intersecting or nonintersecting converging runways where protected flight paths will cross

5-5-11. Visual Approach

a. Pilot.

1. If a visual approach is not desired, advises ATC
2. Complies with controller's instructions for vectors to clear the airport of intended landing or to a visual position behind a preceding aircraft
3. The pilot must at all times have either the airport or the preceding aircraft in sight. After being cleared for a visual approach, proceed to the airport in a normal manner or follow the preceding aircraft. Remain clear of clouds while conducting a visual approach
4. If the pilot accepts a visual approach clearance to visually follow a preceding aircraft, you are required to establish a safe landing interval behind the aircraft you were instructed to follow. You are responsible for wake turbulence separation
5. Advise ATC immediately if the pilot is unable to continue following the preceding aircraft, cannot

remain clear of clouds, needs to climb, or loses sight of the airport

6. Be aware that radar service is automatically terminated without being advised by ATC when the pilot is instructed to change to advisory frequency

7. Be aware that there may be other traffic in the traffic pattern and the landing sequence may differ from the traffic sequence assigned by approach control or ARTCC

b. Controller.

1. Do not clear an aircraft for a visual approach unless reported weather at the airport is ceiling at or above 1 000 feet and visibility is 3 miles or greater. When weather is not available for the destination airport, inform the pilot and do not initiate a visual approach to that airport unless there is reasonable assurance that descent and flight to the airport can be made visually

2. Issue visual approach clearance when the pilot reports sighting either the airport or a preceding aircraft which is to be followed

3. Provide separation except when visual separation is being applied by the pilot

4. Continue flight following and traffic information until the aircraft has landed or has been instructed to change to advisory frequency

5. Inform the pilot when the preceding aircraft is a heavy

6. When weather is available for the destination airport, do not initiate a vector for a visual approach unless the reported ceiling at the airport is 500 feet or more above the MVA and visibility is 3 miles or more. If vectoring, weather minima are not available but weather at the airport is ceiling at or above 1 000 feet and visibility of 3 miles or greater, visual approaches may still be conducted

7. Informs the pilot conducting the visual approach of the aircraft class when pertinent traffic is known to be a heavy aircraft

5-5-12. Visual Separation

a. Pilot.

1. Acceptance of instructions to follow another aircraft or to provide visual separation from it is an acknowledgment that the pilot will maneuver the aircraft as necessary to avoid the other aircraft or to

maintain in trail separation. Pilots are responsible to maintain visual separation until flight paths, altitudes and/or courses diverge.

2. If instructed by ATC to follow another aircraft or to provide visual separation from it, promptly notify the controller if you lose sight of that aircraft, are unable to maintain continued visual contact with it, or cannot accept the responsibility for your own separation for any reason.

3. The pilot also accepts responsibility for wake turbulence separation under these conditions:

b. Controller. Applies visual separation only.

1. Within the terminal area, when a controller has both aircraft in sight or by instructing a pilot who sees the other aircraft to maintain visual separation from it.

2. Pilots are responsible to maintain visual separation until flight paths, altitudes and/or courses diverge.

3. Within en route airspace, when aircraft are on opposite courses and one pilot reports having seen the other aircraft and that the aircraft have passed each other.

5-5-13. VFR-on-top

a. Pilot.

1. This clearance must be requested by the pilot on an IFR flight plan, and if approved, allows the pilot the choice, subject to any ATC restrictions, to select an altitude or flight level in lieu of an assigned altitude.

NOTE—

VFR-on-top is not permitted in certain airspace areas, such as Class A airspace, certain restricted areas, etc. Consequently, IFR flights operating VFR-on-top will avoid such airspace.

REFERENCE—

AIM, IFR Clearance VFR-on-top, Paragraph 4-4-8

AIM, IFR Separation Standards, Paragraph 4-4-1.

AIM, Position Reporting, Paragraph 5-3-2

AIM, Additional Reports, Paragraph 5-3-3

2. By requesting a VFR on top clearance, the pilot assumes the sole responsibility to be vigilant so as to see and avoid other aircraft and to

(a) Fly at the appropriate VFR altitude as prescribed in 14 CFR Section 91.159.

(b) Comply with the VFR visibility and distance from clouds criteria in 14 CFR Section 91.155, *Basic VFR weather minimums*.

(c) Comply with instrument flight rules that are applicable to this flight, i.e., minimum IFR altitudes, position reporting, radio communications, course to be flown, adherence to ATC clearance, etc.

3. Should advise ATC prior to any altitude change to ensure the exchange of accurate traffic information.

b. Controller.

1. May clear an aircraft to maintain VFR on top if the pilot of an aircraft on an IFR flight plan requests the clearance.

2. Informs the pilot of an aircraft cleared to climb to VFR on top, the reported height of the tops, or that no top report is available, issues an alternate clearance if necessary, and once the aircraft reports reaching VFR on top, reclears the aircraft to maintain VFR on top.

3. Before issuing clearance, ascertain that the aircraft is not in, or will not enter, Class A airspace.

5-5-14. Instrument Departures

a. Pilot.

1. Prior to departure, considers the type of terrain and other obstructions on or in the vicinity of the departure airport.

2. Determines if obstruction avoidance can be maintained visually or that the departure procedure should be followed.

3. Determines whether a departure procedure and/or DP is available for obstruction avoidance.

4. At airports where IAPs have not been published, hence no published departure procedure determines what action will be necessary and takes such action that will assure a safe departure.

b. Controller.

1. At locations with airport traffic control service, when necessary, specifies direction of takeoff, turn, or initial heading to be flown after takeoff.

2. At locations without airport traffic control service but within Class E surface area, when necessary, to specify direction of takeoff, turn, or

initial heading to be flown obtains pilot's concurrence that the procedure will allow the pilot to comply with local traffic patterns, terrain, and obstruction avoidance.

3. Includes established departure procedures as part of the ATC clearance when pilot compliance is necessary to ensure separation.

5-5-15. Minimum Fuel Advisory

a. Pilot.

1. Advise ATC of your minimum fuel status when your fuel supply has reached a state where upon reaching destination you cannot accept any undue delay.

2. Be aware this is not an emergency situation but merely an advisory that indicates an emergency situation is possible should any undue delay occur.

3. On initial contact the term "minimum fuel" should be used after stating call sign.

EXAMPLE-

Salt Lake Approach, United 621, "minimum fuel."

4. Be aware a minimum fuel advisory does not imply a need for traffic priority.

5. If the remaining usable fuel supply suggests the need for traffic priority to ensure a safe landing, you should declare an emergency due to low fuel and report fuel remaining in minutes.

REFERENCE-

Pilot/Controller Glossary Item- Fuel Remaining.

b. Controller.

1. When an aircraft declares a state of minimum fuel, relay this information to the facility to whom control jurisdiction is transferred.

2. Be alert for any occurrence which might delay the aircraft.

5-5-16. RNAV and RNP Operations

a. Pilot.

1. If unable to comply with the requirements of an RNAV or RNP procedure, pilots must advise air traffic control as soon as possible. For example, "N1234, failure of GPS system, unable RNAV, request amended clearance."

2. Pilots are not authorized to fly a published RNAV or RNP procedure instrument approach, departure, or arrival procedure unless it is retrievable by the procedure name from the current aircraft navigation database and conforms to the charted procedure. The system must be able to retrieve the procedure by name from the aircraft navigation database, not just as a manually entered series of waypoints.

3. Whenever possible, RNAV routes (Q- or T-route) should be extracted from the database in their entirety rather than loading RNAV route waypoints from the database into the flight plan individually. However, selecting and inserting individual named fixes from the database is permitted provided all fixes along the published route to be flown are inserted.

4. Pilots must not change any database waypoint type from a fly-by to fly-over or vice versa. No other modification of database waypoints or the creation of user-defined waypoints on published RNAV or RNP procedures is permitted except to:

(a) Change altitude and/or airspeed, waypoint constraints to comply with an ATC clearance/instruction.

(b) Insert a waypoint along the published route to assist in complying with ATC instruction, example: "Descend via the WILMS arrival except cross 30 north of BRUCE at/or below FL 210." This is limited only to systems that allow along-track waypoint construction.

5. Pilots of FMS-equipped aircraft who are assigned an RNAV DP or STAR procedure and subsequently receive a change of runway transition or procedure must verify that the appropriate changes are loaded and available for navigation.

6. For RNAV 1 DPs and STARs, pilots must use a CDI, flight director, and/or autopilot in lateral navigation mode. Other methods providing an equivalent level of performance may also be acceptable.

7. For RNAV 1 DPs and STARs, pilots of aircraft without GPS using DME/DME/IRU must ensure the aircraft navigation system position is confirmed within 1,000 feet at the start point of take-off/roll. The use of an automatic or manual runway update is an acceptable means of compliance.

with this requirement. Other methods providing an equivalent level of performance may also be acceptable.

8. For procedures or routes requiring the use of GPS, if the navigation system does not automatically alert the flight crew of a loss of GPS, the operator must develop procedures to verify correct GPS operation.

9. RNAV terminal procedures (DP and STAR) may be amended by ATC issuing radar vectors and/or clearances direct to a waypoint. Pilots should avoid premature manual deletion of waypoints from their active legs page to allow for rejoining procedures.

10. RAIM Prediction. If TSO-C129 equipment is used to solely satisfy the RNAV and RNP requirement, GPS RAIM availability must be confirmed for the intended route of flight, route and time. If RAIM is not available, pilots need an approved alternate means of navigation.

REFERENCE—

AIM, RNAV and RNP Operations, Paragraph 5-1-16

11. Definition of “established” for RNAV and RNP operations. An aircraft is considered to be established on course during RNAV and RNP operations anytime it is within 1 times the required

accuracy for the segment being flown. For example, while operating on a Q Route (RNAV 2), the aircraft is considered to be established on course when it is within 2 nm of the course centerline.

NOTE—

Pilots must be aware of how their navigation system operates, along with any AFM limitations, and confirm that the aircraft’s lateral deviation display (or map display if being used as an allowed alternate means) is suitable for the accuracy of the segment being flown. Automatic scaling and alerting changes are appropriate for some operations. For example, TSO-C129 systems change within 30 miles of destination and within 2 miles of FAF to support approach operations. For some navigation systems and operations, manual selection of scaling will be necessary.

(a) Pilots flying FMS equipped aircraft with barometric vertical navigation (Baro-VNAV) may descend when the aircraft is established on-course following FMS leg transition to the next segment. Leg transition normally occurs at the turn bisector for a fly-by waypoint (reference paragraph 1-2-1 for more on waypoints). When using full automation, pilots should monitor the aircraft to ensure the aircraft is turning at appropriate lead times and descending once established on-course.

(b) Pilots flying TSO-C129 navigation system equipped aircraft without full automation should use normal lead points to begin the turn. Pilots may descend when established on-course on the next segment of the approach.

Section 6. National Security and Interception Procedures

5-6-1. National Security

a. National security in the control of air traffic is governed by 14 CFR Part 99

b. All aircraft entering domestic U S airspace from points outside must provide for identification prior to entry To facilitate early aircraft identification of all aircraft in the vicinity of U S and international airspace boundaries Air Defense Identification ones ADI have been established

REFERENCE-

AIM, ADIZ Boundaries and Designated Mountainous Areas, Paragraph 5-6-5

c. Operational requirements for aircraft operations associated with an ADIZ are as follows:

1. Flight Plan. Except as specified in subparagraphs d and e below an IFR or DVFR flight plan must be filed with an appropriate aeronautical facility as follows

(a) Generally for all operations that enter an ADI

(b) For operations that will enter or exit the U S and which will operate into within or across the Contiguous U S ADI regardless of true airspeed

(c) The flight plan must be filed before departure except for operations associated with the Alaskan ADI when the airport of departure has no facility for filing a flight plan in which case the flight plan may be filed immediately after takeoff or when within range of the aeronautical facility

2. Two-way Radio. For the majority of operations associated with an ADI an operating two way radio is required See 14 CFR Section 99.1 for exceptions

3. Transponder Requirements. Unless otherwise authorized by ATC each aircraft conducting operations into within or across the Contiguous U S ADI must be equipped with an operable radar beacon transponder having altitude reporting capability Mode C and that transponder must be turned on and set to reply on the appropriate code or as assigned by ATC

4. Position Reporting.

(a) For IFR flight. Normal IFR position reporting

(b) For DVFR flights. The estimated time of ADI penetration must be filed with the aeronautical facility at least 15 minutes prior to penetration except for flight in the Alaskan ADI in which case report prior to penetration

(c) For inbound aircraft of foreign registry. The pilot must report to the aeronautical facility at least one hour prior to ADI penetration

5. Aircraft Position Tolerances.

(a) Over land the tolerance is within plus or minus five minutes from the estimated time over a reporting point or point of penetration and within 10 NM from the centerline of an intended track over an estimated reporting point or penetration point

(b) Over water the tolerance is plus or minus five minutes from the estimated time over a reporting point or point of penetration and within 20 NM from the centerline of the intended track over an estimated reporting point or point of penetration to include the Aleutian Islands

6. Land-Based ADIZ. Land-Based ADI are activated and deactivated over U S metropolitan areas as needed with dimensions activation dates and other relevant information disseminated via NOTAM

(a) In addition to requirements outlined in subparagraphs c1 through c3 pilots operating within a Land-Based ADI must report landing or leaving the Land-Based ADI if flying too low for radar coverage

(b) Pilots unable to comply with all requirements must remain clear of Land-Based ADI Pilots entering a Land-Based ADI without authorization or who fail to follow all requirements risk interception by military fighter aircraft

d. Except when applicable under 14 CFR Section 99.7, 14 CFR Part 99 does not apply to aircraft operations:

1. Within the 48 contiguous states and the District of Columbia or within the State of Alaska and remains within 10 miles of the point of departure

2. Over any island or within three nautical miles of the coastline of any island in the Hawaiian Islands or

3. Associated with any ADI other than the Contiguous U.S. ADI when the aircraft true airspeed is less than 180 knots

e. Authorizations to deviate from the requirements of Part 99 may also be granted by the ARTCC on a local basis for some operations associated with an ADI

f. An airfiled VFR Flight Plan makes an aircraft subject to interception for positive identification when entering an ADI. Pilots are therefore urged to file the required DVFR flight plan either in person or by telephone prior to departure

g. Special Security Instructions.

1. Each person operating an aircraft in an ADI or Defense Area must, in addition to the applicable rules of part 99, comply with special security instructions issued by the Administrator in the interest of national security pursuant to agreement between the FAA and the Department of Defense or between the FAA and a U.S. Federal security or intelligence agency

2. *Defense Area* means any airspace of the contiguous United States that is not an ADI in which the control of aircraft is required for reasons of national security

h. Emergency Security Control of Air Traffic (ESCAT).

1. During defense emergency or air defense emergency conditions, additional special security instructions may be issued in accordance with 32 CFR 245 Plan for the Emergency Security Control of Air Traffic (ESCAT)

2. Under the provisions of 32 CFR 245, the military will direct the action to be taken in regard to landing, grounding, diversion, or dispersal of aircraft and the control of air navigation aids in the defense of the U.S. during emergency conditions

3. At the time a portion or all of ESCAT is implemented, ATC facilities will broadcast appropriate instructions received from the Air Traffic

Control System Command Center (ATCSCC) over available ATC frequencies. Depending on instructions received from the ATCSCC, VFR flights may be directed to land at the nearest available airport, and IFR flights will be expected to proceed as directed by ATC.

4. Pilots on the ground may be required to file a flight plan and obtain an approval through FAA prior to conducting flight operation

5. In view of the above, all pilots should monitor an ATC or FSS frequency at all times while conducting flight operations

5-6-2. Interception Procedures

a. General.

1. In conjunction with the FAA Air Defense Sectors monitor air traffic and could order an intercept in the interest of national security or defense. Intercepts during peacetime operations are vastly different than those conducted under increased states of readiness. The interceptors may be fighters or rotary-wing aircraft. The reasons for aircraft intercept include, but are not limited to:

(a) Identify an aircraft

(b) Track an aircraft

(c) Inspect an aircraft

(d) Divert an aircraft

(e) Establish communications with an aircraft

2. When specific information is required (i.e., markings, serial numbers, etc.), the interceptor pilot(s) will respond only if, in their judgment, the request can be conducted in a safe manner. Intercept procedures are described in some detail in the paragraphs below. In all situations, the interceptor pilot(s) will consider safety of flight for all concerned throughout the intercept procedure. The interceptor pilot(s) will use caution to avoid startling the intercepted crew or passengers and understand that maneuvers considered normal for interceptor aircraft may be considered hazardous to other aircraft.

3. All aircraft operating in U.S. national airspace are highly encouraged to maintain a listening watch on VHF/UHF guard frequencies 121.5 or 243.0 MHz. If subjected to a military intercept, it is incumbent on civilian aviators to understand their

responsibilities and to comply with ICAO standard signals relayed from the intercepting aircraft. Specifically, aviators are expected to contact air traffic control without delay, if able, on the local operating frequency or on VHF/UHF guard. Noncompliance may result in the use of force.

b. Fighter intercept phases (See FIG 5-6-1).

1. Approach Phase.

As standard procedure, intercepted aircraft are approached from behind. Typically, interceptor aircraft will be employed in pairs, however, it is not uncommon for a single aircraft to perform the intercept operation. Safe separation between interceptors and intercepted aircraft is the responsibility of the intercepting aircraft and will be maintained at all times.

2. Identification Phase.

Interceptor aircraft will initiate a controlled closure toward the aircraft of interest, holding at a distance no closer than deemed necessary to establish positive identification and to gather the necessary information. The interceptor may also fly past the intercepted aircraft while gathering data at a distance considered safe based on aircraft performance characteristics.

3. Post Intercept Phase.

An interceptor may attempt to establish communications via standard ICAO signals. In time-critical situations, where the interceptor is seeking an immediate response from the intercepted aircraft or if the intercepted aircraft remains non-compliant to

instruction, the interceptor pilot may initiate a divert maneuver. In this maneuver, the interceptor flies across the intercepted aircraft's flight path, minimum 500 feet separation, and commencing from slightly below the intercepted aircraft altitude in the general direction the intercepted aircraft is expected to turn. The interceptor will rock its wings daytime or flash external lights/select afterburners at night while crossing the intercepted aircraft's flight path. The interceptor will roll out in the direction the intercepted aircraft is expected to turn before returning to verify the aircraft of interest is complying. The intercepted aircraft is expected to execute an immediate turn to the direction of the intercepting aircraft. If the aircraft of interest does not comply, the interceptor may conduct a second climbing turn across the intercepted aircraft's flight path, minimum 500 feet separation, and commencing from slightly below the intercepted aircraft altitude.


While expending flares as a warning signal to the intercepted aircraft to comply immediately and to turn in the direction indicated and to leave the area. The interceptor is responsible to maintain safe separation during these and all intercept maneuvers. Flight safety is paramount.

NOTE-

1. *NORAD interceptors will take every precaution to preclude the possibility of the intercepted aircraft experiencing jet wash/wake turbulence; however, there is a potential that this condition could be encountered.*

2. *During Night/IMC, the intercept will be from below flight path.*

FIG 5-6-1
Intercept Procedures

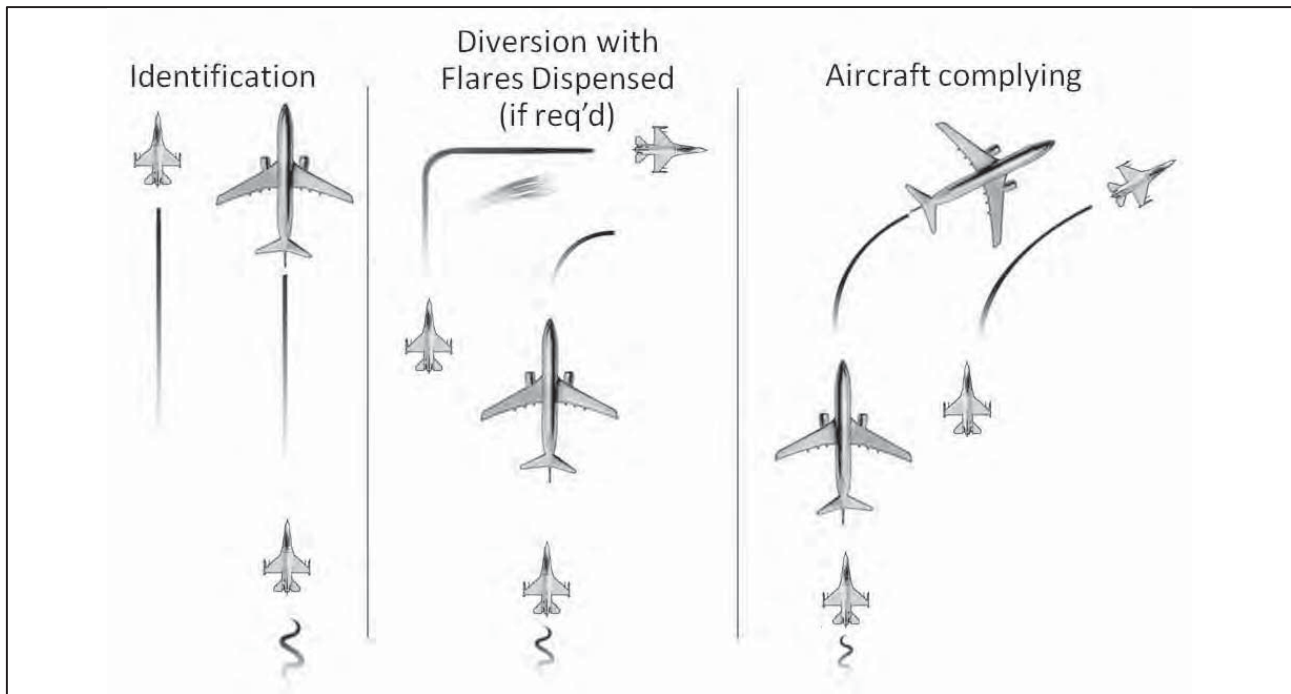

c. Helicopter Intercept phases (See FIG 5-6-2)

1. Approach Phase.

Aircraft intercepted by helicopter may be approached from any direction although the helicopter should close for identification and signaling from behind. Generally the helicopter will approach off the left side of the intercepted aircraft. Safe separation between the helicopter and the unidentified aircraft will be maintained at all times.

2. Identification Phase.

The helicopter will initiate a controlled closure to the aircraft of interest holding at a distance no closer than deemed necessary to establish positive identification and gather the necessary information. The intercepted pilot should expect the interceptor helicopter to take a position off his left wing slightly forward of abeam.

3. Post Intercept Phase.


Visual signaling devices may be used in an attempt to communicate with the intercepted aircraft. Visual signaling devices may include but are not limited to LED scrolling signboards or blue flashing lights. If compliance is not attained through the use of radios or signaling devices, standard ICAO intercept signals, Table 5-6-1, may be employed. In order to maintain safe aircraft separation, it is incumbent upon the pilot of the intercepted aircraft not to fall into a trail position directly behind the helicopter, if instructed to follow the helicopter. This is because the helicopter pilot may lose visual contact with the intercepted aircraft.

NOTE—

Intercepted aircraft must not follow directly behind the helicopter thereby allowing the helicopter pilot to maintain visual contact with the intercepted aircraft and ensuring safe separation is maintained.

FIG 5-6-2

Helicopter Intercept Procedures

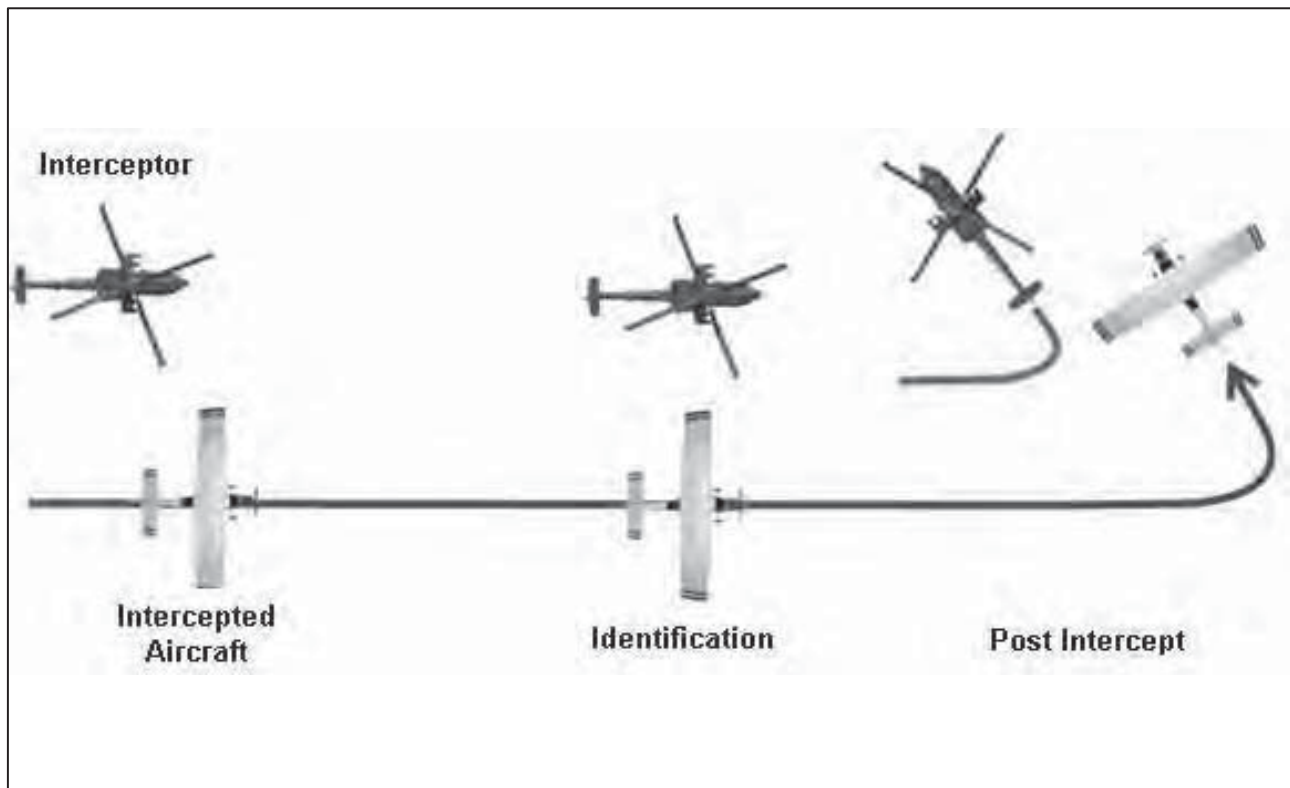

d. Summary of Intercepted Aircraft Actions An intercepted aircraft must without delay

1. Adhere to instructions relayed through the use of visual devices visual signals and radio communications from the intercepting aircraft

2. Attempt to establish radio communications with the intercepting aircraft or with the appropriate air traffic control facility by making a general call on guard frequencies 121.5 or 243.0 MHz giving the identity position and nature of the flight

3. If transponder equipped select Mode 3/A Code 7700 unless otherwise instructed by air traffic control

NOTE–

If instruction received from any agency conflicts with that given by the intercepting aircraft through visual or radio communications, the intercepted aircraft must seek immediate clarification.

4. The crew of the intercepted aircraft must continue to comply with interceptor aircraft signals and instructions until positively released

5–6–3. Law Enforcement Operations by Civil and Military Organizations

a. Special law enforcement operations.

1. Special law enforcement operations include in flight identification surveillance interdiction and pursuit activities performed in accordance with official civil and/or military mission responsibilities

2. To facilitate accomplishment of these special missions exemptions from specified sections of the CFRs have been granted to designated departments and agencies. However it is each organization's responsibility to apprise ATC of their intent to operate under an authorized exemption before initiating actual operations

3. Additionally some departments and agencies that perform special missions have been assigned coded identifiers to permit them to apprise ATC of ongoing mission activities and solicit special air traffic assistance

5-6-4. Interception Signals

TBL 5-6-1 and TBL 5-6-2

TBL 5-6-1 Intercepting Signals


INTERCEPTING SIGNALS Signals initiated by intercepting aircraft and responses by intercepted aircraft (as set forth in ICAO Annex 2-Appendix 1, 2.1)				
Series	INTERCEPTING Aircraft Signals	Meaning	INTERCEPTED Aircraft Responds	Meaning
1	DA –Rocking wings from a position slightly above and ahead of and normally to the left of the intercepted aircraft and after acknowledgement a slow level turn normally to the left on to the desired heading NIGHT Same and in addition flashing navigational lights at irregular intervals <i>NOTE 1–Meteorological conditions or terrain may require the intercepting aircraft to take up a position slightly above and ahead of, and to the right of, the intercepted aircraft and to make the subsequent turn to the right.</i> <i>NOTE 2–If the intercepted aircraft is not able to keep pace with the intercepting aircraft, the latter is expected to fly a series of race-track patterns and to rock its wings each time it passes the intercepted aircraft.</i>	You have been intercepted Follow me	AEROPLANES DA –Rocking wings and following NIGHT–Same and in addition flashing navigational lights at irregular intervals HELICOPTERS DA or NIGHT–Rocking aircraft flashing navigational lights at irregular intervals and following	Understood Will comply
2	DA or NIGHT–An abrupt break—a bay maneuver from the intercepted aircraft consisting of a climbing turn of 90 degrees or more without crossing the line of flight of the intercepted aircraft	You may proceed	AEROPLANES DA or NIGHT Rocking wings HELICOPTERS DA or NIGHT–Rocking aircraft	Understood Will comply
3	DA –Circling aerodrome lowering landing gear and overflying runway in direction of landing or if the intercepted aircraft is a helicopter overflying the helicopter landing area NIGHT–Same and in addition showing steady landing lights	Land at this aerodrome	AEROPLANES DA –Lowering landing gear following the intercepting aircraft and if after overflying the runway landing is considered safe proceeding to land NIGHT–Same and in addition showing steady landing lights if carried HELICOPTERS DA or NIGHT Following the intercepting aircraft and proceeding to land showing a steady landing light if carried	Understood Will comply

TBL 5-6-2
Intercepting Signals

INTERCEPTING SIGNALS Signals and Responses During Aircraft Intercept Signals initiated by intercepted aircraft and responses by intercepting aircraft (as set forth in ICAO Annex 2-Appendix 1, 2.2)				
Series	INTERCEPTED Aircraft Signals	Meaning	INTERCEPTING Aircraft Responds	Meaning
4	DA or NIGHT-Raising landing gear if fitted and flashing landing lights while passing over runway in use or helicopter landing area at a height exceeding 300m 1 000 ft but not exceeding 600m 2 000 ft in the case of a helicopter at a height exceeding 50m 170 ft but not exceeding 100m 330 ft above the aerodrome level and continuing to circle runway in use or helicopter landing area. If unable to flash landing lights flash any other lights available.	Aerodrome you have designated is inadequate.	DA or NIGHT-If it is desired that the intercepted aircraft follow the intercepting aircraft to an alternate aerodrome the intercepting aircraft raises its landing gear if fitted and uses the Series 1 signals prescribed for intercepting aircraft. If it is decided to release the intercepted aircraft the intercepting aircraft uses the Series 2 signals prescribed for intercepting aircraft.	Understood follow me. Understood you may proceed.
5	DA or NIGHT-Regular switching on and off of all available lights but in such a manner as to be distinct from flashing lights.	Cannot comply.	DA or NIGHT Use Series 2 signals prescribed for intercepting aircraft.	Understood.
6	DA or NIGHT-Irregular flashing of all available lights.	In distress.	DA or NIGHT Use Series 2 signals prescribed for intercepting aircraft.	Understood.

5-6-5. ADIZ Boundaries and Designated Mountainous Areas See FIG 5-6-3

FIG 5-6-3
Air Defense Identification Zone Boundaries
Designated Mountainous Areas

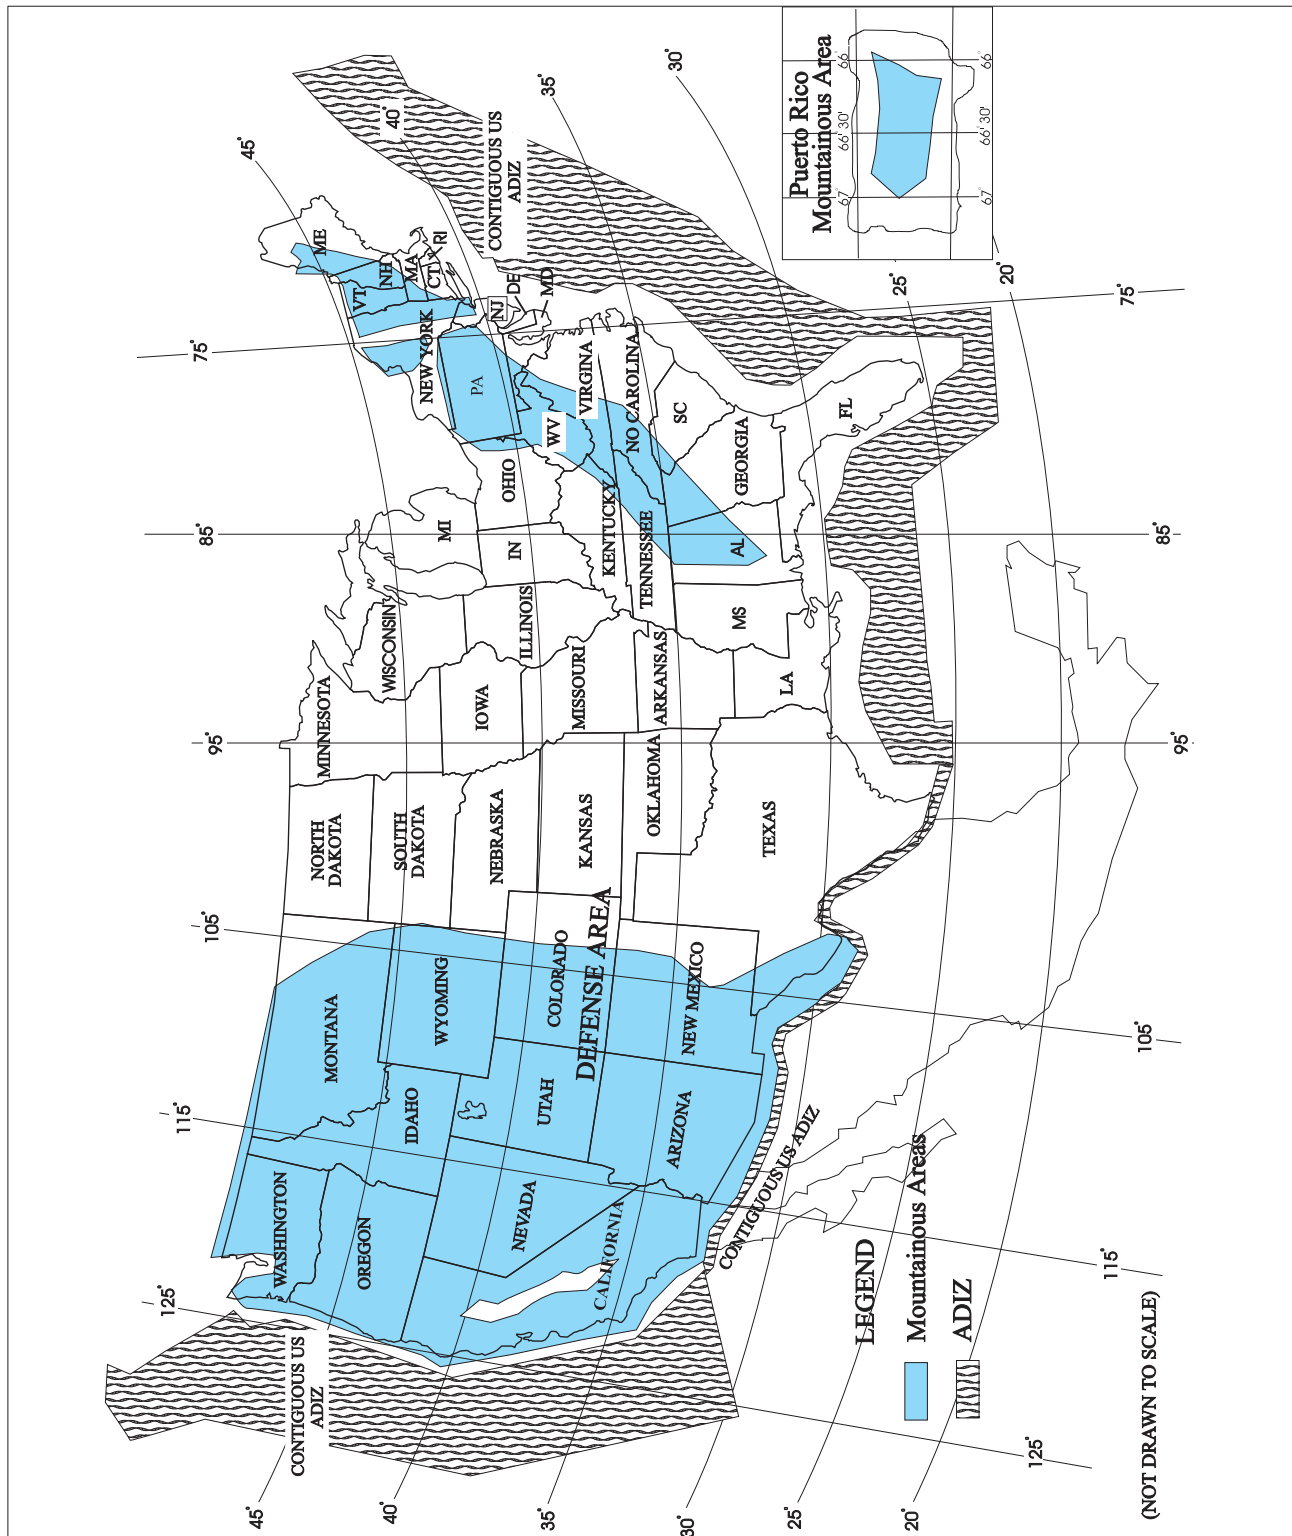

5-6-6. Visual Warning System (VWS)

The VWS signal consists of highly focused red and green colored laser lights designed to illuminate in an alternating red and green signal pattern. These lasers may be directed at specific aircraft suspected of making unauthorized entry into the Washington DC Special Flight Rules Area (DC SFRA) proceeding on a heading or flight path that may be interpreted as a threat or that operate contrary to the operating rules for the DC SFRA. The beam is neither hazardous to the eyes of pilots/aircrew or passengers regardless of altitude or distance from the source nor will the beam affect aircraft systems.

a. If you are communicating with ATC and this signal is directed at your aircraft, you are required to contact ATC and advise that you are being illuminated by a visual warning system.

b. If this signal is directed at you and you are not communicating with ATC, you are advised to turn to the most direct heading away from the center of the DC SFRA as soon as possible. Immediately contact

ATC on an appropriate frequency (VHF Guard 121.5 or UHF Guard 243.0) and provide your aircraft identification, position, and nature of the flight. Failure to follow these procedures may result in interception by military aircraft. Further noncompliance with interceptor aircraft or ATC may result in the use of force.

c. Pilots planning to operate aircraft in or near the DC SFRA are to familiarize themselves with aircraft intercept procedures. This information applies to all aircraft operating within the DC SFRA, including DOD Law Enforcement and aircraft engaged in aeromedical operations and does not change procedures established for reporting unauthorized laser illumination as published in FAA Advisory Circulars and Notices.

REFERENCE—
CFR 91.161

d. More details including a video demonstration of the VWS are available from the following FAA website: **www.faa.gov/VisualWarningSystem/VisualWarning.htm**

Chapter 6. Emergency Procedures

Section 1. General

6-1-1. Pilot Responsibility and Authority

a. The pilot-in-command of an aircraft is directly responsible for and is the final authority as to the operation of that aircraft. In an emergency requiring immediate action, the pilot-in-command may deviate from any rule in 14 CFR Part 91 Subpart A General and Subpart B Flight Rules to the extent required to meet that emergency.

REFERENCE—
14 CFR Section 91.3(b).

b. If the emergency authority of 14 CFR Section 91.3(b) is used to deviate from the provisions of an ATC clearance, the pilot-in-command must notify ATC as soon as possible and obtain an amended clearance.

c. Unless deviation is necessary under the emergency authority of 14 CFR Section 91.3, pilots of IFR flights experiencing total two-way radio communications failure are expected to adhere to the procedures prescribed under IFR operations in total two-way radio communications failure.

REFERENCE—
14 CFR Section 91.185.

6-1-2. Emergency Condition— Request Assistance Immediately

a. An emergency can be either a *distress* or *urgency* condition as defined in the Pilot/Controller Glossary. Pilots do not hesitate to declare an emergency when they are faced with *distress* conditions such as fire, mechanical failure, or structural damage. However, some are reluctant to report an *urgency* condition when they encounter situations which may not be immediately perilous but are potentially catastrophic. An aircraft is in at least an *urgency* condition the moment the pilot becomes doubtful about position, fuel endurance, weather, or any other condition that could adversely affect flight safety. This is the time to ask for help, not after the situation has developed into a *distress* condition.

b. Pilots who become apprehensive for their safety for any reason should *request assistance immediately*. Ready and willing help is available in the form of radio, radar, direction finding stations, and other aircraft. Delay has caused accidents and cost lives. *Safety is not a luxury! Take action!*

Section 2. Emergency Services Available to Pilots

6-2-1. Radar Service for VFR Aircraft in Difficulty

a. Radar equipped ATC facilities can provide radar assistance and navigation service vectors to VFR aircraft in difficulty when the pilot can talk with the controller and the aircraft is within radar coverage. Pilots should clearly understand that authorization to proceed in accordance with such radar navigational assistance does not constitute authorization for the pilot to violate CFRs. In effect, assistance is provided on the basis that navigational guidance information is advisory in nature and the responsibility for flying the aircraft safely remains with the pilot.

b. Experience has shown that many pilots who are not qualified for instrument flight cannot maintain control of their aircraft when they encounter clouds or other reduced visibility conditions. In many cases, the controller will not know whether flight into instrument conditions will result from ATC instructions. To avoid possible hazards resulting from being vectored into IFR conditions, a pilot in difficulty should keep the controller advised of the current weather conditions being encountered and the weather along the course ahead and observe the following:

1. If a course of action is available which will permit flight and a safe landing in VFR weather conditions, noninstrument rated pilots should choose the VFR condition rather than requesting a vector or approach that will take them into IFR weather conditions or

2. If continued flight in VFR conditions is not possible, the noninstrument rated pilot should so advise the controller and, indicating the lack of an instrument rating, declare a *distress* condition or

3. If the pilot is instrument rated and current and the aircraft is instrument equipped, the pilot should so indicate by requesting an IFR flight clearance. Assistance will then be provided on the basis that the aircraft can operate safely in IFR weather conditions.

6-2-2. Transponder Emergency Operation

a. When a *distress* or *urgency* condition is encountered, the pilot of an aircraft with a coded radar beacon transponder who desires to alert a ground radar facility should squawk Mode 3/A Code 7700/Emergency and Mode C altitude reporting and then immediately establish communications with the ATC facility.

b. Radar facilities are equipped so that Code 7700 normally triggers an alarm or special indicator at all control positions. Pilots should understand that they might not be within a radar coverage area. Therefore, they should continue squawking Code 7700 and establish radio communications as soon as possible.

6-2-3. Intercept and Escort

a. The concept of airborne intercept and escort is based on the Search and Rescue (SAR) aircraft establishing visual and/or electronic contact with an aircraft in difficulty, providing in-flight assistance and escorting it to a safe landing. If bailout, crash landing, or ditching becomes necessary, SAR operations can be conducted without delay. For most incidents, particularly those occurring at night and/or during instrument flight conditions, the availability of intercept and escort services will depend on the proximity of SAR units with suitable aircraft on alert for immediate dispatch. In limited circumstances, other aircraft flying in the vicinity of an aircraft in difficulty can provide these services.

b. If specifically requested by a pilot in difficulty or if a *distress* condition is declared, SAR coordinators will take steps to intercept and escort an aircraft. Steps may be initiated for intercept and escort if an *urgency* condition is declared and unusual circumstances make such action advisable.

c. It is the pilot's prerogative to refuse intercept and escort services. Escort services will normally be provided to the nearest adequate airport. Should the pilot receiving escort services continue onto another location after reaching a safe airport or decide not to divert to the nearest safe airport, the escort aircraft is not obligated to continue and further escort is

discretionary. The decision will depend on the circumstances of the individual incident.

6-2-4. Emergency Locator Transmitter (ELT)

a. General.

1. ELTs are required for most General Aviation airplanes.

REFERENCE—
14 CFR SECTION 91.207.

2. ELTs of various types were developed as a means of locating downed aircraft. These electronic battery operated transmitters operate on one of three frequencies. These operating frequencies are 121.5 MHz, 243.0 MHz, and the newer 406 MHz. ELTs operating on 121.5 MHz and 243.0 MHz are analog devices. The newer 406 MHz ELT is a digital transmitter that can be encoded with the owner's contact information or aircraft data. The latest 406 MHz ELT models can also be encoded with the aircraft's position data, which can help SAR forces locate the aircraft much more quickly after a crash. The 406 MHz ELTs also transmit a stronger signal when activated than the older 121.5 MHz ELTs.

(a) The Federal Communications Commission (FCC) requires 406 MHz ELTs be registered with the National Oceanic and Atmospheric Administration (NOAA) as outlined in the ELTs documentation. The FAA's 406 MHz ELT Technical Standard Order (TSO) TSO-C126 also requires that each 406 MHz ELT be registered with NOAA. The reason is NOAA maintains the owner registration database for U.S. registered 406 MHz alerting devices, which includes ELTs. NOAA also operates the United States portion of the Cospas-Sarsat satellite distress alerting system designed to detect activated ELTs and other distress alerting devices.

(b) In the event that a properly registered 406 MHz ELT activates, the Cospas-Sarsat satellite system can decode the owner's information and provide that data to the appropriate search and rescue (SAR) center. In the United States, NOAA provides the alert data to the appropriate U.S. Air Force Rescue Coordination Center (RCC) or U.S. Coast Guard Rescue Coordination Center. That RCC can then telephone or contact the owner to verify the status of the aircraft. If the aircraft is safely secured in a hangar, a costly ground or airborne search is

avoided. In the case of an inadvertent 406 MHz ELT activation, the owner can deactivate the 406 MHz ELT. If the 406 MHz ELT-equipped aircraft is being flown, the RCC can quickly activate a search. 406 MHz ELTs permit the Cospas-Sarsat satellite system to narrow the search area to a more confined area compared to that of a 121.5 MHz or 243.0 MHz ELT. 406 MHz ELTs also include a low-power 121.5 MHz homing transmitter to aid searchers in finding the aircraft in the terminal search phase.

(c) Each analog ELT emits a distinctive downward swept audio tone on 121.5 MHz and 243.0 MHz.

(d) If armed and then subject to crash-generated forces, ELTs are designed to automatically activate and continuously emit their respective signals, analog or digital. The transmitters will operate continuously for at least 48 hours over a wide temperature range. A properly installed, maintained, and functioning ELT can expedite search and rescue operations and save lives if it survives the crash and is activated.

(e) Pilots and their passengers should know how to activate the aircraft's ELT if manual activation is required. They should also be able to verify the aircraft's ELT is functioning and transmitting an alert after a crash or manual activation.

(f) Because of the large number of 121.5 MHz ELT false alerts and the lack of a quick means of verifying the actual status of an activated 121.5 MHz or 243.0 MHz analog ELT through an owner registration database, U.S. SAR forces do not respond as quickly to initial 121.5/243.0 MHz ELT alerts as the SAR forces do to 406 MHz ELT alerts. Compared to the almost instantaneous detection of a 406 MHz ELT, SAR forces' normal practice is to wait for either a confirmation of a 121.5/243.0 MHz alert by additional satellite passes or through confirmation of an overdue aircraft or similar notification. In some cases, this confirmation process can take hours. SAR forces can initiate a response to 406 MHz alerts in minutes compared to the potential delay of hours for a 121.5/243.0 MHz ELT.

3. The Cospas-Sarsat system has announced the termination of satellite monitoring and reception of the 121.5 MHz and 243.0 MHz frequencies in 2009. The Cospas-Sarsat system will continue to monitor the 406 MHz frequency. What this means for pilots is that after the termination date, those aircraft with only

121.5 MHz or 243.0 MHz ELTs onboard will have to depend upon either a nearby Air Traffic Control facility receiving the alert signal or an overflying aircraft monitoring 121.5 MHz or 243.0 MHz detecting the alert. To ensure adequate monitoring of these frequencies and timely alerts after 2009 all airborne pilots should periodically monitor these frequencies to try and detect an activated 121.5/243.0 MHz ELT.

b. Testing.

1. ELTs should be tested in accordance with the manufacturer's instructions preferably in a shielded or screened room or specially designed test container to prevent the broadcast of signals which could trigger a false alert.

2. When this cannot be done aircraft operational testing is authorized as follows:

(a) Analog 121.5/243 MHz ELTs should only be tested during the first 5 minutes after any hour. If operational tests must be made outside of this period they should be coordinated with the nearest FAA Control Tower or FSS. Tests should be no longer than three audible beeps. If the antenna is removable a dummy load should be substituted during test procedures.

(b) Digital 406 MHz ELTs should only be tested in accordance with the unit's manufacturer's instructions.

(c) Airborne tests are not authorized.

c. False Alarms.

1. Caution should be exercised to prevent the inadvertent activation of ELTs in the air or while they are being handled on the ground. Accidental or unauthorized activation will generate an emergency signal that cannot be distinguished from the real thing, leading to expensive and frustrating searches. A false ELT signal could also interfere with genuine emergency transmissions and hinder or prevent the timely location of crash sites. Frequent false alarms could also result in complacency and decrease the vigorous reaction that must be attached to all ELT signals.

2. Numerous cases of inadvertent activation have occurred as a result of aerobatics, hard landings, movement by ground crews and aircraft maintenance.

These false alarms can be minimized by monitoring 121.5 MHz and/or 243.0 MHz as follows:

(a) In flight when a receiver is available.

(b) Before engine shutdown at the end of each flight.

(c) When the ELT is handled during installation or maintenance.

(d) When maintenance is being performed near the ELT.

(e) When a ground crew moves the aircraft.

(f) If an ELT signal is heard, turn off the aircraft's ELT to determine if it is transmitting. If it has been activated, maintenance might be required before the unit is returned to the ARMED position. You should contact the nearest Air Traffic facility and notify it of the inadvertent activation.

d. Inflight Monitoring and Reporting.

1. Pilots are encouraged to monitor 121.5 MHz and/or 243.0 MHz while inflight to assist in identifying possible emergency ELT transmissions. On receiving a signal, report the following information to the nearest air traffic facility:

(a) Your position at the time the signal was first heard.

(b) Your position at the time the signal was last heard.

(c) Your position at maximum signal strength.

(d) Your flight altitudes and frequency on which the emergency signal was heard, 121.5 MHz or 243.0 MHz. If possible, positions should be given relative to a navigation aid. If the aircraft has homing equipment, provide the bearing to the emergency signal with each reported position.

6-2-5. FAA K-9 Explosives Detection Team Program

a. The FAA's Office of Civil Aviation Security Operations manages the FAA K-9 Explosives Detection Team Program, which was established in 1972. Through a unique agreement with law enforcement agencies and airport authorities, the FAA has strategically placed FAA-certified K-9 teams. A team is one handler and one dog at airports throughout the country. If a bomb threat is received

While an aircraft is in flight the aircraft can be directed to an airport with this capability. The FAA provides initial and refresher training for all handlers provides single purpose explosive detector dogs and requires that each team is annually evaluated in five areas for FAA certification: aircraft, airfield, and narrow body vehicles, terminal freight cargo, and luggage. **If you desire this service, notify your company or an FAA air traffic control facility.**

b. The following list shows the locations of current FAA K-9 teams:

TBL 6-2-1

**FAA Sponsored Explosives Detection
Dog/Handler Team Locations**

Airport Symbol	Location
ATL	Atlanta Georgia
BHM	Birmingham Alabama
BOS	Boston Massachusetts
BUF	Buffalo New York
CLT	Charlotte North Carolina
ORD	Chicago Illinois
CVG	Cincinnati Ohio
DFW	Dallas Texas
DEN	Denver Colorado
DTW	Detroit Michigan
IAH	Houston Texas
JA	Jacksonville Florida
MCI	Kansas City Missouri
LA	Los Angeles California
MEM	Memphis Tennessee
MIA	Miami Florida
MKE	Milwaukee Wisconsin
MS	New Orleans Louisiana
MCO	Orlando Florida
PHX	Phoenix Arizona
PIT	Pittsburgh Pennsylvania
PD	Portland Oregon
SLC	Salt Lake City Utah
SFO	San Francisco California
SJU	San Juan Puerto Rico
SEA	Seattle Washington

STL	St Louis Missouri
TUS	Tucson Arizona
TUL	Tulsa Oklahoma

c. If due to weather or other considerations an aircraft with a suspected hidden explosive problem were to land or intended to land at an airport other than those listed in b above, it is recommended that they call the FAA's Washington Operations Center telephone 202-267-3333 if appropriate or have an air traffic facility with which you can communicate contact the above center requesting assistance.

6-2-6. Search and Rescue

a. General. SAR is a lifesaving service provided through the combined efforts of the federal agencies signatory to the National SAR Plan and the agencies responsible for SAR within each state. Operational resources are provided by the U.S. Coast Guard, DOD components, the Civil Air Patrol, the Coast Guard Auxiliary, state, county, and local law enforcement and other public safety agencies, and private volunteer organizations. Services include search for missing aircraft, survival aid, rescue, and emergency medical help for the occupants after an accident site is located.

b. National Search and Rescue Plan. By federal interagency agreement, the National Search and Rescue Plan provides for the effective use of all available facilities in all types of SAR missions. These facilities include aircraft, vessels, pararescue, and ground rescue teams, and emergency radio fixing. Under the plan, the U.S. Coast Guard is responsible for the coordination of SAR in the Maritime Region, and the USAF is responsible in the Inland Region. To carry out these responsibilities, the Coast Guard and the Air Force have established Rescue Coordination Centers (RCCs) to direct SAR activities within their regions. For aircraft emergencies, distress, and urgency information normally will be passed to the appropriate RCC through an ARTCC or FSS.

c. Coast Guard Rescue Coordination Centers. See TBL 6-2-2.

TBL 6-2-2

Coast Guard Rescue Coordination Centers

Coast Guard Rescue Coordination Centers	
Alameda CA 510-437-3701	Miami FL 305-415-6800
Boston MA 617-223-8555	New Orleans LA 504-589-6225
Cleveland OH 216-902-6117	Portsmouth VA 757-398-6390
Honolulu HI 808-541-2500	Seattle WA 206-220-7001
Juneau AK 907-463-2000	San Juan PR 787-289-2042

d. Air Force Rescue Coordination Centers.

See TBL 6-2-3 and TBL 6-2-4

TBL 6-2-3

**Air Force Rescue Coordination Center
48 Contiguous States**

Air Force Rescue Coordination Center	
Tyndall AFB, Florida	Phone
Commercial	850-283-5955
WATS	800-851-3051
DSN	523-5955

TBL 6-2-4

**Air Command Rescue Coordination Center
Alaska**

Alaskan Air Command Rescue Coordination Center	
Elmendorf AFB, Alaska	Phone
Commercial	907-428-7230 800-420-7230 outside Anchorage
DSN	317-551-7230

e. Joint Rescue Coordination Center.

See TBL 6-2-5

TBL 6-2-5

**Joint Rescue Coordination Center
Hawaii**

Honolulu Joint Rescue Coordination Center	
HQ 14th CG District Honolulu	Phone
Commercial	808-541-2500
DSN	448-0301

f. Emergency and Overdue Aircraft.

1. ARTCCs and FSSs will alert the SAR system when information is received from any source that an aircraft is in difficulty overdue or missing

(a) Radar facilities providing radar flight following or advisories consider the loss of radar and radios without service termination notice to be a possible emergency. Pilots receiving VFR services from radar facilities should be aware that SAR may be initiated under these circumstances

(b) A filed flight plan is the most timely and effective indicator that an aircraft is overdue. Flight plan information is invaluable to SAR forces for search planning and executing search efforts

2. Prior to departure on every flight local or other wise someone at the departure point should be advised of your destination and route of flight if other than direct. Search efforts are often wasted and rescue is often delayed because of pilots who thoughtlessly takeoff without telling anyone where they are going. File a flight plan for *your* safety

3. According to the National Search and Rescue Plan. The life expectancy of an injured survivor decreases as much as 80 percent during the first 24 hours while the chances of survival of uninjured survivors rapidly diminishes after the first 3 days

4. An Air Force Review of 325 SAR missions conducted during a 23-month period revealed that Time works against people who experience a *distress* but are not on a flight plan since 36 hours normally pass before family concern initiates an alert

g. VFR Search and Rescue Protection.

1. To receive this valuable protection *file a VFR or DVFR Flight Plan* with an FAA FSS. For maximum protection file only to the point of first intended landing and refile for each leg to final destination. When a lengthy flight plan is filed with several stops en route and an ETE to final destination a mishap could occur on any leg and unless other information is received it is probable that no one would start looking for you until 30 minutes after your ETA at your final destination

2. If you land at a location other than the intended destination report the landing to the nearest FAA FSS and advise them of your original destination

3. If you land en route and are delayed more than 30 minutes report this information to the nearest FSS and give them your original destination

4. If your ETE changes by 30 minutes or more report a new ETA to the nearest FSS and give them your original destination. Remember that if you fail to respond within one half hour after your ETA at final destination a search will be started to locate you

5. It is important that you *close your flight plan IMMEDIATELY AFTER ARRIVAL AT YOUR FINAL DESTINATION WITH THE FSS DESIGNATED WHEN YOUR FLIGHT PLAN WAS FILED. The pilot is responsible for closure of a VFR or DVFR flight plan; they are not closed automatically.* This will prevent needless search efforts

6. The rapidity of rescue on land or water will depend on how accurately your position may be determined. If a flight plan has been followed and your position is on course rescue will be expedited

h. Survival Equipment.

1. For flight over uninhabited land areas it is wise to take and know how to use survival equipment for the type of climate and terrain

2. If a forced landing occurs at sea chances for survival are governed by the degree of crew proficiency in emergency procedures and by the availability and effectiveness of water survival equipment

i. Body Signal Illustrations.

1. If you are forced down and are able to attract the attention of the pilot of a rescue airplane the body

signals illustrated on these pages can be used to transmit messages to the pilot circling over your location

2. Stand in the open when you make the signals

3. Be sure the background as seen from the air is not confusing

4. Go through the motions slowly and repeat each signal until you are positive that the pilot understands you

j. Observance of Downed Aircraft.

1. Determine if crash is marked with a yellow cross if so the crash has already been reported and identified

2. If possible determine type and number of aircraft and whether there is evidence of survivors

3. Fix the position of the crash as accurately as possible with reference to a navigational aid. If possible provide geographic or physical description of the area to aid ground search parties

4. Transmit the information to the nearest FAA or other appropriate radio facility

5. If circumstances permit orbit the scene to guide in other assisting units until their arrival or until you are relieved by another aircraft

6. Immediately after landing make a complete report to the nearest FAA facility or Air Force or Coast Guard Rescue Coordination Center. The report can be made by a long distance collect telephone call

FIG 6-2-1
Ground-Air Visual Code for Use by Survivors

NO	MESSAGE	CODE SYMBOL
1	Require assistance	V
2	Require medical assistance	X
3	No or Negative	N
4	Yes or Affirmative	Y
5	Proceeding in this direction	↑

IF IN DOUBT USE INTERNATIONAL SYMBOLS **S O S**
INSTRUCTIONS

- 1 Lay out symbols by using strips of fabric or parachutes, pieces of wood, stones, or any available material
- 2 Provide as much color contrast as possible between material used for symbols and background against which symbols are exposed
- 3 Symbols should be at least 10 feet high or larger. Care should be taken to lay out symbols exactly as shown
- 4 In addition to using symbols, every effort is to be made to attract attention by means of radio, flares, smoke, or other available means
- 5 On snow-covered ground, signals can be made by dragging, shoveling or tramping. Depressed areas forming symbols will appear black from the air
- 6 Pilot should acknowledge message by rocking wings from side to side

FIG 6-2-2
Ground-Air Visual Code for use by Ground Search Parties

NO	MESSAGE	CODE SYMBOL
1	Operation completed	LLL
2	We have found all personnel	LL
3	We have found only some personnel	++
4	We are not able to continue Returning to base	XX
5	Have divided into two groups Each proceeding in direction indicated	↗ ↘
6	Information received that aircraft is in this direction	→ →
7	Nothing found. Will continue search	NN

Note: These visual signals have been accepted for international use and appear in Annex 12 to the Convention on International Civil Aviation

FIG 6-2-3
Urgent Medical Assistance

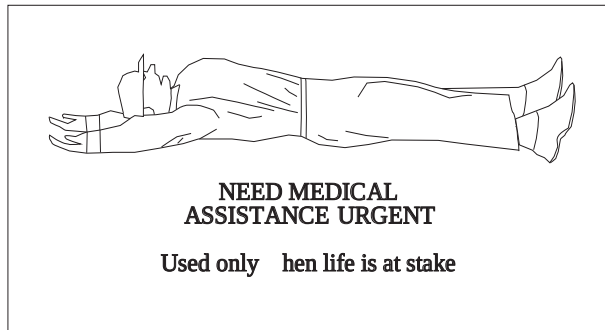


FIG 6-2-4
All OK

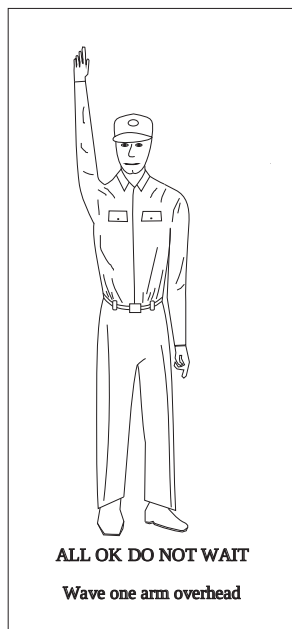


FIG 6-2-5
Short Delay

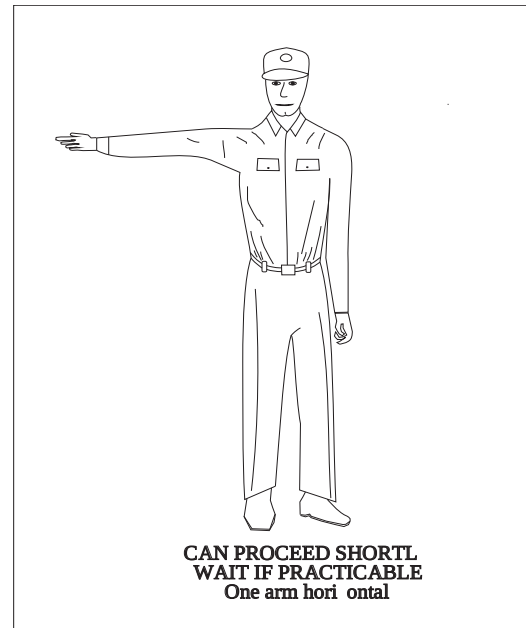


FIG 6-2-6
Long Delay

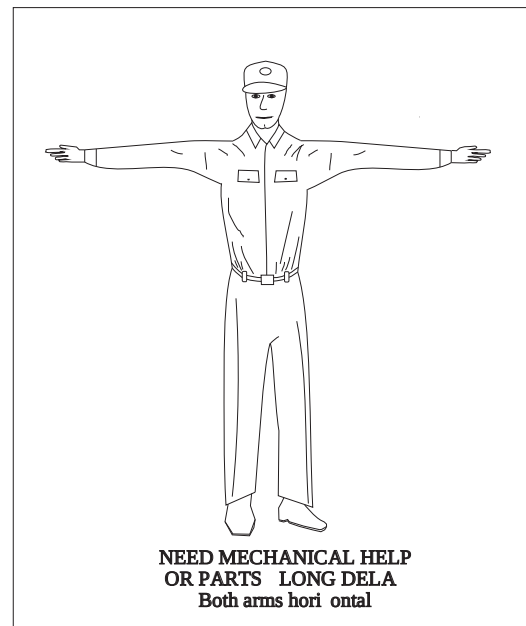


FIG 6-2-7
Drop Message

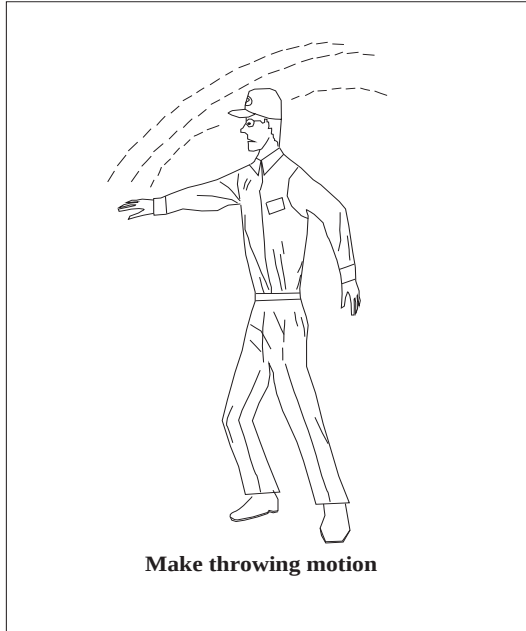


FIG 6-2-9
Do Not Land Here

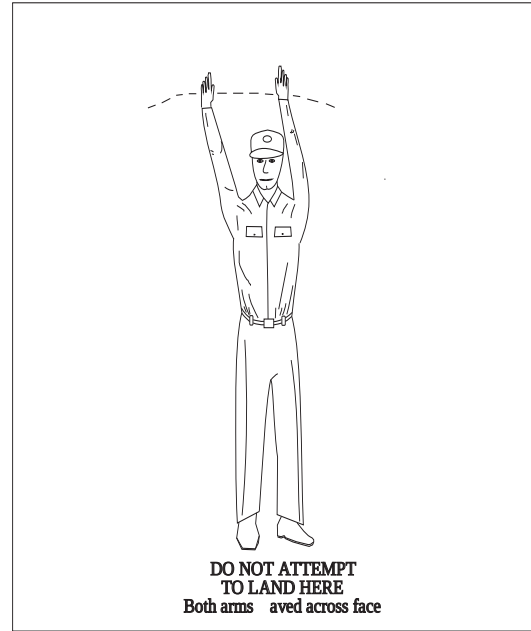


FIG 6-2-8
Receiver Operates

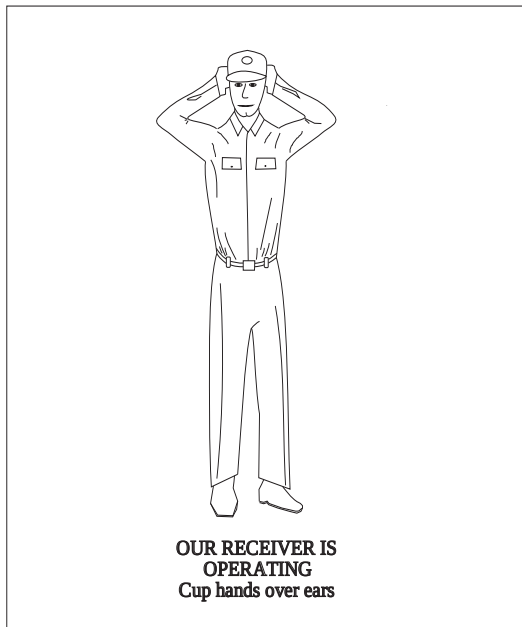


FIG 6-2-10
Land Here

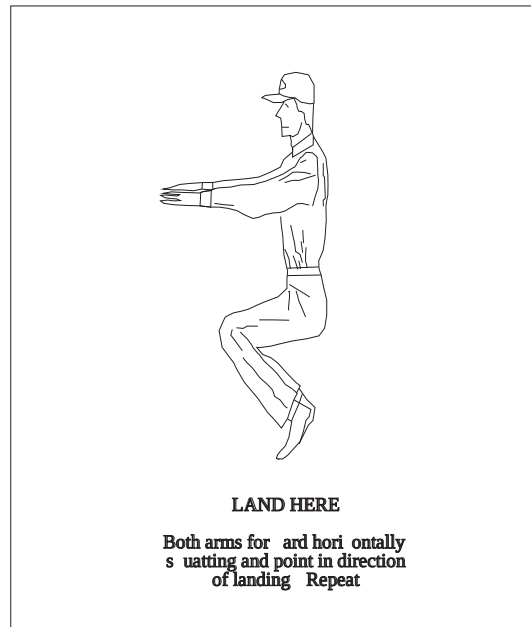


FIG 6-2-11
Negative (Ground)

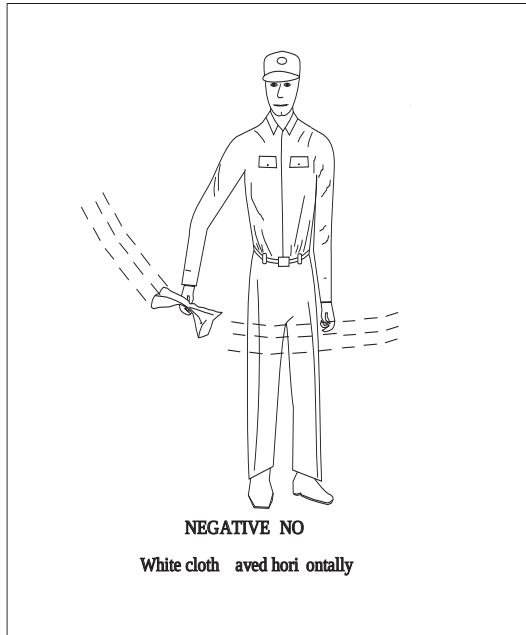


FIG 6-2-13
Pick Us Up

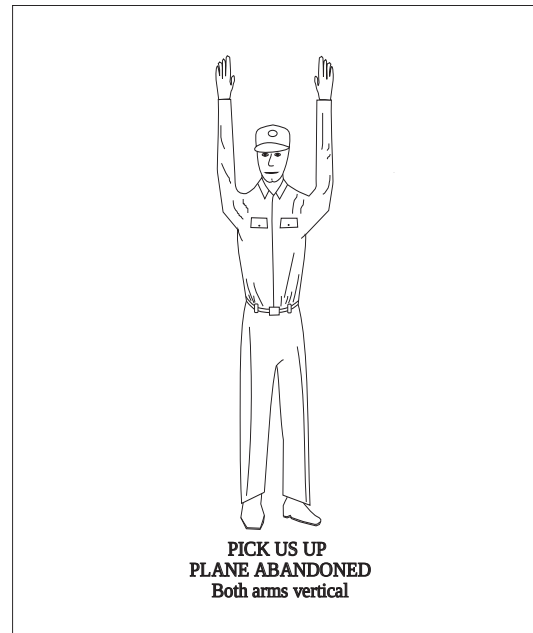


FIG 6-2-12
Affirmative (Ground)

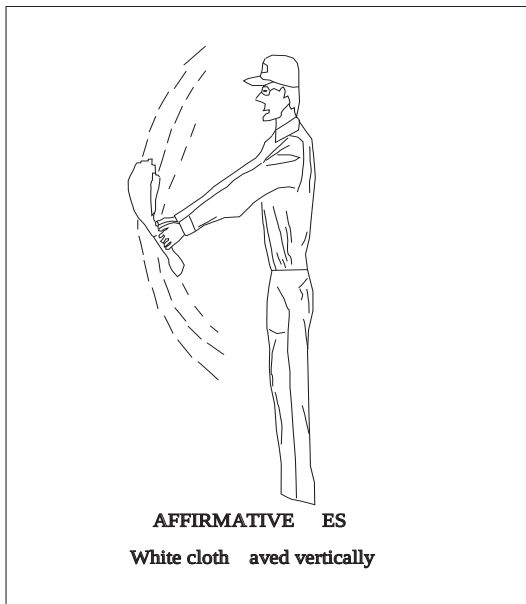


FIG 6-2-14
Affirmative (Aircraft)

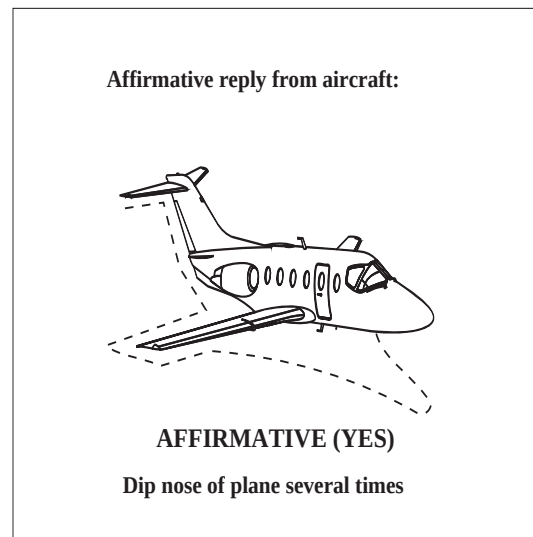


FIG 6-2-15
Negative (Aircraft)

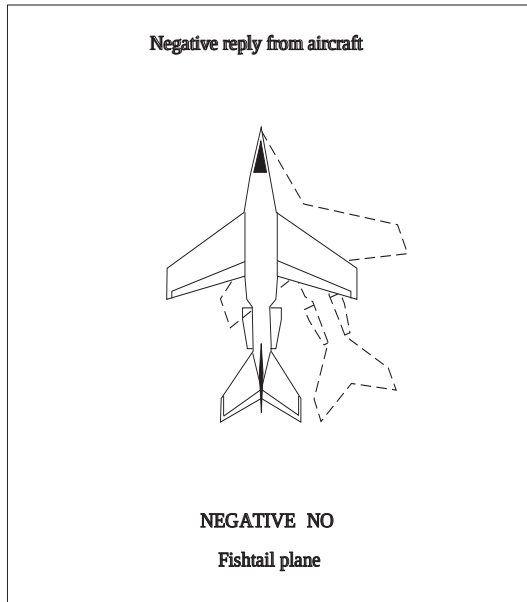


FIG 6-2-16
Message received and understood (Aircraft)


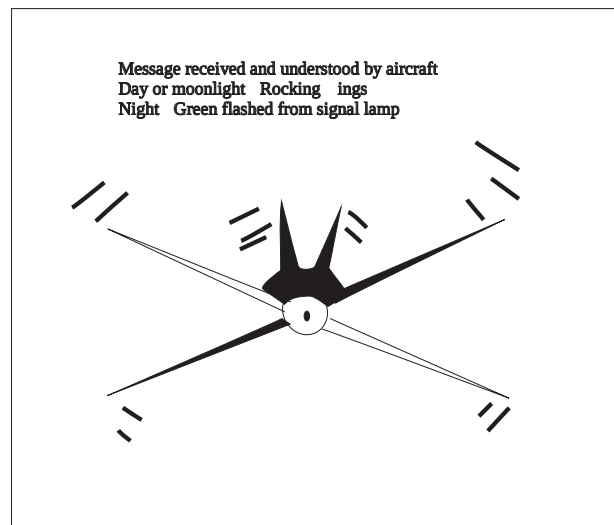


FIG 6-2-17
Message received and NOT understood (Aircraft)

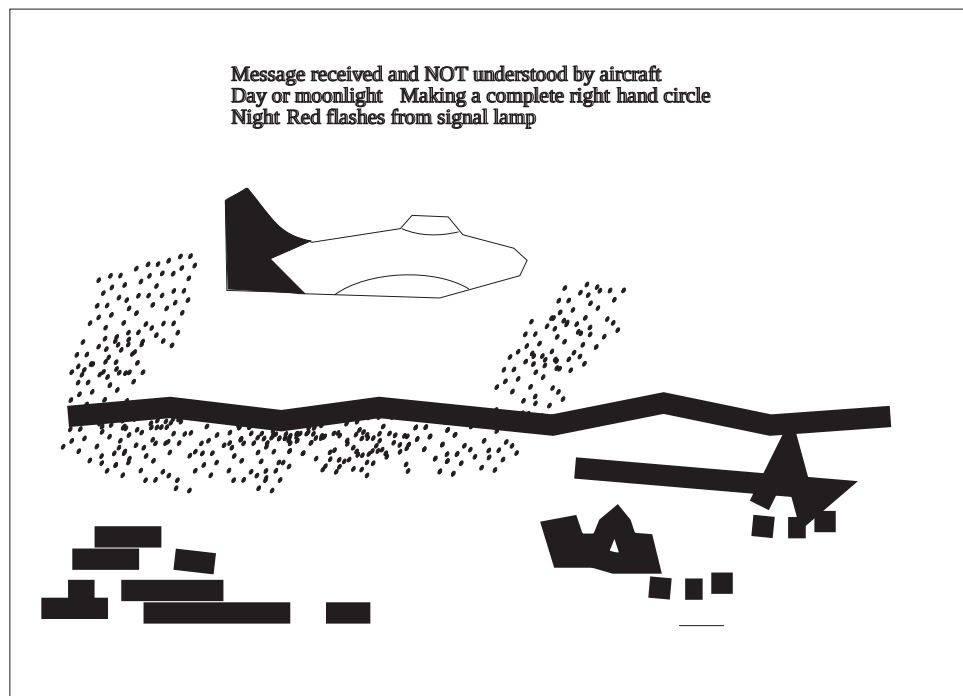

Section 3. Distress and Urgency Procedures

6-3-1. Distress and Urgency Communications

a. A pilot who encounters a *distress* or *urgency* condition can obtain assistance simply by contacting the air traffic facility or other agency in whose area of responsibility the aircraft is operating stating the nature of the difficulty pilot's intentions and assistance desired. *Distress* and *urgency* communications procedures are prescribed by the International Civil Aviation Organization (ICAO) however and have decided advantages over the informal procedure described above.

b. *Distress* and *urgency* communications procedures discussed in the following paragraphs relate to the use of air ground voice communications.

c. The initial communication and if considered necessary any subsequent transmissions by an aircraft in *distress* should begin with the signal MA DA preferably repeated three times. The signal PAN-PAN should be used in the same manner for an *urgency* condition.

d. *Distress* communications have absolute priority over all other communications and the word MA DA commands radio silence on the frequency in use. *Urgency* communications have priority over all other communications except *distress*, and the word PAN-PAN warns other stations not to interfere with *urgency* transmissions.

e. Normally the station addressed will be the air traffic facility or other agency providing air traffic services on the frequency in use at the time. If the pilot is not communicating and receiving services the station to be called will normally be the air traffic facility or other agency in whose area of responsibility the aircraft is operating on the appropriate assigned frequency. If the station addressed does not respond or if time or the situation dictates the *distress* or *urgency* message may be broadcast or a collect call may be used addressing Any Station To or Radio Radar.

f. The station addressed should immediately acknowledge a *distress* or *urgency* message provide assistance coordinate and direct the activities of assisting facilities and alert the appropriate search and rescue coordinator if warranted. Responsibility will be transferred to another station only if better handling will result.

g. All other stations aircraft and ground will continue to listen until it is evident that assistance is being provided. If any station becomes aware that the station being called either has not received a *distress* or *urgency* message or cannot communicate with the aircraft in difficulty it will attempt to contact the aircraft and provide assistance.

h. Although the frequency in use or other frequencies assigned by ATC are preferable the following emergency frequencies can be used for *distress* or *urgency* communications if necessary or desirable.

1. **121.5 MHz and 243.0 MHz.** Both have a range generally limited to line of sight. 121.5 MHz is guarded by direction finding stations and some military and civil aircraft. 243.0 MHz is guarded by military aircraft. Both 121.5 MHz and 243.0 MHz are guarded by military towers most civil towers FSSs and radar facilities. Normally ARTCC emergency frequency capability does not extend to radar coverage limits. If an ARTCC does not respond when called on 121.5 MHz or 243.0 MHz call the nearest tower or FSS.

2. **2182 kHz.** The range is generally less than 300 miles for the average aircraft installation. It can be used to request assistance from stations in the maritime service. 2182 kHz is guarded by major radio stations serving Coast Guard Rescue Coordination Centers and Coast Guard units along the sea coasts of the U.S. and shores of the Great Lakes. The call Coast Guard will alert all Coast Guard Radio Stations within range. 2182 kHz is also guarded by most commercial coast stations and some ships and boats.

6-3-2. Obtaining Emergency Assistance

a. A pilot in any *distress* or *urgency* condition should *immediately* take the following action not necessarily in the order listed to obtain assistance

1. Climb if possible for improved communications and better radar and direction finding detection. However, it must be understood that unauthorized climb or descent under IFR conditions within controlled airspace is prohibited except as permitted by 14 CFR Section 91.3 b

2. If equipped with a radar beacon transponder, civil or IFF/SIF military

(a) Continue squaking assigned Mode A/3 discrete code/VFR code and Mode C altitude encoding when in radio contact with an air traffic facility or other agency providing air traffic services unless instructed to do otherwise

(b) If unable to immediately establish communications with an air traffic facility/agency, squawk Mode A/3 Code 7700/Emergency and Mode C

3. Transmit a *distress* or *urgency* message consisting of *as many* as necessary of the following elements preferably in the order listed

(a) If distress MA DA MA DA MA – DA if urgency PAN–PAN PAN–PAN PAN–PAN

(b) Name of station addressed

(c) Aircraft identification and type

(d) Nature of *distress* or *urgency*

(e) Weather

(f) Pilot's intentions and request

(g) Present position and heading or if *lost*, last known position, time and heading since that position

(h) Altitude or flight level

(i) Fuel remaining in minutes

(j) Number of people on board

(k) Any other useful information

REFERENCE–

Pilot/Controller Glossary Term– Fuel Remaining.

b. After establishing radio contact, comply with advice and instructions received. Cooperate. Do not hesitate to ask questions or clarify instructions when you do not understand or if you cannot comply with clearance. Assist the ground station to control communications on the frequency in use. Silence interfering radio stations. Do not change frequency or change to another ground station unless absolutely necessary. If you do, advise the ground station of the new frequency and station name prior to the change. Transmitting in the blind, if necessary. If two-way communications cannot be established on the new frequency, return immediately to the frequency or station where two-way communications last existed.

c. When in a distress condition with bailout, crash landing or ditching imminent, take the following additional actions to assist search and rescue units:

1. Time and circumstances permitting, transmit as many as necessary of the message elements in subparagraph a3 above and any of the following that you think might be helpful:

(a) ELT status

(b) Visible landmarks

(c) Aircraft color

(d) Number of persons on board

(e) Emergency equipment on board

2. Actuate your ELT if the installation permits.

3. For bailout and for crash landing or ditching if risk of fire is not a consideration, set your radio for continuous transmission.

4. If it becomes necessary to ditch, make every effort to ditch near a surface vessel. If time permits, an FAA facility should be able to get the position of the nearest commercial or Coast Guard vessel from a Coast Guard Rescue Coordination Center.

5. After a crash landing, unless you have good reason to believe that you will not be located by search aircraft or ground teams, it is best to remain with your aircraft and prepare means for signaling search aircraft.

6-3-3. Ditching Procedures

FIG 6-3-1
Single Swell (15 knot wind)

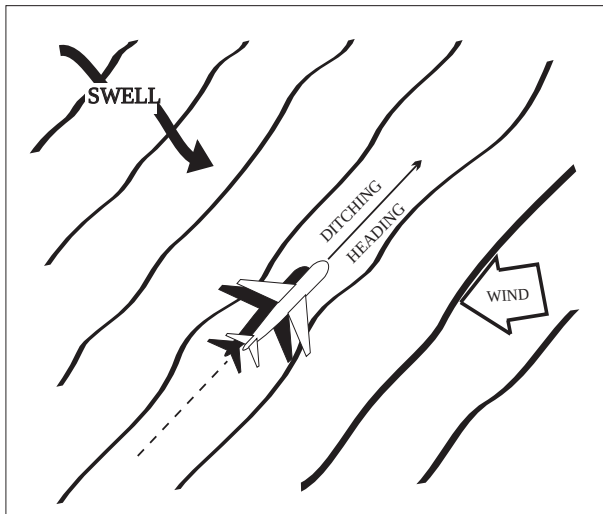


FIG 6-3-3
Double Swell (30 knot wind)

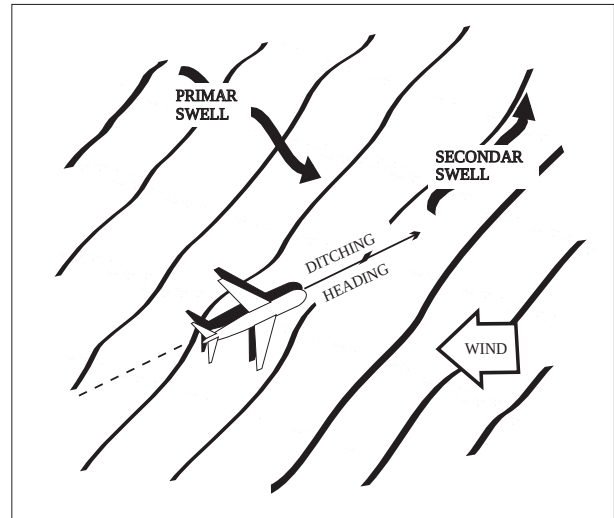


FIG 6-3-2
Double Swell (15 knot wind)

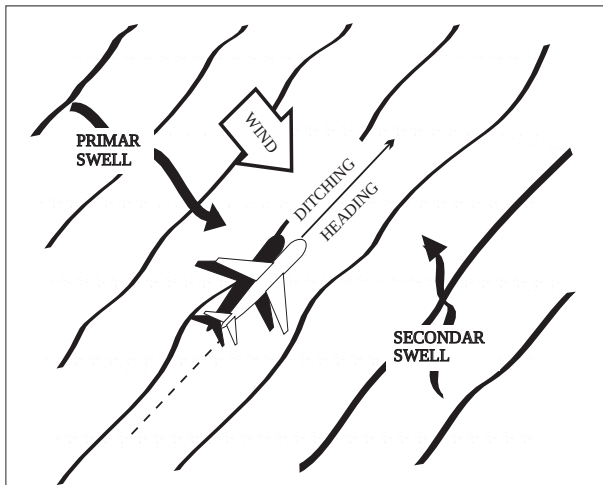


FIG 6-3-4
(50 knot wind)


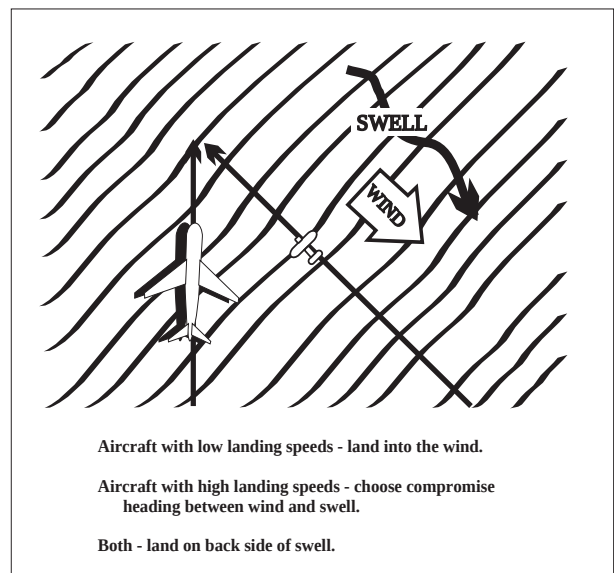


FIG 6-3-5
Wind-Swell-Ditch Heading

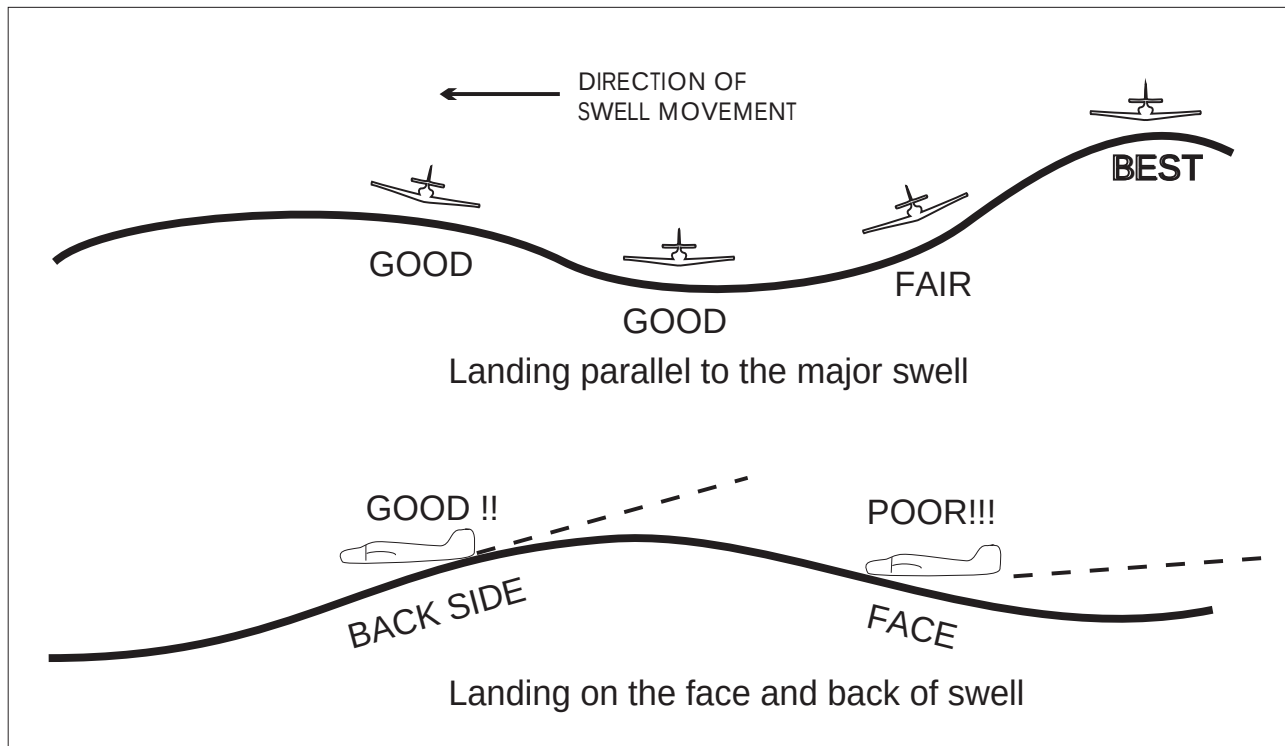

a. A successful aircraft ditching is dependent on three primary factors. In order of importance they are

1. **Sea conditions and wind.**
2. **Type of aircraft.**
3. **Skill and technique of pilot.**

b. Common oceanographic terminology.

1. **Sea.** The condition of the surface that is the result of both waves and swells

2. **Wave** or Chop The condition of the surface caused by the local winds

3. **Swell.** The condition of the surface which has been caused by a distance disturbance

4. **Swell Face.** The side of the swell toward the observer. The backside is the side away from the observer. These definitions apply regardless of the direction of swell movement

5. **Primary Swell.** The swell system having the greatest height from trough to crest

6. **Secondary Swells.** Those swell systems of less height than the primary swell

7. **Fetch.** The distance the waves have been driven by a wind blowing in a constant direction without obstruction

8. **Swell Period.** The time interval between the passage of two successive crests at the same spot in the water measured in seconds

9. **Swell Velocity.** The speed and direction of the swell with relation to a fixed reference point measured in knots. There is little movement of water in the horizontal direction. Swells move primarily in a vertical motion similar to the motion observed when shaking out a carpet

10. **Swell Direction.** The direction from which a swell is moving. This direction is not necessarily the result of the wind present at the scene. The swell may be moving into or across the local wind. Swells once set in motion tend to maintain their original direction for as long as they continue in deep water regardless of changes in wind direction

11. Swell Height. The height between crest and trough measured in feet. The vast majority of ocean swells are lower than 12 to 15 feet and swells over 25 feet are not common at any spot on the oceans. Successive swells may differ considerably in height.

c. In order to select a good heading when ditching an aircraft a basic evaluation of the sea is required. Selection of a good ditching heading may minimize damage and could save your life. It can be extremely dangerous to land into the wind without regard to sea conditions; the swell system or systems must be taken into consideration. Remember one axiom—**AVOID THE FACE OF A SWELL.**

1. In ditching parallel to the swell it makes little difference whether touchdown is on the top of the crest or in the trough. It is preferable however to land on the top or back side of the swell if possible. After determining which heading and its reciprocal will parallel the swell select the heading with the most into the wind component.

2. If only one swell system exists the problem is relatively simple—even with a high fast system. Unfortunately most cases involve two or more swell systems running in different directions. With more than one system present the sea presents a confused appearance. One of the most difficult situations occurs when two swell systems are at right angles. For example if one system is eight feet high and the other three feet plan to land parallel to the primary system and on the down swell of the secondary system. If both systems are of equal height a compromise may be advisable—select an intermediate heading at 45 degrees down swell to both systems. When landing down a secondary swell attempt to touch down on the back side not on the face of the swell.

3. If the swell system is formidable it is considered advisable in landplanes to accept more crosswind in order to avoid landing directly into the swell.

4. The secondary swell system is often from the same direction as the wind. Here the landing may be made parallel to the primary system with the wind and secondary system at an angle. There is a choice to two directions paralleling the primary system. One direction is downwind and down the secondary swell and the other is into the wind and into the secondary

swell. The choice will depend on the velocity of the wind versus the velocity and height of the secondary swell.

d. The simplest method of estimating the wind direction and velocity is to examine the windstreaks on the water. These appear as long streaks up and downwind. Some persons may have difficulty determining wind direction after seeing the streaks on the water. Whitecaps fall forward with the wind but are overrun by the waves thus producing the illusion that the foam is sliding backward. Knowing this and by observing the direction of the streaks the wind direction is easily determined. Wind velocity can be estimated by noting the appearance of the whitecaps foam and wind streaks.

1. The behavior of the aircraft on making contact with the water will vary within wide limits according to the state of the sea. If landed parallel to a single swell system the behavior of the aircraft may approximate that to be expected on a smooth sea. If landed into a heavy swell or into a confused sea the deceleration forces may be extremely great—resulting in breaking up of the aircraft. Within certain limits the pilot is able to minimize these forces by proper sea evaluation and selection of ditching heading.

2. When on final approach the pilot should look ahead and observe the surface of the sea. There may be shadows and whitecaps—signs of large seas. Shadows and whitecaps close together indicate short and rough seas. Touchdown in these areas is to be avoided. Select and touchdown in any area only about 500 feet is needed where the shadows and whitecaps are not so numerous.

3. Touchdown should be at the lowest speed and rate of descent which permit safe handling and optimum nose up attitude on impact. Once first impact has been made there is often little the pilot can do to control a landplane.

e. Once preditching preparations are completed the pilot should turn to the ditching heading and commence let-down. The aircraft should be flown low over the water and slowed down until ten knots or so above stall. At this point additional power should be used to overcome the increased drag caused by the nose up attitude. When a smooth stretch of water appears ahead cut power and touchdown at the best recommended speed as fully stalled as possible. By cutting power when approaching a relatively smooth area the pilot will prevent overshooting and

ill touchdown with less chance of planing off into a second uncontrolled landing. Most experienced seaplane pilots prefer to make contact with the water in a semi-stalled attitude cutting power as the tail makes contact. This technique eliminates the chance of misjudging altitude with a resultant heavy drop in a fully stalled condition. Care must be taken not to drop the aircraft from too high altitude or to balloon due to excessive speed. The altitude above water depends on the aircraft. Over glassy smooth water or at night without sufficient light it is very easy for even the most experienced pilots to misjudge altitude by 50 feet or more. Under such conditions carry enough power to maintain nine to twelve degrees nose up attitude and 10 to 20 percent over stalling speed until contact is made with the water. The proper use of power on the approach is of great importance. If power is available on one side only a little power should be used to flatten the approach however the engine should not be used to such an extent that the aircraft cannot be turned against the wind engines right down to the stall with a margin of rudder movement available. When near the stall sudden application of excessive unbalanced power may result in loss of directional control. If power is available on one side only a slightly higher than normal glide approach speed should be used. This will ensure good control and some margin of speed after leveling off without excessive use of power. The use of power in ditching is so important that when it is certain that the coast cannot be reached the pilot should if possible ditch before fuel is exhausted. The use of power in a night or instrument ditching is far more essential than under daylight contact conditions.

1. If no power is available a greater than normal approach speed should be used down to the flare-out. This speed margin will allow the glide to be broken early and more gradually thereby giving the pilot time and distance to feel for the surface – decreasing the possibility of stalling high or flying into the water. When landing parallel to a swell system little difference is noted between landing on top of a crest or in the trough. If the wings of aircraft are trimmed to the surface of the sea rather than the horizon there is little need to worry about a wing hitting a swell crest. The actual slope of a swell is very gradual. If forced to land into a swell touchdown should be

made just after passage of the crest. If contact is made on the face of the swell the aircraft may be slammed or thrown violently into the air dropping heavily into the next swell. If control surfaces remain intact the pilot should attempt to maintain the proper nose above the horizon attitude by rapid and positive use of the controls.

- f. **After Touchdown.** In most cases drift caused by crosswind can be ignored. The forces acting on the aircraft after touchdown are of such magnitude that drift will be only a secondary consideration. If the aircraft is under good control the crab may be kicked out with rudder just prior to touchdown. This is more important with high wing aircraft for they are laterally unstable on the water in a crosswind and may roll to the side in ditching.

REFERENCE–

This information has been extracted from Appendix H of the “National Search and Rescue Manual.”

6–3–4. Special Emergency (Air Piracy)

- a. A special emergency is a condition of air piracy or other hostile act by a person(s) aboard an aircraft which threatens the safety of the aircraft or its passengers.

- b. The pilot of an aircraft reporting a special emergency condition should

1. If circumstances permit apply *distress* or *urgency* radio–telephony procedures. Include the details of the special emergency.

REFERENCE–

AIM, Distress and Urgency Communications, Paragraph 6–3–1

2. If circumstances do not permit the use of prescribed *distress* or *urgency* procedures transmit

- (a) On the air/ground frequency in use at the time

- (b) As many as possible of the following elements spoken distinctly and in the following order

- (1) Name of the station addressed time and circumstances permitting

- (2) The identification of the aircraft and present position

- (3) The nature of the special emergency condition and pilot intentions circumstances permitting

(4) If unable to provide this information use code words and/or transponder as follows

Spoken Words
TRANSPONDER SEVEN FIVE ERO ERO
Meaning
I am being hijacked/forced to a new destination
Transponder Setting
Mode 3/A Code 7500

NOTE–

Code 7500 will never be assigned by ATC without prior notification from the pilot that the aircraft is being subjected to unlawful interference. The pilot should refuse the assignment of Code 7500 in any other situation and inform the controller accordingly. Code 7500 will trigger the special emergency indicator in all radar ATC facilities.

c. Air traffic controllers will acknowledge and confirm receipt of transponder Code 7500 by asking the pilot to verify it. If the aircraft is not being subjected to unlawful interference the pilot should respond to the query by broadcasting in the clear that the aircraft is not being subjected to unlawful interference. Upon receipt of this information the controller will request the pilot to verify the code selection depicted in the code selector window in the transponder control panel and change the code to the appropriate setting. If the pilot replies in the affirmative or does not reply the controller will not ask further questions but will flight follow respond to pilot requests and notify appropriate authorities.

d. If it is possible to do so without jeopardizing the safety of the flight the pilot of a hijacked passenger aircraft after departing from the cleared routing over which the aircraft was operating will attempt to do one or more of the following things insofar as circumstances may permit

1. Maintain a true airspeed of no more than 400 knots and preferably an altitude of between 10 000 and 25 000 feet

2. Fly a course toward the destination which the hijacker has announced

e. If these procedures result in either radio contact or air intercept the pilot will attempt to comply with any instructions received which may direct the aircraft to an appropriate landing field or alter the aircraft's flight path off its current course away from protected airspace

6–3–5. Fuel Dumping

a. Should it become necessary to dump fuel the pilot should immediately advise ATC. Upon receipt of information that an aircraft will dump fuel ATC will broadcast or cause to be broadcast immediately and every 3 minutes thereafter the following on appropriate ATC and FSS radio frequencies

EXAMPLE–

Attention all aircraft – fuel dumping in progress over – (location) at (altitude) by (type aircraft) (flight direction).

b. Upon receipt of such a broadcast pilots of aircraft affected which are not on IFR flight plans or special VFR clearances should clear the area specified in the advisory. Aircraft on IFR flight plans or special VFR clearances will be provided specific separation by ATC. At the termination of the fuel dumping operation pilots should advise ATC. Upon receipt of such information ATC will issue on the appropriate frequencies the following

EXAMPLE–

ATTENTION ALL AIRCRAFT – FUEL DUMPING BY – (type aircraft) – TERMINATED.

Section 4. Two-way Radio Communications Failure

6-4-1. Two-way Radio Communications Failure

a. It is virtually impossible to provide regulations and procedures applicable to all possible situations associated with two-way radio communications failure. During two-way radio communications failure, when confronted by a situation not covered in the regulation, pilots are expected to exercise good judgment in whatever action they elect to take. Should the situation so dictate, they should not be reluctant to use the emergency action contained in 14 CFR Section 91.3(b).

b. Whether two-way communications failure constitutes an emergency depends on the circumstances, and in any event, it is a determination made by the pilot. 14 CFR Section 91.3(b) authorizes a pilot to deviate from any rule in Subparts A and B to the extent required to meet an emergency.

c. In the event of two-way radio communications failure, ATC service will be provided on the basis that the pilot is operating in accordance with 14 CFR Section 91.185. A pilot experiencing two-way communications failure should, unless emergency authority is exercised, comply with 14 CFR Section 91.185, quoted below:

1. General. Unless otherwise authorized by ATC, each pilot who has two-way radio communications failure when operating under IFR must comply with the rules of this section.

2. VFR conditions. If the failure occurs in VFR conditions or if VFR conditions are encountered after the failure, each pilot must continue the flight under VFR and land as soon as practicable.

NOTE—

This procedure also applies when two-way radio failure occurs while operating in Class A airspace. The primary objective of this provision in 14 CFR Section 91.185 is to preclude extended IFR operation by these aircraft within the ATC system. Pilots should recognize that operation under these conditions may unnecessarily, as well as adversely affect other users of the airspace, since ATC may be required to reroute or delay other users in order to protect the failure aircraft. However, it is not intended that the requirement to “land as soon as practicable” be construed to mean “as soon as possible.” Pilots retain the prerogative of exercising their best judgment and are not

required to land at an unauthorized airport, at an airport unsuitable for the type of aircraft flown, or to land only minutes short of their intended destination.

3. IFR conditions. If the failure occurs in IFR conditions or if subparagraph 2 above cannot be complied with, each pilot must continue the flight according to the following:

(a) Route.

(1) By the route assigned in the last ATC clearance received.

(2) If being radar vectored, by the direct route from the point of radio failure to the fix, route, or airway specified in the vector clearance.

(3) In the absence of an assigned route, by the route that ATC has advised may be expected in a further clearance, or

(4) In the absence of an assigned route or a route that ATC has advised may be expected in a further clearance, by the route filed in the flight plan.

(b) Altitude. At the HIGHEST of the following altitudes or flight levels FOR THE ROUTE SEGMENT BEING FLOWN:

(1) The altitude or flight level assigned in the last ATC clearance received.

(2) The minimum altitude converted, if appropriate, to minimum flight level as prescribed in 14 CFR Section 91.121(c) for IFR operations, or

(3) The altitude or flight level ATC has advised may be expected in a further clearance.

NOTE—

The intent of the rule is that a pilot who has experienced two-way radio failure should select the appropriate altitude for the particular route segment being flown and make the necessary altitude adjustments for subsequent route segments. If the pilot received an “expect further clearance” containing a higher altitude to expect at a specified time or fix, maintain the highest of the following altitudes until that time/fix:

- (1) the last assigned altitude; or*
- (2) the minimum altitude/flight level for IFR operations.*

Upon reaching the time/fix specified, the pilot should commence climbing to the altitude advised to expect. If the

radio failure occurs after the time/fix specified, the altitude to be expected is not applicable and the pilot should maintain an altitude consistent with 1 or 2 above. If the pilot receives an "expect further clearance" containing a lower altitude, the pilot should maintain the highest of 1 or 2 above until that time/fix specified in subparagraph (c) Leave clearance limit, below.

EXAMPLE–

1. A pilot experiencing two-way radio failure at an assigned altitude of 7,000 feet is cleared along a direct route which will require a climb to a minimum IFR altitude of 9,000 feet, should climb to reach 9,000 feet at the time or place where it becomes necessary (see 14 CFR Section 91.177(b)). Later while proceeding along an airway with an MEA of 5,000 feet, the pilot would descend to 7,000 feet (the last assigned altitude), because that altitude is higher than the MEA.

2. A pilot experiencing two-way radio failure while being progressively descended to lower altitudes to begin an approach is assigned 2,700 feet until crossing the VOR and then cleared for the approach. The MOCA along the airway is 2,700 feet and MEA is 4,000 feet. The aircraft is within 22 NM of the VOR. The pilot should remain at 2,700 feet until crossing the VOR because that altitude is the minimum IFR altitude for the route segment being flown.

3. The MEA between a and b: 5,000 feet. The MEA between b and c: 5,000 feet. The MEA between c and d: 11,000 feet. The MEA between d and e: 7,000 feet. A pilot had been cleared via a, b, c, d, to e. While flying between a and b the assigned altitude was 6,000 feet and the pilot was told to expect a clearance to 8,000 feet at b. Prior to receiving the higher altitude assignment, the pilot experienced two-way failure. The pilot would maintain 6,000 to b, then climb to 8,000 feet (the altitude advised to expect). The pilot would maintain 8,000 feet, then climb to 11,000 at c, or prior to c if necessary to comply with an MCA at c. (14 CFR Section 91.177(b).) Upon reaching d, the pilot would descend to 8,000 feet (even though the MEA was 7,000 feet), as 8,000 was the highest of the altitude situations stated in the rule (14 CFR Section 91.185).

(c) Leave clearance limit.

(1) When the clearance limit is a fix from which an approach begins commence descent or descent and approach as close as possible to the expect further clearance time if one has been received or if one has not been received as close as possible to the Estimated Time of Arrival ETA as

calculated from the filed or amended with ATC Estimated Time En Route ETE

(2) If the clearance limit is not a fix from which an approach begins leave the clearance limit at the expect further clearance time if one has been received or if none has been received upon arrival over the clearance limit and proceed to a fix from which an approach begins and commence descent or descent and approach as close as possible to the estimated time of arrival as calculated from the filed or amended with ATC estimated time en route

6–4–2. Transponder Operation During Two-way Communications Failure

a. If an aircraft with a coded radar beacon transponder experiences a loss of two-way radio capability the pilot should adjust the transponder to reply on Mode A/3 Code 7600

b. The pilot should understand that the aircraft may not be in an area of radar coverage

6–4–3. Reestablishing Radio Contact

a. In addition to monitoring the NAVAID voice feature the pilot should attempt to reestablish communications by attempting contact

1. On the previously assigned frequency or
2. With an FSS or ARINC

b. If communications are established with an FSS or ARINC the pilot should advise that radio communications on the previously assigned frequency has been lost giving the aircraft's position altitude last assigned frequency and then request further clearance from the controlling facility The preceding does not preclude the use of 121.5 MHz There is no priority on which action should be attempted first If the capability exists do all at the same time

NOTE–

**Aeronautical Radio/Incorporated (ARINC) is a commercial communications corporation which designs, constructs, operates, leases or otherwise engages in radio activities serving the aviation community. ARINC has the capability of relaying information to/from ATC facilities throughout the country.*

Section 5. Aircraft Rescue and Fire Fighting Communications

6-5-1. Discrete Emergency Frequency

a. Direct contact between an emergency aircraft flight crew, Aircraft Rescue and Fire Fighting Incident Commander, ARFF IC, and the Airport Traffic Control Tower, ATCT, is possible on an aeronautical radio frequency, Discrete Emergency Frequency, DEF, designated by Air Traffic Control, ATC, from the operational frequencies assigned to that facility.

b. Emergency aircraft at airports without an ATCT, or when the ATCT is closed, may contact the ARFF IC, if ARFF service is provided, on the Common Traffic Advisory Frequency (CTAF) published for the airport or the civil emergency frequency, 121.5 MHz.

6-5-2. Radio Call Signs

Preferred radio call sign for the ARFF IC is location/facility **Command** when communicating with the flight crew and the FAA ATCT.

EXAMPLE-

LAX Command.

Washington Command.

6-5-3. ARFF Emergency Hand Signals

In the event that electronic communications cannot be maintained between the ARFF IC and the flight crew, standard emergency hand signals as depicted in FIG 6-5-1 through FIG 6-5-3 should be used. These hand signals should be known and understood by all cockpit and cabin aircrew and all ARFF firefighters.

FIG 6-5-1

Recommend Evacuation



RECOMMEND EVACUATION - Evacuation recommended based on ARFF IC's assessment of external situation.

Arm extended from body, and held horizontal with hand upraised at eye level. Execute beckoning arm motion angled backward. Nonbeckoning arm held against body.

NIGHT - same with wands.

FIG 6-5-2

Recommend Stop



RECOMMEND STOP - Recommend evacuation in progress be halted. Stop aircraft movement or other activity in progress.

Arms in front of head -
Crossed at wrists.

NIGHT - same with wands.

FIG 6-5-3
Emergency Contained



EMERGENCY CONTAINED - No outside evidence of dangerous condition or "all-clear."

Arms extended outward and down at a 45 degree angle. Arms moved inward below waistline simultaneously until wrists crossed, then extended outward to starting position (umpire's "safe" signal).

NIGHT - same with wands.

Chapter 7. Safety of Flight

Section 1. Meteorology

7-1-1. National Weather Service Aviation Products

a. Weather service to aviation is a joint effort of the National Weather Service (NWS), the Federal Aviation Administration (FAA), the military weather services, and other aviation oriented groups and individuals. The NWS maintains an extensive surface, upper air, and radar weather observing program, a nationwide aviation weather forecasting service, and provides limited pilot briefing service. Interpretational Pilot weather briefings are provided by personnel at Flight Service Stations operated by FAA in Alaska, or by federal contract facilities elsewhere in the U.S. Aviation routine weather reports (METAR) are taken manually by NWS, FAA contractors, or supplemental observers. METAR reports are also provided by Automated Weather Observing System (AWOS), Automated Surface Observing System (ASOS), and Automated Weather Sensor System (AWSS).

REFERENCE-

AIM, Para 7-1-12, Weather Observing Programs.

b. Aerodrome forecasts are prepared by 122 Weather Forecast Offices (WFOs). These offices prepare and distribute 625 aerodrome forecasts 4 times daily for specific airports in the 50 States, Puerto Rico, the Caribbean, and Pacific Islands. These forecasts are valid for 24 or 30 hours and amended as required. A centralized aviation forecast program originating from the Aviation Weather Center (AWC) in Kansas City was implemented in October 1995. In the conterminous U.S., all inflight advisories, Significant Meteorological Information (SIGMETs), Convective SIGMETs, and Airmen's Meteorological Information (AIRMET)-text bulletins (WA) and graphics (G-AIRMETs), and all Area Forecasts (FAs). 6 areas are not issued by AWC. FAs are prepared 3 times a day in the conterminous U.S. and Alaska, 4 times in Hawaii, and amended as required. Inflight advisories are issued only when conditions warrant. Winds aloft forecasts are provided for

176 locations in the 48 contiguous States and 21 locations in Alaska for flight planning purposes.

Winds aloft forecasts for Hawaii are prepared locally. All the aviation weather forecasts are given wide distribution through the Weather Message Switching Center Replacement (WMSCR) in Atlanta, Georgia, and Salt Lake City, Utah.

REFERENCE-

AIM, Para 7-1-6, Inflight Aviation Weather Advisories.

c. Weather element values may be expressed by using different measurement systems depending on several factors, such as whether the weather products will be used by the general public, aviation interests, international services, or a combination of these users. FIG 7-1-1 provides conversion tables for the most used weather elements that will be encountered by pilots.

7-1-2. FAA Weather Services

a. The FAA maintains a nationwide network of Flight Service Stations (FSSs) to serve the weather needs of pilots. In addition, NWS meteorologists are assigned to most ARTCCs as part of the Center Weather Service Unit (CWSU). They provide Center Weather Advisories (CWAs) and gather weather information to support the needs of the FAA and other users of the system.

b. The primary source of preflight weather briefings is an individual briefing obtained from a briefer at the FSS. These briefings, which are tailored to your specific flight, are available 24 hours a day through the use of the toll-free number 1-800-W-BRIEF. Numbers for these services can be found in the Airport/Facility Directory (A/FD) under FAA and NWS Telephone Numbers section. They may also be listed in the U.S. Government section of your local telephone directory under Department of Transportation, Federal Aviation Administration.

REFERENCE-

AIM, Para 7-1-4, Preflight Briefing, explains the types of preflight briefings available and the information contained in each.

FIG 7-1-1
Weather Elements Conversion Tables

TIME**STANDARD TO UTC**


Eastern + 5 hr = UTC
 Central + 6 hr = UTC
 Mountain + 7 hr = UTC
 Pacific + 8 hr = UTC
 Alaskan + 9 hr = UTC
 Hawaii & Aleutian Islands
 + 10 hr = UTC

Subtract one hour for
 Daylight Time

WINDSPEED

MPH	KNOTS
1-2	1-2
3-8	3-7
9-14	8-12
15-20	13-17
21-26	18-22
26-31	23-27
32-37	28-32
38-43	33-37
44-49	38-42
50-54	43-47
55-60	48-52
61-66	53-57
67-71	58-62
72-77	63-67
78-83	68-72
84-89	73-77
119-123	103-107

Knots x 1.15 =
 Miles Per Hour
 Miles Per Hour x
 0.889 = Knots

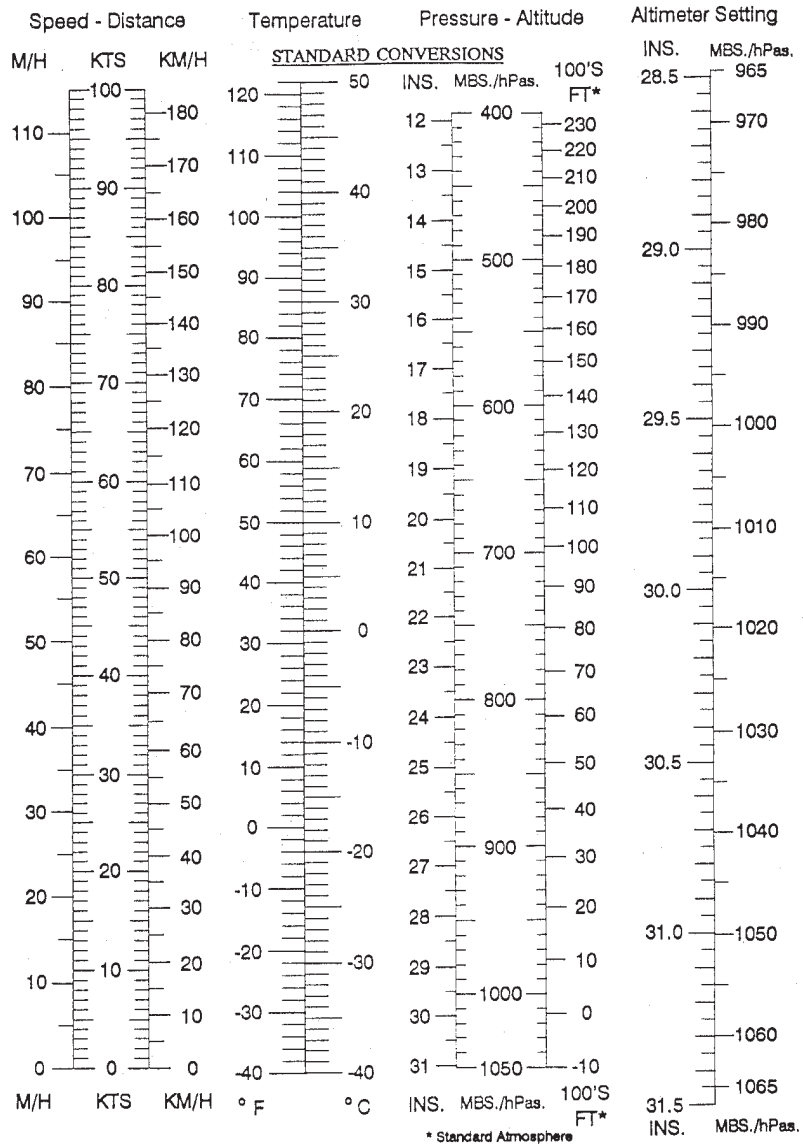

c. Other Sources of Weather Information

1. Telephone Information Briefing Service TIBS FSS and in Alaska Transcribed Weather Broadcast TWEB locations and telephone access to the TWEB TEL-TWEB provide continuously updated recorded weather information for short or local flights Separate paragraphs in this section give additional information regarding these services

REFERENCE–

AIM, Telephone Information Briefing Service (TIBS), Paragraph 7–1–8
AIM, Transcribed Weather Broadcast (TWEB) (Alaska Only), Paragraph 7–1–9

2. Weather and aeronautical information are also available from numerous private industry sources on an individual or contract pay basis Information on how to obtain this service should be available from local pilot organizations

3. The Direct User Access Terminal System DUATS can be accessed by pilots with a current medical certificate toll free in the 48 contiguous States via personal computer Pilots can receive alpha numeric preflight weather data and file domestic VFR and IFR flight plans The following are the contract DUATS vendors

Computer Sciences Corporation CSC
15000 Conference Center Drive
Chantilly VA 22021–3808
Internet Access [http // duats.com](http://duats.com)
Telnet Access modem terminal–style
800 767–9989 or
telnet //direct duats.com
For customer service 800 345–3828

Data Transformation Corporation DTC
108–D Greentree Road
Turnersville NJ 08012
Internet Access [http // duat.com](http://duat.com)
For customer service 800 243–3828

d. Inflight weather information is available from any FSS within radio range The common frequency for all FSSs is 122.2 Discrete frequencies for individual stations are listed in the A/FD

1. Information on In Flight Weather broadcasts

REFERENCE–

AIM, Inflight Weather Broadcasts, Paragraph 7–1–10

2. En Route Flight Advisory Service EFAS is provided to serve the nonroutine weather needs of pilots in flight

REFERENCE–

AIM, En Route Flight Advisory Service (EFAS), Paragraph 7–1–5 gives details on this service.

7–1–3. Use of Aviation Weather Products

a. Air carriers and operators certificated under the provisions of 14 CFR Part 119 are required to use the aeronautical weather information systems defined in the Operations Specifications issued to that certificate holder by the FAA These systems may utilize basic FAA/National Weather Service NWS weather services contractor– or operator–proprietary weather services and/or Enhanced Weather Information System EWINS when approved in the Operations Specifications As an integral part of this system approval the procedures for collecting producing and disseminating aeronautical weather information as well as the crew member and dispatcher training to support the use of system weather products must be accepted or approved

b. Operators not certificated under the provisions of 14 CFR Part 119 are encouraged to use FAA/NWS products through Flight Service Stations Direct User Access Terminal System DUATS and/or Flight Information Services–Broadcast FIS–B

c. The suite of available aviation weather product types is expanding with the development of new sensor systems algorithms and forecast models The FAA and NWS supported by various weather research laboratories and corporations under contract to the Government develop and implement new aviation weather product types The FAA's NextGen Aviation Weather Research Program AWRP facilitates collaboration between the NWS the FAA and various industry and research representatives This collaboration ensures that user needs and technical readiness requirements are met before experimental products mature to operational application

d. The AWRP manages the transfer of aviation weather R&D to operational use through technical review panels and conducting safety assessments to ensure that newly developed aviation weather products meet regulatory requirements and enhance safety

e. The AWRP review and decision–making process applies criteria to weather products at various stages The stages are composed of the following

1. Sponsorship of user needs

2. R & D and controlled testing
3. Experimental application
4. Operational application

f. Pilots and operators should be aware that weather services provided by entities other than FAA/NWS or their contractors such as the DUAT/DUATS and Lockheed Martin Flight Services may not meet FAA/NWS quality control standards. Hence operators and pilots contemplating using such services should request and/or review an appropriate description of services and provider disclosure. This should include but is not limited to the type of weather product e.g. current weather or forecast weather the currency of the product i.e. product issue and valid times and the relevance of the product. Pilots and operators should be cautious when using unfamiliar products or products not supported by FAA/NWS technical specifications.

NOTE—

When in doubt, consult with a FAA Flight Service Station Specialist.

g. In addition pilots and operators should be aware there are weather services and products available from government organizations beyond the scope of the AWRP process mentioned earlier in this section. For example governmental agencies such as the NWS and the Aviation Weather Center (AWC) or research organizations such as the National Center for Atmospheric Research (NCAR) display weather model data and experimental products which require training and/or expertise to properly interpret and use. These products are developmental prototypes that are subject to ongoing research and can change without notice. Therefore some data on display by government organizations or government data on display by independent organizations may be unsuitable for flight planning purposes. Operators and pilots contemplating using such services should request and/or review an appropriate description of services and provider disclosure. This should include but is not limited to the type of weather product for example current weather or forecast weather the currency of the product i.e. product issue and valid times and the relevance of the product. Pilots and operators should be cautious when using unfamiliar weather products.

NOTE—

When in doubt, consult with a FAA Flight Service Station Specialist.

h. With increased access to weather products via the public Internet the aviation community has access to an overwhelming amount of weather information and data that support self briefing. FAA AC 00-45 current edition describes the weather products distributed by the NWS. Pilots and operators using the public Internet to access weather from a third party vendor should request and/or review an appropriate description of services and provider disclosure. This should include but is not limited to the type of weather product for example current weather or forecast weather the currency of the product i.e. product issue and valid times and the relevance of the product. Pilots and operators should be cautious when using unfamiliar weather products and when in doubt consult with a Flight Service Specialist.

i. The development of new weather products coupled with the termination of some legacy textual and graphical products may create confusion between regulatory requirements and the new products. All flight-related aviation weather decisions must be based on all available pertinent weather products. As every flight is unique and the weather conditions for that flight vary hour by hour day to day multiple weather products may be necessary to meet aviation weather regulatory requirements. Many new weather products do not have a Precautionary Use Statement that details the proper use or application of the specific product.

j. The FAA has identified three distinct types of weather information available to pilots and operators:

1. Observations Raw weather data collected by some type of sensor suite including surface and airborne observations radar lightning satellite imagery and profilers

2. Analysis Enhanced depiction and/or interpretation of observed weather data

3. Forecasts Predictions of the development and/or movement of weather phenomena based on meteorological observations and various mathematical models

k. Not all sources of aviation weather information are able to provide all three types of weather information. The FAA has determined that operators and pilots may utilize the following approved sources of aviation weather information:

1. Federal Government The FAA and NWS collect raw weather data analyze the observations

and produce forecasts. The FAA and NWS disseminate meteorological observations, analyses, and forecasts through a variety of systems. In addition, the Federal Government is the only approval authority for sources of weather observations; for example, contract towers and airport operators may be approved by the Federal Government to provide weather observations.

2. Enhanced Weather Information System (EWINS). An EWINS is an FAA authorized proprietary system for tracking, evaluating, reporting, and forecasting the presence or lack of adverse weather phenomena. The FAA authorizes a certificate holder to use an EWINS to produce flight movement forecasts, adverse weather phenomena forecasts, and other meteorological advisories. For more detailed information regarding EWINS, see the Aviation Weather Services Advisory Circular 00-45 and the Flight Standards Information Management System 8900.1.

3. Commercial Weather Information Providers. In general, commercial providers produce proprietary weather products based on NWS/FAA products with formatting and layout modifications but no material changes to the weather information itself. This is also referred to as repackaging. In addition, commercial providers may produce analyses, forecasts, and other proprietary weather products that substantially alter the information contained in government-produced products. However, those proprietary weather products that substantially alter government-produced weather products or information may only be approved for use by 14 CFR Part 121 and Part 135 certificate holders if the commercial provider is EWINS qualified.

NOTE—

Commercial weather information providers contracted by FAA to provide weather observations, analyses, and forecasts (e.g., contract towers) are included in the Federal Government category of approved sources by virtue of maintaining required technical and quality assurance standards under Federal Government oversight.

1. As a point of clarification, Advisory Circular 00-62, Internet Communications of Aviation Weather and NOTAMS, describes the process for a weather information provider to become a Qualified Internet Communications Provider (QICP) and only applies to 14 CFR Part 121 and

Part 135 certificate holders. Therefore, pilots conducting operations under 14 CFR Part 91 may access weather products via the public Internet.

7-1-4. Preflight Briefing

a. Flight Service Stations (FSSs). FSSs are the primary source for obtaining preflight briefings and inflight weather information. Flight Service Specialists are qualified and certificated by the NWS as Pilot Weather Briefers. They are not authorized to make original forecasts but are authorized to translate and interpret available forecasts and reports directly into terms describing the weather conditions which you can expect along your flight route and at your destination. Available aviation weather reports, forecasts, and aviation weather charts are displayed at each FSS for pilot use. Pilots should feel free to use these self-briefing displays where available or to ask for a briefing or assistance from the specialist on duty. Three basic types of preflight briefings are available to serve your specific needs: Standard Briefing, Abbreviated Briefing, and Outlook Briefing. You should specify to the briefer the type of briefing you want along with your appropriate background information. This will enable the briefer to tailor the information to your intended flight. The following paragraphs describe the types of briefings available and the information provided in each briefing.

REFERENCE—

AIM, Preflight Preparation, Paragraph 5-1-1, for items that are required.

b. Standard Briefing. You should request a Standard Briefing any time you are planning a flight and you have not received a previous briefing or have not received preliminary information through mass dissemination media (e.g., TIBS, TWEB, Alaska only, etc.). International data may be inaccurate or incomplete. If you are planning a flight outside of U.S. controlled airspace, the briefer will advise you to check data as soon as practical after entering foreign airspace unless you advise that you have the international cautionary advisory. The briefer will automatically provide the following information in the sequence listed, except as noted, when it is applicable to your proposed flight:

1. Adverse Conditions. Significant meteorological and/or aeronautical information that might influence the pilot to alter or cancel the proposed flight, for example, hazardous weather conditions.

airport closures, air traffic delays, etc. Pilots should be especially alert for current or forecast weather that could reduce flight minimums below VFR or IFR conditions. Pilots should also be alert for any reported or forecast icing if the aircraft is not certified for operating in icing conditions. Flying into areas of icing or weather below minimums could have disastrous results.

2. VFR Flight Not Recommended. When VFR flight is proposed and sky conditions or visibilities are present or forecast, surface or aloft that in the briefer's judgment could make flight under VFR doubtful, the briefer will describe the conditions, describe the affected locations, and use the phrase "*VFR flight not recommended.*" This recommendation is advisory in nature. The final decision as to whether the flight can be conducted safely rests solely with the pilot. Upon receiving a *VFR flight not recommended* statement, the non-IFR rated pilot will need to make a go or no go decision. This decision should be based on weighing the current and forecast weather conditions against the pilot's experience and ratings. The aircraft's equipment capabilities and limitations should also be considered.

NOTE—

Pilots flying into areas of minimal VFR weather could encounter unforecasted lowering conditions that place the aircraft outside the pilot's ratings and experience level. This could result in spatial disorientation and/or loss of control of the aircraft.

3. Synopsis. A brief statement describing the type, location, and movement of weather systems and/or air masses which might affect the proposed flight.

NOTE—

These first 3 elements of a briefing may be combined in any order when the briefer believes it will help to more clearly describe conditions.

4. Current Conditions. Reported weather conditions applicable to the flight will be summarized from all available sources, e.g., METARs/ SPECIs, PIREPs, RAREPs. This element will be omitted if the proposed time of departure is beyond 2 hours, unless the information is specifically requested by the pilot.

5. En Route Forecast. Forecast en route conditions for the proposed route are summarized in logical order, i.e., departure/climbout, en route, and descent. Heights are MSL, unless the contractions

AGL or CIG are denoted, indicating that heights are above ground.

6. Destination Forecast. The destination forecast for the planned ETA. Any significant changes within 1 hour before and after the planned arrival are included.

7. Winds Aloft. Forecast winds aloft will be provided using degrees of the compass. The briefer will interpolate wind directions and speeds between levels and stations as necessary to provide expected conditions at planned altitudes. Heights are MSL. Temperature information will be provided on request.

8. Notices to Airmen (NOTAMs).

(a) Available NOTAM D information pertinent to the proposed flight, including special use airspace, SUA, NOTAMs for restricted areas, aerial refueling, and night vision goggles, NVG.

NOTE—

Other SUA NOTAMs (D), such as military operations area (MOA), military training route (MTR), and warning area NOTAMs, are considered "upon request" briefing items as indicated in paragraph 7-1-4b10(a).

(b) Prohibited Areas P-40, P-49, P-56, and the special flight rules area, SFRA, for Washington, DC.

(c) FSS briefers do not provide FDC NOTAM information for special instrument approach procedures unless specifically asked. Pilots authorized by the FAA to use special instrument approach procedures must specifically request FDC NOTAM information for these procedures.

NOTE—

NOTAM information may be combined with current conditions when the briefer believes it is logical to do so.

NOTE—

NOTAM (D) information and FDC NOTAMs which have been published in the Notices to Airmen Publication are not included in pilot briefings unless a review of this publication is specifically requested by the pilot. For complete flight information you are urged to review the printed NOTAMs in the Notices to Airmen Publication and the A/FD in addition to obtaining a briefing.

9. ATC Delays. Any known ATC delays and flow control advisories which might affect the proposed flight.

10. Pilots may obtain the following from flight service station briefers upon request:

(a) Information on SUA and SUA-related airspace, except those listed in paragraph 7-1-4b8.

NOTE—

1. For the purpose of this paragraph, SUA and related airspace includes the following types of airspace: alert area, military operations area (MOA), warning area, and air traffic control assigned airspace (ATCAA). MTR data includes the following types of airspace: IFR training routes (IR), VFR training routes (VR), and slow training routes (SR).

2. Pilots are encouraged to request updated information from ATC facilities while in flight.

(b) A review of the Notices to Airmen Publication for pertinent NOTAMs and Special Notices

(c) Approximate density altitude data

(d) Information regarding such items as air traffic services and rules customs/immigration procedures ADI rules search and rescue etc

(e) GPS RAIM availability for 1 hour before to 1 hour after ETA or a time specified by the pilot

(f) Other assistance as required

c. Abbreviated Briefing. Request an Abbreviated Briefing when you need information to supplement mass disseminated data update a previous briefing or when you need only one or two specific items. Provide the briefer with appropriate background information the time you received the previous information and/or the specific items needed. You should indicate the source of the information already received so that the briefer can limit the briefing to the information that you have not received and/or appreciable changes in meteorological/aeronautical conditions since your previous briefing. To the extent possible the briefer will provide the information in the sequence shown for a Standard Briefing. If you request only one or two specific items the briefer will advise you if adverse conditions are present or forecast. Adverse conditions contain both meteorological and/or aeronautical information. Details on these conditions will be provided at your request. International data may be inaccurate or incomplete. If you are planning a flight outside of U.S. controlled airspace the briefer will advise you to check data as soon as practical after entering foreign airspace unless you advise that you have the international cautionary advisory.

d. Outlook Briefing. You should request an Outlook Briefing whenever your proposed time of departure is six or more hours from the time of the

briefing. The briefer will provide available forecast data applicable to the proposed flight. This type of briefing is provided for planning purposes only. You should obtain a Standard or Abbreviated Briefing prior to departure in order to obtain such items as adverse conditions current conditions updated forecasts trends aloft and NOTAMs etc.

e. When filing a flight plan only you will be asked if you require the latest information on adverse conditions pertinent to the route of flight.

f. Inflight Briefing. You are encouraged to obtain your preflight briefing by telephone or in person before departure. In those cases where you need to obtain a preflight briefing or an update to a previous briefing by radio you should contact the nearest FSS to obtain this information. After communications have been established advise the specialist of the type briefing you require and provide appropriate background information. You will be provided information as specified in the above paragraphs depending on the type of briefing requested. In addition the specialist will recommend shifting to the Flight Watch frequency when conditions along the intended route indicate that it would be advantageous to do so. Remember that weather conditions can change rapidly and that a go or no go decision as mentioned in paragraph 7-1-4b2 should be assessed at all phases of flight.

g. Following any briefing feel free to ask for any information that you or the briefer may have missed or are not understood. This way the briefer is able to present the information in a logical sequence and lessens the chance of important items being overlooked.

7-1-5. En Route Flight Advisory Service (EFAS)

a. EFAS radio call Flight Watch is a service specifically designed to provide en route aircraft with timely and meaningful weather advisories pertinent to the type of flight intended route of flight and altitude. In conjunction with this service EFAS is also a central collection and distribution point for pilot reported weather information. EFAS is provided by specially trained FSS specialists controlling multiple Remote Communications Outlets covering a large geographical area and is normally available throughout the conterminous U.S. and Puerto Rico from 6 a.m. to 10 p.m. EFAS provides communica-

tions capabilities for aircraft flying at 5 000 feet above ground level to 17 500 feet MSL on a common frequency of 122.0 MHz. Discrete EFAS frequencies have been established to ensure communications coverage from 18 000 through 45 000 MSL serving in each specific ARTCC area. These discrete frequencies may be used below 18 000 feet when coverage permits reliable communication.

NOTE—

When an EFAS outlet is located in a time zone different from the zone in which the flight watch control station is located, the availability of service may be plus or minus one hour from the normal operating hours.

b. In some regions of the contiguous U.S., especially those that are mountainous, it is necessary to be above 5000 feet AGL in order to be at an altitude where the EFAS frequency 122.0 MHz is available. Pilots should take this into account when flight planning. Other FSS communication frequencies may be available at lower altitudes. See FIG 7-1-2.

c. Contact flight watch by using the name of the ARTCC facility identification serving the area of your location followed by your aircraft identification and the name of the nearest VOR to your position. The specialist needs to know this approximate location to select the most appropriate transmitter/receiver outlet for communications coverage.

EXAMPLE—

Cleveland Flight Watch, Cessna One Two Three Four Kilo, Mansfield V-O-R, over.

d. Charts depicting the location of the flight watch control stations, parent facility, and the outlets they use are contained in the A/FD. If you do not know in which flight watch area you are flying, initiate contact by using the words "Flight Watch," your aircraft identification, and the name of the nearest VOR. The facility will respond using the name of the flight watch facility.

EXAMPLE—

Flight Watch, Cessna One Two Three Four Kilo, Mansfield V-O-R, over.

e. Radio outlets that provide En Route Flight Advisory Service are listed regionally in the A/FDs.

f. EFAS is not intended to be used for filing or closing flight plans, position reporting, getting complete preflight briefings, or obtaining random weather reports and forecasts. En route flight

advisories are tailored to the phase of flight that begins after climb out and ends with descent to land. Immediate destination weather and terminal aerodrome forecasts will be provided on request. Pilots requesting information not within the scope of flight watch will be advised of the appropriate FSS frequency to obtain the information. Pilot participation is essential to the success of EFAS by providing a continuous exchange of information on weather, winds, turbulence, flight visibility, icing, etc., between pilots and flight watch specialists. Pilots are encouraged to report good weather as well as bad, and to confirm expected conditions as well as unexpected to EFAS facilities.

7-1-6. Inflight Aviation Weather Advisories

a. Background

1. Inflight Aviation Weather Advisories are forecasts to advise en route aircraft of development of potentially hazardous weather. All inflight aviation weather advisories in the conterminous U.S. are issued by the Aviation Weather Center (AWC) in Kansas City, Missouri. The Weather Forecast Office (WFO) in Honolulu issues advisories for the Hawaiian Islands. In Alaska, the Alaska Aviation Weather Unit (AAWU) issues inflight aviation weather advisories. All heights are referenced MSL, except in the case of ceilings. CIGs which indicate AGL.

2. There are three types of inflight aviation weather advisories: the SIGMET, the Convective SIGMET, and the AIRMET. Text or graphical product. All of these advisories use the same location identifiers: either VORs, airports, or well-known geographic areas to describe the hazardous weather areas. See FIG 7-1-3 and FIG 7-1-4. Graphics with improved clarity can be found in the latest version of Advisory Circular AC 00-45, series Aviation Weather Services, which is available on the following Web site: <http://www.faa.gov>.

3. Two other weather products supplement these Inflight Aviation Weather Advisories:

(a) The Severe Weather Watch Bulletins (WWs) with associated Alert Messages (AWW) and

(b) The Center Weather Advisories (CWAs).

b. SIGMET (WS)/AIRMET (WA or G-AIRMET)

SIGMETs/AIRMET text WA products are issued corresponding to the Area Forecast FA areas described in FIG 7-1-5 FIG 7-1-6 and FIG 7-1-7. The maximum forecast period is 4 hours for SIGMETs and 6 hours for AIRMETs. The G-AIRMET is issued over the CONUS every 6 hours, valid at 3-hour increments through 12 hours, with optional forecasts possible during the first 6 hours. The first 6 hours of the G-AIRMET correspond to the 6-hour period of the AIRMET. SIGMETs and AIRMETs are considered wide spread because they must be either affecting or be forecasted to affect an area of at least 3 000 square miles at any one time. However, if the total area to be affected during the forecast period is very large, it could be that in actuality only a small portion of this total area could be affected at any one time.

c. SIGMET (WS)

1. A SIGMET advises of non-convective weather that is potentially hazardous to all aircraft. SIGMETs are unscheduled products that are valid for 4 hours. However, conditions that are associated with hurricanes are valid for 6 hours. Unscheduled updates and corrections are issued as necessary. In the conterminous U.S., SIGMETs are issued when the following phenomena occur or are expected to occur:

- (a) Severe icing not associated with thunderstorms
 - (b) Severe or extreme turbulence or clear air turbulence (CAT) not associated with thunderstorms
 - (c) Widespread dust storms or sandstorms lowering surface visibilities to below 3 miles
 - (d) Volcanic ash
2. In Alaska and Hawaii, SIGMETs are also issued for:
- (a) Tornadoes
 - (b) Lines of thunderstorms
 - (c) Embedded thunderstorms
 - (d) Hail greater than or equal to $\frac{3}{4}$ inch in diameter

3. SIGMETs are identified by an alphabetic designator from November through Yankee, excluding

Sierra and Tango. Sierra, Tango, and Ulu are reserved for AIRMET text WA products. G-AIRMETs do not use the Sierra, Tango, or Ulu designators. The first issuance of a SIGMET will be labeled as UWS (Urgent Weather SIGMET). Subsequent issuances are at the forecaster's discretion. Issuance for the same phenomenon will be sequentially numbered using the original designator until the phenomenon ends. For example, the first issuance in the Chicago (CHI) FA area for a phenomenon moving from the Salt Lake City (SLC) FA area will be SIGMET Papa 3 if the previous two issuances, Papa 1 and Papa 2, had been in the SLC FA area. Note that not two different phenomena across the country can have the same alphabetic designator at the same time.

EXAMPLE-

Example of a SIGMET:

BOSR WS 050600

SIGMET ROMEO 2 VALID UNTIL 051000

ME NH VT

FROM CAR TO YSJ TO CON TO MPV TO CAR


OCNL SEV TURB BLW 080 EXP DUE TO STG NWLY FLOW. CONDS CONTG BYD 1000Z.

d. Convective SIGMET (WST)

1. Convective SIGMETs are issued in the conterminous U.S. for any of the following:

- (a) Severe thunderstorm due to:
 - (1) Surface winds greater than or equal to 50 knots
 - (2) Hail at the surface greater than or equal to $\frac{3}{4}$ inches in diameter
 - (3) Tornadoes
 - (b) Embedded thunderstorms
 - (c) A line of thunderstorms
 - (d) Thunderstorms producing precipitation greater than or equal to heavy precipitation affecting 40 percent or more of an area at least 3 000 square miles
2. Any convective SIGMET implies severe or greater turbulence, severe icing, and low-level wind shear. A convective SIGMET may be issued for any convective situation that the forecaster feels is hazardous to all categories of aircraft.

FIG 7-1-2
EFAS Radio Coverage Areas

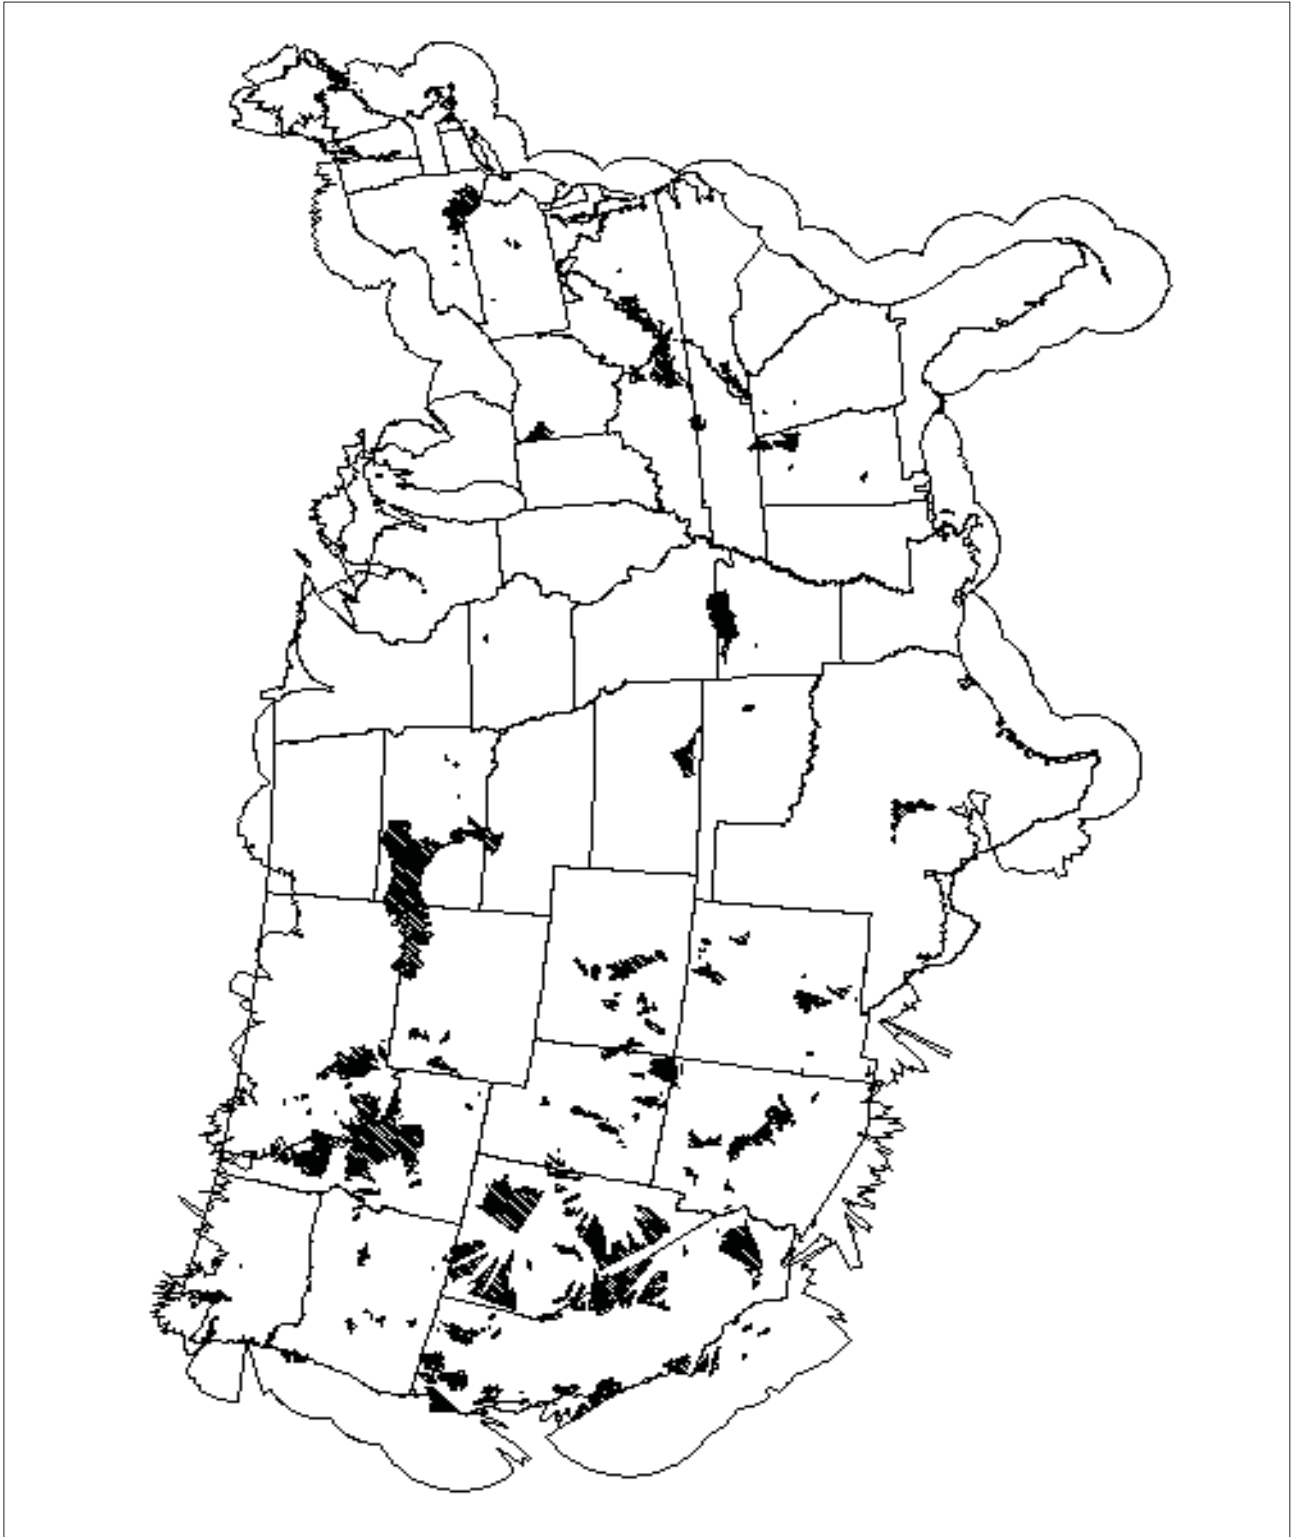

NOTE—

EFAS radio coverage at 5000 feet AGL. The shaded areas depict limited coverage areas in which altitudes above 5000 feet AGL would be required to contact EFAS.

FIG 7-1-3
Inflight Advisory Plotting Chart

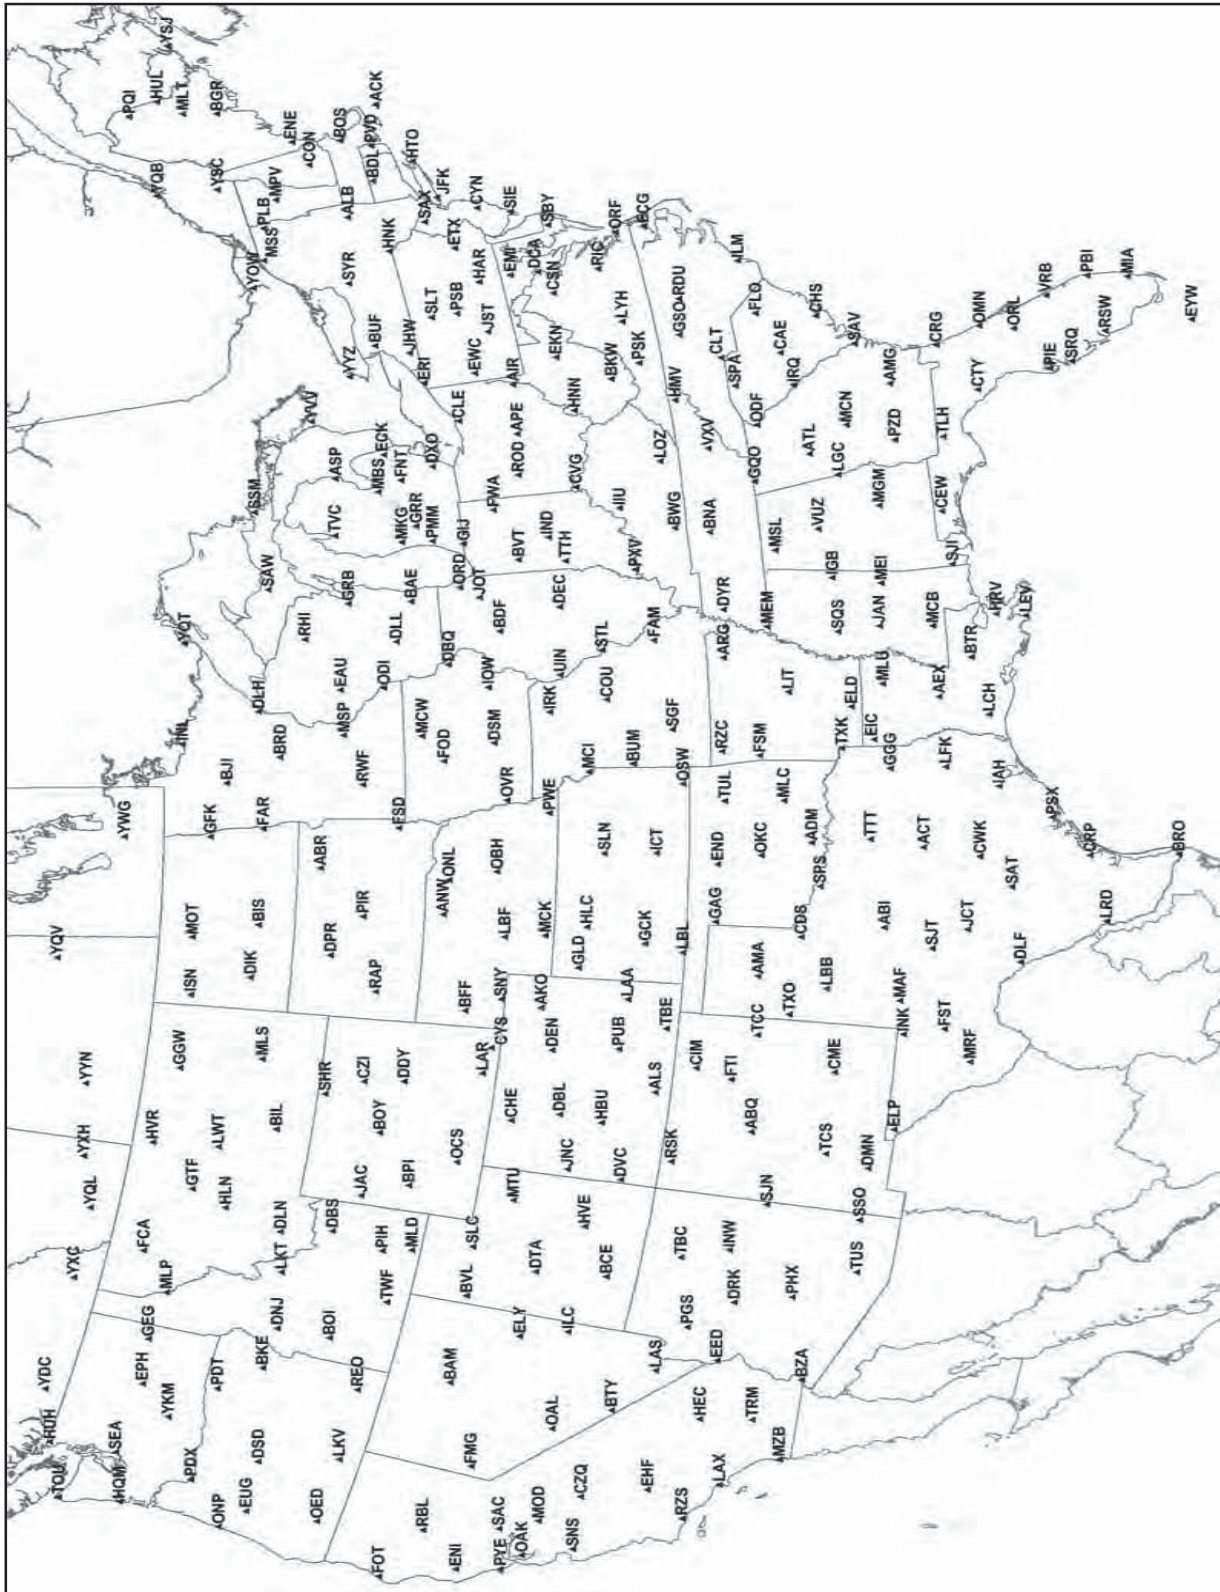


FIG 7-1-4
Geographical Areas and Terrain Features

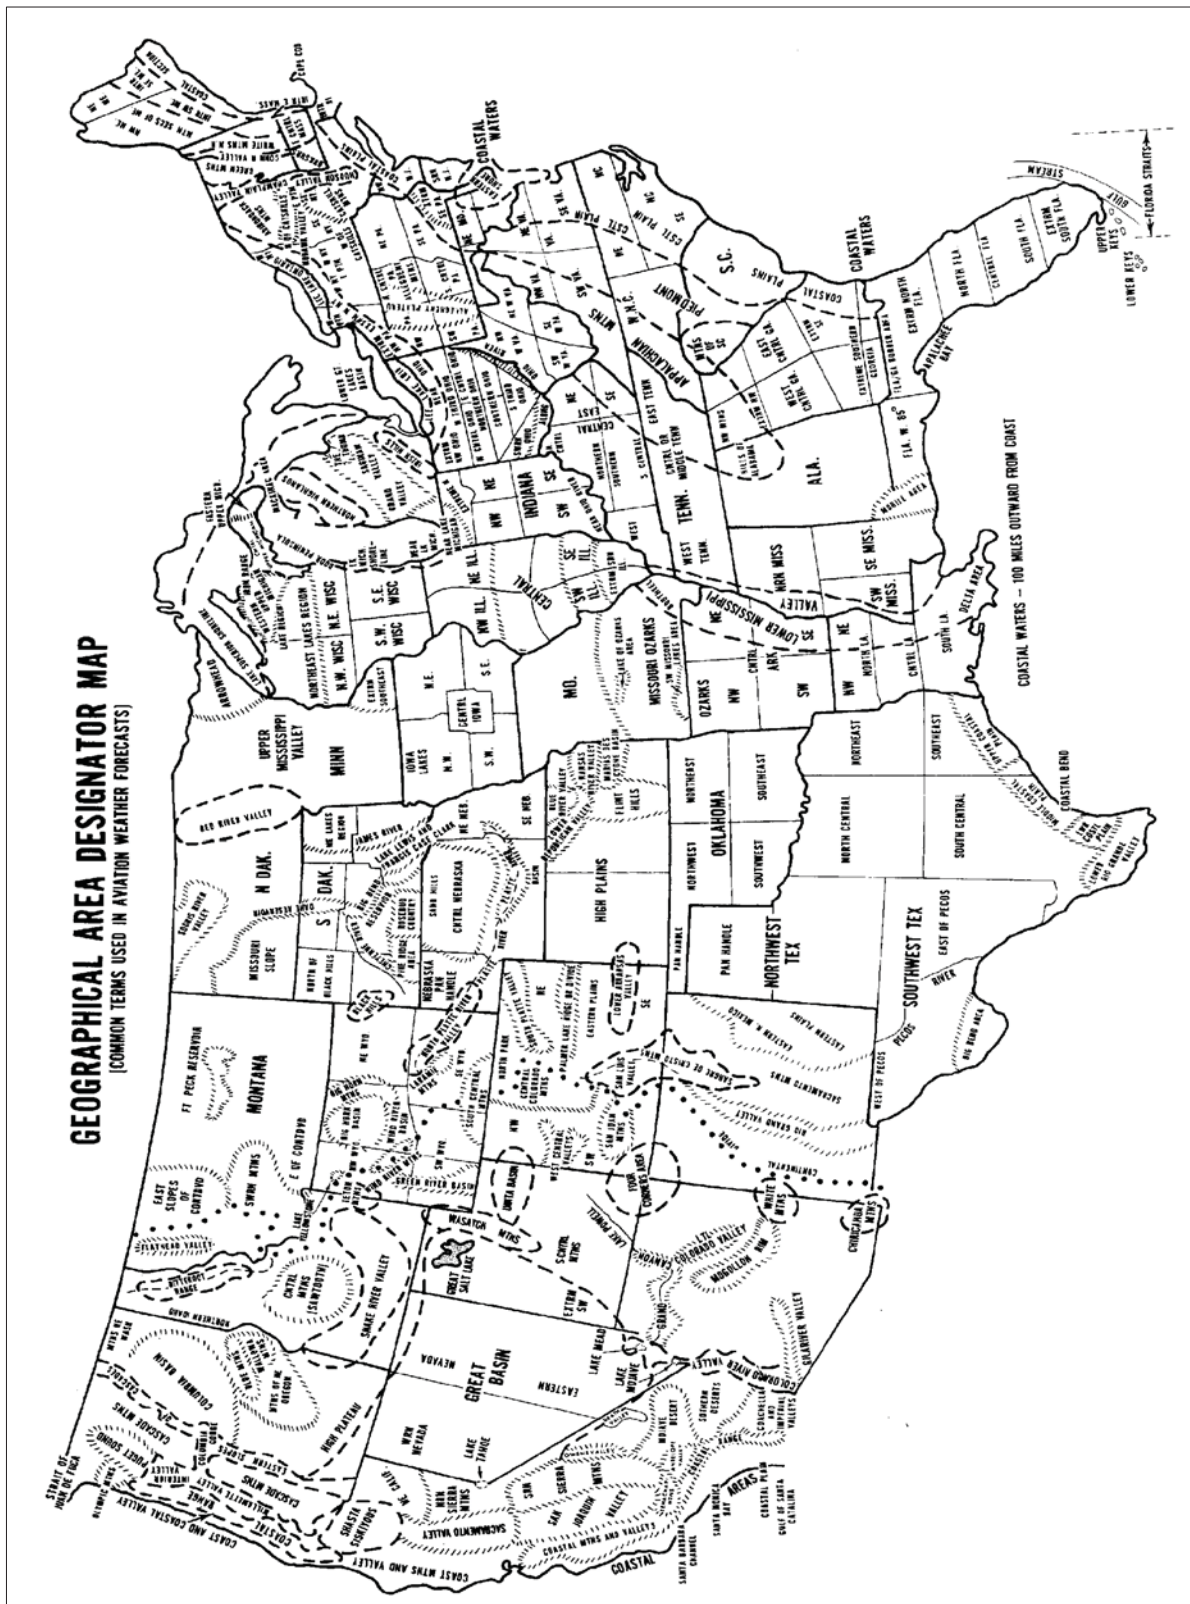


FIG 7-1-5
Aviation Area Forecasts
FA Locations – Contiguous United States

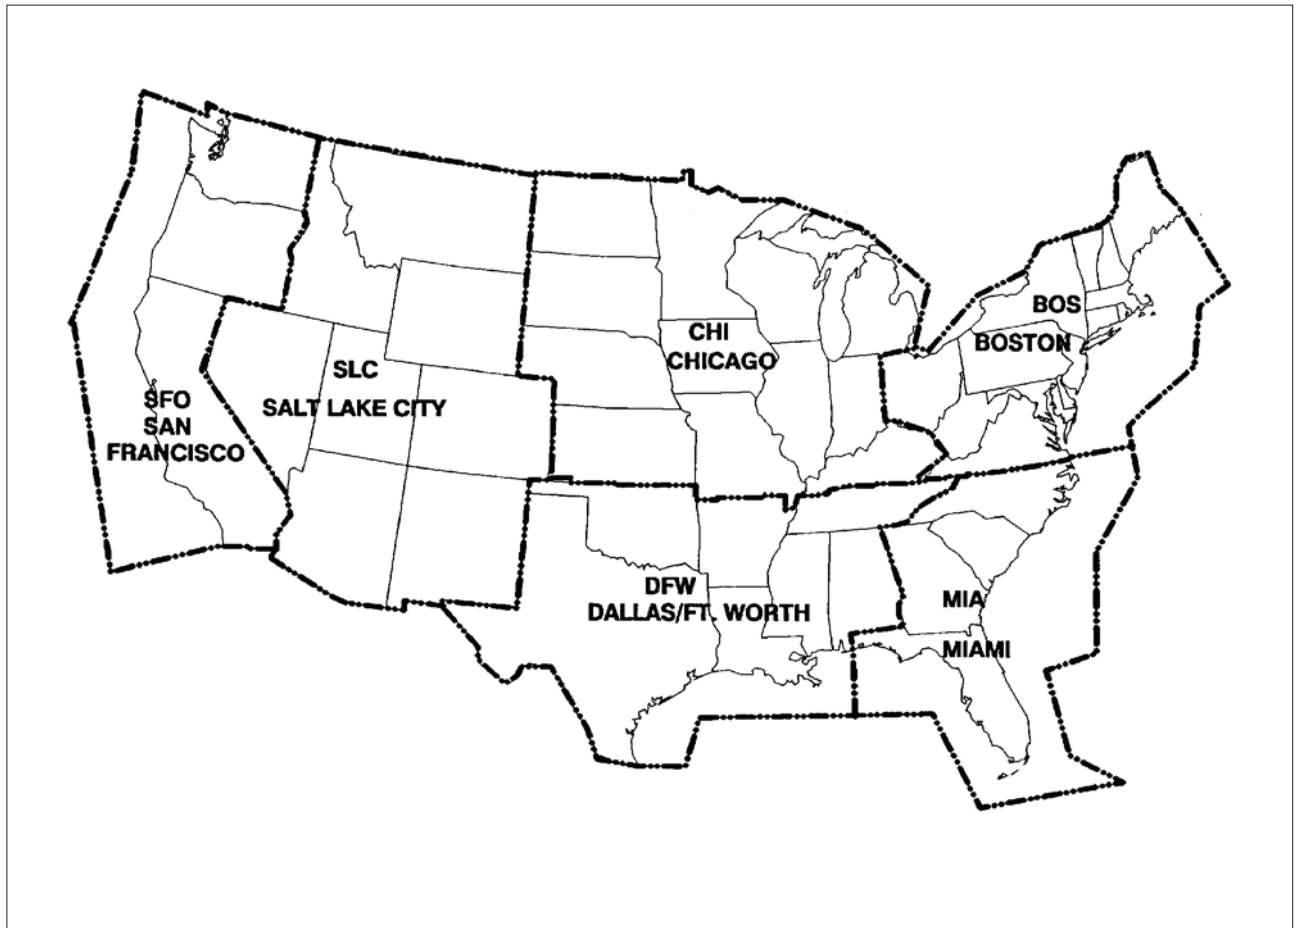


FIG 7-1-6
Alaska Area Forecast Sectors


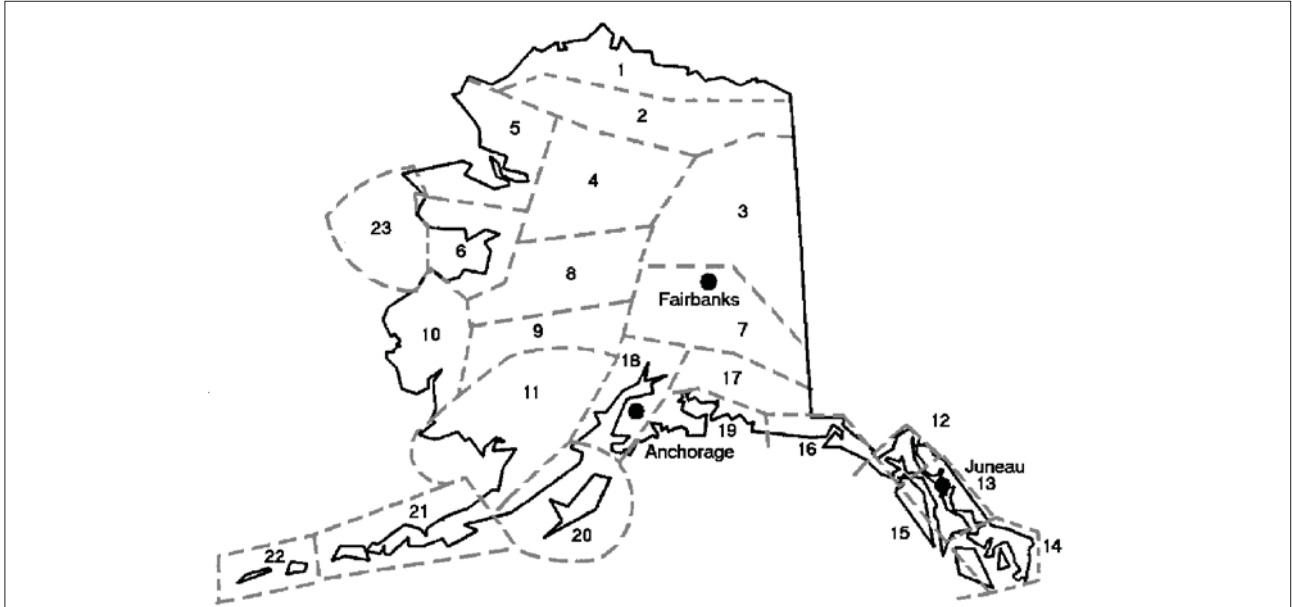


FIG 7-1-7
Hawaii Area Forecast Locations

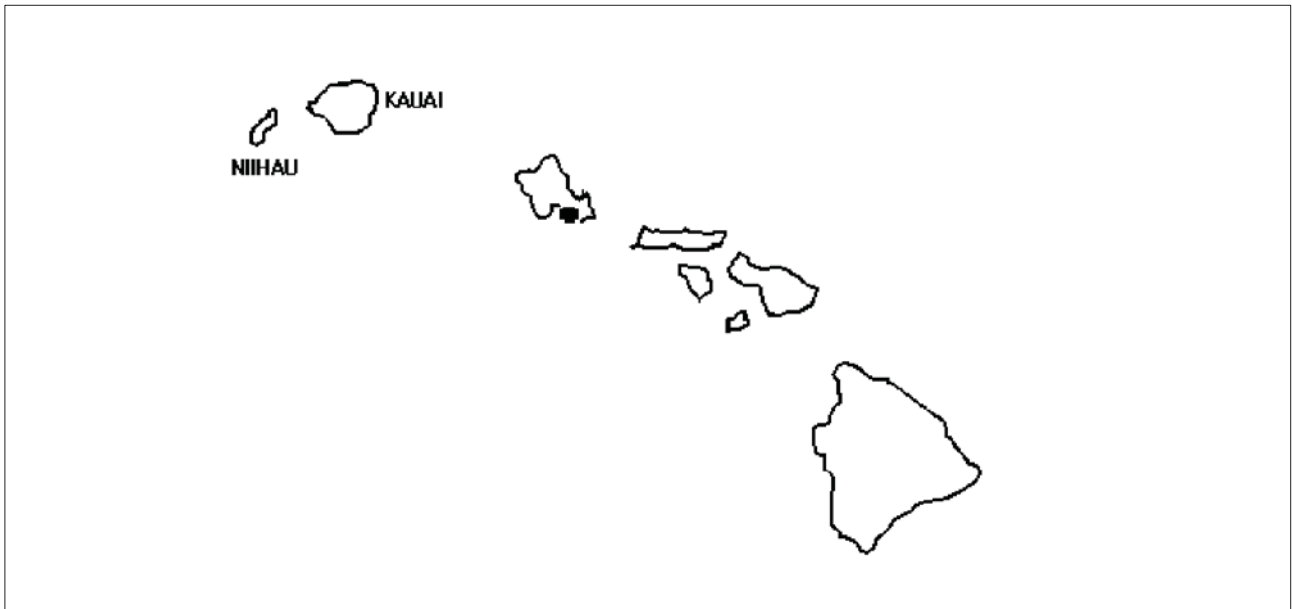

3. Convective SIGMET bulletins are issued for the eastern W central C and eastern E United States. Convective SIGMETs are not issued for Alaska or Hawaii. The areas are separated at 87 and 107 degrees west longitude with sufficient overlap to cover most cases when the phenomenon crosses the boundaries. Bulletins are issued hourly at H 55. Special bulletins are issued at any time as required and updated at H 55. If no criteria meeting convective SIGMET requirements are observed or forecasted, the message CONVECTIVE SIGMET NONE will be issued for each area at H 55. Individual convective SIGMETs for each area W C E are numbered sequentially from number one each day beginning at 00. A convective SIGMET for a continuing phenomenon will be reissued every hour at H 55 with a new number. The text of the bulletin consists of either an observation and a forecast or just a forecast. The forecast is valid for up to 2 hours.

EXAMPLE–

CONVECTIVE SIGMET 44C
VALID UNTIL 1455Z
AR TX OK
FROM 40NE ADM-40ESE MLC-10W TXK-50WNW
LFK-40ENE SJT-40NE ADM
AREA TS MOV FROM 26025KT. TOPS ABV FL450.
OUTLOOK VALID 061455-061855
FROM 60WSW OKC-MLC-40N TXK-40WSW
IGB-VUZ-MGM-HRV-60S BTR-40N
IAH-60SW SJT-40ENE LBB-60WSW OKC
WST ISSUANCES EXPD. REFER TO MOST RECENT
ACUS01 KWNS FROM STORM PREDICTION CENTER
FOR SYNOPSIS AND METEOROLOGICAL DETAILS

e. International SIGMET

1. Some NWS offices have been designated by the ICAO as Meteorological Watch Offices (MWOs). These offices are responsible for issuing International SIGMETs for designated areas that include Alaska, Hawaii, portions of the Atlantic and Pacific Oceans, and the Gulf of Mexico.

2. The offices which issue international SIGMETs are

- (a) The AWC in Kansas City, Missouri
- (b) The AAWU in Anchorage, Alaska
- (c) The WFO in Honolulu, Hawaii

3. These SIGMETs are considered wide spread because they must be either affecting or be

forecasted to affect an area of at least 3,000 square miles at any one time. The International SIGMET is issued for 6 hours for volcanic ash events, 6 hours for hurricanes and tropical storms, and 4 hours for all other events. Like the domestic SIGMETs, international SIGMETs are also identified by an alphabetic designator from Alpha through Mike and are numbered sequentially until that weather phenomenon ends. The criteria for an international SIGMET are

- (a) Thunderstorms occurring in lines embedded in clouds or in large areas producing tornadoes or large hail
- (b) Tropical cyclones
- (c) Severe icing
- (d) Severe or extreme turbulence
- (e) Dust storms and sandstorms lowering visibilities to less than 3 miles
- (f) Volcanic ash

EXAMPLE–

Example of an International SIGMET:

WSNT06 KKKCI 022014
SIGA0F
KZMA KZNY TJZS SIGMET FOXTROT 3 VALID
022015/030015 KKKCI– MIAMI OCEANIC FIR NEW
YORK OCEANIC FIR SAN JUAN FIR FRQ TS WI AREA
BOUNDED BY 2711N6807W 2156N6654W 2220N7040W
2602N7208W 2711N6807W. TOPS TO FL470. MOV NE
15KT. WKN. BASED ON SAT AND LTG OBS.
MOSHER

f. AIRMET

1. AIRMETs (WAs) are advisories of significant weather phenomena but describe conditions at intensities lower than those which require the issuance of SIGMETs. AIRMETs are intended for dissemination to all pilots in the preflight and en route phase of flight to enhance safety. AIRMET information is available in two formats: text bulletins (WA) and graphics (G-AIRMET). Both formats meet the criteria of paragraph 7-1-3i1 and are issued on a scheduled basis every 6 hours beginning at 0245 UTC. Unscheduled updates and corrections are issued as necessary. AIRMETs contain details about IFR, extensive mountain obscuration, turbulence, strong surface winds, icing, and freezing levels.

2. There are three AIRMETs: Sierra, Tango, and Zulu. After the first issuance each day, scheduled

or unscheduled bulletins are numbered sequentially for easier identification

(a) AIRMET Sierra describes IFR conditions and/or extensive mountain obscurations

(b) AIRMET Tango describes moderate turbulence sustained surface winds of 30 knots or greater and/or nonconvective low-level wind shear

(c) AIRMET Zulu describes moderate icing and provides freezing level heights

EXAMPLE–

Example of AIRMET Sierra issued for the Chicago FA area:

CHIS WA 131445

AIRMET SIERRA UPDT 2 FOR IFR AND MTN OBSCN VALID UNTIL 132100.

AIRMET IFR...KY

FROM 20SSW HNN TO HNV TO 50ENE DYR TO 20SSW HNN

CIG BLW 010/VIS BLW 3SM PCPN/BR/FG. CONDS ENDG BY 18Z.

AIRMET IFR....MN LS

FROM INL TO 70W YQT TO 40ENE DLH TO 30NNW DLH TO 50SE GFK TO 20 ENE GFK TO INL

CIG BLW 010/VIS BLW 3SM BR. CONDS ENDG 15–18Z.

AIRMET IFR....KS

FROM 30N SLN TO 60E ICT TO 40S ICT TO 50W LBL TO 30SSW GLD TO 30N SLN

CIG BLW 010/VIS BLW 3SM PCPN/BR/FG. CONDS ENDG 15–18Z.

AIRMET MTN OBSCN...KY TN

FROM HNN TO HNV TO GQO TO LOZ TO HNN MTN OBSC BY CLDS/PCPN/BR. CONDS CONTG BYD 21Z THRU 03Z.

.....

EXAMPLE–

Example of AIRMET Tango issued for the Salt Lake City FA area:

SLCT WA 131445

AIRMET TANGO UPDT 2 FOR TURB VALID UNTIL 132100.

AIRMET TURB...MT

FROM 40NW HVR TO 50SE BIL TO 60E DLN TO 60SW YQL TO 40NW HVR

MOD TURB BLW 150. CONDS DVLPG 18–21Z. CONDS CONTG BYD 21Z THRU 03Z.

AIRMET TURB....ID MT WY NV UT CO

FROM 100SE MLS TO 50SSW BFF TO 20SW BTY

TO 40SW BAM TO 100SE MLS

MOD TURB BTN FL310 AND FL410. CONDS CONTG BYD 21Z ENDG 21–00Z.

AIRMET TURB...NV AZ NM CA AND CSTL WTRS FROM 100WSW ENI TO 40W BTY TO 40S LAS TO 30ESE TBE TO INK TO ELP TO 50S TUS TO BZA TO 20S MZB TO 150SW PYE TO 100WSW ENI MOD TURB BTWN FL210 AND FL380. CONDS CONTG BYD 21Z THRU 03Z.

....

EXAMPLE–

Example of AIRMET Zulu issued for the San Francisco FA area:

SFOZ WA 131445

AIRMET ZULU UPDT 2 FOR ICE AND FRZLVL VALID UNTIL 132100.

NO SGFNT ICE EXP OUTSIDE OF CNVTV ACT.

FRZLVL....RANGING FROM SFC–105 ACRS AREA MULT FRZLVL BLW 080 BOUNDED BY 40SE YDC–60NNW GEG–60SW MLP–30WSW BKE–20SW BAM–70W BAM–40SW YKM–40E HUH–40SE YDC SFC ALG 20NNW HUH–30SSE HUH–60S SEA 50NW LKV–60WNWOAL–30SW OAL 040 ALG 40W HUH–30W HUH–30NNW SEA–40N PDX–20NNW DSD 080 ALG 160NW FOT–80SW ONP–50SSW EUG 40SSE OED–50SSE CZQ–60E EHF–40WSW LAS

....

3. Graphical AIRMETs (G-AIRMETs)

found on the Aviation Weather Center webpage at <http://aviationweather.gov> are graphical forecasts of en-route weather hazards valid at discrete times no more than 3 hours apart for a period of up to 12 hours into the future for example 00 03 06 09 and 12 hours. Additional forecasts may be inserted during the first 6 hours for example 01 02 04 and 05. 00 hour represents the initial conditions and the subsequent graphics depict the area affected by the particular hazard at that valid time. Forecasts valid at 00 through 06 hours correspond to the text AIRMET bulletin. Forecasts valid at 06 through 12 hours correspond to the text bulletin outlook. G-AIRMET depicts the following en route aviation weather hazards:

- (a) Instrument flight rule conditions ceiling 1000 and/or surface visibility 3 miles
- (b) Mountain obscuration
- (c) Icing
- (d) Freezing level

- (e) Turbulence
- (f) Low level wind shear LLWS
- (g) Strong surface winds

G-AIRMETs are snap shots at discrete time intervals as defined above. The text AIRMET is the result of the production of the G-AIRMET but provided in a time smear for a 6hr valid period. G-AIRMETs provide a higher forecast resolution than text AIRMET products. Since G-AIRMETs and text AIRMETs are created from the same forecast production process there exists perfect consistency between the two. Using the two together will provide clarity of the area impacted by the weather hazard and improve situational awareness and decision making.

Interpolation of time periods between G-AIRMET valid times. Users must keep in mind when using the G-AIRMET that if a 00 hour forecast shows no significant weather and a 03 hour forecast shows hazardous weather they must assume a change is occurring during the period between the two forecasts. It should be taken into consideration that the hazardous weather starts immediately after the 00 hour forecast unless there is a defined initiation or ending time for the hazardous weather. The same would apply after the 03 hour forecast. The user should assume the hazardous weather condition is occurring between the snap shots unless informed otherwise. For example if a 00 hour forecast shows no hazard a 03 hour forecast shows the presence of hazardous weather and a 06 hour forecast shows no hazard the user should assume the hazard exists from the 0001 hour to the 0559 hour time period.

EXAMPLE-

See FIG 7-1-8 for an example of the G-AIRMET graphical product.

g. Severe Weather Watch Bulletins (WWs) and Alert Messages (AWWs)

1. WWs define areas of possible severe thunderstorms or tornado activity. The bulletins are issued by the Storm Prediction Center (SPC) in Norman, OK. WWs are unscheduled and are issued as required.

2. A severe thunderstorm watch describes areas of expected severe thunderstorms. Severe thunderstorm criteria are $\frac{3}{4}$ -inch hail or larger and/or winds gusts of 50 knots (58 mph) or greater.

3. A tornado watch describes areas where the threat of tornadoes exists.

4. In order to alert the WFOs, CWSUs, FSSs and other users a preliminary notification of a watch called the Alert Severe Weather Watch bulletin (AWW) is sent before the WW. WFOs know this product as a SAW.

EXAMPLE-

Example of an AWW:

MKC AWW 011734

WW 75 TORNADO TX OK AR 011800Z-020000Z

AXIS..80 STATUTE MILES EAST AND WEST OF A LINE..60ESE DAL/DALLAS TX/ - 30 NW ARG/ WALNUT RIDGE AR/

..AVIATION COORDS.. 70NM E/W /58W GGG - 25NW ARG/

HAIL SURFACE AND ALOFT..1 $\frac{3}{4}$ INCHES. WIND GUSTS..70 KNOTS. MAX TOPS TO 450. MEAN WIND VECTOR 24045.

5. Soon after the AWW goes out the actual watch bulletin itself is issued. A WW is in the following format:

(a) Type of severe weather watch, watch area, valid time period, type of severe weather possible, watch axis, meaning of a watch, and a statement that persons should be on the lookout for severe weather.

(b) Other watch information, i.e. references to previous watches.

(c) Phenomena, intensities, hail size and speed, knots, maximum cumulonimbus (CB) tops, and estimated cell movement, mean wind vector.

(d) Cause of severe weather.

(e) Information on updating Convective Outlook (AC) products.

EXAMPLE-

Example of a WW:

BULLETIN - IMMEDIATE BROADCAST REQUESTED
TORNADO WATCH NUMBER 381

STORM PREDICTION CENTER NORMAN OK
556 PM CDT MON JUN 2 1997

THE STORM PREDICTION CENTER HAS ISSUED A
TORNADO WATCH FOR PORTIONS OF NORTHEAST
NEW MEXICO TEXAS PANHANDLE

EFFECTIVE THIS MONDAY NIGHT AND TUESDAY
MORNING FROM 630 PM UNTIL MIDNIGHT CDT.

TORNADOES...HAIL TO 2 $\frac{3}{4}$ INCHES IN DIAMETER...THUNDERSTORM WIND GUSTS TO 80 MPH...AND DANGEROUS LIGHTNING ARE POSSIBLE IN THESE AREAS.

THE TORNADO WATCH AREA IS ALONG AND 60 STATUTE MILES NORTH AND SOUTH OF A LINE FROM 50 MILES SOUTHWEST OF RATON NEW MEXICO TO 50 MILES EAST OF AMARILLO TEXAS. REMEMBER...A TORNADO WATCH MEANS CONDITIONS ARE FAVORABLE FOR TORNADOES AND SEVERE THUNDERSTORMS IN AND CLOSE TO THE WATCH AREA. PERSONS IN THESE AREAS SHOULD BE ON THE LOOKOUT FOR THREATENING WEATHER CONDITIONS AND LISTEN FOR LATER STATEMENTS AND POSSIBLE WARNINGS. OTHER WATCH INFORMATION...CONTINUE... WW 378...WW 379...WW 380

DISCUSSION...THUNDERSTORMS ARE INCREASING OVER NE NM IN MOIST SOUTHEASTERLY UPSLOPE FLOW. OUTFLOW BOUNDARY EXTENDS EASTWARD INTO THE TEXAS PANHANDLE AND EXPECT STORMS TO MOVE ESE ALONG AND NORTH OF THE BOUNDARY ON THE N EDGE OF THE CAP. VEERING WINDS WITH HEIGHT ALONG WITH INCREASING MID LVL FLOW INDICATE A THREAT FOR SUPER-CELLS.

AVIATION...TORNADOES AND A FEW SEVERE THUNDERSTORMS WITH HAIL SURFACE AND ALOFT TO 2 $\frac{3}{4}$ INCHES. EXTREME TURBULENCE AND SURFACE WIND GUSTS TO 70 KNOTS. A FEW CUMULONIMBI WITH MAXIMUM TOPS TO 550. MEAN STORM MOTION VECTOR 28025.

6. Status reports are issued as needed to show progress of storms and to delineate areas no longer under the threat of severe storm activity. Cancellation bulletins are issued when it becomes evident that no severe weather will develop or that storms have subsided and are no longer severe.

7. When tornadoes or severe thunderstorms have developed the local WFO office will issue the warnings covering those areas.

h. Center Weather Advisories (CWAs)

1. CWAs are unscheduled inflight flow control air traffic and air crew advisory. By nature of its short lead time the CWA is not a flight planning product. It is generally a forecast for conditions beginning within the next two hours. CWAs will be issued

(a) As a supplement to an existing SIGMET Convective SIGMET or AIRMET

(b) When an Inflight Advisory has not been issued but observed or expected weather conditions meet SIGMET/AIRMET criteria based on current pilot reports and reinforced by other sources

of information about existing meteorological conditions

(c) When observed or developing weather conditions do not meet SIGMET Convective SIGMET or AIRMET criteria e.g. in terms of intensity or area coverage but current pilot reports or other weather information sources indicate that existing or anticipated meteorological phenomena will adversely affect the safe flow of air traffic within the ARTCC area of responsibility

2. The following example is a CWA issued from the Kansas City Missouri ARTCC. The 3 after KC in the first line denotes this CWA has been issued for the third weather phenomena to occur for the day. The 301 in the second line denotes the phenomena number again 3 and the issuance number 01 for this phenomena. The CWA was issued at 2140 and is valid until 2340.

EXAMPLE–

ZKC3 CWA 032140

ZKC CWA 301 VALID UNTIL 032340

ISOLD SVR TSTM over KCOU MOVG SWWD 10 KTS ETC.

7–1–7. Categorical Outlooks

a. Categorical outlook terms describing general ceiling and visibility conditions for advanced planning purposes are used only in area forecasts and are defined as follows:

1. **LIFR (Low IFR).** Ceiling less than 500 feet and/or visibility less than 1 mile

2. **IFR.** Ceiling 500 to less than 1 000 feet and/or visibility 1 to less than 3 miles

3. **MVFR (Marginal VFR).** Ceiling 1 000 to 3 000 feet and/or visibility 3 to 5 miles inclusive

4. **VFR.** Ceiling greater than 3 000 feet and visibility greater than 5 miles includes sky clear

b. The cause of LIFR, IFR, or MVFR is indicated by either ceiling or visibility restrictions or both. The contraction CIG and/or weather and obstruction to vision symbols are used. If winds or gusts of 25 knots or greater are forecast for the outlook period the word WIND is also included for all categories including VFR.

EXAMPLE–

1. *LIFR CIG–low IFR due to low ceiling.*

2. *IFR FG–IFR due to visibility restricted by fog.*

3. *MVFR CIG HZ FU—marginal VFR due to both ceiling and visibility restricted by haze and smoke.*

4. *IFR CIG RA WIND—IFR due to both low ceiling and visibility restricted by rain; wind expected to be 25 knots or greater.*

7-1-8. Telephone Information Briefing Service (TIBS)

a. TIBS provided by FSS is a system of automated telephone recordings of meteorological and aeronautical information available throughout the United States. Based on the specific needs of each area, TIBS provides route and/or area briefings in addition to airspace procedures and special announcements concerning aviation interests that may be available. Depending on user demand, other items may be provided, for example, surface weather observations, terminal forecasts, wind and temperatures aloft forecasts, etc.

b. TIBS is not intended to be a substitute for specialist-provided preflight briefings from FSS. TIBS is recommended as a preliminary briefing and often will be valuable in helping you to make a go or no go decision.

c. Pilots are encouraged to utilize TIBS, which can be accessed by dialing the FSS toll-free telephone number 1-800-W-BRIEF 992-7433 or specific published TIBS telephone numbers in certain areas. Consult the FSS Telephone Numbers section of the A/FD or the Alaska or Pacific Chart Supplement book.

NOTE—

A touch-tone telephone is necessary to fully utilize TIBS.

7-1-9. Transcribed Weather Broadcast (TWEB) (Alaska Only)

Equipment is provided in Alaska by which meteorological and aeronautical data are recorded on tapes and broadcast continuously over selected L/MF and VOR facilities. Broadcasts are made from a series of individual tape recordings and changes as they occur are transcribed onto the tapes. The information provided varies depending on the type of equipment available. Generally, the broadcast contains a summary of adverse conditions, surface weather observations, pilot weather reports, and a density altitude statement, if applicable. At the discretion of the broadcast facility, recordings may also include a

synopsis, winds aloft forecast, en route and terminal forecast data, and radar reports. At selected locations, telephone access to the TWEB has been provided. TEL-TWEB Telephone numbers for this service are found in the Supplement Alaska A/FD. These broadcasts are made available primarily for preflight and inflight planning and as such should not be considered as a substitute for specialist-provided preflight briefings.

7-1-10. Inflight Weather Broadcasts

a. **Weather Advisory Broadcasts.** ARTCCs broadcast a Severe Weather Forecast Alert (AWW), Convective SIGMET, SIGMET, or CWA alert once on all frequencies except emergency when any part of the area described is within 150 miles of the airspace under their jurisdiction. These broadcasts contain SIGMET or CWA identification and a brief description of the weather activity and general area affected.

EXAMPLE—

1. *Attention all aircraft, SIGMET Delta Three, from Myton to Tuba City to Milford, severe turbulence and severe clear icing below one zero thousand feet. Expected to continue beyond zero three zero zero zulu.*

2. *Attention all aircraft, convective SIGMET Two Seven Eastern. From the vicinity of Elmira to Phillipsburg. Scattered embedded thunderstorms moving east at one zero knots. A few intense level five cells, maximum tops four five zero.*

3. *Attention all aircraft, Kansas City Center weather advisory one zero three. Numerous reports of moderate to severe icing from eight to nine thousand feet in a three zero mile radius of St. Louis. Light or negative icing reported from four thousand to one two thousand feet remainder of Kansas City Center area.*

NOTE—

1. Terminal control facilities have the option to limit the AWW, convective SIGMET, SIGMET, or CWA broadcast as follows: local control and approach control positions may opt to broadcast SIGMET or CWA alerts only when any part of the area described is within 50 miles of the airspace under their jurisdiction.

2. In areas where HIWAS is available, ARTCC, Terminal ATC, and FSS facilities no longer broadcast Inflight Weather Advisories as described above in paragraph a. See paragraphs b1 and b2 below.

b. **Hazardous Inflight Weather Advisory Service (HIWAS).** HIWAS is an automated, continuous broadcast of inflight weather advisories provided by FSS over select VOR outlets, which include the

following weather products AWW SIGMET Convective SIGMET CWA AIRMET text WA or graphical G-AIRMET products and urgent PIREP HIWAS is available throughout the conterminous United States as an additional source of hazardous weather information. HIWAS does not replace preflight or inflight weather briefings from FSS or real-time weather updates from Enroute Flight Advisory Service EFAS radio call Flight Watch. Pilots should call FSS or Flight Watch if there are any questions about weather that is different than forecasted or if the HIWAS broadcast appears to be in error.

1. Where HIWAS is available ARTCC and terminal ATC facilities will broadcast upon receipt a HIWAS alert once on all frequencies except emergency frequencies. Included in the broadcast will be an alert announcement frequency instruction number and type of advisory updated for example AWW SIGMET Convective SIGMET or CWA.

EXAMPLE–

Attention all aircraft. Hazardous weather information (SIGMET, Convective SIGMET, AIRMET (text [WA] or graphical [G-AIRMET] product), Urgent Pilot Weather Report [UUA], or Center Weather Advisory [CWA], Number or Numbers) for (geographical area) available on HIWAS, Flight Watch, or Flight Service frequencies.


2. Upon notification of an update to HIWAS FSS will broadcast a HIWAS update announcement once on all frequencies except emergency frequencies. Included in the broadcast will be the type of advisory updated for example AWW SIGMET Convective SIGMET CWA etc.

EXAMPLE–

Attention all aircraft. Hazardous weather information for (geographical area) available from Flight Watch or Flight Service.

3. HIWAS availability is notated with VOR listings in the Airport/Facility Directory A/FD and is shown by symbols on IFR Enroute Low Altitude Charts and VFR Sectional Charts. The symbol depiction is identified in the chart legend.

FIG 7-1-8
G-AIRMET Graphical Product

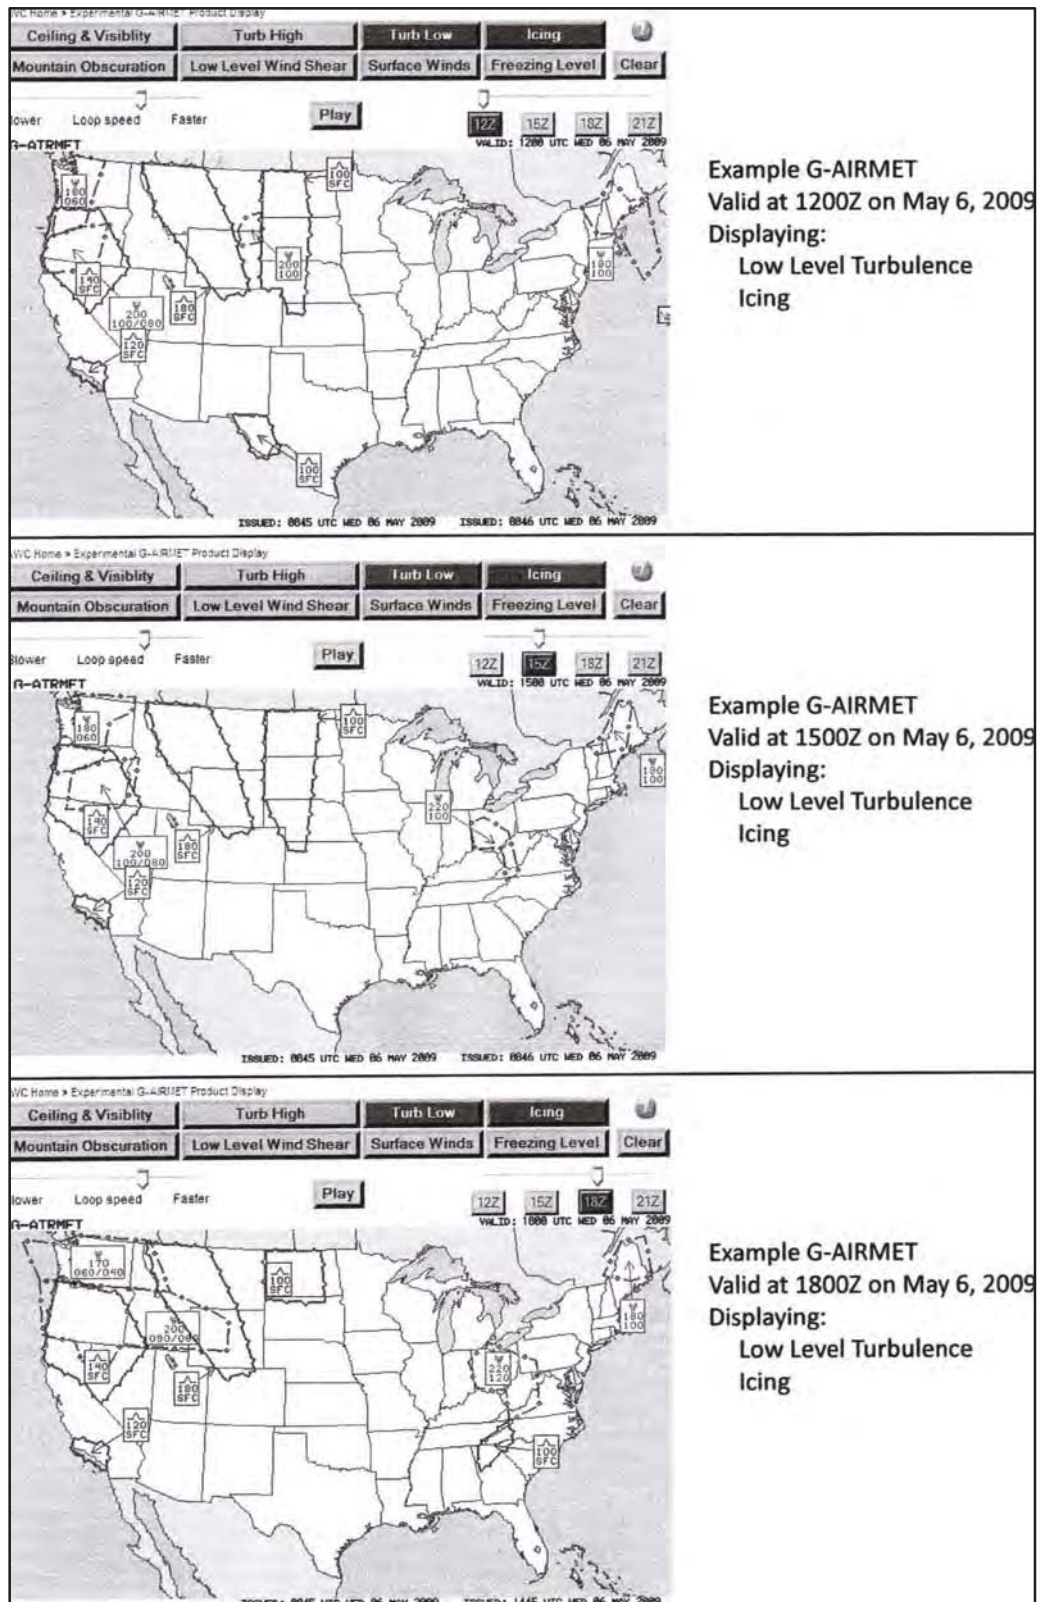

7-1-11. Flight Information Services (FIS)

a. FIS FIS is a method of disseminating meteorological (MET) and aeronautical information (AI) to displays in the cockpit in order to enhance pilot situational awareness, provide decision support tools, and improve safety. FIS augments traditional pilot voice communication with Flight Service Stations (FSSs), ATC facilities, or Airline Operations Control Centers (AOCCs). FIS is not intended to replace traditional pilot and controller/flight service specialist/aircraft dispatcher preflight briefings or inflight voice communications. FIS, however, can provide textual and graphical information that can help abbreviate and improve the usefulness of such communications. FIS enhances pilot situational awareness and improves safety.

1. Data Link Service Providers (DLSP) DLSPs deploy and maintain airborne, ground-based, and in some cases, space-based infrastructure that supports the transmission of AI/MET information over one or more physical links. DLSP may provide a free of charge or for fee service that permits end users to uplink and downlink AI/MET and other information. The following are examples of DLSP:

(a) FAA FIS-B A ground-based broadcast service provided through the ADS-B Universal Access Transceiver (UAT) network. The service provides users with a 978 MHz data link capability when operating within range and line of sight of a transmitting ground station. FIS-B enables users of properly equipped aircraft to receive and display a suite of broadcast weather and aeronautical information products.

(b) Non FAA FIS Systems Several commercial vendors provide customers with FIS data over both the aeronautical spectrum and on other frequencies using a variety of data link protocols. Services available from these providers vary greatly and may include tier-based subscriptions. Advancements in bandwidth technology permits preflight as well as inflight access to the same MET and AI information available on the ground. Pilots and operators using non-FAA FIS for MET and AI information should be knowledgeable regarding the weather services being provided as some commercial vendors may be repackaging NWS-sourced weather while other commercial vendors may alter the weather information to produce vendor-tailored or vendor-specific weather reports and forecasts.

2. Three Data Link Modes There are three data link modes that may be used for transmitting AI and MET information to aircraft. The intended use of the AI and/or MET information will determine the most appropriate data link service:

(a) Broadcast Mode A one-way interaction in which AI and/or MET updates or changes applicable to a designated geographic area are continuously transmitted or transmitted at repeated periodic intervals to all aircraft capable of receiving the broadcast within the service volume defined by the system network architecture.

(b) Contract/Demand Mode A two-way interaction in which AI and/or MET information is transmitted to an aircraft in response to a specific request.

(c) Contract/Update Mode A two-way interaction that is an extension of the Demand Mode. Initial AI and/or MET reports are sent to an aircraft and subsequent updates or changes to the AI and/or MET information that meet the contract criteria are automatically or manually sent to an aircraft.

3. To ensure airman compliance with Federal Aviation Regulations, manufacturer's operating manuals should remind airmen to contact ATC controllers, FSS specialists, operator dispatchers, or airline operations control centers for general and mission-critical aviation weather information and/or NAS status conditions such as NOTAMs, Special Use Airspace status, and other government flight information. If FIS products are systemically modified (for example, are displayed as abbreviated plain text and/or graphical depictions), the modification process and limitations of the resultant product should be clearly described in the vendor's user guidance.

4. Operational Use of FIS Regardless of the type of FIS system being used, several factors must be considered when using FIS:

(a) Before using FIS for inflight operations, pilots and other flight crew members should become familiar with the operation of the FIS system to be used, the airborne equipment to be used, including its system architecture, airborne system components, coverage, service volume, and other limitations of the particular system, modes of operation, and indications of various system failures. Users should also be familiar with the specific content and format of the services available from the FIS provider(s). Sources

of information that may provide this specific guidance include manufacturer's manuals, training programs, and reference guides.

(b) FIS should not serve as the sole source of aviation weather and other operational information. ATC FSSs and, if applicable, AOCC VHF/HF voice remain as a redundant method of communicating aviation weather. NOTAMs and other operational information to aircraft in flight. FIS augments these traditional ATC/FSS/AOCC services and, for some products, offers the advantage of being displayed as graphical information. By using FIS for orientation, the usefulness of information received from conventional means may be enhanced. For example, FIS may alert the pilot to specific areas of concern that will more accurately focus requests made to FSS or AOCC for inflight updates or similar queries made to ATC.

(c) The airspace and aeronautical environment is constantly changing. These changes occur quickly and without warning. Critical operational decisions should be based on use of the most current and appropriate data available. When differences exist between FIS and information obtained by voice communication with ATC, FSS, and/or AOCC, if applicable, pilots are cautioned to use the most recent data from the most authoritative source.

(d) FIS aviation weather products, for example, graphical ground-based radar precipitation depictions, are not appropriate for tactical, typical timeframe of less than 3 minutes, avoidance of severe weather such as negotiating a path through a weather hazard area. FIS supports strategic, typical timeframe of 20 minutes or more, weather decisionmaking such as route selection to avoid a weather hazard area in its entirety. The misuse of information beyond its applicability may place the pilot and aircraft in jeopardy. In addition, FIS should never be used in lieu of an individual preflight weather and flight planning briefing.

(e) DLSP offer numerous MET and AI products with information that can be layered on top of each other. Pilots need to be aware that too much information can have a negative effect on their cognitive workload. Pilots need to manage the amount of information to a level that offers the most pertinent information to that specific flight without creating a cockpit distraction. Pilots may need to

adjust the amount of information based on numerous factors including, but not limited to, the phase of flight, single pilot operation, autopilot availability, class of airspace, and the weather conditions encountered.

(f) FIS NOTAM products, including Temporary Flight Restriction (TFR) information, are advisory-use information and are intended for situational awareness purposes only. Cockpit displays of this information are not appropriate for tactical navigation – pilots should stay clear of any geographic area displayed as a TFR NOTAM. Pilots should contact FSSs and/or ATC while en route to obtain updated information and to verify the cockpit display of NOTAM information.

(g) FIS supports better pilot decisionmaking by increasing situational awareness. Better decision-making is based on using information from a variety of sources. In addition to FIS, pilots should take advantage of other weather/NAS status sources, including briefings from Flight Service Stations (FSSs), en route Flight Watch service, data from other air traffic control facilities, airline operation control centers, pilot reports, as well as their own observations.

(h) FAA's Flight Information Service–Broadcast (FIS–B).

(1) FIS–B is a ground-based broadcast service provided through the FAA's Automatic Dependent Surveillance Broadcast (ADS–B) Services Universal Access Transceiver (UAT) network. The service provides users with a 978 MHz data link capability when operating within range and line-of-sight of a transmitting ground station. FIS–B enables users of properly-equipped aircraft to receive and display a suite of broadcast weather and aeronautical information products.

(2) The following list represents the initial suite of text and graphical products available through FIS–B and provided free-of-charge. Detailed information concerning FIS–B meteorological products can be found in Advisory Circular 00–45, Aviation Weather Services, and AC 00–63, Use of Cockpit Displays of Digital Weather and Aeronautical Information. Information on Special Use Airspace (SUA), Temporary Flight Restriction (TFR), and Notice to Airmen (NOTAM) products can be found in Chapters 3, 4, and 5 of this manual.

[a] Text: Aviation Routine Weather Report METAR and Special Aviation Report SPECI

[b] Text: Pilot Weather Report PIREP

[c] Text: Winds and Temperatures Aloft

[d] Text: Terminal Aerodrome Forecast TAF and amendments

[e] Text: Notice to Airmen NOTAM Distant and Flight Data Center

[f] Text/Graphic: Airmen's Meteorological Conditions AIRMET

[g] Text/Graphic: Significant Meteorological Conditions SIGMET

[h] Text/Graphic: Convective SIGMET

[i] Text/Graphic: Special Use Airspace SUA

[j] Text/Graphic: Temporary Flight Restriction TFR NOTAM and

[k] Graphic: NE RAD Composite Reflectivity Products Regional and National

(3) Users of FIS-B should familiarize themselves with the operational characteristics and limitations of the system including system architecture service environment product lifecycles modes of operation and indications of system failure

(4) FIS-B products are updated and transmitted at specific intervals based primarily on product issuance criteria. Update intervals are defined as the rate at which the product data is available from the source for transmission. Transmission intervals are defined as the amount of time within which a new or updated product transmission must be completed and/or the rate or repetition interval at which the product is rebroadcast. Update and transmission intervals for each product are provided in TBL 7-1-1.

(5) Where applicable FIS-B products include a look-ahead range expressed in nautical miles (NM) for three service domains: Airport Surface Terminal Airspace and Enroute/Gulf-of-Mexico GOME. TBL 7-1-2 provides service domain availability and look-ahead ranging for each FIS-B product.

(6) Prior to using this capability, users should familiarize themselves with the operation of FIS-B avionics by referencing the applicable User's Guides. Guidance concerning the interpretation of information displayed should be obtained from the appropriate avionics manufacturer.

(7) FIS-B malfunctions not attributed to aircraft system failures or covered by active NOTAM should be reported by radio or telephone to the nearest FSS facility. Malfunctions may also be reported by submitting FAA Form 8740-5 Safety Improvement Report via mail, fax, or email to your local Flight District Standards Office Safety Program Manager.

b. Non-FAA FIS Systems. Several commercial vendors also provide customers with FIS data over both the aeronautical spectrum and on other frequencies using a variety of data link protocols. In some cases, the vendors provide only the communications system that carries customer messages such as the Aircraft Communications Addressing and Reporting System (ACARS) used by many air carrier and other operators.

1. Operators using non-FAA FIS data for inflight weather and other operational information should ensure that the products used conform to FAA/NWS standards. Specifically, aviation weather and NAS status information should meet the following criteria:

(a) The products should be either FAA/NWS accepted aviation weather reports or products or based on FAA/NWS accepted aviation weather reports or products. If products are used which do not meet this criteria, they should be so identified. The operator must determine the applicability of such products to their particular flight operations.

(b) In the case of a weather product which is the result of the application of a process which alters the form, function, or content of the base FAA/NWS accepted weather products, that process and any limitations to the application of the resultant product should be described in the vendor's user guidance material.

2. An example could be a NE RAD radar composite/mosaic map which has been modified by changing the scaling resolution. The methodology of assigning reflectivity values to the resultant image components should be described in the vendor's

guidance material to ensure that the user can accurately interpret the displayed data

TBL 7-1-1
FIS-B Over UAT Product Update and Transmission Intervals

Product	FIS-B Over UAT Service Update Intervals¹	FIS-B Service Transmission Intervals²
AIRMET	As Available	5 minutes
Convective SIGMET	As Available	5 minutes
METARs/SPECIs	1 minute/As Available	5 minutes
NEXRAD Composite Reflectivity (CONUS)	15 minutes	15 minutes
NEXRAD Composite Reflectivity (Regional)	5 minutes	2.5 minutes
NOTAMs-D/FDC/TFR	As Available	10 minutes
PIREP	As Available	10 minutes
SIGMET	As Available	5 minutes
SUA Status	As Available	10 minutes
TAF/AMEND	8 Hours/As Available	10 minutes
Temperatures Aloft	12 Hours	10 minutes
Winds Aloft	12 Hours	10 minutes

¹ The Update Interval is the rate at which the product data is available from the source.

² The Transmission Interval is the amount of time within which a new or updated product transmission must be completed and the rate or repetition interval at which the product is rebroadcast.

TBL 7-1-2
Product Parameters for Low/Medium/High Altitude Tier Radios

Product	Surface Radios	Low Altitude Tier	Medium Altitude Tier	High Altitude Tier
CONUS NE RAD	N/A	CONUS NE RAD not provided	CONUS NE RAD imagery	CONUS NE RAD imagery
Winds & Temps Aloft	500 NM look-ahead range	500 NM look-ahead range	750 NM look-ahead range	1 000 NM look-ahead range
METAR	100 NM look-ahead range	250 NM look-ahead range	375 NM look-ahead range	CONUS CONUS Class B & C airport METARs and 500 NM look-ahead range Outside of CONUS 500 NM look ahead range
TAF	100 NM look-ahead range	250 NM look-ahead range	375 NM look-ahead range	CONUS CONUS Class B & C airport TAFs and 500 NM look-ahead range Outside of CONUS 500 NM look ahead range
AIRMET SIGMET PIREP and SUA/ SAA	100 NM look-ahead range PIREP/SUA/ SAA is N/A	250 NM look-ahead range	375 NM look-ahead range	500 NM look-ahead range
Regional NE RAD	150 NM look-ahead range	150 NM look-ahead range	200 NM look-ahead range	250 NM look-ahead range
NOTAMs D FDC and TFR	100 NM look-ahead range	100 NM look-ahead range	100 NM look-ahead range	100 NM look-ahead range

7-1-12. Weather Observing Programs

a. Manual Observations. With only a few exceptions these reports are from airport locations staffed by FAA or NWS personnel who manually observe perform calculations and enter these observations into the WMSCR communication system. The format and coding of these observations are contained in Paragraph 7-1-30 Key to Aviation Routine Weather Report METAR and Aerodrome Forecasts TAF.

b. Automated Weather Observing System (AWOS).

1. Automated weather reporting systems are increasingly being installed at airports. These systems consist of various sensors a processor a computer generated voice subsystem and a transmit

ter to broadcast local minute by minute weather data directly to the pilot.

NOTE-

When the barometric pressure exceeds 31.00 inches Hg., see Paragraph 7-2-2, Procedures, for the altimeter setting procedures.

2. The AWOS observations will include the prefix AUTO to indicate that the data are derived from an automated system. Some AWOS locations will be augmented by certified observers who will provide weather and obstruction to vision information in the remarks of the report when the reported visibility is less than 7 miles. These sites along with the hours of augmentation are to be published in the A/FD. Augmentation is identified in the observation as OBSERVER WEATHER. The AWOS wind speed direction and gusts temperature dew point

and altimeter setting are exactly the same as for manual observations. The AWOS will also report density altitude when it exceeds the field elevation by more than 1 000 feet. The reported visibility is derived from a sensor near the touchdown of the primary instrument runway. The visibility sensor output is converted to a visibility value using a 10-minute harmonic average. The reported sky condition/ceiling is derived from the ceilometer located next to the visibility sensor. The AWOS algorithm integrates the last 30 minutes of ceilometer data to derive cloud layers and heights. This output may also differ from the observer sky condition in that the AWOS is totally dependent upon the cloud advection over the sensor site.

3. These real time systems are operationally classified into nine basic levels:

(a) **AWOS-A** only reports altimeter setting

NOTE—

Any other information is advisory only.

(b) **AWOS-AV** reports altimeter and visibility

NOTE—

Any other information is advisory only.

(c) **AWOS-1** usually reports altimeter setting and data temperature dew point and density altitude

(d) **AWOS-2** provides the information provided by AWOS-1 plus visibility and

(e) **AWOS-3** provides the information provided by AWOS-2 plus cloud/ceiling data

(f) **AWOS-3P** provides reports the same as the AWOS 3 system plus a precipitation identification sensor

(g) **AWOS-3PT** reports the same as the AWOS 3P System plus thunderstorm/lightning reporting capability

(h) **AWOS-3T** reports the same as AWOS 3 system and includes a thunderstorm/lightning reporting capability

(i) **AWOS-4** reports the same as the AWOS 3 system plus precipitation occurrence type and accumulation freezing rain thunderstorm and runway surface sensors

4. The information is transmitted over a discrete VHF radio frequency or the voice portion of a local NAVD. AWOS transmissions on a discrete VHF radio frequency are engineered to be receivable to a maximum of 25 NM from the AWOS site and a maximum altitude of 10 000 feet AGL. At many locations, AWOS signals may be received on the surface of the airport but local conditions may limit the maximum AWOS reception distance and/or altitude. The system transmits a 20 to 30 second weather message updated each minute. Pilots should monitor the designated frequency for the automated weather broadcast. A description of the broadcast is contained in subparagraph c. There is no two-way communication capability. Most AWOS sites also have a dial up capability so that the minute by minute weather messages can be accessed via telephone.

5. AWOS information system level frequency phone number, etc., concerning specific locations is published as the systems become operational in the A/FD and where applicable on published Instrument Approach Procedures. Selected individual systems may be incorporated into nationwide data collection and dissemination networks in the future.

c. AWOS Broadcasts. Computer generated voice is used in AWOS to automate the broadcast of the minute by minute weather observations. In addition, some systems are configured to permit the addition of an operator generated voice message, e.g., weather remarks following the automated parameters. The phraseology used generally follows that used for other weather broadcasts. Following are explanations and examples of the exceptions.

1. Location and Time. The location/name and the phrase "AUTOMATED WEATHER OBSERVATION" followed by the time are announced.

(a) If the airport's specific location is included in the airport's name, the airport's name is announced.

EXAMPLE—

"Bremerton National Airport automated weather observation, one four five six zulu;"

"Ravenswood Jackson County Airport automated weather observation, one four five six zulu."

(b) If the airport's specific location is not included in the airport's name, the location is announced followed by the airport's name.

EXAMPLE–

“Sault Ste. Marie, Chippewa County International Airport automated weather observation;”

“Sandusky, Cowley Field automated weather observation.”

(c) The word TEST is added following OBSERVATION when the system is not in commissioned status

EXAMPLE–

“Bremerton National Airport automated weather observation test, one four five six zulu.”

(d) The phrase TEMPORARILY INOPERATIVE is added when the system is inoperative

EXAMPLE–

“Bremerton National Airport automated weather observing system temporarily inoperative.”

2. Visibility.

(a) The lowest reportable visibility value in AWOS is less than $\frac{1}{4}$. It is announced as VISIBILITY LESS THAN ONE QUARTER

(b) A sensor for determining visibility is not included in some AWOS. In these systems, visibility is not announced. VISIBILITY MISSING is announced only if the system is configured with a visibility sensor and visibility information is not available

3. Weather. In the future, some AWOSs are to be configured to determine the occurrence of precipitation. However, the type and intensity may not always be determined. In these systems, the word PRECIPITATION will be announced if precipitation is occurring, but the type and intensity are not determined

4. Ceiling and Sky Cover.

(a) Ceiling is announced as either CEILING or INDEFINITE CEILING. With the exception of indefinite ceilings, all automated ceiling heights are measured

EXAMPLE–

“Bremerton National Airport automated weather observation, one four five six zulu. Ceiling two thousand overcast;”

“Bremerton National Airport automated weather observation, one four five six zulu. Indefinite ceiling two hundred, sky obscured.”

(b) The word Clear is not used in AWOS due to limitations in the height ranges of the sensors

No clouds detected is announced as NO CLOUDS BELOW or in newer systems as CLEAR BELOW. Here is the range limit of the sensor

EXAMPLE–

“No clouds below one two thousand.”

“Clear below one two thousand.”

(c) A sensor for determining ceiling and sky cover is not included in some AWOS. In these systems, ceiling and sky cover are not announced. SKY CONDITION MISSING is announced only if the system is configured with a ceilometer and the ceiling and sky cover information is not available

5. Remarks. If remarks are included in the observation, the word REMARKS is announced following the altimeter setting

(a) Automated Remarks

(1) Density Altitude

(2) Variable Visibility

(3) Variable Wind Direction

(b) Manual Input Remarks Manual input remarks are prefaced with the phrase OBSERVER WEATHER. As a general rule, the manual remarks are limited to

(1) Type and intensity of precipitation

(2) Thunderstorms and direction and

(3) Obstructions to vision when the visibility is 3 miles or less

EXAMPLE–

“Remarks ... density altitude, two thousand five hundred ... visibility variable between one and two ... wind direction variable between two four zero and three one zero ... observed weather ... thunderstorm moderate rain showers and fog ... thunderstorm overhead.”

(c) If an automated parameter is missing and no manual input for that parameter is available, the parameter is announced as MISSING. For example, a report with the dew point missing and no manual input available could be announced as follows

EXAMPLE–

“Ceiling one thousand overcast ... visibility three ... precipitation ... temperature three zero, dew point missing ... wind calm ... altimeter three zero zero one.”

(d) REMARKS are announced in the following order of priority

(1) Automated REMARKS

- [a]** Density Altitude
- [b]** Variable Visibility
- [c]** Variable Wind Direction

(2) Manual Input REMARKS

- [a]** Sky Condition
- [b]** Visibility
- [c]** Weather and Obstructions to Vision
- [d]** Temperature
- [e]** Dew Point
- [f]** Wind and
- [g]** Altimeter Setting

EXAMPLE—

“Remarks ... density altitude, two thousand five hundred ... visibility variable between one and two ... wind direction variable between two four zero and three one zero ... observer ceiling estimated two thousand broken ... observer temperature two, dew point minus five.”

d. Automated Surface Observing System (ASOS)/Automated Weather Sensor System (AWSS). The ASOS/AWSS is the primary surface weather observing system of the U.S. See Key to Decode an ASOS/AWSS METAR Observation FIG 7-1-9 and FIG 7-1-10. The program to install and operate these systems throughout the U.S. is a joint effort of the NWS, the FAA and the Department of Defense. AWSS is a follow-on program that provides identical data as ASOS. ASOS/AWSS is designed to support aviation operations and weather forecast activities. The ASOS/AWSS will provide continuous minute by minute observations and perform the basic observing functions necessary to generate an aviation routine weather report METAR and other aviation weather information. The information may be transmitted over a discrete VHF radio frequency or the voice portion of a local NAVAID. ASOS/AWSS transmissions on a discrete VHF radio frequency are engineered to be receivable to a maximum of 25 NM from the ASOS/AWSS site and a maximum altitude of 10 000 feet AGL. At many locations ASOS/AWSS signals may be received on the surface of the airport but local conditions may limit the maximum reception distance and/or altitude. While the automated system and the human may differ in their methods of data collection and

interpretation both produce an observation quite similar in form and content. For the objective elements such as pressure, ambient temperature, dew point temperature, wind and precipitation accumulation both the automated system and the observer use a fixed location and time averaging technique. The quantitative differences between the observer and the automated observation of these elements are negligible. For the subjective elements however observers use a fixed time spatial averaging technique to describe the visual elements sky condition, visibility and present weather while the automated systems use a fixed location time averaging technique. Although this is a fundamental change the manual and automated techniques yield remarkably similar results within the limits of their respective capabilities.

1. System Description.

(a) The ASOS/AWSS at each airport location consists of four main components:

- (1)** Individual weather sensors
- (2)** Data collection and processing units
- (3)** Peripherals and displays

(b) The ASOS/AWSS sensors perform the basic function of data acquisition. They continuously sample and measure the ambient environment, derive raw sensor data and make them available to the collection and processing units.

2. Every ASOS/AWSS will contain the following basic set of sensors:

- (a)** Cloud height indicator one or possibly three
- (b)** Visibility sensor one or possibly three
- (c)** Precipitation identification sensor
- (d)** Freezing rain sensor at select sites
- (e)** Pressure sensors two sensors at small airports three sensors at large airports
- (f)** Ambient temperature/Dew point temperature sensor
- (g)** Anemometer wind direction and speed sensor
- (h)** Rainfall accumulation sensor

3. The ASOS/AWSS data outlets include:

- (a)** Those necessary for on site airport users

(b) National communications networks

(c) Computer generated voice available through FAA radio broadcast to pilots and dial in telephone line

NOTE—

Wind direction broadcast over FAA radios is in reference to magnetic north.

4. An ASOS/AWOS/AWSS report without human intervention will contain only that weather data capable of being reported automatically. The modifier for this METAR report is AUTO. When an observer augments or backs-up an ASOS/AWOS/AWSS site the AUTO modifier disappears.

5. There are two types of automated stations: AO1 for automated weather reporting stations without a precipitation discriminator and AO2 for automated stations with a precipitation discriminator. As appropriate, AO1 and AO2 must appear in remarks. A precipitation discriminator can determine the difference between liquid and frozen/freezing precipitation.

NOTE—

To decode an ASOS/AWSS report, refer to FIG 7-1-9 and FIG 7-1-10.

REFERENCE—

A complete explanation of METAR terminology is located in AIM, Paragraph 7-1-30 Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR).

FIG 7-1-9

Key to Decode an ASOS/AWSS (METAR) Observation (Front)

METAR KABC 121755Z AUTO 21016G24KT 180V240 1SM R11/P6000FT -RA BR BKN015 OVC025 06/04 A2990 RMK A02 PK WND 20032/25 WSHFT 1715 VIS 3/4V1 1/2 VIS 3/4 RWY11 RAB07 CIG 013V017 CIG 017 RWY11 PRESFR SLP125 P0003 6009 T00640036 10066 21012 58033 TSNO \$			
TYPE OF REPORT	METAR: hourly (scheduled report; SPECI: special (unscheduled) report.		METAR
STATION IDENTIFIER	Four alphabetic characters; ICAO location identifiers.		KABC
DATE/TIME	All dates and times in UTC using a 24-hour clock; two-digit date and four-digit time; always appended with <u>Z</u> to indicate UTC.		121755Z
REPORT MODIFIER	Fully automated report, no human intervention; removed when observer signed-on.		AUTO
WIND DIRECTION AND SPEED	Direction in tens of degrees from true north (first three digits); next two digits: speed in whole knots; as needed <u>G</u> usts (character) followed by maximum observed speed; always appended with <u>K</u> T to indicate knots; 00000KT for calm; if direction varies by 60° or more a <u>V</u> ariable wind direction group is reported.		21016G24KT 108V240
VISIBILITY	Prevailing visibility in statute miles and fractions (space between whole miles and fractions); always appended with <u>S</u> M to indicate statute miles.		1SM
RUNWAY VISUAL RANGE	10-minute RVR value in hundreds of feet; reported if prevailing visibility is ≤ one mile or RVR ≤ 6000 feet; always appended with <u>FT</u> to indicate feet; value prefixed with <u>M</u> or <u>P</u> to indicate value is lower or higher than the reportable RVR value.		R11/P6000FT
WEATHER PHENOMENA	RA: liquid precipitation that does not freeze; SN: frozen precipitation other than hail; UP: precipitation of unknown type; intensity prefixed to precipitation: light (-), moderate (no sign), heavy (+); FG: fog; FZFG: freezing fog (temperature below 0°C); BR: mist; HZ: haze; SQ: squall; maximum of three groups reported; augmented by observer: FC (funnel cloud/tornado/waterspout); TS(thunderstorm); GR (hail); GS (small hail; <1/4 inch); FZRA (intensity; freezing rain); VA (volcanic ash).		-RA BR
SKY CONDITION	Cloud amount and height: CLR (no clouds detected below 12000 feet); FEW (few); SCT (scattered); BKN (broken); OVC (overcast); followed by 3-digit height in hundreds of feet; or vertical visibility (<u>V</u> V) followed by height for indefinite ceiling.		BKN015 OVC025
TEMPERATURE/DEW POINT	Each is reported in whole degrees Celsius using two digits; values are separated by a solidus; sub-zero values are prefixed with an <u>M</u> (minus).		06/04
ALTIMETER	Altimeter always prefixed with an <u>A</u> indicating inches of mercury; reported using four digits: tens, units, tenths, and hundredths.		A2990

FIG 7-1-10

Key to Decode an ASOS/AWSS (METAR) Observation (Back)

REMARKS IDENTIFIER: RMK	RMK
TORNADIC ACTIVITY: Augmented; report should include TORNADO, FUNNEL CLOUD, or WATERSPOUT, time begin/end, location, movement; e.g., TORNADO B25 N MOV E.	
TYPE OF AUTOMATED STATION: AO2; automated station with precipitation discriminator.	AO2
PEAK WIND: PK WND dddff(f)(hh)mm; direction in tens of degrees, speed in whole knots, and time.	PK WND 20032/25
WIND SHIFT: WSHFT (hh)mm	WSHFT 1715
TOWER OR SURFACE VISIBILITY: TWR VIS vvvvv: visibility reported by tower personnel, e.g., TWR VIS 2; SFC VIS vvvvv: visibility reported by ASOS, e.g., SFC VIS 2.	
VARIABLE PREVAILING VISIBILITY: VIS v _n v _n v _n Vv _x Vv _x Vv _x ; reported if prevailing visibility is <3 miles and variable.	VIS 3/4V1 1/2
VISIBILITY AT SECOND LOCATION: VIS vvvvv [LOC]; reported if different than the reported prevailing visibility in body of report.	VIS 3/4 RWY11
LIGHTNING: [FREQ] LTG [LOC]; when detected the frequency and location is reported, e.g., FRQ LTG NE.	
BEGINNING AND ENDING OF PRECIPITATION AND THUNDERSTORMS: w'w'(hh)mmE(hh)mm; TSB(hh)mmE(hh)mm	RAB07
VIRGA: Augmented; precipitation not reaching the ground, e.g., VIRGA.	
VARIABLE CEILING HEIGHT: CIG h _n h _n h _n Vh _x h _x h _x ; reported if ceiling in body of report is <3000 feet and variable.	CIG 013V017
CEILING HEIGHT AT SECOND LOCATION: CIG hhh [LOC]; Ceiling height reported if secondary ceilometer site is different than the ceiling height in the body of the report.	CIG 017 RWY11
PRESSURE RISING OR FALLING RAPIDLY: PRESRR or PRESFR; pressure rising or falling rapidly at time of observation.	PRESFR
SEA-LEVEL PRESSURE: SLPppp; tens, units, and tenths of SLP in hPa.	SLP125
HOURLY PRECIPITATION AMOUNT: Pmmr; in .01 inches since last METAR; a trace is P0000.	P0003
3- AND 6-HOUR PRECIPITATION AMOUNT: 6RRRR; precipitation amount in .01 inches for past 6 hours reported in 00, 06, 12, and 18 UTC observations and for past 3 hours in 03, 09, 15, and 21 UTC observations; a trace is 60000.	60009
24-HOUR PRECIPITATION AMOUNT: 7R ₂₄ R ₂₄ R ₂₄ ; precipitation amount in .01 inches for past 24 hours reported in 12 UTC observation, e.g., 70015.	
HOURLY TEMPERATURE AND DEW POINT: Ts _n T _x T _a Ts _n T _a T _n ; tenth of degree Celsius; s _n : 1 if temperature below 0° C and 0 if temperature 0° C or higher.	T00640036
6-HOUR MAXIMUM TEMPERATURE: 1s _n T _x T _x T _x ; tenth of degree Celsius; 00, 06, 12, 18 UTC; s _n : 1 if temperature below 0° C and 0 if temperature 0° C or higher.	10066
6-HOUR MINIMUM TEMPERATURE: 2s _n T _n T _n ; tenth of degree Celsius; 00, 06, 12, 18 UTC; s _n : 1 if temperature below 0° C and 0 if temperature 0° C or higher.	21012
24-HOUR MAXIMUM AND MINIMUM TEMPERATURE: 4s _n T _x T _x T _x T _n T _n ; tenth of degree Celsius; reported at midnight local standard time; 1 if temperature below 0° C and 0 if temperature 0° C or higher, e.g., 400461006.	
PRESSURE TENDENCY: 5appp; the character (a) and change in pressure (ppp); tenths of hPa the past 3 hours.	58033
SENSOR STATUS INDICATORS: RVRNO: RVR missing; PWINO: precipitation identifier information not available; PNO: precipitation amount not available; FZRANO: freezing rain information not available; TSNO: thunderstorm information not available; VISNO [LOC]: visibility at secondary location not available, e.g., VISNO RWY06; CHINO [LOC]: (cloud-height-indicator) sky condition at secondary location not available, e.g., CHINO RWY06.	TSNO
MAINTENANCE CHECK INDICATOR: Maintenance needed on the system.	
If an element or phenomena does not occur, is missing, or cannot be observed, the corresponding group and space are omitted (body and/or remarks) from that particular report, except for Sea-Level Pressure (SLPppp). SLPNO shall be reported in a METAR when the SLP is not available.	\$

U.S. DEPARTMENT OF TRANSPORTATION • FEDERAL AVIATION ADMINISTRATION • Aviation Weather Directorate, 400 7th Street, SW, Rooms 8200-8326, Washington, D.C. 20591

e. TBL 7–1–3 contains a comparison of weather observing programs and the elements reported

f. **Service Standards.** During 1995 a government/industry team worked to comprehensively reassess the requirements for surface observations at the nation's airports. That work resulted in agreement on a set of service standards and the FAA and NWS ASOS sites to which the standards could apply. The term Service Standards refers to the level of detail in weather observation. The service standards consist of four different levels of service: A, B, C, and D, as described below. Specific observational elements included in each service level are listed in TBL 7–1–4.

1. Service Level D defines the minimum acceptable level of service. It is a completely automated service in which the ASOS/AWSS observation will constitute the entire observation; i.e., no additional weather information is added by a human observer. This service is referred to as a stand-alone D site.

2. Service Level C is a service in which the human observer usually an air traffic controller augments or adds information to the automated observation. Service Level C also includes backup of ASOS/AWSS elements in the event of an ASOS/AWSS malfunction or an unrepresentative ASOS/AWSS report. In backup, the human observer

inserts the correct or missing value for the automated ASOS/AWSS elements. This service is provided by air traffic controllers under the Limited Aviation Weather Reporting Station (LAWRS) process. FSS and NWS observers and, at selected sites, Non-Federal Observation Program observers.

Two categories of airports require detail beyond Service Level C in order to enhance air traffic control efficiency and increase system capacity. Services at these airports are typically provided by contract weather observers, NWS observers, and, at some locations, FSS observers.

3. Service Level B is a service in which weather observations consist of all elements provided under Service Level C plus augmentation of additional data beyond the capability of the ASOS/AWSS. This category of airports includes smaller hubs or special airports in other ways that have worse than average bad weather operations for thunderstorms and/or freezing/frozen precipitation and/or that are remote airports.

4. Service Level A is the highest and most demanding category; it includes all the data reported in Service Standard B plus additional requirements as specified. Service Level A covers major aviation hubs and/or high volume traffic airports with average or worse weather.

TBL 7–1–3
Weather Observing Programs

Element Type Reported	Wind	Visibility	Temperature Dew Point	Altimeter	Density Altimeter	Cloud/Ceiling	Precipitation Identification	Thunderstorm/ Lightning	Precipitation Occurrence	Rainfall Accumulation	Runway Surface Condition	Freezing Rain Occurrence	Remarks
AWSS													
ASOS													
AWOS-A													
AWOS-A/V													
AWOS-1													
AWOS-2													
AWOS-3													
AWOS-3P													
AWOS-3T													
AWOS-3P/T													
AWOS-4													
Manual													
REFERENCE —FAA Order 7900.5B, Surface Weather Observing, for element reporting													

TBL 7-1-4

SERVICE LEVEL A	
Service Level A consists of all the elements of Service Levels B, C and D plus the elements listed to the right if observed	10 minute longline RVR at predated sites or additional visibility increments of 1/8, 1/16 and 0 Sector visibility Variable sky condition Cloud layers above 12 000 feet and cloud types Widespread dust, sand and other obscurations Volcanic eruptions
SERVICE LEVEL B	
Service Level B consists of all the elements of Service Levels C and D plus the elements listed to the right if observed	Longline RVR at predated sites may be instantaneous readout Freezing drizzle versus freezing rain Ice pellets Snow depth & snow increasing rapidly remarks Thunderstorm and lightning location remarks Observed significant weather not at the station remarks
SERVICE LEVEL C	
Service Level C consists of all the elements of Service Level D plus augmentation and backup by a human observer or an air traffic control specialist on location nearby. Backup consists of inserting the correct value if the system malfunctions or is unrepresentative. Augmentation consists of adding the elements listed to the right if observed. During hours that the observing facility is closed, the site reverts to Service Level D.	Thunderstorms Tornadoes Hail Virga Volcanic ash Tower visibility Operationally significant remarks as deemed appropriate by the observer
SERVICE LEVEL D	
This level of service consists of an ASOS or AWSS continually measuring the atmosphere at a point near the runway. The ASOS or AWSS senses and measures the weather parameters listed to the right.	Wind Visibility Precipitation/Obstruction to vision Cloud height Sky cover Temperature Dew point Altimeter

7-1-13. Weather Radar Services

a. The National Weather Service operates a network of radar sites for detecting coverage intensity and movement of precipitation. The network is supplemented by FAA and DOD radar sites in the eastern sections of the country. Local warning radar sites augment the network by operating on an as needed basis to support warning and forecast programs.

b. Scheduled radar observations are taken hourly and transmitted in alpha numeric format on weather telecommunications circuits for flight planning purposes. Under certain conditions, special radar reports are issued in addition to the hourly

transmittals. Data contained in the reports are also collected by the National Center for Environmental Prediction and used to prepare national radar summary charts for dissemination on facsimile circuits.

c. A clear radar display, no echoes, does not mean that there is no significant weather within the coverage of the radar site. Clouds and fog are not detected by the radar. However, when echoes are present, turbulence can be implied by the intensity of the precipitation, and icing is implied by the presence of the precipitation at temperatures at or below zero degrees Celsius. Used in conjunction with other weather products, radar provides invaluable information for weather avoidance and flight planning.

FIG 7-1-12
NEXRAD Coverage


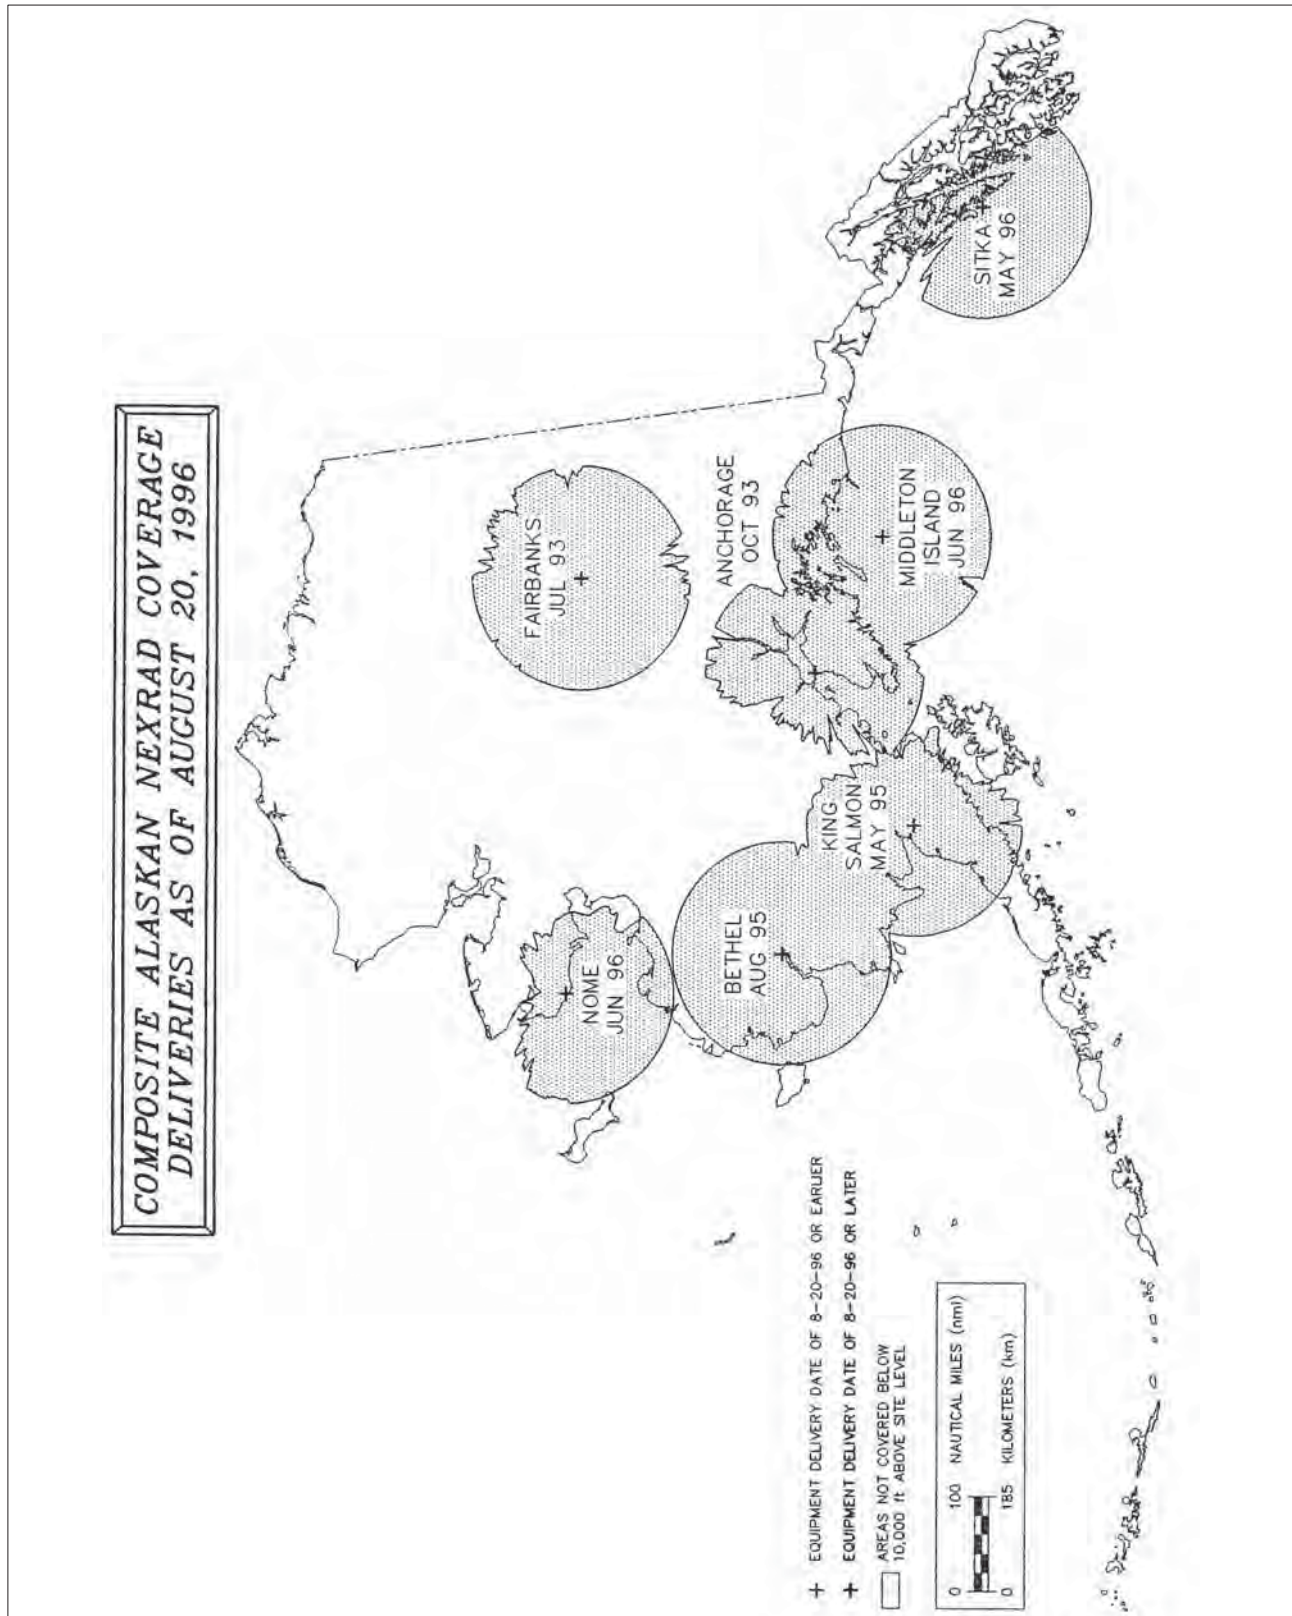


FIG 7-1-13
NEXRAD Coverage

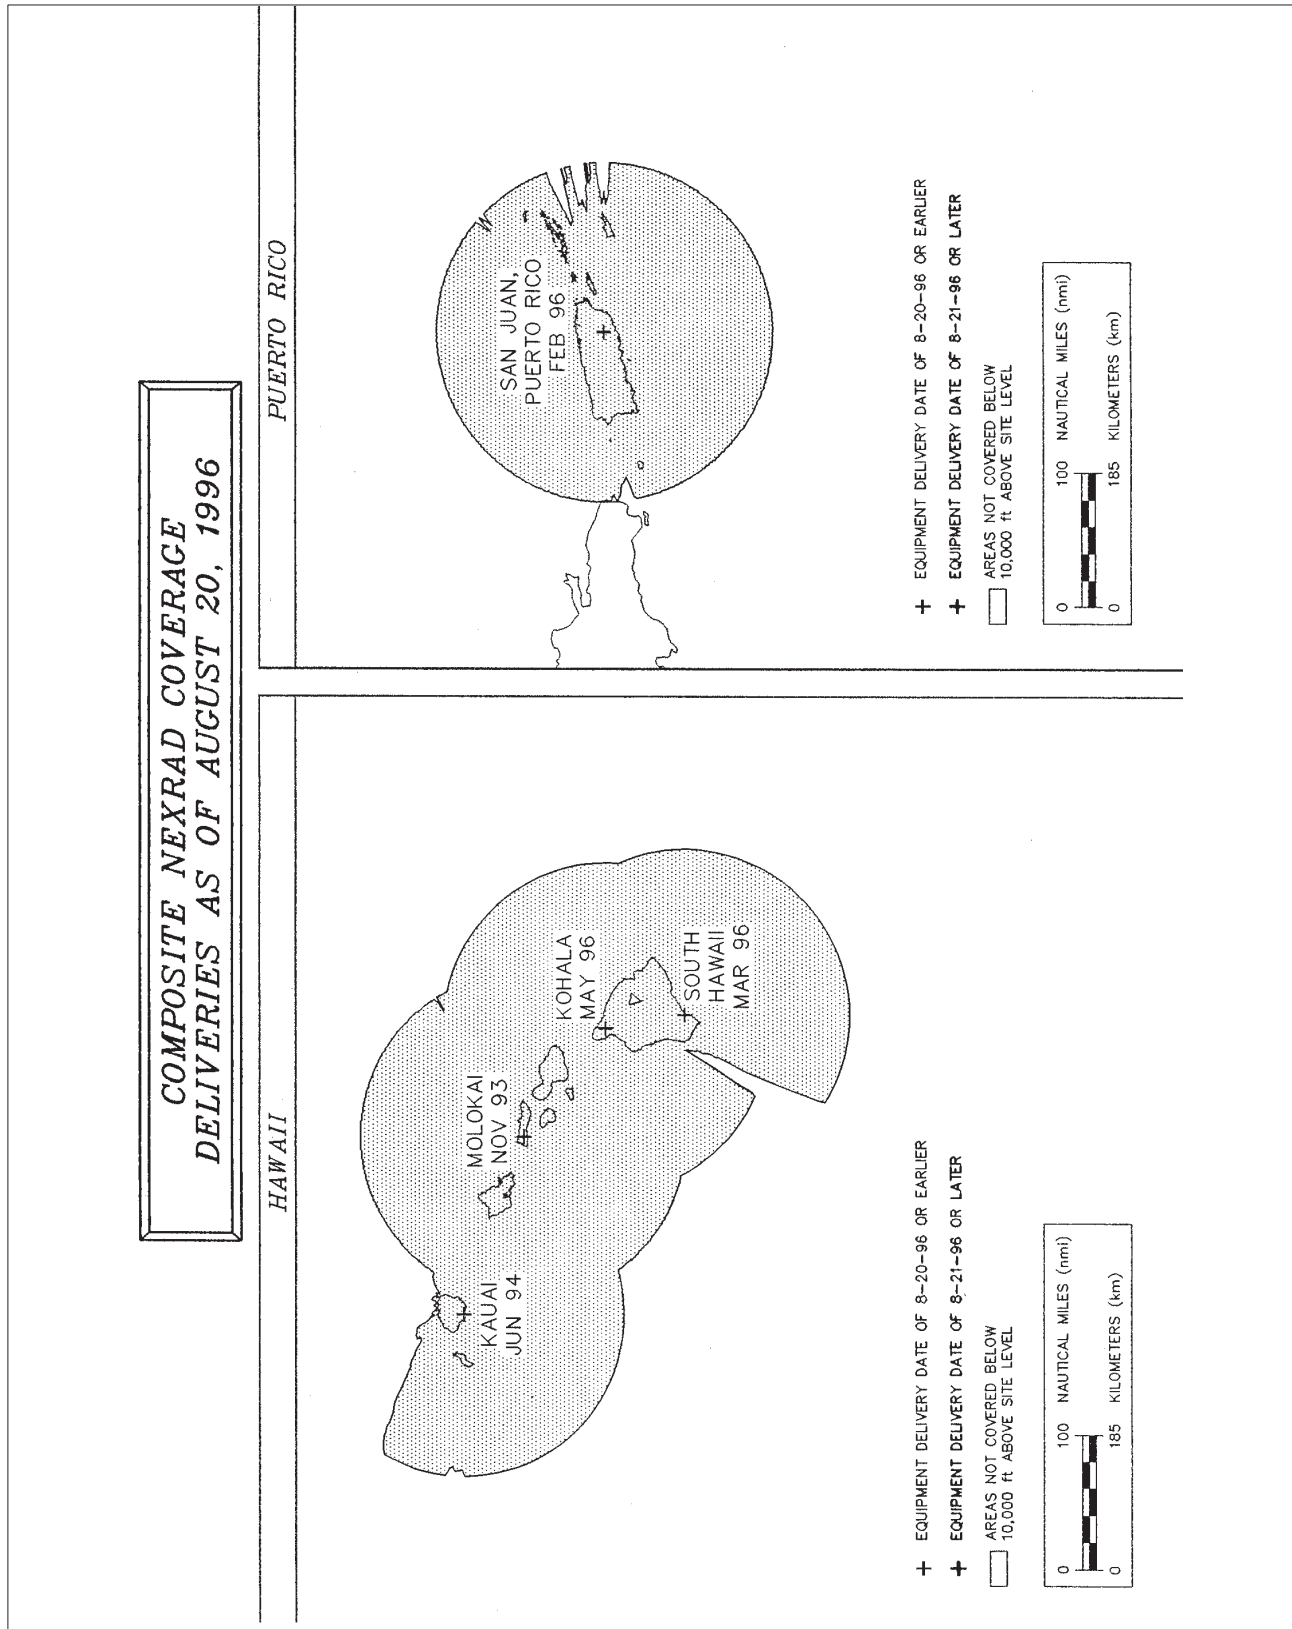

d. All En Route Flight Advisory Service facilities and FSSs have equipment to directly access the radar displays from the individual weather radar sites. Specialists at these locations are trained to interpret the display for pilot briefing and inflight advisory services. The Center Weather Service Units located in ARTCCs also have access to weather radar displays and provide support to all air traffic facilities within their center's area.

e. Additional information on weather radar products and services can be found in AC 00-45 Aviation Weather Services.

REFERENCE—

Pilot/Controller Glossary Term—Precipitation Radar Weather Descriptions.

AIM, Thunderstorms, Paragraph 7-1-28

A/FD, Charts, NWS Upper Air Observing Stations and Weather Network for the location of specific radar sites.

7-1-14. ATC Inflight Weather Avoidance Assistance

a. ATC Radar Weather Display.

1. ATC radars are able to display areas of precipitation by sending out a beam of radio energy that is reflected back to the radar antenna when it strikes an object or moisture which may be in the form of rain drops, hail, or snow. The larger the object is or the more dense its reflective surface, the stronger the return will be presented. Radar weather processors indicate the intensity of reflective returns in terms of decibels (dB). ATC systems cannot detect the presence or absence of clouds. The ATC systems can often determine the intensity of a precipitation area, but the specific character of that area (snow, rain, hail, VIRGA, etc.) cannot be determined. For this reason, ATC refers to all weather areas displayed on ATC radar scopes as precipitation.

2. All ATC facilities using radar weather processors with the ability to determine precipitation intensity will describe the intensity to pilots as:

- (a) LIGHT 30 dB
- (b) MODERATE 30 to 40 dB
- (c) HEAVY 40 to 50 dB
- (d) EXTREME 50 dB

NOTE—

Enroute ATC radar's Weather and Radar Processor (WARP) does not display light precipitation intensity.

3. ATC facilities that, due to equipment limitations, cannot display the intensity levels of precipitation will describe the location of the precipitation area by geographic position or position relative to the aircraft. Since the intensity level is not available, the controller will state: INTENSITY UNKNOWN.

4. ARTCC facilities normally use a Weather and Radar Processor (WARP) to display a mosaic of data obtained from multiple NEXRAD sites. There is a time delay between actual conditions and those displayed to the controller. For example, the precipitation data on the ARTCC controller's display could be up to 6 minutes old. When the WARP is not available, a second system, the narrow band Air Route Surveillance Radar (ARSR), can display two distinct levels of precipitation intensity that will be described to pilots as MODERATE (30 to 40 dB) and HEAVY TO EXTREME (40 dB). The WARP processor is only used in ARTCC facilities.

5. *ATC radar is not able to detect turbulence.* Generally, turbulence can be expected to occur as the rate of rainfall or intensity of precipitation increases. Turbulence associated with greater rates of rainfall/precipitation will normally be more severe than any associated with lesser rates of rainfall/precipitation. Turbulence should be expected to occur near convective activity, even in clear air. Thunderstorms are a form of convective activity that imply severe or greater turbulence. Operation within 20 miles of thunderstorms should be approached with great caution, as the severity of turbulence can be markedly greater than the precipitation intensity might indicate.

b. Weather Avoidance Assistance.

1. To the extent possible, controllers will issue pertinent information on weather or chaff areas and assist pilots in avoiding such areas when requested. Pilots should respond to a weather advisory by either acknowledging the advisory or by acknowledging the advisory and requesting an alternative course of action as follows:

(a) Request to deviate off course by stating a heading or degrees direction of deviation and approximate number of miles. In this case, when the requested deviation is approved, navigation is at the pilot's prerogative but must maintain the altitude assigned and remain within the lateral restrictions issued by ATC.

(b) An approval for lateral deviation authorizes the pilot to maneuver left or right within the limits specified in the clearance

NOTE—

1. *It is often necessary for ATC to restrict the amount of lateral deviation (“twenty degrees right,” “up to fifteen degrees left,” “up to ten degrees left or right of course”).*

2. *The term “when able, proceed direct,” in an ATC weather deviation clearance, refers to the pilot’s ability to remain clear of the weather when returning to course/route.*

(c) Request a new route to avoid the affected area

(d) Request a change of altitude

(e) Request radar vectors around the affected areas

2. For obvious reasons of safety an IFR pilot must not deviate from the course or altitude or flight level without a proper ATC clearance. When weather conditions encountered are so severe that an immediate deviation is determined to be necessary and time will not permit approval by ATC, the pilot’s emergency authority may be exercised.

3. When the pilot requests clearance for a route deviation or for an ATC radar vector, the controller must evaluate the air traffic picture in the affected area and coordinate with other controllers if ATC jurisdictional boundaries may be crossed before replying to the request.

4. It should be remembered that the controller’s primary function is to provide safe separation between aircraft. Any additional service, such as weather avoidance assistance, can only be provided to the extent that it does not derogate the primary function. It is also worth noting that the separation workload is generally greater than normal when weather disrupts the usual flow of traffic. ATC radar limitations and frequency congestion may also be a factor in limiting the controller’s capability to provide additional service.

5. It is very important, therefore, that the request for deviation or radar vector be forwarded to ATC as far in advance as possible. Delay in submitting it may delay or even preclude ATC approval or require that additional restrictions be placed on the clearance. Insofar as possible, the following information should

be furnished to ATC when requesting clearance to detour around weather activity:

(a) Proposed point where detour will commence

(b) Proposed route and extent of detour, direction and distance

(c) Point where original route will be resumed

(d) Flight conditions: IFR or VFR

(e) Any further deviation that may become necessary as the flight progresses

(f) Advise if the aircraft is equipped with functioning airborne radar

6. To a large degree, the assistance that might be rendered by ATC will depend upon the weather information available to controllers. Due to the extremely transitory nature of severe weather situations, the controller’s weather information may be of only limited value if based on weather observed on radar only. Frequent updates by pilots giving specific information as to the area affected, altitudes, intensity and nature of the severe weather can be of considerable value. Such reports are relayed by radio or phone to other pilots and controllers and also receive widespread teletype/radio dissemination.

7. Obtaining IFR clearance or an ATC radar vector to circumnavigate severe weather can often be accommodated more readily in the en route areas away from terminals because there is usually less congestion and therefore offer greater freedom of action. In terminal areas, the problem is more acute because of traffic density, ATC coordination requirements, complex departure and arrival routes, adjacent airports, etc. As a consequence, controllers are less likely to be able to accommodate all requests for weather detours in a terminal area or be in a position to volunteer such routing to the pilot. Nevertheless, pilots should not hesitate to advise controllers of any observed severe weather and should specifically advise controllers if they desire circumnavigation of observed weather.

c. Procedures for Weather Deviations and Other Contingencies in Oceanic Controlled Airspace.

1. When the pilot initiates communications with ATC, rapid response may be obtained by stating WEATHER DEVIATION REQUIRED to indicate

priority is desired on the frequency and for ATC response

2. The pilot still retains the option of initiating the communications using the urgency call PAN-PAN 3 times to alert all listening parties of a special handling condition which will receive ATC priority for issuance of a clearance or assistance

3. ATC will

(a) Approve the deviation

(b) Provide vertical separation and then approve the deviation or

(c) If ATC is unable to establish vertical separation ATC must advise the pilot that standard separation cannot be applied provide essential traffic information for all affected aircraft to the extent practicable and if possible suggest a course of action ATC may suggest that the pilot climb or descend to a contingency altitude 1 000 feet above or below that assigned if operating above FL 290 500 feet above or below that assigned if operating at or below FL 290

PHRASEOLOGY–

STANDARD SEPARATION NOT AVAILABLE, DEVIATE AT PILOT'S DISCRETION; SUGGEST CLIMB (or descent) TO (appropriate altitude); TRAFFIC (position and altitude); REPORT DEVIATION COMPLETE.

4. The pilot will follow the ATC advisory altitude when approximately 10 NM from track as well as execute the procedures detailed in paragraph 7-1-14c5

5. If contact cannot be established or revised ATC clearance or advisory is not available and deviation from track is required the pilot must take the following actions

(a) If possible deviate away from an organized track or route system

(b) Broadcast aircraft position and intentions on the frequency in use as well as on frequency 121.5 MHz at suitable intervals stating flight identification operator call sign flight level track code or ATS route designator and extent of deviation expected

(c) Watch for conflicting traffic both visually and by reference to TCAS if equipped

(d) Turn on aircraft exterior lights

(e) Deviations of less than 10 NM or operations within COMPOSITE NOPAC and CEPAC Airspace should REMAIN at ASSIGNED altitude Other wise when the aircraft is approximately 10 NM from track initiate an altitude change based on the following criteria

TBL 7-1-5

Route Centerline/Track	Deviations >10 NM	Altitude Change
East 000 – 179°M	Left Right	Descend 300 Feet Climb 300 Feet
West 180–359°M	Left Right	Climb 300 Feet Descend 300 Feet
Pilot Memory Slogan: “East right up, West right down.”		

(f) When returning to track be at assigned flight level when the aircraft is within approximately 10 NM of centerline

(g) If contact was not established prior to deviating continue to attempt to contact ATC to obtain a clearance If contact was established continue to keep ATC advised of intentions and obtain essential traffic information

7-1-15. Runway Visual Range (RVR)

There are currently two configurations of RVR in the NAS commonly identified as Taskers and Next Generation RVR The Taskers are the existing configuration which uses transmissometer technology The Next Generation RVRs were deployed in November 1994 and use forward scatter technology The Next Generation RVRs are currently being deployed in the NAS to replace the existing Taskers

a. RVR values are measured by transmissometers mounted on 14-foot towers along the runway A full RVR system consists of

1. Transmissometer projector and related items
2. Transmissometer receiver detector and related items
3. Analog
4. recorder
5. Signal data converter and related items
6. Remote digital or remote display programmer

b. The transmissometer projector and receiver are mounted on towers 250 feet apart A known intensity

of light is emitted from the projector and is measured by the receiver. Any obscuring matter such as rain, snow, dust, fog, haze or smoke reduces the light intensity arriving at the receiver. The resultant intensity measurement is then converted to an RVR value by the signal data converter. These values are displayed by readout equipment in the associated air traffic facility and updated approximately once every minute for controller issuance to pilots.

c. The signal data converter receives information on the high intensity runway edge light setting in use (step 3, 4 or 5) transmission values from the transmissometer and the sensing of day or night conditions. From the three data sources, the system will compute appropriate RVR values.

d. An RVR transmissometer established on a 250 foot baseline provides digital readouts to a minimum of 600 feet which are displayed in 200 foot increments to 3,000 feet and in 500 foot increments from 3,000 feet to a maximum value of 6,000 feet.

e. RVR values for Category IIIa operations extend down to 700 feet RVR. However, only 600 and 800 feet are reportable RVR increments. The 800 RVR reportable value covers a range of 701 feet to 900 feet and is therefore a valid minimum indication of Category IIIa operations.

f. Approach categories with the corresponding minimum RVR values. See TBL 7-1-6.

TBL 7-1-6

Approach Category/Minimum RVR Table

Category	Visibility (RVR)
Nonprecision	2,400 feet
Category I	1,800 feet
Category II	1,000 feet
Category IIIa	700 feet
Category IIIb	150 feet
Category IIIc	0 feet

1,400 feet with special equipment and authorization.

g. Ten minute maximum and minimum RVR values for the designated RVR runway are reported in the body of the aviation weather report when the prevailing visibility is less than one mile and/or the RVR is 6,000 feet or less. ATCTs report RVR when the prevailing visibility is 1 mile or less and/or the RVR is 6,000 feet or less.

h. Details on the requirements for the operational use of RVR are contained in FAA AC 97-1 Runway Visual Range (RVR). Pilots are responsible for compliance with minimums prescribed for their class of operations in the appropriate CFRs and/or operations specifications.

i. RVR values are also measured by forward scatter meters mounted on 14-foot frangible fiberglass poles. A full RVR system consists of:

1. Forward scatter meter with a transmitter, receiver and associated items.
2. A runway light intensity monitor (RLIM).
3. An ambient light sensor (ALS).
4. A data processor unit (DPU).
5. Controller display (CD).

j. The forward scatter meter is mounted on a 14-foot frangible pole. Infrared light is emitted from the transmitter and received by the receiver. Any obscuring matter such as rain, snow, dust, fog, haze or smoke increases the amount of scattered light reaching the receiver. The resulting measurement along with inputs from the runway light intensity monitor and the ambient light sensor are forwarded to the DPU which calculates the proper RVR value. The RVR values are displayed locally and remotely on controller displays.

k. The runway light intensity monitors both the runway edge and centerline light step settings (steps 1 through 5). Centerline light step settings are used for CAT IIIb operations. Edge Light step settings are used for CAT I, II, and IIIa operations.

l. Next Generation RVRs can measure and display RVR values down to the lowest limits of Category IIIb operations (150 feet RVR). RVR values are displayed in 100 foot increments and are reported as follows:

1. 100-foot increments for products below 800 feet.
2. 200-foot increments for products between 800 feet and 3,000 feet.
3. 500-foot increments for products between 3,000 feet and 6,500 feet.
4. 25-meter increments for products below 150 meters.
5. 50-meter increments for products between 150 meters and 800 meters.

6. 100-meter increments for products between 800 meters and 1 200 meters

7. 200-meter increments for products between 1 200 meters and 2 000 meters

7-1-16. Reporting of Cloud Heights

a. Ceiling by definition in the CFRs and as used in aviation weather reports and forecasts is the height above ground or water level of the lowest layer of clouds or obscuring phenomenon that is reported as broken, overcast, or obscuration, e.g., an aerodrome forecast TAF which reads BKN030 refers to height above ground level. An area forecast which reads BKN030 indicates that the height is above mean sea level.

REFERENCE-

AIM, Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR), Paragraph 7-1-30 defines "broken," "overcast," and "obscuration."

b. Pilots usually report height values above MSL since they determine heights by the altimeter. This is taken in account when disseminating and otherwise applying information received from pilots. Ceiling heights are always above ground level. In reports disseminated as PIREPs, height references are given the same as received from pilots that is above MSL.

c. In area forecasts or inflight advisories, ceilings are denoted by the contraction CIG when used with sky cover symbols as in LWRG TO CIG OVC005 or the contraction AGL after the forecast cloud height value. When the cloud base is given in height above MSL, it is so indicated by the contraction MSL or ASL following the height value. The heights of clouds tops, freezing level, icing, and turbulence are always given in heights above ASL or MSL.

7-1-17. Reporting Prevailing Visibility

a. Surface horizontal visibility is reported in METAR reports in terms of statute miles and increments thereof, e.g., $\frac{1}{16}$, $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{5}{8}$, $\frac{3}{4}$, $\frac{7}{8}$, 1, $1\frac{1}{8}$, etc. Visibility reported by an unaugmented automated site is reported differently than in a manual report, i.e., ASOS/AWSS 0 $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, 1, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$, 2, $2\frac{1}{2}$, 3, 4, 5, etc. AWOS M $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, 1, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$, 2, $2\frac{1}{2}$, 3, 4, 5, etc. Visibility is determined through the ability to see and identify preselected and prominent objects at a

known distance from the usual point of observation. Visibilities which are determined to be less than 7 miles identify the obscuring atmospheric condition, e.g., fog, haze, smoke, etc., or combinations thereof.

b. Prevailing visibility is the greatest visibility equalled or exceeded throughout at least one-half of the horizon circle, not necessarily contiguous. Segments of the horizon circle which may have a significantly different visibility may be reported in the remarks section of the weather report, i.e., the southeastern quadrant of the horizon circle may be determined to be 2 miles in mist while the remaining quadrants are determined to be 3 miles in mist.

c. When the prevailing visibility at the usual point of observation or at the tower level is less than 4 miles, certificated tower personnel will take visibility observations in addition to those taken at the usual point of observation. The lower of these two values will be used as the prevailing visibility for aircraft operations.

7-1-18. Estimating Intensity of Rain and Ice Pellets

a. Rain

1. **Light.** From scattered drops that regardless of duration do not completely wet an exposed surface up to a condition where individual drops are easily seen.

2. **Moderate.** Individual drops are not clearly identifiable; spray is observable just above pavements and other hard surfaces.

3. **Heavy.** Rain seemingly falls in sheets; individual drops are not identifiable; heavy spray to height of several inches is observed over hard surfaces.

b. Ice Pellets

1. **Light.** Scattered pellets that do not completely cover an exposed surface regardless of duration. Visibility is not affected.

2. **Moderate.** Slow accumulation on ground. Visibility reduced by ice pellets to less than 7 statute miles.

3. **Heavy.** Rapid accumulation on ground. Visibility reduced by ice pellets to less than 3 statute miles.

7-1-19. Estimating Intensity of Snow or Drizzle (Based on Visibility)

- a. **Light.** Visibility more than $\frac{1}{2}$ statute mile
- b. **Moderate.** Visibility from more than $\frac{1}{4}$ statute mile to $\frac{1}{2}$ statute mile
- c. **Heavy.** Visibility $\frac{1}{4}$ statute mile or less

7-1-20. Pilot Weather Reports (PIREPs)

a. FAA air traffic facilities are required to solicit PIREPs when the following conditions are reported or forecast: ceilings at or below 5 000 feet; visibility at or below 5 miles; surface or aloft thunderstorms and related phenomena; icing of light degree or greater; turbulence of moderate degree or greater; wind shear and reported or forecast volcanic ash clouds.

b. Pilots are urged to cooperate and promptly volunteer reports of these conditions and other atmospheric data such as cloud bases, tops and layers, flight visibility, precipitation, visibility restrictions such as haze, smoke and dust, and at altitude and temperature aloft.

c. PIREPs should be given to the ground facility with which communications are established, i.e., EFAS, FSS, ARTCC, or terminal ATC. One of the primary duties of EFAS facilities' radio call "FLIGHT WATCH" is to serve as a collection point for the exchange of PIREPs with en route aircraft.

d. If pilots are not able to make PIREPs by radio reporting upon landing of the inflight conditions encountered to the nearest FSS or Weather Forecast Office, it will be helpful. Some of the uses made of the reports are:

1. The ATCT uses the reports to expedite the flow of air traffic in the vicinity of the field and for hazardous weather avoidance procedures.

2. The FSS uses the reports to brief other pilots to provide inflight advisories and weather avoidance information to en route aircraft.

3. The ARTCC uses the reports to expedite the flow of en route traffic to determine most favorable altitudes and to issue hazardous weather information within the center's area.

4. The NWS uses the reports to verify or amend conditions contained in aviation forecast and advisories. In some cases, pilot reports of hazardous conditions are the triggering mechanism for the issuance of advisories. They also use the reports for pilot weather briefings.

5. The NWS, other government organizations, the military, and private industry groups use PIREPs for research activities in the study of meteorological phenomena.

6. All air traffic facilities and the NWS forward the reports received from pilots into the weather distribution system to assure the information is made available to all pilots and other interested parties.

e. The FAA, NWS, and other organizations that enter PIREPs into the weather reporting system use the format listed in TBL 7-1-7. Items 1 through 6 are included in all transmitted PIREPs along with one or more of items 7 through 13. Although the PIREP should be as complete and concise as possible, pilots should not be overly concerned with strict format or phraseology. The important thing is that the information is relayed so other pilots may benefit from your observation. If a portion of the report needs clarification, the ground station will request the information. Completed PIREPs will be transmitted to weather circuits as in the following examples:

TBL 7-1-7
PIREP Element Code Chart

	PIREP ELEMENT	PIREP CODE	CONTENTS
1	3-letter station identifier		Nearest weather reporting location to the reported phenomenon
2	Report type	UA or UUA	Routine or Urgent PIREP
3	Location	/OV	In relation to a VOR
4	Time	/TM	Coordinated Universal Time
5	Altitude	/FL	Essential for turbulence and icing reports
6	Type Aircraft	/TP	Essential for turbulence and icing reports
7	Sky cover	/SK	Cloud height and coverage sky clear few scattered broken or overcast
8	Weather	/W	Flight visibility precipitation restrictions to visibility etc
9	Temperature	/TA	Degrees Celsius
10	Wind	/WV	Direction in degrees magnetic north and speed in knots
11	Turbulence	/TB	See AIM paragraph 7-1-23
12	Icing	/IC	See AIM paragraph NO TAG
13	Remarks	/RM	For reporting elements not included or to clarify previously reported items

EXAMPLE-

1. KCMH UA /OV APE 230010/TM 1516/FL085/TP BE20/SK BKN065/WX FV03SM HZ FU/TA 20/TB LGT

NOTE-

1. One zero miles southwest of Appleton VOR; time 1516 UTC; altitude eight thousand five hundred; aircraft type BE200; bases of the broken cloud layer is six thousand five hundred; flight visibility 3 miles with haze and smoke; air temperature 20 degrees Celsius; light turbulence.

EXAMPLE-

2. KCRW UV /OV KBKW 360015-KCRW/TM 1815/FL120//TP BE99/SK IMC/WX RA/TA M08 /WV 290030/TB LGT-MDT/IC LGT RIME/RM MDT MXD ICG DURC KROA NWBND FL080-100 1750Z

NOTE-

2. From 15 miles north of Beckley VOR to Charleston VOR; time 1815 UTC; altitude 12,000 feet; type aircraft, BE-99; in clouds; rain; temperature minus 8 Celsius; wind 290 degrees magnetic at 30 knots; light to moderate turbulence; light rime icing during climb northwestbound from Roanoke, VA, between 8,000 and 10,000 feet at 1750 UTC.

7-1-21. PIREPs Relating to Airframe Icing

a. The effects of ice on aircraft are cumulative thrust is reduced drag increases lift lessens and weight increases. The results are an increase in stall speed and a deterioration of aircraft performance. In

extreme cases 2 to 3 inches of ice can form on the leading edge of the airfoil in less than 5 minutes. It takes but 1/2 inch of ice to reduce the lifting power of some aircraft by 50 percent and increases the frictional drag by an equal percentage.

b. A pilot can expect icing when flying in visible precipitation such as rain or cloud droplets and the temperature is between 02 and -10 degrees Celsius. When icing is detected a pilot should do one of two things particularly if the aircraft is not equipped with deicing equipment get out of the area of precipitation or go to an altitude where the temperature is above freezing. This warmer altitude may not always be a lower altitude. Proper preflight action includes obtaining information on the freezing level and the above freezing levels in precipitation areas. Report icing to ATC and if operating IFR request new routing or altitude if icing will be a hazard. Be sure to give the type of aircraft to ATC when reporting icing. The following describes how to report icing conditions.

1. **Trace.** Ice becomes perceptible. Rate of accumulation slightly greater than sublimation. Deicing/anti icing equipment is not utilized unless encountered for an extended period of time over 1 hour.

2. Light. The rate of accumulation may create a problem if flight is prolonged in this environment over 1 hour. Occasional use of deicing/anti icing equipment removes/prevents accumulation. It does not present a problem if the deicing/anti icing equipment is used.

3. Moderate. The rate of accumulation is such that even short encounters become potentially hazardous and use of deicing/anti icing equipment or flight diversion is necessary.

4. Severe. The rate of accumulation is such that deicing/anti icing equipment fails to reduce or control the hazard. Immediate flight diversion is necessary.

EXAMPLE–

Pilot report: give aircraft identification, location,

time (UTC), intensity of type, altitude/FL, aircraft type, indicated air speed (IAS), and outside air temperature (OAT).

NOTE–

1. Rime ice. Rough, milky, opaque ice formed by the instantaneous freezing of small supercooled water droplets.

2. Clear ice. A glossy, clear, or translucent ice formed by the relatively slow freezing of large supercooled water droplets.

3. The OAT should be requested by the FSS or ATC if not included in the PIREP.

7–1–22. Definitions of Inflight Icing Terms

See TBL 7–1–8 Icing Types and TBL 7–1–9 Icing Conditions

**TBL 7–1–8
Icing Types**

Clear Ice	See Glaze Ice
Glaze Ice	Ice sometimes clear and smooth but usually containing some air pockets which results in a lumpy translucent appearance. Glaze ice results from supercooled drops/droplets striking a surface but not freezing rapidly on contact. Glaze ice is denser, harder, and sometimes more transparent than rime ice. Factors which favor glaze formation are those that favor slow dissipation of the heat of fusion, i.e., slight supercooling and rapid accretion. With larger accretions, the ice shape typically includes horns protruding from unprotected leading edge surfaces. It is the ice shape rather than the clarity or color of the ice which is most likely to be accurately assessed from the cockpit. The terms clear and glaze have been used for essentially the same type of ice accretion although some reserve clear for thinner accretions which lack horns and conform to the airfoil.
Intercycle Ice	Ice which accumulates on a protected surface between actuation cycles of a deicing system.
Known or Observed or Detected Ice Accretion	Actual ice observed visually to be on the aircraft by the flight crew or identified by on-board sensors.
Mixed Ice	Simultaneous appearance or a combination of rime and glaze ice characteristics. Since the clarity, color, and shape of the ice will be a mixture of rime and glaze characteristics, accurate identification of mixed ice from the cockpit may be difficult.
Residual Ice	Ice which remains on a protected surface immediately after the actuation of a deicing system.
Rime Ice	A rough, milky, opaque ice formed by the rapid freezing of supercooled drops/droplets after they strike the aircraft. The rapid freezing results in air being trapped, giving the ice its opaque appearance and making it porous and brittle. Rime ice typically accretes along the stagnation line of an airfoil and is more regular in shape and conformal to the airfoil than glaze ice. It is the ice shape rather than the clarity or color of the ice which is most likely to be accurately assessed from the cockpit.
Runback Ice	Ice which forms from the freezing or refreezing of water leaving protected surfaces and running back to unprotected surfaces.
Note– <i>Ice types are difficult for the pilot to discern and have uncertain effects on an airplane in flight. Ice type definitions will be included in the AIM for use in the “Remarks” section of the PIREP and for use in forecasting.</i>	

TBL 7-1-9
Icing Conditions

Appendix C Icing Conditions	Appendix C 14 CFR Part 25 and 29 is the certification icing condition standard for approving ice protection provisions on aircraft. The conditions are specified in terms of altitude, temperature, liquid water content (LWC), representative droplet size, mean effective drop diameter (MED), and cloud horizontal extent.
Forecast Icing Conditions	Environmental conditions expected by a National Weather Service or an FAA-approved weather provider to be conducive to the formation of inflight icing on aircraft.
Freezing Drizzle (FZDZ)	Drizzle is precipitation at ground level or aloft in the form of liquid water drops which have diameters less than 0.5 mm and greater than 0.05 mm. Freezing drizzle is drizzle that exists at air temperatures less than 0°C, supercooled, remains in liquid form, and freezes upon contact with objects on the surface or airborne.
Freezing Precipitation	Freezing precipitation is freezing rain or freezing drizzle falling through or outside of visible cloud.
Freezing Rain (FZRA)	Rain is precipitation at ground level or aloft in the form of liquid water drops which have diameters greater than 0.5 mm. Freezing rain is rain that exists at air temperatures less than 0°C, supercooled, remains in liquid form, and freezes upon contact with objects on the ground or in the air.
Icing in Cloud	Icing occurring within visible cloud. Cloud droplets (diameter < 0.05 mm) will be present. Freezing drizzle and/or freezing rain may or may not be present.
Icing in Precipitation	Icing occurring from an encounter with freezing precipitation that is supercooled drops with diameters exceeding 0.05 mm within or outside of visible cloud.
Known Icing Conditions	Atmospheric conditions in which the formation of ice is observed or detected in flight. Note— <i>Because of the variability in space and time of atmospheric conditions, the existence of a report of observed icing does not assure the presence or intensity of icing conditions at a later time, nor can a report of no icing assure the absence of icing conditions at a later time.</i>
Potential Icing Conditions	Atmospheric icing conditions that are typically defined by airframe manufacturers relative to temperature and visible moisture that may result in aircraft ice accretion on the ground or in flight. The potential icing conditions are typically defined in the Airplane Flight Manual or in the Airplane Operation Manual.
Supercooled Drizzle Drops (SCDD)	Synonymous with freezing drizzle aloft.
Supercooled Drops or /Droplets	Water drops/droplets which remain unfrozen at temperatures below 0°C. Supercooled drops are found in clouds, freezing drizzle, and freezing rain in the atmosphere. These drops may impinge and freeze after contact on aircraft surfaces.
Supercooled Large Drops (SLD)	Liquid droplets with diameters greater than 0.05 mm at temperatures less than 0°C, i.e., freezing rain or freezing drizzle.

7-1-23. PIREPs Relating to Turbulence

a. When encountering turbulence pilots are urgently requested to report such conditions to ATC as soon as practicable. PIREPs relating to turbulence should state

1. Aircraft location
2. Time of occurrence in UTC
3. Turbulence intensity
4. Whether the turbulence occurred in or near clouds

5. Aircraft altitude or flight level

6. Type of aircraft

7. Duration of turbulence

EXAMPLE-

1. Over Omaha, 1232Z, moderate turbulence in clouds at Flight Level three one zero, Boeing 707.

2. From five zero miles south of Albuquerque to three zero miles north of Phoenix, 1250Z, occasional moderate chop at Flight Level three three zero, DC8.

b. Duration and classification of intensity should be made using TBL 7-1-10

TBL 7-1-10

Turbulence Reporting Criteria Table

Intensity	Aircraft Reaction	Reaction Inside Aircraft	Reporting Term–Definition
Light	Turbulence that momentarily causes slight erratic changes in altitude and/or attitude pitch roll ya Report as Light Turbulence ; ¹ or Turbulence that causes slight rapid and some hat rhythmic bumpiness ithout appreciable changes in altitude or attitude Report as Light Chop .	Occupants may feel a slight strain against seat belts or shoulder straps Unsecured ob ects may be displaced slightly Food service may be con ducted and little or no difficulty is encountered in alking	Occasional–Less than 1/3 of the time Intermittent–1/3 to 2/3 Continuous–More than 2/3
Moderate	Turbulence that is similar to Light Turbulence but of greater intensity Changes in altitude and/or attitude occur but the aircraft remains in positive control at all times It usually causes variations in indicated airspeed Report as Moderate Turbulence ; ¹ or Turbulence that is similar to Light Chop but of greater intensity It causes rapid bumps or olts ithout appreciable changes in aircraft altitude or attitude Report as Moderate Chop . ¹	Occupants feel definite strains against seat belts or shoulder straps Unse cured ob ects are dislodged Food service and alking are difficult	NOTE 1 Pilots should report location s time UTC intensity hether in or near clouds altitude type of aircraft and hen applicable duration of turbulence 2 Duration may be based on time bet een t o locations or over a single location All locations should be readily identifiable EXAMPLES: a Over Omaha 1232 Moderate Turbulence in cloud Flight Level 310 B707 b From 50 miles south of Albu uer ue to 30 miles north of Phoenix 1210 to 1250 occasional Moderate Chop Flight Level 330 DC8
Severe	Turbulence that causes large abrupt changes in altitude and/or attitude It usually causes large variations in indicated airspeed Aircraft may be momentarily out of control Report as Severe Turbulence . ¹	Occupants are forced violently against seat belts or shoulder straps Unse cured ob ects are tossed about Food Service and alking are impossible	
Extreme	Turbulence in hich the aircraft is violently tossed about and is practically impossible to control It may cause structural damage Report as Extreme Turbulence . ¹		

¹ High level turbulence normally above 15 000 feet ASL not associated ith cumuliform cloudiness including thunderstorms should be reported as CAT clear air turbulence preceded by the appropriate intensity or light or moderate chop

7-1-24. Wind Shear PIREPs

a. Because unexpected changes in wind speed and direction can be hazardous to aircraft operations at low altitudes on approach to and departing from airports, pilots are urged to promptly volunteer reports to controllers of wind shear conditions they encounter. An advance warning of this information will assist other pilots in avoiding or coping with a wind shear on approach or departure.

b. When describing conditions, use of the terms negative or positive wind shear should be avoided. PIREPs of "negative wind shear on final" intended to describe loss of airspeed and lift have been interpreted to mean that no wind shear was encountered. The recommended method for wind shear reporting is to state the loss or gain of airspeed and the altitudes at which it was encountered.

EXAMPLE-

1. *Denver Tower, Cessna 1234 encountered wind shear, loss of 20 knots at 400.*

2. *Tulsa Tower, American 721 encountered wind shear on final, gained 25 knots between 600 and 400 feet followed by loss of 40 knots between 400 feet and surface.*

1. Pilots who are not able to report wind shear in these specific terms are encouraged to make reports in terms of the effect upon their aircraft.

EXAMPLE-

Miami Tower, Gulfstream 403 Charlie encountered an abrupt wind shear at 800 feet on final, max thrust required.

2. Pilots using Inertial Navigation Systems (INSs) should report the wind and altitude both above and below the shear level.

7-1-25. Clear Air Turbulence (CAT) PIREPs

CAT has become a very serious operational factor to flight operations at all levels and especially to jet

traffic flying in excess of 15 000 feet. The best available information on this phenomenon must come from pilots via the PIREP reporting procedures. All pilots encountering CAT conditions are urgently requested to report time, location, and intensity (light, moderate, severe, or extreme) of the element to the FAA facility with which they are maintaining radio contact. If time and conditions permit, elements should be reported according to the standards for other PIREPs and position reports.

REFERENCE-


AIM, PIREPs Relating to Turbulence, Paragraph 7-1-23

7-1-26. Microbursts

a. Relatively recent meteorological studies have confirmed the existence of microburst phenomenon. Microbursts are small scale intense downdrafts which, on reaching the surface, spread outward in all directions from the downdraft center. This causes the presence of both vertical and horizontal wind shears that can be extremely hazardous to all types and categories of aircraft, especially at low altitudes. Due to their small size, short life span, and the fact that they can occur over areas without surface precipitation, microbursts are not easily detectable using conventional weather radar or wind shear alert systems.

b. Parent clouds producing microburst activity can be any of the low or middle layer convective cloud types. Note, however, that microbursts commonly occur within the heavy rain portion of thunderstorms and in much weaker, benign appearing convective cells that have little or no precipitation reaching the ground.

FIG 7-1-14
Evolution of a Microburst

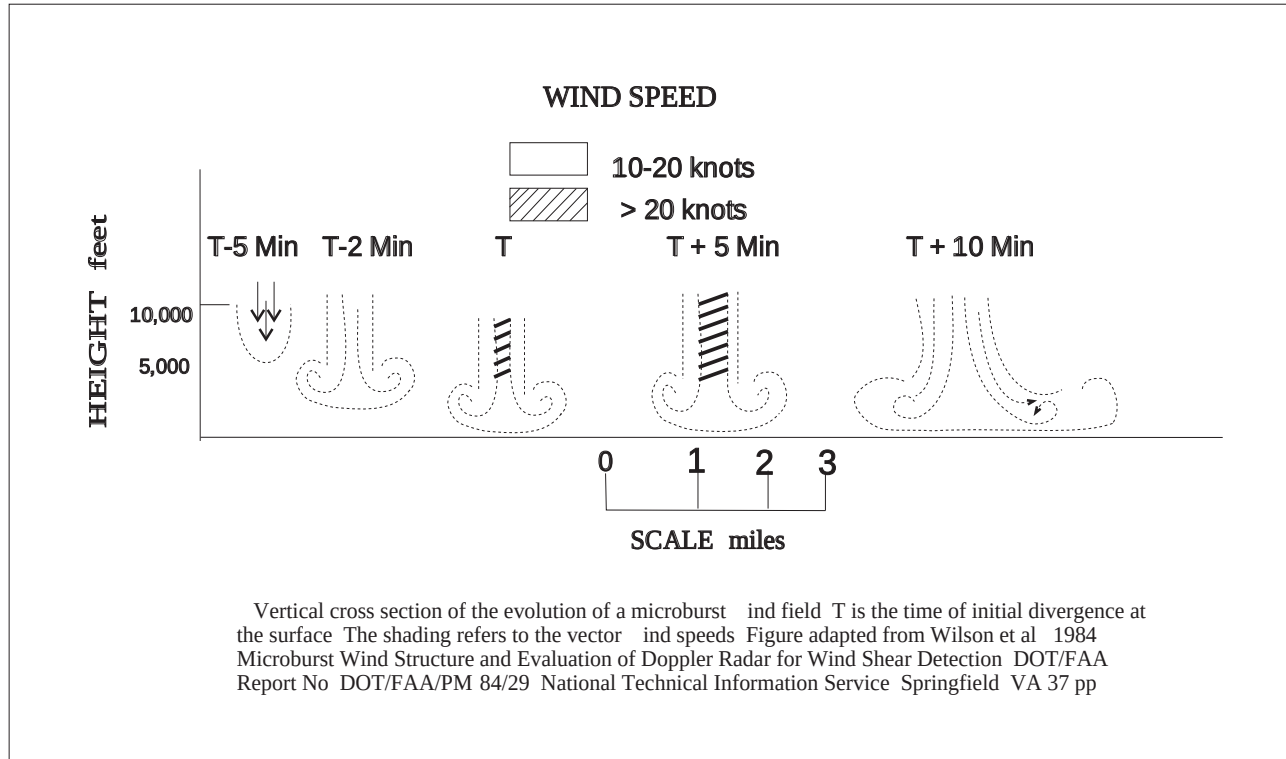

c. The life cycle of a microburst as it descends in a convective rain shaft is seen in FIG 7-1-14. An important consideration for pilots is the fact that the microburst intensifies for about 5 minutes after it strikes the ground.

d. Characteristics of microbursts include:


1. Size. The microburst downdraft is typically less than 1 mile in diameter as it descends from the cloud base to about 1,000–3,000 feet above the ground. In the transition zone near the ground, the downdraft changes to a horizontal outflow that can extend to approximately 2 1/2 miles in diameter.

2. Intensity. The downdrafts can be as strong as 6,000 feet per minute. Horizontal winds near the surface can be as strong as 45 knots, resulting in a 90-knot shear. Headwind to tailwind change for a traversing aircraft across the microburst. These strong horizontal winds occur within a few hundred feet of the ground.

3. Visual Signs. Microbursts can be found almost anywhere that there is convective activity. They may be embedded in heavy rain associated with a thunderstorm or in light rain in benign appearing virga. When there is little or no precipitation at the surface accompanying the microburst, a ring of blowing dust may be the only visual clue of its existence.

4. Duration. An individual microburst will seldom last longer than 15 minutes from the time it strikes the ground until dissipation. The horizontal winds continue to increase during the first 5 minutes with the maximum intensity winds lasting approximately 2–4 minutes. Sometimes microbursts are concentrated into a line structure, and under these conditions, activity may continue for as long as an hour. Once microburst activity starts, multiple microbursts in the same general area are not uncommon and should be expected.


FIG 7-1-15
Microburst Encounter During Takeoff

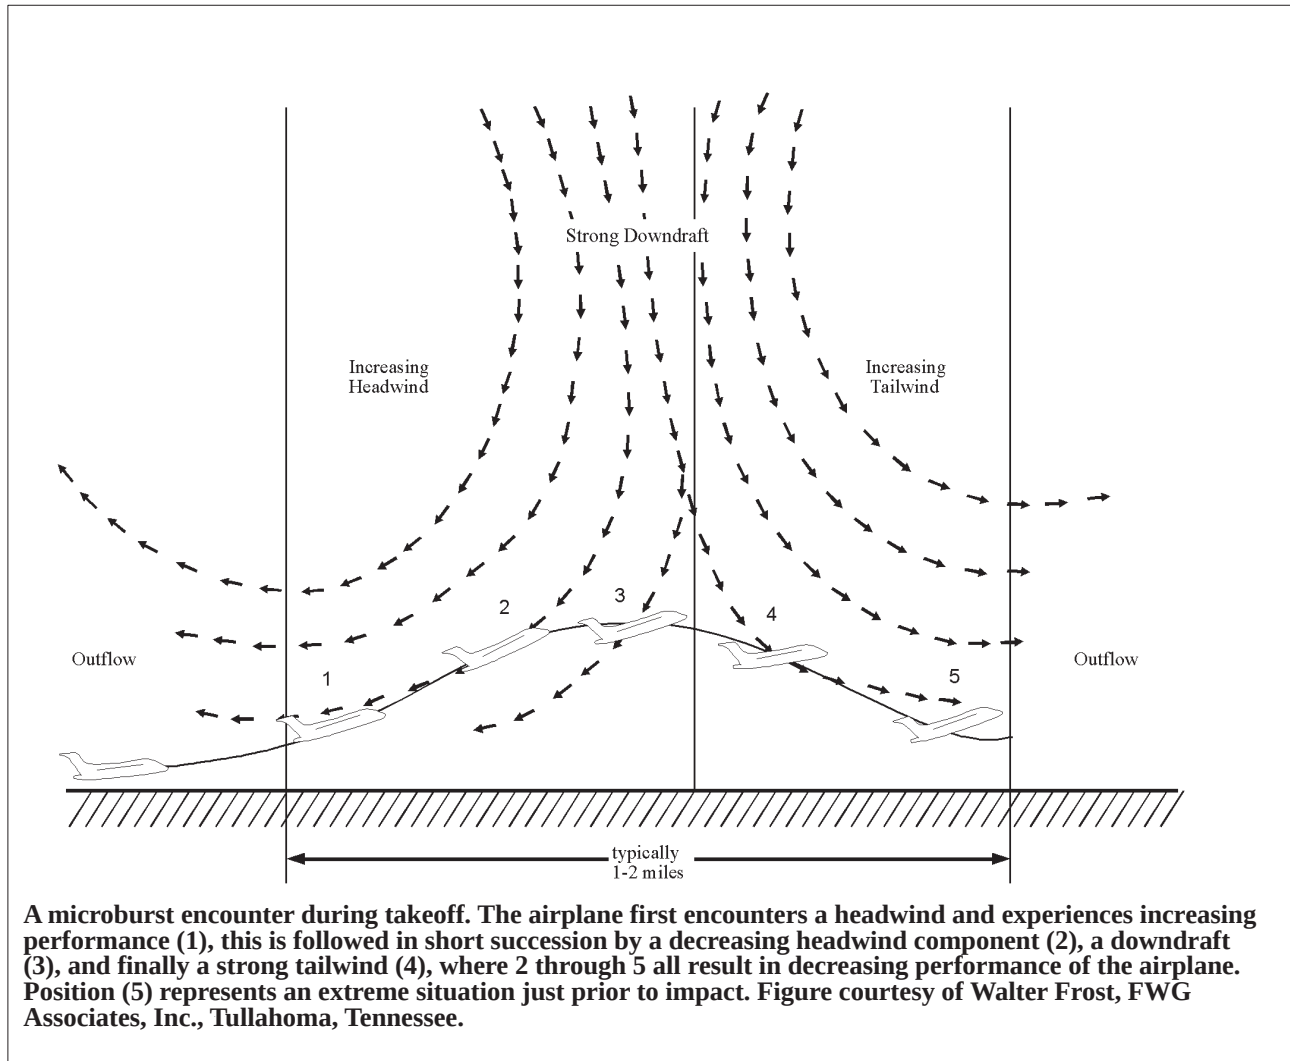

e. Microburst wind shear may create a severe hazard for aircraft within 1 000 feet of the ground particularly during the approach to landing and landing and take off phases. The impact of a microburst on aircraft which have the unfortunate

experience of penetrating one is characterized in FIG 7-1-15. The aircraft may encounter a headwind performance increasing followed by a downdraft and tailwind both performance decreasing possibly resulting in terrain impact.

FIG 7-1-16
NAS Wind Shear Product Systems

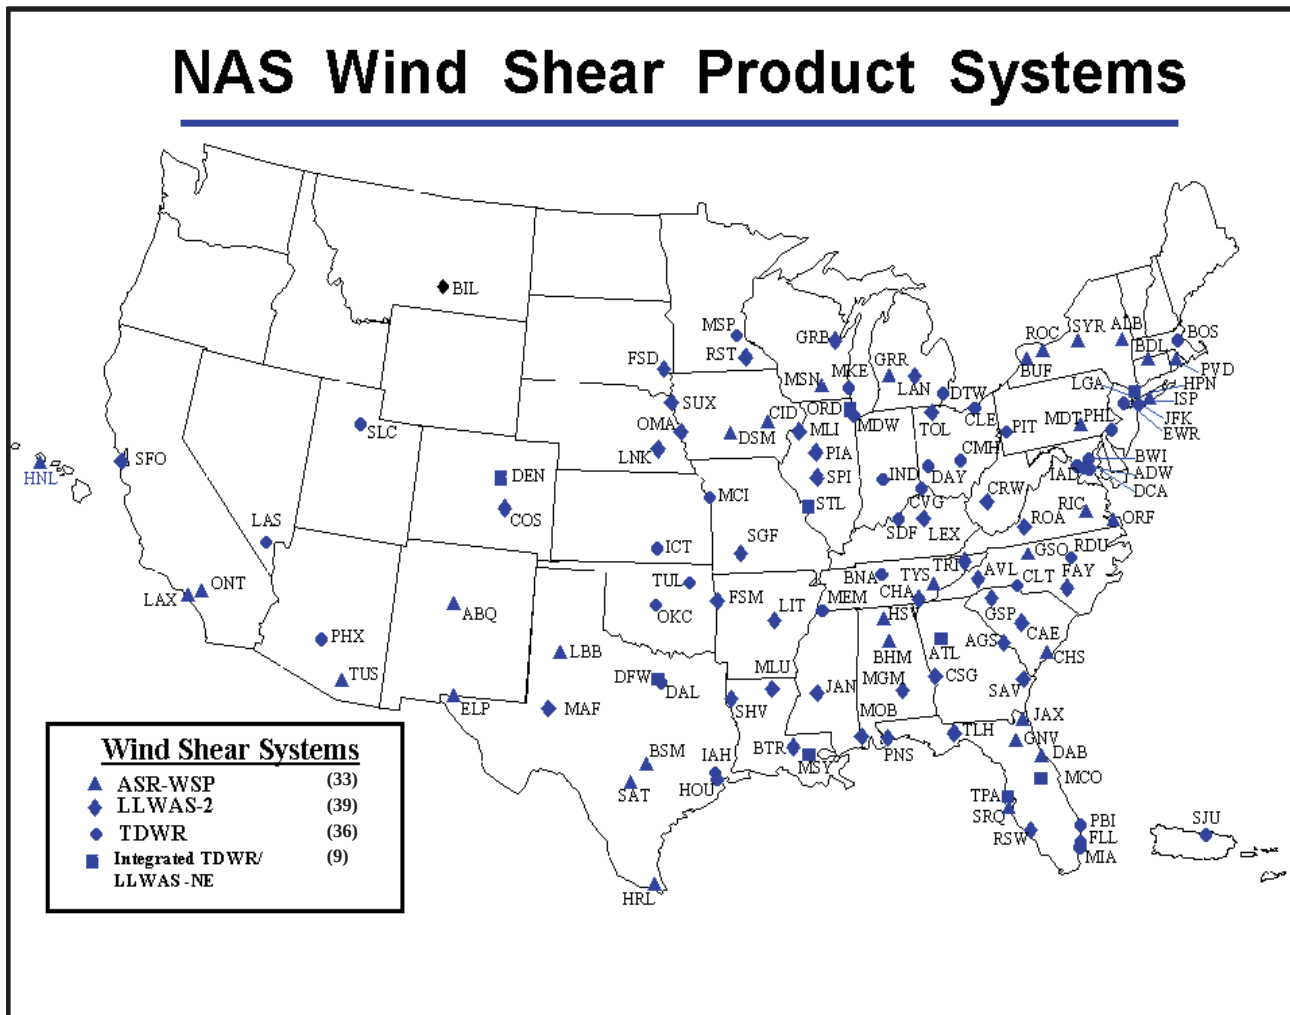

f. Detection of Microbursts, Wind Shear and Gust Fronts.


1. FAA's Integrated Wind Shear Detection Plan.

(a) The FAA currently employs an integrated plan for wind shear detection that will significantly improve both the safety and capacity of the majority of the airports currently served by the air carriers. This plan integrates several programs such as the Integrated Terminal Weather System (ITWS), Terminal Doppler Weather Radar (TDWR), Weather System Processor (WSP), and Low Level Wind Shear Alert Systems (LLWAS) into a single strategic

concept that significantly improves the aviation weather information in the terminal area. See FIG 7-1-16.

(b) The wind shear/microburst information and warnings are displayed on the ribbon display terminals (RBDTs) located in the tower cabs. They are identical and standardized in the LLWAS, TDWR, and WSP systems and so designed that the controller does not need to interpret the data but simply read the displayed information to the pilot. The RBDTs are constantly monitored by the controller to ensure the rapid and timely dissemination of any hazardous events to the pilot.

FIG 7-1-17
LLWAS Siting Criteria

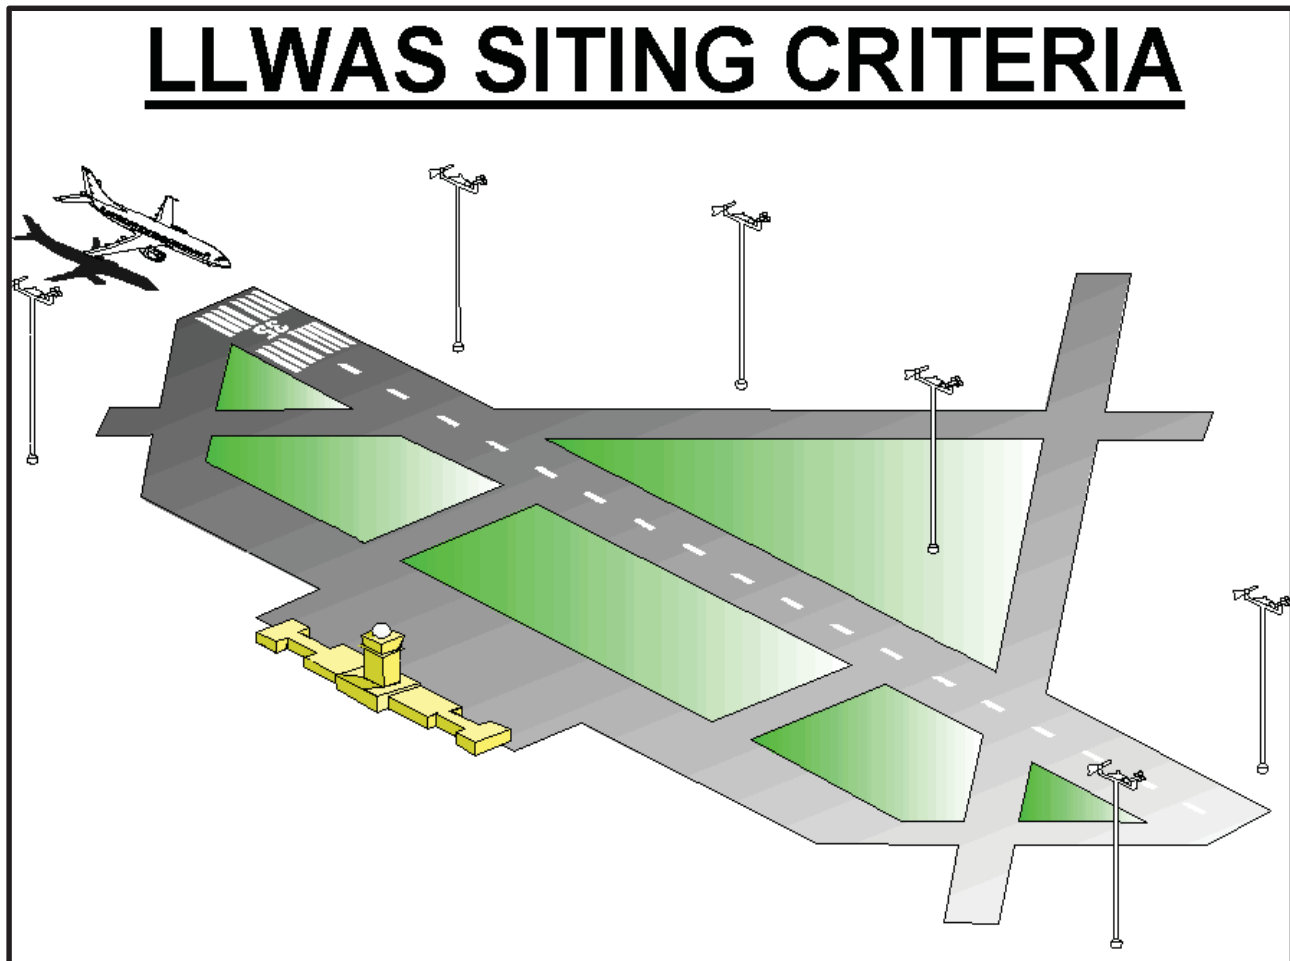


(c) The early detection of a wind shear/micro-burst event and the subsequent warnings issued to an aircraft on approach or departure will alert the pilot/crew to the potential of and to be prepared for a situation that could become very dangerous. Without these warnings the aircraft may NOT be able to climb out of or safely transition the event resulting in a catastrophe. The air carriers working with the FAA have developed specialized training programs using their simulators to train and prepare their pilots on the demanding aircraft procedures required to escape these very dangerous wind shear and/or microburst encounters.

2. Low Level Wind Shear Alert System (LLWAS).

(a) The LLWAS provides wind data and software processes to detect the presence of hazardous wind shear and microbursts in the vicinity of an airport. Wind sensors mounted on poles sometimes as high as 150 feet are ideally located 2,000 – 3,500 feet but not more than 5,000 feet from the centerline of the runway. See FIG 7-1-17.

FIG 7-1-18
Warning Boxes

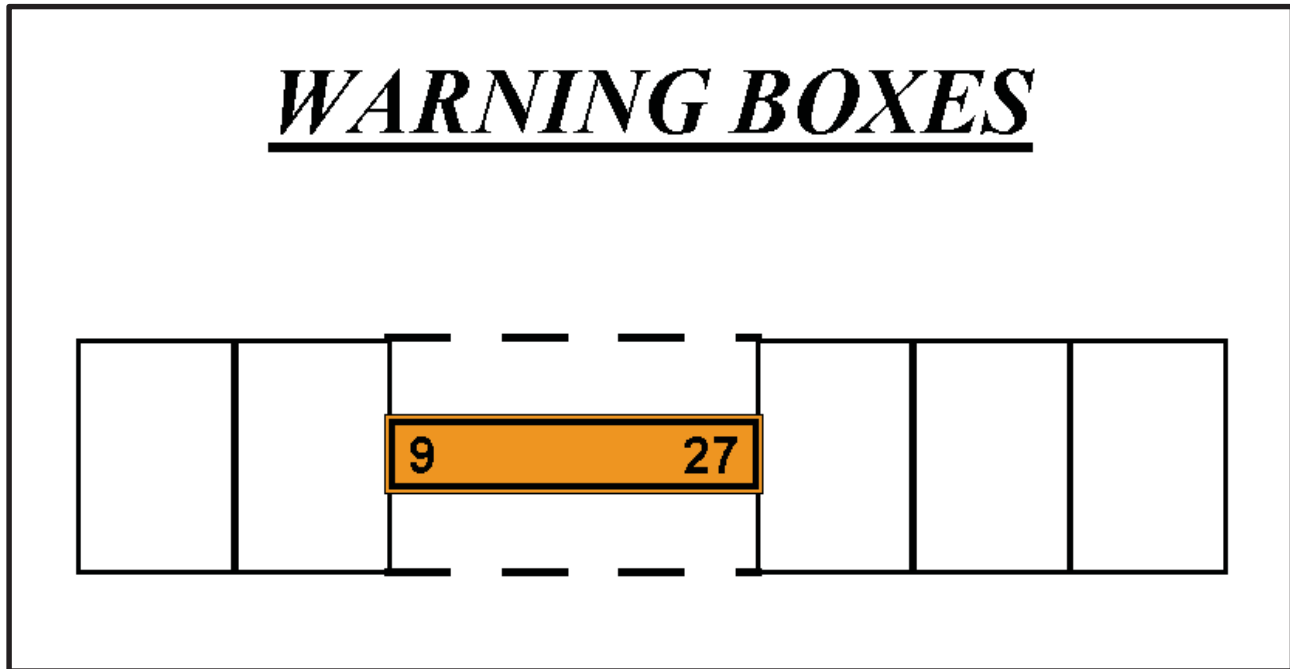

(b) LLWAS was fielded in 1988 at 110 airports across the nation. Many of these systems have been replaced by new TDWR and WSP technology. Eventually all LLWAS systems will be phased out. However, 39 airports will be upgraded to the LLWAS-NE Network Expansion system, which employs the very latest software and sensor technology. The new LLWAS-NE systems will not only provide the controller with wind shear warnings and alerts, including wind shear/microburst detection at the airport and sensor location, but will also provide the location of the hazards relative to the airport runways. It will also have the flexibility and capability to grow with the airport as new runways are built. As many as 32 sensors, strategically located around the airport and in relationship to its runway configuration, can be accommodated by the LLWAS-NE network.

3. Terminal Doppler Weather Radar (TDWR).

(a) TDWRs are being deployed at 45 locations across the U.S. Optimum locations for TDWRs are 8 to 12 miles off of the airport proper and designed to look at the airspace around and over the airport to detect microbursts, gust fronts, and shifts

and precipitation intensities. TDWR products advise the controller of wind shear and microburst events impacting all runways and the areas $\frac{1}{2}$ mile on either side of the extended centerline of the runways out to 3 miles on final approach and 2 miles out on departure.

FIG 7-1-18 is a theoretical view of the warning boxes, including the runway that the software uses in determining the locations of wind shear or microbursts. These warnings are displayed as depicted in the examples in subparagraph 5 on the RBDT.

(b) It is very important to understand that TDWR does NOT DO

(1) It **DOES NOT** warn of wind shear outside of the alert boxes on the arrival and departure ends of the runways.

(2) It **DOES NOT** detect wind shear that is NOT a microburst or a gust front.

(3) It **DOES NOT** detect gusty or crosswind conditions and

(4) It **DOES NOT** detect turbulence.

However, research and development is continuing on these systems. Future improvements may include such areas as storm motion, movement, improved

gust front detection storm growth and decay microburst prediction and turbulence detection

(c) TDWR also provides a geographical situation display GSD for supervisors and traffic management specialists for planning purposes. The GSD displays in color 6 levels of weather precipitation gust fronts and predicted storm movements. This data is used by the tower supervisor traffic management specialists and controllers to plan for runway changes and arrival/departure route changes in order to both reduce aircraft delays and increase airport capacity.

4. Weather System Processor (WSP).

(a) The WSP provides the controller supervisor traffic management specialist and ultimately the pilot with the same products as the terminal doppler weather radar TDWR at a fraction of the cost of a TDWR. This is accomplished by utilizing new technologies to access the weather channel capabilities of the existing ASR-9 radar located on or near the airport thus eliminating the requirements for a separate radar location land acquisition support facilities and the associated communication landlines and expenses.

(b) The WSP utilizes the same RBDT display as the TDWR and LLWAS and just like TDWR also has a GSD for planning purposes by supervisors traffic management specialists and controllers. The WSP GSD emulates the TDWR display i.e. it also depicts 6 levels of precipitation gust fronts and predicted storm movement and like the TDWR GSD is used to plan for runway changes and arrival/departure route changes in order to reduce aircraft delays and to increase airport capacity.

(c) This system is currently under development and is operating in a developmental test status at the Albuquerque New Mexico airport. When fielded the WSP is expected to be installed at

34 airports across the nation substantially increasing the safety of the American flying public.

5. Operational aspects of LLWAS, TDWR and WSP.

To demonstrate how this data is used by both the controller and the pilot 3 ribbon display examples and their explanations are presented.

(a) MICROBURST ALERTS

EXAMPLE–

This is what the controller sees on his/her ribbon display in the tower cab.

27A MBA 35K– 2MF 250 20

NOTE–

(See FIG 7–1–19 to see how the TDWR/WSP determines the microburst location).

This is what the controller will say when issuing the alert.

PHRASEOLOGY–

RUNWAY 27 ARRIVAL, MICROBURST ALERT, 35 KT LOSS 2 MILE FINAL, THRESHOLD WIND 250 AT 20.

In plain language the controller is telling the pilot that on approach to runway 27 there is a microburst alert on the approach lane to the runway and to anticipate or expect a 35 knot loss of airspeed at approximately 2 miles out on final approach. Here it will first encounter the phenomena. With that information the aircrew is forewarned and should be prepared to apply wind shear/microburst escape procedures should they decide to continue the approach. Additionally the surface winds at the airport for landing runway 27 are reported as 250 degrees at 20 knots.


NOTE–

Threshold wind is at pilot's request or as deemed appropriate by the controller.

REFERENCE–

FAA Order JO 7110.65, Air Traffic Control, Low Level Wind Shear/Microburst Advisories, Paragraph 3–1–8b2(a).

FIG 7-1-19
Microburst Alert

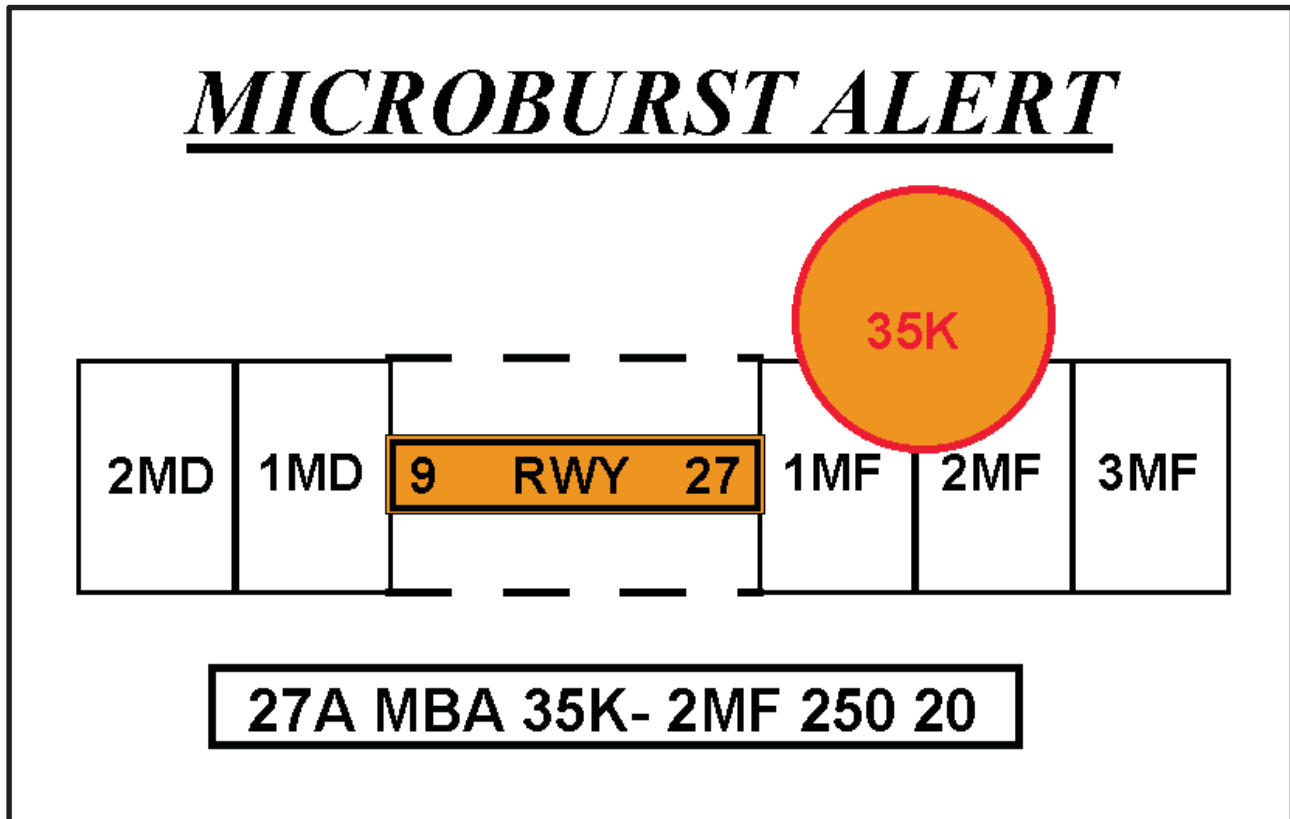

(b) WIND SHEAR ALERTS

EXAMPLE–

This is what the controller sees on his/her ribbon display in the tower cab.

27A WSA 20K- 3MF 200 15

NOTE–

(See FIG 7-1-20 to see how the TDWR/WSP determines the wind shear location).

This is what the controller will say when issuing the alert

PHRASEOLOGY–

RUNWAY 27 ARRIVAL, WIND SHEAR ALERT, 20 KT LOSS 3 MILE FINAL, THRESHOLD WIND 200 AT 15.

In plain language the controller is advising the aircraft arriving on runway 27 that at about 3 miles out they can expect to encounter a wind shear condition that will decrease their airspeed by 20 knots and possibly encounter turbulence. Additionally the airport surface winds for landing runway 27 are reported as 200 degrees at 15 knots.

NOTE–

Threshold wind is at pilot's request or as deemed appropriate by the controller.

REFERENCE–

FAA Order JO 7110.65, Air Traffic Control, Low Level Wind Shear/Microburst Advisories, Paragraph 3-1-8b2(a).

FIG 7-1-20
Weak Microburst Alert


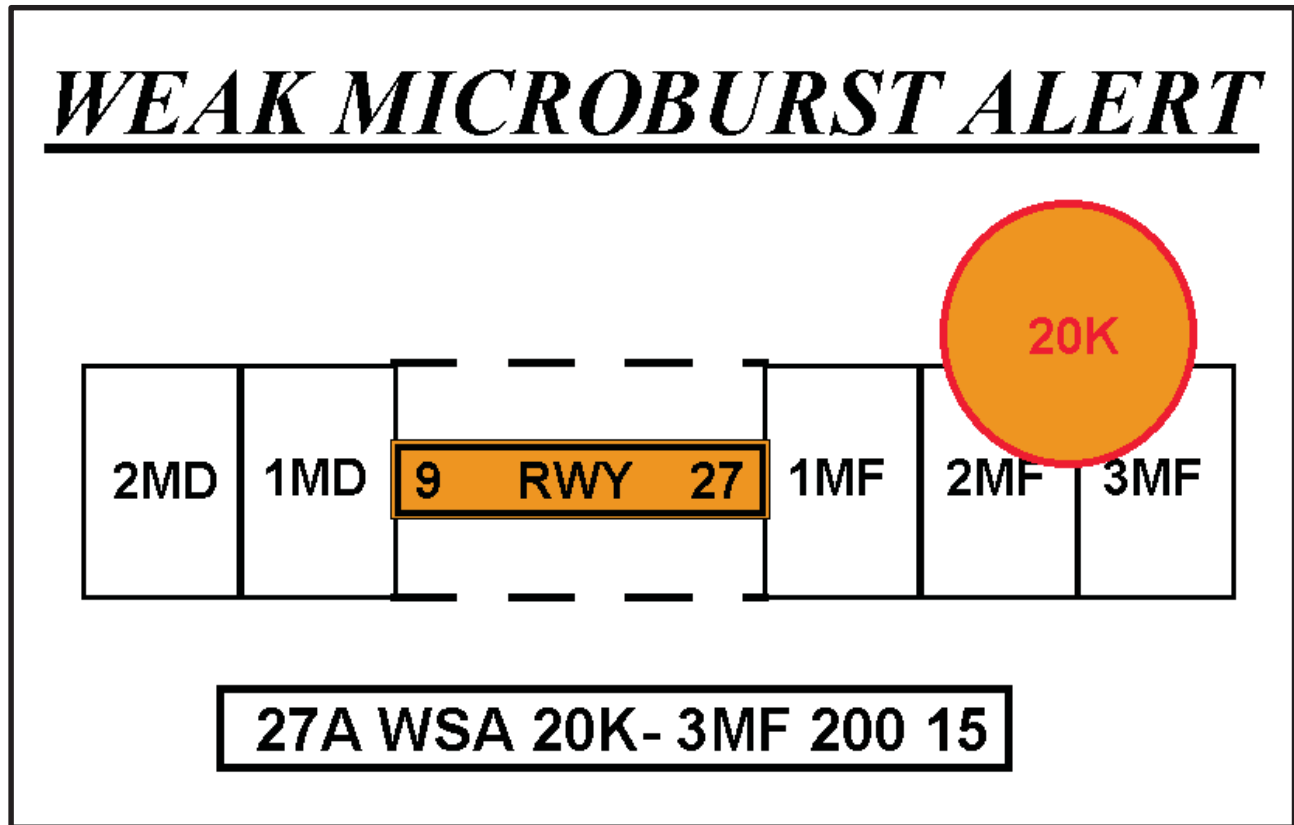


FIG 7-1-21
Gust Front Alert

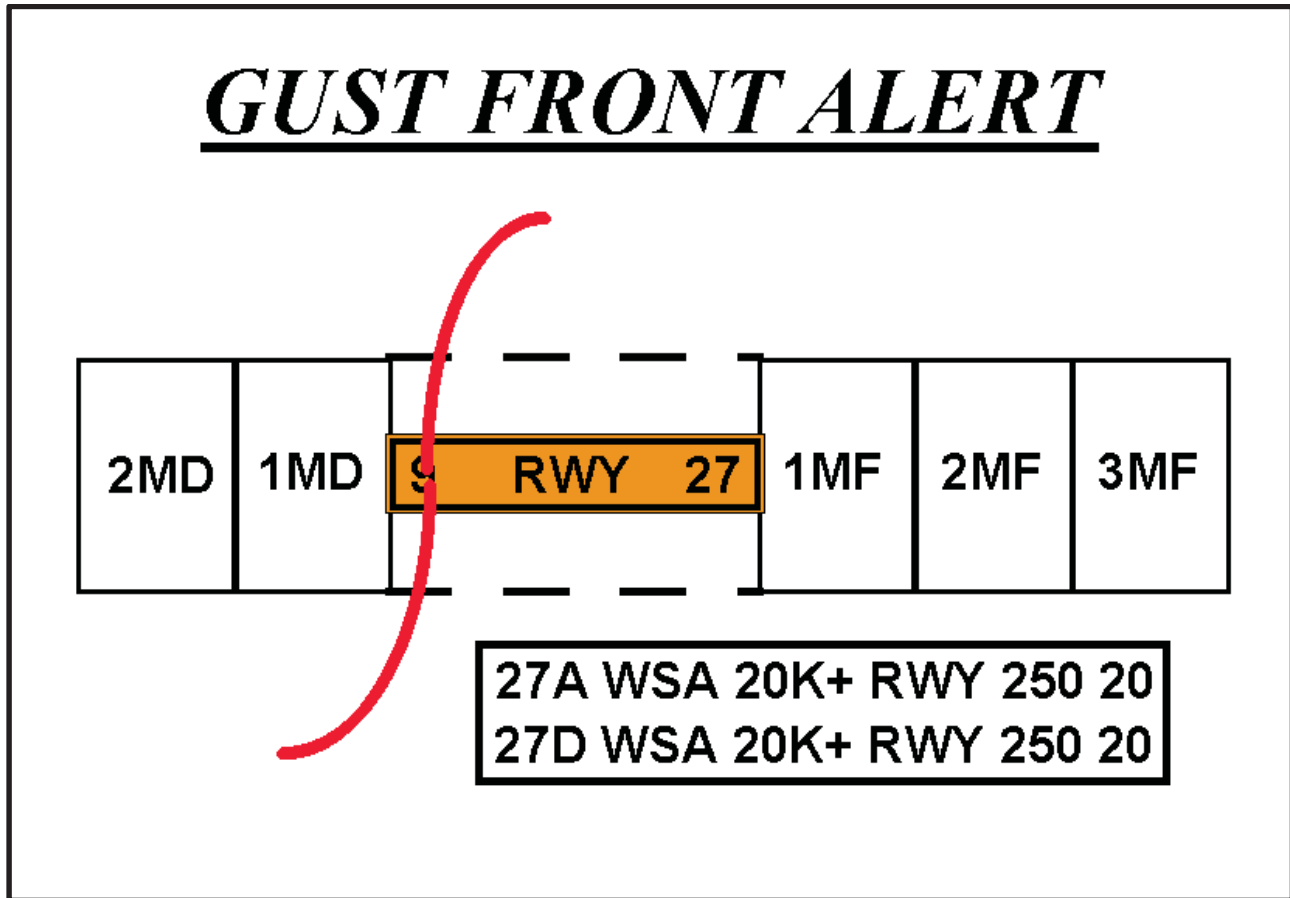

(c) MULTIPLE WIND SHEAR ALERTS

EXAMPLE–

This is what the controller sees on his/her ribbon display in the tower cab.

27A WSA 20K	RW	250 20
27D WSA 20K	RW	250 20

NOTE–

(See FIG 7-1-21 to see how the TDWR/WSP determines the gust front/wind shear location.)

This is what the controller will say when issuing the alert

PHRASEOLOGY–

MULTIPLE WIND SHEAR ALERTS. RUNWAY 27 ARRIVAL, WIND SHEAR ALERT, 20 KT GAIN ON RUNWAY; RUNWAY 27 DEPARTURE, WIND SHEAR ALERT, 20 KT GAIN ON RUNWAY, WIND 250 AT 20.

EXAMPLE–

In this example, the controller is advising arriving and departing aircraft that they could encounter a wind shear condition right on the runway due to a gust front (significant change of wind direction) with the possibility of a 20 knot gain in airspeed associated with the gust front. Additionally, the airport surface winds (for the runway in use) are reported as 250 degrees at 20 knots.

REFERENCE–

FAA Order JO 7110.65, Air Traffic Control, Low Level Wind Shear/Microburst Advisories, Paragraph 3-1-8b2(d).

6. The Terminal Weather Information for Pilots System (TWIP).

(a) With the increase in the quantity and quality of terminal weather information available through TDWR the next step is to provide this information directly to pilots rather than relying on voice communications from ATC. The National Airspace System has long been in need of a means of delivering terminal weather information to the cockpit more efficiently in terms of both speed and accuracy to enhance pilot awareness of weather hazards and reduce air traffic controller workload. With the TWIP capability terminal weather information both alphanumerically and graphically is now available directly to the cockpit on a test basis at 9 locations.

(b) TWIP products are generated using weather data from the TDWR or the Integrated Terminal Weather System (ITWS) testbed. TWIP products are generated and stored in the form of text and character graphic messages. Software has been developed to allow TDWR or ITWS to format the data and send the TWIP products to a database resident at Aeronautical Radio, Inc. (ARINC). These products can then be accessed by pilots using the ARINC Aircraft Communications Addressing and Reporting System (ACARS) data link services. Airline dispatchers can also access this database and send messages to specific aircraft whenever wind and shear activity begins or ends at an airport.

(c) TWIP products include descriptions and character graphics of microburst alerts and shear alerts, significant precipitation convective activity within 30 NM surrounding the terminal area, and expected weather that will impact airport operations. During inclement weather, i.e., whenever a predetermined level of precipitation or wind shear is detected within 15 miles of the terminal area, TWIP products are updated once each minute for text messages and once every five minutes for character graphic messages. During good weather below the predetermined precipitation or wind shear parameters, each message is updated every 10 minutes. These products are intended to improve the situational awareness of the pilot/flight crew and to aid in flight planning prior to arriving or departing the terminal area. It is important to understand that in the context of TWIP the predetermined levels for inclement versus good weather has nothing to do with the criteria for

VFR/MVFR/IFR/LIFR; it only deals with precipitation and shears and microbursts.

7-1-27. PIREPs Relating to Volcanic Ash Activity

a. Volcanic eruptions which send ash into the upper atmosphere occur somewhere around the world several times each year. Flying into a volcanic ash cloud can be extremely dangerous. At least two B747s have lost all power in all four engines after such an encounter. Regardless of the type aircraft, some damage is almost certain to ensue after an encounter with a volcanic ash cloud. Additionally, studies have shown that volcanic eruptions are the only significant source of large quantities of sulphur dioxide (SO₂) gas at jet cruising altitudes. Therefore, the detection and subsequent reporting of SO₂ is of significant importance. Although SO₂ is colorless, its presence in the atmosphere should be suspected when a sulphur-like or rotten egg odor is present throughout the cabin.

b. While some volcanoes in the U.S. are monitored, many in remote areas are not. These unmonitored volcanoes may erupt without prior warning to the aviation community. A pilot observing a volcanic eruption who has not had previous notification of it may be the only witness to the eruption. Pilots are strongly encouraged to transmit a PIREP regarding volcanic eruptions and any observed volcanic ash clouds or detection of sulphur dioxide (SO₂) gas associated with volcanic activity.

c. Pilots should submit PIREPs regarding volcanic activity using the Volcanic Activity Reporting (VAR) form as illustrated in Appendix 2. If a VAR form is not immediately available, relay enough information to identify the position and type of volcanic activity.

d. Pilots should verbally transmit the data required in items 1 through 8 of the VAR as soon as possible. The data required in items 9 through 16 of the VAR should be relayed after landing if possible.

7-1-28. Thunderstorms

a. Turbulence, hail, rain, snow, lightning, sustained updrafts and downdrafts, icing conditions—all are present in thunderstorms. While there is some evidence that maximum turbulence exists at the middle level of a thunderstorm, recent studies show little variation of turbulence intensity with altitude.

b. There is no useful correlation between the external visual appearance of thunderstorms and the severity or amount of turbulence or hail within them. The visible thunderstorm cloud is only a portion of a turbulent system whose updrafts and downdrafts often extend far beyond the visible storm cloud. Severe turbulence can be expected up to 20 miles from severe thunderstorms. This distance decreases to about 10 miles in less severe storms.

c. Weather radar, airborne or ground based, will normally reflect the areas of moderate to heavy precipitation; radar does not detect turbulence. The frequency and severity of turbulence generally increases with the radar reflectivity, which is closely associated with the areas of highest liquid water content of the storm. **NO FLIGHT PATH THROUGH AN AREA OF STRONG OR VERY STRONG RADAR ECHOES SEPARATED BY 20–30 MILES OR LESS MAY BE CONSIDERED FREE OF SEVERE TURBULENCE.**

d. Turbulence beneath a thunderstorm should not be minimized. This is especially true when the relative humidity is low in any layer between the surface and 15,000 feet. Then the lower altitudes may be characterized by strong outflowing winds and severe turbulence.

e. The probability of lightning strikes occurring to aircraft is greatest when operating at altitudes where temperatures are between minus 5 degrees Celsius and plus 5 degrees Celsius. Lightning can strike aircraft flying in the clear in the vicinity of a thunderstorm.

f. METAR reports do not include a descriptor for severe thunderstorms. However, by understanding severe thunderstorm criteria, i.e., 50 knot winds or 3/4 inch hail, the information is available in the report to know that one is occurring.

g. Current weather radar systems are able to objectively determine precipitation intensity. These precipitation intensity areas are described as light, moderate, heavy, and extreme.

REFERENCE–

Pilot/Controller Glossary, Precipitation Radar Weather Descriptions.

EXAMPLE–

1. Alert provided by an ATC facility to an aircraft: (aircraft identification) **EXTREME** precipitation between ten o'clock and two o'clock, one five miles. Precipitation area is two five miles in diameter.

2. Alert provided by an FSS:

(aircraft identification) **EXTREME** precipitation two zero miles west of Atlanta VOR, two five miles wide, moving east at two zero knots, tops flight level three niner zero.

7–1–29. Thunderstorm Flying

a. Thunderstorm Avoidance. Never regard any thunderstorm lightly, even when radar echoes are of light intensity. Avoiding thunderstorms is the best policy. Following are some Do's and Don'ts of thunderstorm avoidance:

1. Don't land or takeoff in the face of an approaching thunderstorm. A sudden gust front of low level turbulence could cause loss of control.

2. Don't attempt to fly under a thunderstorm, even if you can see through to the other side. Turbulence and wind shear under the storm could be hazardous.

3. Don't attempt to fly under the anvil of a thunderstorm. There is a potential for severe and extreme clear air turbulence.

4. Don't fly without airborne radar into a cloud mass containing scattered embedded thunderstorms. Scattered thunderstorms not embedded usually can be visually circumnavigated.

5. Don't trust the visual appearance to be a reliable indicator of the turbulence inside a thunderstorm.

6. Don't assume that ATC will offer radar navigation guidance or deviations around thunderstorms.

7. Don't use data linked weather next generation weather radar (NE RAD) mosaic imagery as the sole means for negotiating a path through a thunderstorm area; tactical maneuvering.

8. Do remember that the data linked NE RAD mosaic imagery shows where the weather is, not where the weather is. The weather conditions may be 15 to 20 minutes older than the age indicated on the display.

9. Do listen to chatter on the ATC frequency for Pilot Weather Reports (PIREP) and other aircraft requesting to deviate or divert.

10. Do ask ATC for radar navigation guidance or to approve deviations around thunderstorms if needed.

11. Do use data linked weather NE RAD mosaic imagery for example Flight Information Service Broadcast FIS B for route selection to avoid thunderstorms entirely strategic maneuvering

12. Do advise ATC when switched to another controller that you are deviating for thunderstorms before accepting to rejoin the original route

13. Do ensure that after an authorized weather deviation before accepting to rejoin the original route that the route of flight is clear of thunderstorms

14. Do avoid by at least 20 miles any thunderstorm identified as severe or giving an intense radar echo This is especially true under the anvil of a large cumulonimbus

15. Do circumnavigate the entire area if the area has 6/10 thunderstorm coverage

16. Do remember that vivid and frequent lightning indicates the probability of a severe thunderstorm

17. Do regard as extremely hazardous any thunderstorm with tops 35 000 feet or higher whether the top is visually sighted or determined by radar

18. Do give a PIREP for the flight conditions

19. Do divert and wait out the thunderstorms on the ground if unable to navigate around an area of thunderstorms

20. Do contact Flight Service/Flight Watch for assistance in avoiding thunderstorms Flight Service/Flight Watch specialists have NE RAD mosaic radar imagery and NE RAD single site radar with unique features such as base and composite reflectivity echo tops and VAD wind profiles

b. If you cannot avoid penetrating a thunderstorm following are some Do's before entering the storm

1. Tighten your safety belt put on your shoulder harness if installed if and secure all loose objects

2. Plan and hold the course to take the aircraft through the storm in a minimum time

3. To avoid the most critical icing establish a penetration altitude below the freezing level or above the level of 15 C

4. Verify that pilot heat is on and turn on carburetor heat or jet engine anti ice Icing can be rapid at any altitude and cause almost instantaneous power failure and/or loss of airspeed indication

5. Establish power settings for turbulence penetration airspeed recommended in the aircraft manual

6. Turn up cockpit lights to highest intensity to lessen temporary blindness from lightning

7. If using automatic pilot disengage Altitude Hold Mode and Speed Hold Mode The automatic altitude and speed controls will increase maneuvers of the aircraft thus increasing structural stress

8. If using airborne radar tilt the antenna up and down occasionally This will permit the detection of other thunderstorm activity at altitudes other than the one being flown

c. Following are some Do's and Don'ts during the thunderstorm penetration

1. Do keep your eyes on your instruments Looking outside the cockpit can increase danger of temporary blindness from lightning

2. Don't change power settings maintain settings for the recommended turbulence penetration airspeed

3. Do maintain constant attitude Allow the altitude and airspeed to fluctuate

4. Don't turn back once you are in the thunderstorm A straight course through the storm most likely will get the aircraft out of the hazards most quickly In addition turning maneuvers increase stress on the aircraft

7-1-30. Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR)

FIG 7-1-22

Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR) (Front)



Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR) (Front)



TAF	KPIT 091730Z 0918/1024 15005KT 5SM HZ FEW020 WS010/31022KT FM091930 30015G25KT 3SM SHRA OVC015 TEMPO 0920/0922 1/2SM +TSRA OVC008CB FM100100 27008KT 5SM SHRA BKN020 OVC040 PROB30 1004/1007 1SM -RA BR FM101015 18005KT 6SM -SHRA OVC020 BECMG 1013/1015 P6SM NSW SKC
NOTE: Users are cautioned to confirm DATE and TIME of the TAF. For example FM100000 is 0000Z on the 10th . Do not confuse with 1000Z !	
METAR	KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB 18/16 A2992 RMK SLP045 T01820159

Forecast	Explanation	Report
TAF	Message type: TAF-routine or TAF AMD-amended forecast, METAR-hourly, SPECI-special or TESTM-non-commissioned ASOS report	METAR
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC “Z”, 2-digit date, 4-digit time	091955Z
0918/1024	Valid period, either 24 hours or 30 hours. The first two digits of EACH four digit number indicate the date of the valid period, the final two digits indicate the time (valid from 18Z on the 9 th to 24Z on the 10 th).	
	In U.S. METAR: <u>C</u> ORrected ob; or <u>A</u> UTOMated ob for automated report with no human intervention; omitted when observer logs on.	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or <u>Va</u> Ria <u>B</u> le); next 2-3 digits for speed and unit, <u>K</u> T (KMH or MPS); as needed, <u>G</u> ust and maximum speed; 00000KT for calm; for METAR, if direction varies 60 degrees or more, <u>V</u> ariability appended, e.g., 180 <u>V</u> 260	22015G25KT
5SM	Prevailing visibility; in U.S., <u>S</u> tatute <u>M</u> iles & fractions; above 6 miles in TAF Plus <u>6</u> <u>S</u> M. (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	¾SM
	Runway Visual Range: <u>R</u> ; 2-digit runway designator <u>L</u> eft, <u>C</u> enter, or <u>R</u> ight as needed; “ <u>L</u> ”, Minus or Plus in U.S., 4-digit value, <u>F</u> ee <u>T</u> in U.S., (usually meters elsewhere); 4-digit value <u>V</u> ariability 4-digit value (and tendency <u>D</u> own, <u>U</u> p or <u>N</u> o change)	R28L/2600FT
HZ	Significant present, forecast and recent weather: see table (on back)	TSRA
FEW020	Cloud amount, height and type: <u>S</u> ky Clear 0/8, <u>F</u> EW >0/8-2/8, <u>S</u> ca <u>T</u> tered 3/8-4/8, <u>B</u> ro <u>K</u> e <u>N</u> 5/8-7/8, <u>O</u> ver <u>C</u> ast 8/8; 3-digit height in hundreds of ft; <u>T</u> owering <u>C</u> umulus or <u>C</u> umulonim <u>B</u> us in METAR ; in TAF , only <u>C</u> B. <u>V</u> ertical <u>V</u> isibility for obscured sky and height “VV004”. More than 1 layer may be reported or forecast. In automated METAR reports only, <u>C</u> lea <u>R</u> for “clear below 12,000 feet”	OVC 010CB
	Temperature: degrees Celsius; first 2 digits, temperature “ <u>L</u> ” last 2 digits, dew-point temperature; <u>M</u> inus for below zero, e.g., M06	18/16
	Altimeter setting: indicator and 4 digits; in U.S., <u>A</u> -inches and hundredths; (<u>Q</u> -hectoPascals, e.g., Q1013)	A2992
WS010/31022KT	In U.S. TAF , non-convective low-level (≤2,000 ft) <u>W</u> ind <u>S</u> hear; 3-digit height (hundreds of ft); “ <u>L</u> ”; 3-digit wind direction and 2-3 digit wind speed above the indicated height, and unit, <u>K</u> T	

FIG 7-1-23

Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR) (Back)



Key to Aerodrome Forecast (TAF) and Aviation Routine Weather Report (METAR) (Back)



	In METAR , <u>ReMarK</u> indicator & remarks. For example: <u>Sea- Level</u> Pressure in hectoPascals & tenths, as shown: 1004.5 hPa; <u>Temp/dew-point</u> in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C	RMK SLP045 T01820159
FM091930	<u>FroM</u> : changes are expected at: 2-digit date, 2-digit hour, and 2-digit minute beginning time: indicates significant change. Each FM starts on a new line, indented 5 spaces	
TEMPO 0920/0922	<u>TEMPO</u> rary: changes expected for <1 hour and in total, < half of the period between the 2-digit date and 2-digit hour beginning, and 2-digit date and 2-digit hour ending time	
PROB30 1004/1007	<u>PROB</u> ability and 2-digit percent (30 or 40): probable condition in the period between the 2-digit date & 2-digit hour beginning time, and the 2-digit date and 2-digit hour ending time	
BECMG 1013/1015	<u>BECO</u> MinG: change expected in the period between the 2-digit date and 2-digit hour beginning time, and the 2-digit date and 2-digit hour ending time	

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather.

Qualifiers			
Intensity or Proximity			
“-” = Light		No sign = Moderate	
		“+” = Heavy	
“VC” = Vicinity, but not at aerodrome. In the US METAR, 5 to 10 SM from the point of observation. In the US TAF, 5 to 10 SM from the center of the runway complex. Elsewhere, within 8000m.			
Descriptor			
BC – Patches	BL – Blowing	DR – Drifting	FZ – Freezing
MI – Shallow	PR – Partial	SH – Showers	TS – Thunderstorm
Weather Phenomena			
Precipitation			
DZ – Drizzle	GR – Hail	GS – Small Hail/Snow Pellets	
IC – Ice Crystals	PL – Ice Pellets	RA – Rain	SG – Snow Grains
SN – Snow	UP – Unknown Precipitation in automated observations		
Obscuration			
BR – Mist ($\geq 5/8$ SM)	DU – Widespread Dust	FG – Fog ($< 5/8$ SM)	FU – Smoke
HZ – Haze	PY – Spray	SA – Sand	VA – Volcanic Ash
Other			
DS – Dust Storm	FC – Funnel Cloud	+FC – Tornado or Waterspout	
PO – Well developed dust or sand whirls		SQ – Squall	SS – Sandstorm

- Explanations in parentheses “()” indicate different worldwide practices.
- Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
- NWS TAFs exclude BECMG groups and temperature forecasts, NWS TAFS do not use PROB in the first 9 hours of a TAF; NWS METARs exclude trend forecasts. US Military TAFs include Turbulence and Icing groups.

7-1-31. International Civil Aviation Organization (ICAO) Weather Formats

The U S uses the ICAO world standard for aviation weather reporting and forecasting. The World Meteorological Organization's (WMO) publication No. 782, *Aerodrome Reports and Forecasts*, contains the base METAR and TAF code as adopted by the WMO member countries.

a. Although the METAR code is adopted worldwide, each country is allowed to make modifications or exceptions to the code for use in their particular country. For example, the U S will continue to use statute miles for visibility, feet for RVR values, knots for wind speed, and inches of mercury for altimetry. However, temperature and dew point will be reported in degrees Celsius. The U S reports prevailing visibility rather than lowest sector visibility. The elements in the body of a METAR report are separated with a space. The only exceptions are RVR, temperature, and dew point, which are separated with a solidus (/). When an element does not occur or cannot be observed, the preceding space and that element are omitted from that particular report. A METAR report contains the following sequence of elements in the following order:

1. Type of report
2. ICAO Station Identifier
3. Date and time of report
4. Modifier, as required
5. Wind
6. Visibility
7. Runway Visual Range (RVR)
8. Weather phenomena
9. Sky conditions
10. Temperature/dew point group
11. Altimeter
12. Remarks (RMK)

b. The following paragraphs describe the elements in a METAR report:

1. **Type of report.** There are two types of report:

(a) Aviation Routine Weather Report (METAR) and

(b) Nonroutine Special Aviation Weather Report (SPECI).

The type of report (METAR or SPECI) will always appear as the lead element of the report.

2. **ICAO Station Identifier.** The METAR code uses ICAO 4-letter station identifiers. In the contiguous 48 States, the 3-letter domestic station identifier is prefixed with a K. For example, the domestic identifier for Seattle is SEA, while the ICAO identifier is KSEA. Elsewhere, the first two letters of the ICAO identifier indicate that region of the world and country or state the station is in. For Alaska, all station identifiers start with PA. For Hawaii, all station identifiers start with PH. Canadian station identifiers start with CU, CW, C, and C. Mexican station identifiers start with MM. The identifier for the eastern Caribbean is M, followed by the individual country's letter. For example, Cuba is MU, Dominican Republic is MD, the Bahamas is M. The identifier for the eastern Caribbean is T, followed by the individual country's letter. For example, Puerto Rico is TJ. For a complete worldwide listing, see ICAO Document 7910, *Location Indicators*.

3. **Date and Time of Report.** The date and time the observation is taken are transmitted as a six-digit date/time group appended with Z to denote Coordinated Universal Time (UTC). The first two digits are the date, followed by two digits for hour and two digits for minutes.

EXAMPLE-

172345Z (the 17th day of the month at 2345Z)

4. **Modifier (As Required).** AUTO identifies a METAR/SPECI report as an automated weather report with no human intervention. If AUTO is shown in the body of the report, the type of sensor equipment used at the station will be encoded in the remarks section of the report. The absence of AUTO indicates that a report was made manually by an observer or that an automated report had human augmentation/backup. The modifier COR indicates a corrected report that is sent out to replace an earlier report with an error.

NOTE-

There are two types of automated stations, AO1 for automated weather reporting stations without a precipitation discriminator, and AO2 for automated stations with a precipitation discriminator. (A precipitation discriminator can determine the difference between liquid and frozen/freezing precipitation). This information appears in the remarks section of an automated report.

5. Wind. The wind is reported as a five digit group six digits if speed is over 99 knots. The first three digits are the direction the wind is blowing from in tens of degrees referenced to true north or VRB if the direction is variable. The next two digits is the wind speed in knots or if over 99 knots the next three digits. If the wind is gusty it is reported as a G after the speed followed by the highest gust reported. The abbreviation KT is appended to denote the use of knots for wind speed.

EXAMPLE–

13008KT – wind from 130 degrees at 8 knots

08032G45KT – wind from 080 degrees at 32 knots with gusts to 45 knots

VRB04KT – wind variable in direction at 4 knots

00000KT – wind calm

210103G130KT – wind from 210 degrees at 103 knots with gusts to 130 knots

If the wind direction is variable by 60 degrees or more and the speed is greater than 6 knots, a variable group consisting of the extremes of the wind direction separated by a “v” will follow the prevailing wind group.
32012G22KT 280V350

(a) Peak Wind. Whenever the peak wind exceeds 25 knots PK WND will be included in Remarks e.g. PK WND 28045/1955. Peak wind time of day at four five occurred at one nine five five. If the hour can be inferred from the report time only the minutes will be appended e.g. PK WND 34050/38. Peak wind three four zero at five zero occurred at three eight past the hour.

(b) Wind shift. Whenever a wind shift occurs WSHFT will be included in remarks followed by the time the wind shift began e.g. WSHFT 30 FROPA. Wind shift at three zero due to frontal passage.

6. Visibility. Prevailing visibility is reported in statute miles with SM appended to it.

EXAMPLE–

7SM – seven statute miles

15SM – fifteen statute miles

1/2SM – one-half statute mile

(a) Tower/surface visibility. If either visibility to tower or surface is below four statute miles

the lesser of the two will be reported in the body of the report the greater will be reported in remarks.

(b) Automated visibility. ASOS/AWSS visibility stations will show visibility 10 or greater than 10 miles as 10SM. AWOS visibility stations will show visibility less than 1/4 statute mile as M1/4SM and visibility 10 or greater than 10 miles as 10SM.

NOTE–

Automated sites that are augmented by human observer to meet service level requirements can report 0, 1/16 SM, and 1/8 SM visibility increments.

(c) Variable visibility. Variable visibility is shown in remarks when rapid increase or decrease by 1/2 statute mile or more and the average prevailing visibility is less than three miles e.g. VIS 1V2. Visibility variable between one and two.

(d) Sector visibility. Sector visibility is shown in remarks when it differs from the prevailing visibility and either the prevailing or sector visibility is less than three miles.

EXAMPLE–

VIS N2 – visibility north two

7. Runway Visual Range (When Reported).

R identifies the group followed by the runway heading and parallel runway designator if needed / and the visual range in feet. Meters in other countries followed with FT. Feet is not spoken.

(a) Variability Values. When RVR varies by more than one reportable value the lowest and highest values are shown with V between them.

(b) Maximum/Minimum Range. P indicates an observed RVR is above the maximum value for this system spoken as more than M. M indicates an observed RVR is below the minimum value which can be determined by the system spoken as less than.

EXAMPLE–

R32L/1200FT – runway three two left R–V–R one thousand two hundred.

R27R/M1000V4000FT – runway two seven right R–V–R variable from less than one thousand to four thousand.

8. Weather Phenomena. The weather as reported in the METAR code represents a significant change in the way weather is currently reported. In METAR, weather is reported in the format

Intensity/Proximity/Descriptor/Precipitation/
Obstruction to visibility/Other

NOTE–

The “/” above and in the following descriptions (except as the separator between the temperature and dew point) are for separation purposes in this publication and do not appear in the actual METARs.

(a) **Intensity** applies only to the first type of precipitation reported. A – denotes light, no symbol denotes moderate, and a denotes heavy.

(b) **Proximity** applies to and reported only for weather occurring in the vicinity of the airport between 5 and 10 miles of the point of observation. It is denoted by the letters VC. Intensity and VC will not appear together in the weather group.

(c) **Descriptor.** These eight descriptors apply to the precipitation or obstructions to visibility.

TS	thunderstorm
DR	low drifting
SH	showers
MI	shallow
FZ	freezing
BC	patches
BL	blowing
PR	partial

NOTE–

Although “TS” and “SH” are used with precipitation and may be preceded with an intensity symbol, the intensity still applies to the precipitation, **not** the descriptor.

(d) **Precipitation.** There are nine types of precipitation in the METAR code.

RA	rain
DZ	drizzle
SN	snow
GR	hail 1/4" or greater
GS	small hail/snow pellets
PL	ice pellets
SG	snow grains
IC	ice crystals diamond dust
UP	unknown precipitation automated stations only

(e) **Obstructions to visibility.** There are eight types of obscuration phenomena in the METAR code. Obscurations are any phenomena in the atmosphere other than precipitation that reduce horizontal visibility.

FG	fog vsby less than 5/8 mile
HZ	haze
FU	smoke
PY	spray
BR	mist vsby 5/8 – 6 miles
SA	sand
DU	dust
VA	volcanic ash

NOTE–

Fog (FG) is observed or forecast only when the visibility is less than five-eighths of a mile, otherwise mist (BR) is observed or forecast.

(f) **Other.** There are five categories of other weather phenomena which are reported when they occur.

SQ	squall
SS	sandstorm
DS	duststorm
PO	dust/sand whirls
FC	funnel cloud
+FC	tornado/ waterspout

Examples:

TSRA	thunderstorm with moderate rain
+SN	heavy snow
–RA FG	light rain and fog
BRHZ	mist and haze visibility 5/8 mile or greater
FZDZ	freezing drizzle
VCSH	rain shower in the vicinity
+SHRASNPL	heavy rain showers snow ice pellets intensity indicator refers to the predominant rain

9. Sky Condition. The sky condition as reported in METAR represents a significant change from the way sky condition is currently reported. In METAR, sky condition is reported in the format

Amount/Height/ Type or Indefinite Ceiling/Height

(a) Amount. The amount of sky cover is reported in eighths of sky cover using the contractions

SKC	clear no clouds
FEW	>0 to $\frac{2}{8}$
SCT	scattered $\frac{3}{8}$ s to $\frac{4}{8}$ s of clouds
BKN	broken $\frac{5}{8}$ s to $\frac{7}{8}$ s of clouds
OVC	overcast $\frac{8}{8}$ s clouds
CB	Cumulonimbus when present
TCU	Towering cumulus when present

NOTE–

1. “SKC” will be reported at manual stations. “CLR” will be used at automated stations when no clouds below 12,000 feet are reported.

2. A ceiling layer is not designated in the METAR code. For aviation purposes, the ceiling is the lowest broken or overcast layer, or vertical visibility into an obscuration. Also there is no provision for reporting thin layers in the METAR code. When clouds are thin, that layer must be reported as if it were opaque.

(b) Height. Cloud bases are reported with three digits in hundreds of feet above ground level AGL. Clouds above 12 000 feet cannot be reported by an automated station

(c) (Type). If Towering Cumulus Clouds TCU or Cumulonimbus Clouds CB are present they are reported after the height which represents their base

EXAMPLE–

(Reported as) SCT025TCU BKN080 BKN250 (spoken as) “TWO THOUSAND FIVE HUNDRED SCATTERED TOWERING CUMULUS, CEILING EIGHT THOUSAND BROKEN, TWO FIVE THOUSAND BROKEN.”

(Reported as) SCT008 OVC012CB (spoken as) “EIGHT HUNDRED SCATTERED CEILING ONE THOUSAND TWO HUNDRED OVERCAST CUMULONIMBUS CLOUDS.”

(d) Vertical Visibility (indefinite ceiling height). The height into an indefinite ceiling is preceded by VV and followed by three digits indicating the vertical visibility in hundreds of feet. This layer indicates total obscuration

EXAMPLE–

$\frac{1}{8}$ SM FG VV006 – visibility one eighth, fog, indefinite ceiling six hundred.

(e) Obscurations are reported when the sky is partially obscured by a ground-based phenomena by indicating the amount of obscuration as FEW SCT BKN followed by three figures 000. In remarks the obscuring phenomenon precedes the amount of obscuration and three figures

EXAMPLE–

BKN000 (in body) “sky partially obscured”
FU BKN000 (in remarks) . . . “smoke obscuring five–to seven–eighths of the sky”

(f) When sky conditions include a layer aloft other than clouds such as smoke or haze the type of phenomena sky cover and height are shown in remarks

EXAMPLE–

BKN020 (in body) “ceiling two thousand broken”
RMK FU BKN020 “broken layer of smoke aloft, based at two thousand”

(g) Variable ceiling. When a ceiling is below three thousand and is variable the remark CIG will be shown followed with the lowest and highest ceiling heights separated by a V

EXAMPLE–

CIG 005V010 “ceiling variable between five hundred and one thousand”

(h) Second site sensor. When an automated station uses meteorological discontinuity sensors remarks will be shown to identify site specific sky conditions which differ and are lower than conditions reported in the body

EXAMPLE–

CIG 020 RY11 “ceiling two thousand at runway one one”

(i) Variable cloud layer. When a layer is varying in sky cover remarks will show the variability range. If there is more than one cloud layer the variable layer will be identified by including the layer height

EXAMPLE–

SCT V BKN “scattered layer variable to broken”
BKN025 V OVC “broken layer at two thousand five hundred variable to overcast”

(j) Significant clouds. When significant clouds are observed they are shown in remarks along with the specified information as shown below

(1) Cumulonimbus CB or Cumulonimbus Mammatus CBMAM distance if known direction from the station and direction of movement if known If the clouds are beyond 10 miles from the airport DSNT will indicate distance

EXAMPLE–

CB W MOV E “cumulonimbus west moving east”
CBMAM DSNT S “cumulonimbus mammatus distant south”

(2) Towering Cumulus TCU location if known or direction from the station

EXAMPLE–

TCU OHD “towering cumulus overhead”
TCU W “towering cumulus west”

(3) Altocumulus Castellanus ACC Stratus cumulus Standing Lenticular SCSL Altocumulus Standing Lenticular ACSL Cirrocumulus Standing Lenticular CCSL or rotor clouds describing the clouds if needed and the direction from the station

EXAMPLE–

ACC W “altocumulus castellanus west”
ACSL SW–S “standing lenticular altocumulus southwest through south”
APRNT ROTOR CLD S “apparent rotor cloud south”
CCSL OVR MTE “standing lenticular cirrocumulus over the mountains east”

10. Temperature/Dew Point. Temperature and dew point are reported in total digit groups in degrees Celsius separated by a solidus / Temperatures below zero are prefixed with an M If the temperature is available but the dew point is missing the temperature is shown followed by a solidus If the temperature is missing the group is omitted from the report

EXAMPLE–

15/08 “temperature one five, dew point 8”
00/M02 “temperature zero, dew point minus 2”
M05/ “temperature minus five, dew point missing”

11. Altimeter. Altimeter settings are reported in a four digit format in inches of mercury prefixed with an A to denote the units of pressure

EXAMPLE–

A2995 – “Altimeter two nine nine five”

12. Remarks. Remarks will be included in all observations when appropriate The contraction RMK denotes the start of the remarks section of a METAR report

Except for precipitation phenomena located within 5 statute miles of the point of observation will be reported as at the station Phenomena between 5 and 10 statute miles will be reported in the vicinity VC Precipitation not occurring at the point of observation but within 10 statute miles is also reported as in the vicinity VC Phenomena beyond 10 statute miles will be shown as distant DSNT Distances are in statute miles except for automated lightning remarks which are in nautical miles Movement of clouds or weather will be indicated by the direction to and which the phenomena is moving

(a) There are two categories of remarks

(1) Automated manual and plain language

(2) Additive and automated maintenance data

(b) Automated, Manual, and Plain Language. This group of remarks may be generated from either manual or automated weather reporting stations and generally elaborate on parameters reported in the body of the report Plain language remarks are only provided by manual stations

(1) Volcanic eruptions

(2) Tornado Funnel Cloud Waterspout

(3) Station Type AO1 or AO2

(4) PK WND

(5) WSHFT FROPA

(6) TWR VIS or SFC VIS

(7) VRB VIS

(8) Sector VIS

(9) VIS @ 2nd Site

(10) fire LTG type loc

- (11) Beginning/Ending of Precipitation/
TSTMS
- (12) TSTM Location MVMT
- (13) Hailstone Size GR
- (14) Virga
- (15) VRB CIG height
- (16) Obscuration
- (17) VRB Sky Condition
- (18) Significant Cloud Types
- (19) Ceiling Height 2nd Location
- (20) PRESFR PRESRR
- (21) Sea-Level Pressure
- (22) ACFT Mishap not transmitted
- (23) NOSPECI
- (24) SNINCR
- (25) Other SIG Info
- (c) Additive and Automated Maintenance Data.**
- (1) Hourly Precipitation
- (2) 3- and 6-Hour Precipitation Amount
- (3) 24-Hour Precipitation
- (4) Sno Depth on Ground
- (5) Water Equivalent of Sno
- (6) Cloud Type
- (7) Duration of Sunshine
- (8) Hourly Temperature/Dew Point
Tenths
- (9) 6-Hour Maximum Temperature
- (10) 6-Hour Minimum Temperature
- (11) 24-Hour Maximum/Minimum
Temperature
- (12) Pressure Tendency
- (13) Sensor Status
PWINO
F RANO
TSNO
RVRNO

PNO
VISNO

Examples of METAR reports and explanation:

METAR KBNA 281250 33018KT 290V360
1/2SM R31/2700FT SN BLSN FG VV008 00/M03
A2991 RMK RAE42SNB42

METAR	aviation routine weather report
KBNA	Nashville TN
281250Z	date 28 th time 1250 UTC
(no modifier)	This is a manually generated report due to the absence of AUTO and AO1 or AO2 in remarks
33018KT	wind three three zero at one eight
290V360	wind variable between two nine zero and three six zero
1/2SM	visibility one half
R31/2700FT	Runway three one RVR two thousand seven hundred
SN	moderate snow
BLSN FG	visibility obscured by blowing snow and fog
VV008	indefinite ceiling eight hundred
00/M03	temperature zero dew point minus three
A2991	altimeter two nine nine one
RMK	remarks
RAE42	rain ended at four two
SNB42	snow began at four two

METAR KSFO 041453 AUTO VRB02KT 3SM
BR CLR 15/12 A3012 RMK AO2

METAR	aviation routine weather report
KSFO	San Francisco CA
041453Z	date 4 th time 1453 UTC
AUTO	fully automated no human intervention
VRB02KT	wind variable at two
3SM	visibility three
BR	visibility obscured by mist
CLR	no clouds below one two thousand
15/12	temperature one five dew point one two

A3012 altimeter three zero one two
RMK remarks
AO2 this automated station has a
 weather discriminator for
 precipitation

SPECI KCVG 152224 28024G36KT 3/4SM
 TSRA BKN008 OVC020CB 28/23 A3000 RMK
 TSRAB24 TS W MOV E

SPECI nonroutine aviation special
 weather report
KCVG Cincinnati OH
152228Z date 15th time 2228 UTC
(no modifier) This is a manually generated
 report due to the absence of
 AUTO and AO1 or AO2
 in remarks
28024G36KT wind two eight zero at
 two four gusts three six
3/4SM visibility three fourths
+TSRA thunderstorms heavy rain
BKN008 ceiling eight hundred broken
OVC020CB two thousand overcast
 cumulonimbus clouds
28/23 temperature two eight
 dew point two three
A3000 altimeter three zero zero zero
RMK remarks
TSRAB24 thunderstorm and rain began
 at two four
TS W MOV E thunderstorm west moving
 east

c. Aerodrome Forecast (TAF). A concise statement of the expected meteorological conditions at an airport during a specified period. At most locations TAFs have a 24-hour forecast period. However TAFs for some locations have a 30-hour forecast period. These forecast periods may be shorter in the case of an amended TAF. TAFs use the same codes as METAR weather reports. They are scheduled four times daily for 24-hour periods beginning at 0000, 0600, 1200, and 1800.

Forecast times in the TAF are depicted in two ways. The first is a 6-digit number to indicate a specific point in time consisting of a two-digit date, two-digit hour, and two-digit minute, such as issuance time or FM. The second is a pair of four-digit numbers separated by a / to indicate a

beginning and end for a period of time. In this case, each four-digit pair consists of a two-digit date and a two-digit hour.

TAFs are issued in the following format:

TYPE OF REPORT/ICAO STATION IDENTIFIER/
 DATE AND TIME OF ORIGIN/VALID PERIOD
 DATE AND TIME/FORECAST METEOROLOGICAL
 CONDITIONS

NOTE—

The “/” above and in the following descriptions are for separation purposes in this publication and do not appear in the actual TAFs.

TAF KORD 051130 0512/0618 14008KT 5SM BR
 BKN030

TEMPO 0513/0516 1 1/2SM BR

FM051600 16010KT P6SM SKC

FM052300 20013G20KT 4SM SHRA OVC020

PROB40 0600/0606 2SM TSRA OVC008CB

BECMG 0606/0608 21015KT P6SM NSW

SCT040

TAF format observed in the above example

TAF type of report

KORD ICAO station identifier

051130 date and time of origin/issuance time

0512/0618 valid period date and times

14008KT 5SM BR BKN030 forecast meteorological conditions

Explanation of TAF elements

1. Type of Report. There are two types of TAF issuances: a routine forecast issuance (TAF) and an amended forecast (TAF AMD). An amended TAF is issued when the current TAF no longer adequately describes the ongoing weather or the forecaster feels the TAF is not representative of the current or expected weather. Corrected (COR) or delayed (RTD) TAFs are identified only in the communications header, which precedes the actual forecasts.

2. ICAO Station Identifier. The TAF code uses ICAO 4-letter location identifiers as described in the METAR section.

3. Date and Time of Origin. This element is the date and time the forecast is actually prepared. The format is a two-digit date and four-digit time followed without a space by the letter

4. Valid Period Date and Time. The UTC valid period of the forecast consists of two four-digit

sets separated by a /. The first four-digit set is a four-digit date followed by the four-digit beginning hour and the second four-digit set is a four-digit date followed by the four-digit ending hour. Although most airports have a 24-hour TAF, a select number of airports have a 30-hour TAF. In the case of an amended forecast or a forecast which is corrected or delayed, the valid period may be for less than 24 hours. Where an airport or terminal operates on a part-time basis, less than 24 hours/day, the TAFs issued for those locations will have the abbreviated statement AMD NOT SKED added to the end of the forecasts. The time observations are scheduled to end and/or resume will be indicated by expanding the AMD NOT SKED statement. Expanded statements will include:

- (a) Observation ending time AFT DDH Hm for example AFT 120200
- (b) Scheduled observations resumption time TIL DDHHm for example TIL 171200 or
- (c) Period of observation unavailability DDHH/DDHH for example 2502/2512

5. Forecast Meteorological Conditions. This is the body of the TAF. The basic format is:

WIND/VISIBILITY /WEATHER/SK
CONDITION/OPTIONAL DATA WIND SHEAR

The wind, visibility, and sky condition elements are always included in the initial time group of the forecast. Weather is included only if significant to aviation. If a significant lasting change in any of the elements is expected during the valid period, a new time period with the changes is included. It should be noted that with the exception of a FM group, the new time period will include only those elements which are expected to change, i.e., if a lowering of the visibility is expected but the wind is expected to remain the same, the new time period reflecting the lower visibility would not include a forecast wind. The forecast wind would remain the same as in the previous time period. Any temporary conditions expected during a specific time period are included with that time period. The following describes the elements in the above format:

(a) **Wind.** This five or six digit group includes the expected wind direction (first 3 digits) and speed (last 2 digits or 3 digits if 100 knots or greater). The contraction KT follows to denote the

units of wind speed. Wind gusts are noted by the letter G appended to the wind speed followed by the highest expected gust. A variable wind direction is noted by VRB where the three digit direction usually appears. A calm wind (3 knots or less) is forecast as 00000KT.

EXAMPLE–

18010KT wind one eight zero at one zero (wind is blowing from 180).

35012G20KT wind three five zero at one two gust two zero.

(b) **Visibility.** The expected prevailing visibility up to and including 6 miles is forecast in statute miles, including fractions of miles, followed by SM to note the units of measure. Expected visibilities greater than 6 miles are forecast as P6SM, plus six statute miles.

EXAMPLE–

$\frac{1}{2}$ SM – visibility one-half

4SM – visibility four

P6SM – visibility more than six

(c) **Weather Phenomena.** The expected weather phenomena is coded in TAF reports using the same format, qualifiers, and phenomena contractions as METAR reports, except UP. Obscurations to vision will be forecast whenever the prevailing visibility is forecast to be 6 statute miles or less. If no significant weather is expected to occur during a specific time period in the forecast, the weather phenomena group is omitted for that time period. If, after a time period in which significant weather phenomena has been forecast, a change to a forecast of no significant weather phenomena occurs, the contraction NSW (No Significant Weather) will appear as the weather group in the new time period. NSW is included only in TEMPO groups.

NOTE–

It is very important that pilots understand that NSW only refers to weather phenomena, i.e., rain, snow, drizzle, etc. Omitted conditions, such as sky conditions, visibility, winds, etc., are carried over from the previous time group.

(d) **Sky Condition.** TAF sky condition forecasts use the METAR format described in the METAR section. Cumulonimbus clouds (CB) are the only cloud type forecast in TAFs. When clear skies are forecast, the contraction SKC will always be used. The contraction CLR is never used in the TAF. When the sky is obscured due to a surface-based phenomenon, vertical visibility (VV) into the obscuration is forecast. The format for

vertical visibility is VV followed by a three-digit height in hundreds of feet

NOTE–

As in METAR, ceiling layers are not designated in the TAF code. For aviation purposes, the ceiling is the lowest broken or overcast layer or vertical visibility into a complete obscuration.

SKC	sky clear
SCT005 BKN025CB	five hundred scattered ceiling to thousand five hundred broken cumulonimbus clouds
VV008	indefinite ceiling eight hundred

(e) Optional Data (Wind Shear). Wind shear is the forecast of nonconvective low level winds up to 2 000 feet. The forecast includes the letters WS followed by the height of the wind shear the wind direction and wind speed at the indicated height and the ending letters KT knots. Height is given in hundreds of feet AGL up to and including 2 000 feet. Wind shear is encoded with the contraction WS followed by a three-digit height slant character / and winds at the height indicated in the same format as surface winds. The wind shear element is omitted if not expected to occur.

WS010/18040KT – LOW LEVEL WIND SHEAR AT ONE THOUSAND WIND ONE EIGHT ZERO AT FOUR ZERO

d. Probability Forecast. The probability or chance of thunderstorms or other precipitation events occurring along with associated weather conditions and visibility and sky conditions. The PROB30 group is used when the occurrence of thunderstorms or precipitation is 30–39 and the PROB40 group is used when the occurrence of thunderstorms or precipitation is 40–49. This is followed by two four-digit groups separated by a / giving the beginning date and hour and the ending date and hour of the time period during which the thunderstorms or precipitation are expected.

NOTE–

NWS does not use PROB 40 in the TAF. However U.S. Military generated TAFS may include PROB40. PROB30 will not be shown during the first nine hours of a NWS forecast.

EXAMPLE–

PROB40 2221/2302 1/2SM +TSRA “chance between 2100Z and 0200Z of visibility one-half statute mile in thunderstorms and heavy rain.”

PROB30 3010/3014 1SM RASN . “chance between 1000Z and 1400Z of visibility one statute mile in mixed rain and snow.”

e. Forecast Change Indicators. The following change indicators are used when either a rapid gradual or temporary change is expected in some or all of the forecast meteorological conditions. Each change indicator marks a time group within the TAF report.

1. From FM group. The FM group is used when a rapid change usually occurring in less than one hour in prevailing conditions is expected. Typically a rapid change of prevailing conditions to more or less a completely new set of prevailing conditions is associated with a synoptic feature passing through the terminal area cold or warm frontal passage. Appended to the FM indicator is the six-digit date hour and minute the change is expected to begin and continues until the next change group or until the end of the current forecast. A FM group will mark the beginning of a new line in a TAF report indented 5 spaces. Each FM group contains all the required elements—wind visibility weather and sky condition. Weather will be omitted in FM groups when it is not significant to aviation. FM groups will not include the contraction NSW.

EXAMPLE–

FM210100 14010KT P6SM SKC – “after 0100Z on the 21st, wind one four zero at one zero, visibility more than six, sky clear.”

2. Becoming BECMG group. The BECMG group is used when a gradual change in conditions is expected over a longer time period usually two hours. The time period when the change is expected is two four-digit groups separated by a / with the beginning date and hour and ending date and hour of the change period which follows the BECMG indicator. The gradual change will occur at an unspecified time within this time period. Only the changing forecast meteorological conditions are included in BECMG groups. The omitted conditions are carried over from the previous time group.

NOTE–

The NWS does not use *BECMG* in the TAF.

EXAMPLE–

OVC012 BECMG 0114/0116 BKN020 – “ceiling one thousand two hundred overcast. Then a gradual change to ceiling two thousand broken between 1400Z on the 1st and 1600Z on the 1st.”

3. Temporary TEMPO group The TEMPO group is used for any conditions in wind, visibility, weather, or sky condition which are expected to last for generally less than an hour at a time, occasional, and are expected to occur during less than half the time period. The TEMPO indicator is followed by two four-digit groups separated by a slash. The first

four digit group gives the beginning date and hour and the second four digit group gives the ending date and hour of the time period during which the temporary conditions are expected. Only the changing forecast meteorological conditions are included in TEMPO groups. The omitted conditions are carried over from the previous time group.

EXAMPLE–

1. SCT030 TEMPO 0519/0523 BKN030 – “three thousand scattered with occasional ceilings three thousand broken between 1900Z on the 5th and 2300Z on the 5th.”

2. 4SM HZ TEMPO 1900/1906 2SM BR HZ – “visibility four in haze with occasional visibility two in mist and haze between 0000Z on the 19th and 0600Z on the 19th.”

Section 2. Altimeter Setting Procedures

7-2-1. General

a. The accuracy of aircraft altimeters is subject to the following factors

1. Nonstandard temperatures of the atmosphere
2. Nonstandard atmospheric pressure
3. Aircraft static pressure systems position error and
4. Instrument error

b. **EXTREME CAUTION SHOULD BE EXERCISED WHEN FLYING IN PROXIMITY TO OBSTRUCTIONS OR TERRAIN IN LOW TEMPERATURES AND PRESSURES.** This is especially true in extremely cold temperatures that cause a large differential between the Standard Day temperature and actual temperature. This circumstance can cause serious errors that result in the aircraft being significantly lower than the indicated altitude.

NOTE—

Standard temperature at sea level is 15 degrees Celsius (59 degrees Fahrenheit). The temperature gradient from sea level is minus 2 degrees Celsius (3.6 degrees Fahrenheit) per 1,000 feet. Pilots should apply corrections for static pressure systems and/or instruments, if appreciable errors exist.

c. The adoption of a standard altimeter setting at the higher altitudes eliminates station barometer errors, some altimeter instrument errors, and errors caused by altimeter settings derived from different geographical sources.

7-2-2. Procedures

The cruising altitude or flight level of aircraft must be maintained by reference to an altimeter which must be set when operating

a. Below 18,000 feet MSL.

1. When the barometric pressure is 31.00 inches Hg. or less. To the current reported altimeter setting of a station along the route and within 100 NM of the aircraft, or if there is no station within this area, the current reported altimeter setting of an appropriate available station. When an aircraft

is en route on an instrument flight plan, air traffic controllers will furnish this information to the pilot at least once while the aircraft is in the controllers area of jurisdiction. In the case of an aircraft not equipped with a radio, set to the elevation of the departure airport or use an appropriate altimeter setting available prior to departure.

2. When the barometric pressure exceeds 31.00 inches Hg. The following procedures will be placed in effect by NOTAM defining the geographic area affected:

(a) For all aircraft. Set 31.00 inches for en route operations below 18,000 feet MSL. Maintain this setting until beyond the affected area or until reaching final approach segment. At the beginning of the final approach segment, the current altimeter setting will be set, if possible. If not possible, 31.00 inches will remain set throughout the approach. Aircraft on departure or missed approach will set 31.00 inches prior to reaching any mandatory/crossing altitude or 1,500 feet AGL, whichever is lower. Air traffic control will issue actual altimeter settings and advise pilots to set 31.00 inches in their altimeters for en route operations below 18,000 feet MSL in affected areas.

(b) During preflight, barometric altimeters must be checked for normal operation to the extent possible.

(c) For aircraft with the capability of setting the current altimeter setting and operating into airports with the capability of measuring the current altimeter setting, no additional restrictions apply.

(d) For aircraft operating VFR, there are no additional restrictions, however, extra diligence in flight planning and in operating in these conditions is essential.

(e) Airports unable to accurately measure barometric pressures above 31.00 inches of Hg will report the barometric pressure as missing or in excess of 31.00 inches of Hg. Flight operations to and from those airports are restricted to VFR weather conditions.

(f) For aircraft operating IFR and unable to set the current altimeter setting the following restrictions apply

(1) To determine the suitability of departure alternate airports, destination airports, and destination alternate airports, increase ceiling requirements by 100 feet and visibility requirements by $\frac{1}{4}$ statute mile for each $\frac{1}{10}$ of an inch of Hg or any portion thereof over 31.00 inches. These adjusted values are then applied in accordance with the requirements of the applicable operating regulations and operations specifications.

EXAMPLE–

Destination altimeter is 31.28 inches, ILS DH 250 feet (200– $\frac{1}{2}$). When flight planning, add 300– $\frac{3}{4}$ to the weather requirements which would become 500– $1\frac{1}{4}$.

(2) On approach 31.00 inches will remain set. Decision height (DH) or minimum descent altitude must be deemed to have been reached when the published altitude is displayed on the altimeter.

NOTE–

Although visibility is normally the limiting factor on an approach, pilots should be aware that when reaching DH the aircraft will be higher than indicated. Using the example above the aircraft would be approximately 300 feet higher.

(3) These restrictions do not apply to authorized Category II and III ILS operations nor do they apply to certificate holders using approved QFE altimetry systems.

(g) The FAA Regional Flight Standards Division Manager of the affected area is authorized to approve temporary waivers to permit emergency resupply or emergency medical service operation.

b. At or above 18,000 feet MSL. To 29.92 inches of mercury standard setting. The lowest usable flight level is determined by the atmospheric pressure in the area of operation as shown in TBL 7–2–1.

TBL 7–2–1

Lowest Usable Flight Level

Altimeter Setting (Current Reported)	Lowest Usable Flight Level
29.92 or higher	180
29.91 to 29.42	185
29.41 to 28.92	190
28.91 to 28.42	195
28.41 to 27.92	200

c. Where the minimum altitude as prescribed in 14 CFR Section 91.159 and 14 CFR Section 91.177 is above 18,000 feet MSL, the lowest usable flight level must be the flight level equivalent of the minimum altitude plus the number of feet specified in TBL 7–2–2.

TBL 7–2–2

Lowest Flight Level Correction Factor

Altimeter Setting	Correction Factor
29.92 or higher	none
29.91 to 29.42	500 feet
29.41 to 28.92	1000 feet
28.91 to 28.42	1500 feet
28.41 to 27.92	2000 feet
27.91 to 27.42	2500 feet

EXAMPLE–

The minimum safe altitude of a route is 19,000 feet MSL and the altimeter setting is reported between 29.92 and 29.42 inches of mercury, the lowest usable flight level will be 195, which is the flight level equivalent of 19,500 feet MSL (minimum altitude plus 500 feet).

7-2-3. Altimeter Errors

a. Most pressure altimeters are subject to mechanical elastic temperature and installation errors. Detailed information regarding the use of pressure altimeters is found in the Instrument Flying Handbook Chapter IV. Although manufacturing and installation specifications as well as the periodic test and inspections required by regulations 14 CFR Part 43 Appendix E act to reduce these errors, any scale error may be observed in the following manner:

1. Set the current reported altimeter setting on the altimeter setting scale.

2. Altimeter should not read field elevation if you are located on the same reference level used to establish the altimeter setting.

3. Note the variation between the known field elevation and the altimeter indication. If this variation is in the order of plus or minus 75 feet, the accuracy of the altimeter is questionable and the problem should be referred to an appropriately rated repair station for evaluation and possible correction.

b. Once in flight, it is very important to obtain frequently current altimeter settings en route. If you do not reset your altimeter when flying *from* an area of high pressure into an area of low pressure, *your aircraft will be closer to the surface than your altimeter indicates*. An inch error in the altimeter setting equals 1,000 feet of altitude. To quote an old saying: **“GOING FROM A HIGH TO A LOW, LOOK OUT BELOW.”**

c. Temperature also has an effect on the accuracy of altimeters and your altitude. The crucial values to consider are standard temperature versus the ambient at altitude temperature. It is this difference that causes the error in indicated altitude. When the air is

warmer than standard, you are higher than your altimeter indicates. Subsequently, when the air is colder than standard, you are lower than indicated. It is the magnitude of this difference that determines the magnitude of the error. When flying into a cooler air mass while maintaining a constant indicated altitude, you are losing true altitude. However, flying into a cooler air mass does not necessarily mean you will be lower than indicated if the *difference* is still on the plus side. For example, while flying at 10,000 feet, here **STANDARD** temperature is -5 degrees Celsius. If the outside air temperature cools from 5 degrees C to 0 degrees C, the temperature error will nevertheless cause the aircraft to be **HIGHER** than indicated. It is the extreme cold difference that normally would be of concern to the pilot. Also, when flying in cold conditions over mountainous country, the pilot should exercise caution in flight planning both in regard to route and altitude to ensure adequate en route and terminal area terrain clearance.

d. TBL 7-2-3, derived from ICAO formulas, indicates how much error can exist when the temperature is extremely cold. To use the table, find the reported temperature in the left column, then read across the top row to locate the height above the airport/reporting station, i.e., subtract the airport/reporting elevation from the intended flight altitude. The intersection of the column and row is how much *lower* the aircraft may actually be as a result of the possible cold temperature induced error.

e. The possible result of the above example should be obvious, particularly if operating at the minimum altitude or when conducting an instrument approach. When operating in extreme cold temperatures, pilots may wish to compensate for the reduction in terrain clearance by adding a cold temperature correction.

TBL 7-2-3
ICAO Cold Temperature Error Table
Height Above Airport in Feet

	200	300	400	500	600	700	800	900	1000	1500	2000	3000	4000	5000
Reported Temp °C	+10	10	10	10	10	20	20	20	20	20	30	40	60	90
	0	20	20	30	30	40	40	50	50	60	90	120	170	280
	-10	20	30	40	50	60	70	80	90	100	150	200	290	490
	-20	30	50	60	70	90	100	120	130	140	210	280	420	710
	-30	40	60	80	100	120	140	150	170	190	280	380	570	950
	-40	50	80	100	120	150	170	190	220	240	360	480	720	1210
	-50	60	90	120	150	180	210	240	270	300	450	590	890	1500

EXAMPLE-

Temperature -10 degrees Celsius, and the aircraft altitude is 1,000 feet above the airport elevation. The chart shows that the reported current altimeter setting may place the aircraft as much as 100 feet below the altitude indicated by the altimeter.

7-2-4. High Barometric Pressure

a. Cold dry air masses may produce barometric pressures in excess of 31.00 inches of Mercury and many altimeters do not have an accurate means of being adjusted for settings of these levels. When the altimeter cannot be set to the higher pressure setting the aircraft actual altitude will be higher than the altimeter indicates.

REFERENCE-
 AIM, Paragraph 7-2-3 Altimeter Errors.

b. When the barometric pressure exceeds 31.00 inches air traffic controllers will issue the actual altimeter setting and

1. **En Route/Arrivals.** Advise pilots to remain set on 31.00 inches until reaching the final approach segment.

2. **Departures.** Advise pilots to set 31.00 inches prior to reaching any mandatory/crossing altitude or 1,500 feet whichever is lower.

c. The altimeter error caused by the high pressure will be in the opposite direction to the error caused by the cold temperature.

7-2-5. Low Barometric Pressure

When abnormally low barometric pressure conditions occur below 28,000 feet flight operations by aircraft unable to set the actual altimeter setting are not recommended.

NOTE-

The true altitude of the aircraft is **lower** than the indicated altitude if the pilot is unable to set the actual altimeter setting.

Section 3. Wake Turbulence

7-3-1. General


a. Every aircraft generates a wake while in flight. Initially, when pilots encountered this wake in flight, the disturbance was attributed to prop wash. It is known, however, that this disturbance is caused by a pair of counter-rotating vortices trailing from the wing tips. The vortices from larger aircraft pose problems to encountering aircraft. For instance, the wake of these aircraft can impose rolling moments exceeding the roll-control authority of the encountering aircraft. Further turbulence generated within the vortices can damage aircraft components and equipment if encountered at close range. The pilot must learn to envision the location of the vortex wake generated by larger transport category aircraft and adjust the flight path accordingly.

b. During ground operations and during takeoff, jet engine blast thrust stream turbulence can cause damage and upsets if encountered at close range. Exhaust velocity versus distance studies at various thrust levels have shown a need for light aircraft to maintain an adequate separation behind large turbojet aircraft. Pilots of larger aircraft should be particularly careful to consider the effects of their jet blast on other aircraft, vehicles, and maintenance equipment during ground operations.

7-3-2. Vortex Generation

Lift is generated by the creation of a pressure differential over the wing surface. The lowest pressure occurs over the upper wing surface and the highest pressure under the wing. This pressure differential triggers the roll up of the airflow aft of the wing, resulting in swirling air masses trailing downstream of the wing tips. After the roll up is completed, the wake consists of two counter-rotating cylindrical vortices. See FIG 7-3-1. Most of the energy is within a few feet of the center of each vortex, but pilots should avoid a region within about 100 feet of the vortex core.

FIG 7-3-1
Wake Vortex Generation

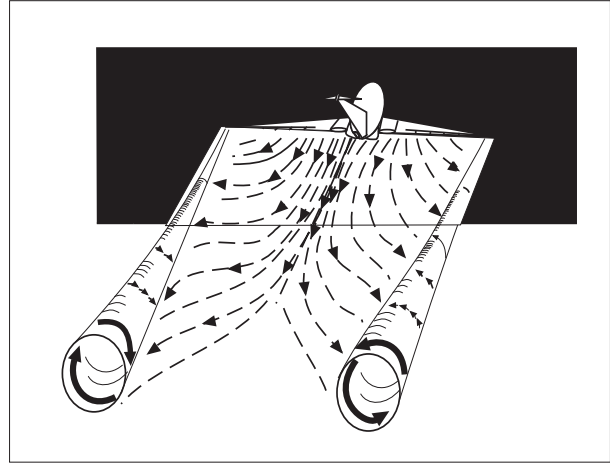

7-3-3. Vortex Strength


a. The strength of the vortex is governed by the weight, speed, and shape of the wing of the generating aircraft. The vortex characteristics of any given aircraft can also be changed by extension of flaps or other wing configuring devices as well as by change in speed. However, as the basic factor is weight, the vortex strength increases proportionately. Peak vortex tangential speeds exceeding 300 feet per second have been recorded. The greatest vortex strength occurs when the generating aircraft is HEAVY, CLEAN, and SLOW.

b. Induced Roll

1. In rare instances, a wake encounter could cause inflight structural damage of catastrophic proportions. However, the usual hazard is associated with induced rolling moments, which can exceed the roll-control authority of the encountering aircraft. In flight experiments, aircraft have been intentionally flown directly up trailing vortex cores of larger aircraft. It has been shown that the capability of an aircraft to counteract the roll imposed by the wake vortex primarily depends on the wingspan and counter-control responsiveness of the encountering aircraft.

2. Counter control is usually effective and induced roll minimal in cases where the wingspan and ailerons of the encountering aircraft extend beyond the rotational flow field of the vortex. It is more difficult for aircraft with short wingspan relative to the generating aircraft to counter the imposed roll induced by vortex flow. Pilots of short span aircraft, even of the high performance type, must be especially alert to vortex encounters. See FIG 7-3-2.

**FIG 7-3-2
Wake Encounter Counter Control**

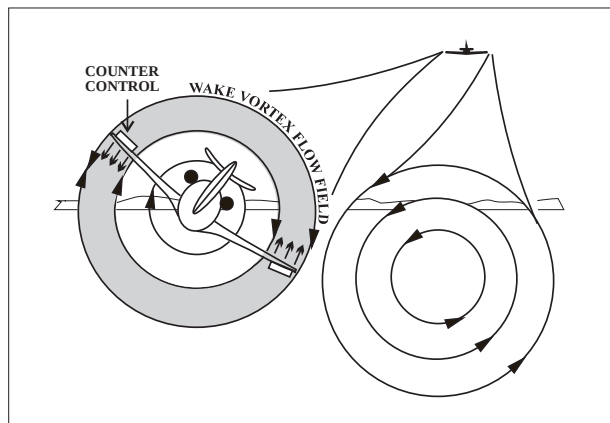

3. The wake of larger aircraft requires the respect of all pilots.

7-3-4. Vortex Behavior

a. Trailing vortices have certain behavioral characteristics which can help a pilot visualize the

wake location and thereby take avoidance precautions.

1. Vortices are generated from the moment aircraft leave the ground, since trailing vortices are a by-product of wing lift. Prior to takeoff or touchdown, pilots should note the rotation or touchdown point of the preceding aircraft. See FIG 7-3-3.

2. The vortex circulation is outward up and around the wing tips when viewed from either ahead or behind the aircraft. Tests with large aircraft have shown that the vortices remain spaced a bit less than a wingspan apart, drifting with the wind at altitudes greater than a wingspan from the ground. In view of this, if persistent vortex turbulence is encountered, a slight change of altitude and lateral position, preferably up and still, will provide a flight path clear of the turbulence.

3. Flight tests have shown that the vortices from larger transport category aircraft sink at a rate of several hundred feet per minute, slowing their descent and diminishing in strength with time and distance behind the generating aircraft. Atmospheric turbulence hastens breakup. Pilots should fly at or above the preceding aircraft's flight path, altering course as necessary to avoid the area behind and below the generating aircraft. See FIG 7-3-4. However, vertical separation of 1,000 feet may be considered safe.

4. When the vortices of larger aircraft sink close to the ground, within 100 to 200 feet, they tend to move laterally over the ground at a speed of 2 or 3 knots. See FIG 7-3-5.

**FIG 7-3-3
Wake Ends/Wake Begins**

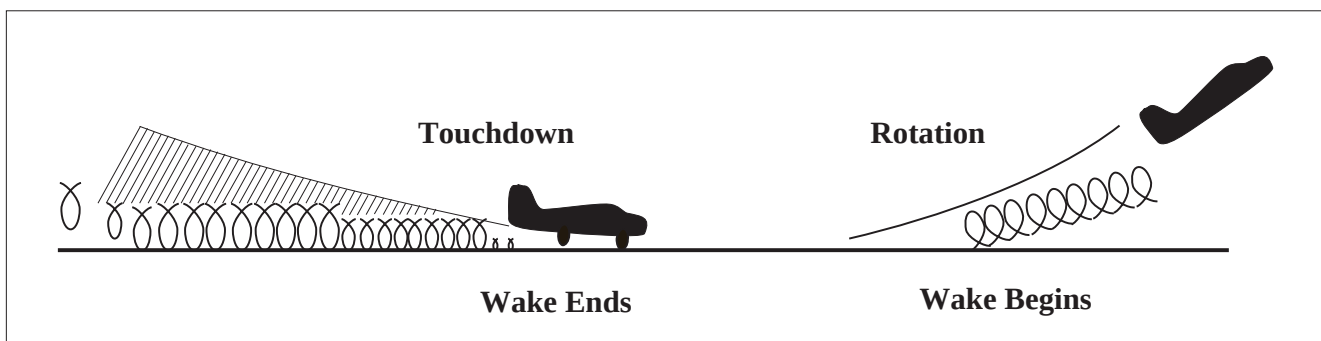


FIG 7-3-4
Vortex Flow Field

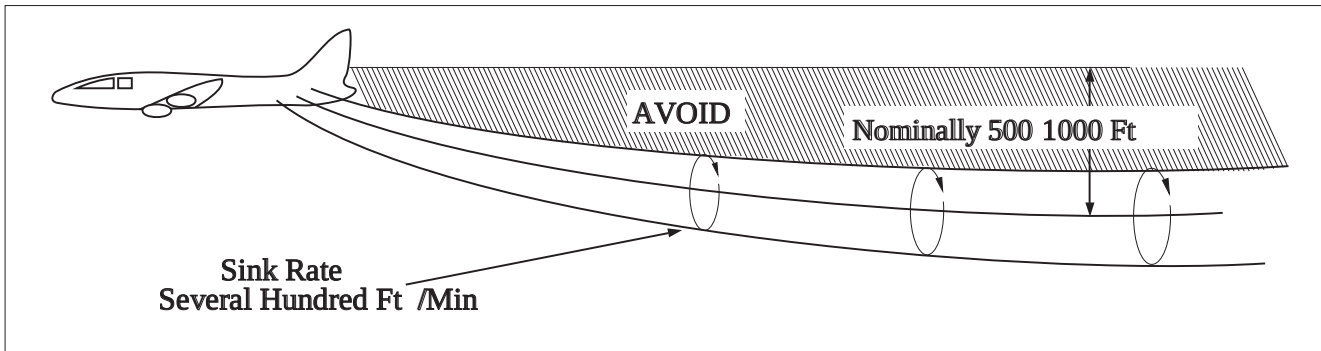


FIG 7-3-5
Vortex Movement Near Ground – No Wind


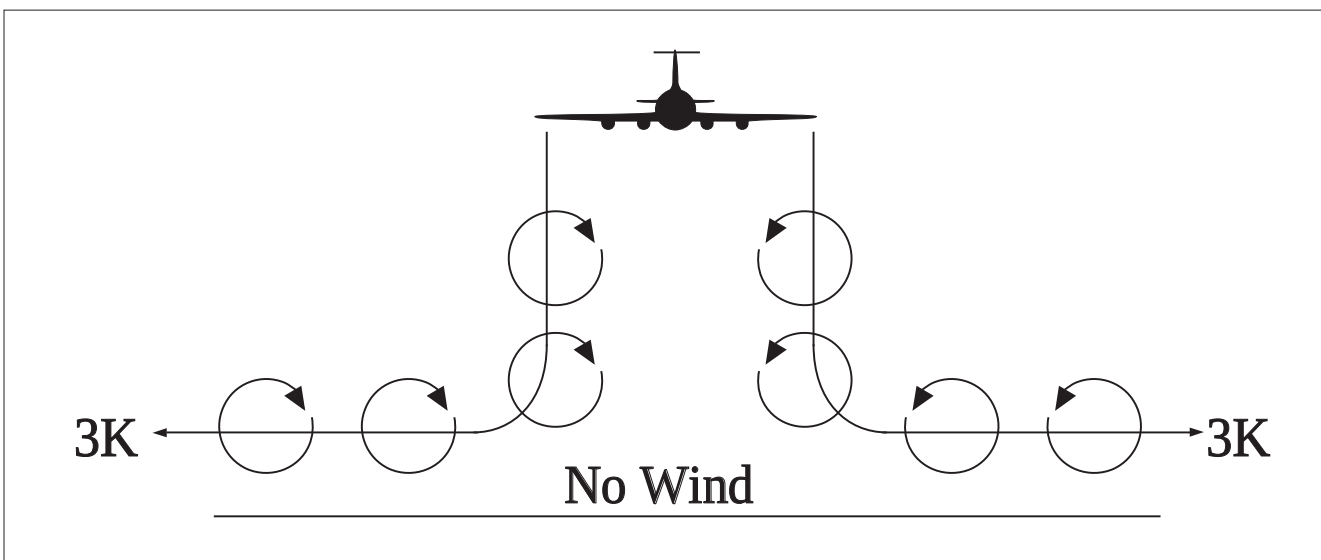


FIG 7-3-6
Vortex Movement Near Ground – with Cross Winds

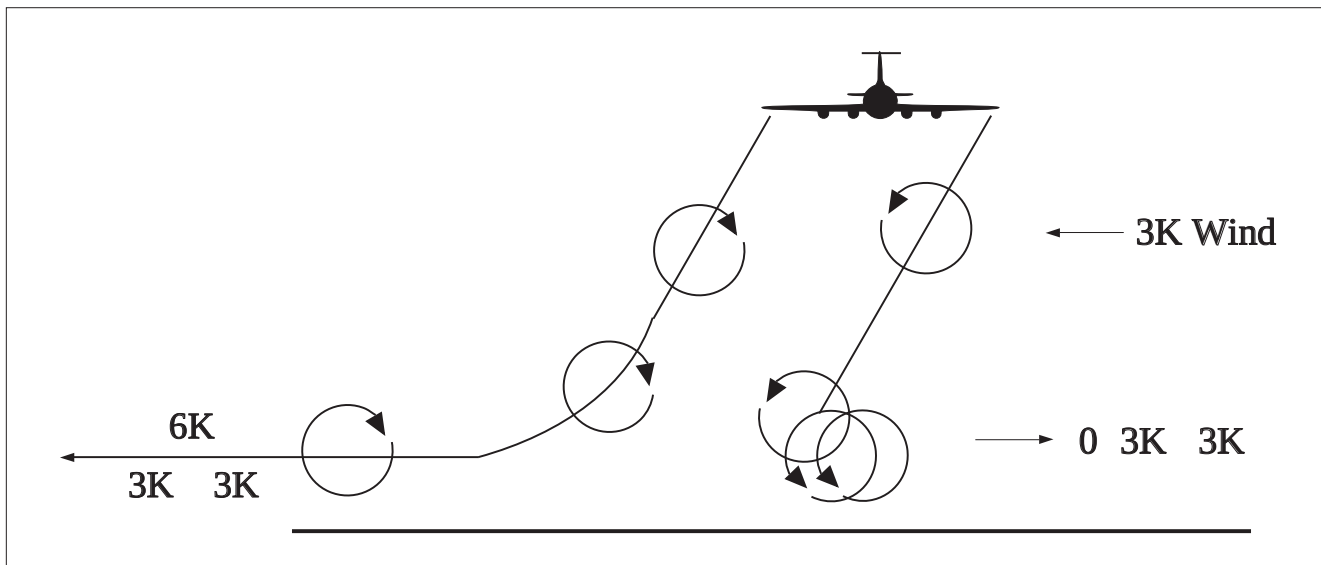


5. There is a small segment of the aviation community that have become convinced that wake vortices may bounce up to twice their nominal steady state height. With a 200-foot span aircraft, the bounce height could reach approximately 200 feet AGL. This conviction is based on a single unsubstantiated report of an apparent coherent vortical flow that was seen in the volume scan of a research sensor. No one can say what conditions cause vortex bouncing, how high they bounce at what angle they bounce, or how many times a vortex may bounce. On the other hand, no one can say for certain that vortices never bounce. Test data have shown that vortices can rise with the air mass in which they are embedded. Wind shear, particularly, can cause vortex flow field tilting. Also, ambient thermal lifting and orographic effects, rising terrain, or tree lines, can cause a vortex flow field to rise. Notwithstanding the foregoing, pilots are reminded that they should be alert at all times for possible wake

vortex encounters when conducting approach and landing operations. The pilot has the ultimate responsibility for ensuring appropriate separations and positioning of the aircraft in the terminal area to avoid the wake turbulence created by a preceding aircraft.

b. A crosswind will decrease the lateral movement of the upwind vortex and increase the movement of the downwind vortex. Thus, a light wind with a cross runway component of 1 to 5 knots could result in the upwind vortex remaining in the touchdown zone for a period of time and hasten the drift of the downwind vortex toward another runway. See FIG 7-3-6. Similarly, a tailwind condition can move the vortices of the preceding aircraft forward into the touchdown zone. THE LIGHT QUARTERING TAILWIND REQUIRES MAXIMUM CAUTION. Pilots should be alert to large aircraft upwind from their approach and takeoff flight paths. See FIG 7-3-7.

FIG 7-3-7
Vortex Movement in Ground Effect – Tailwind

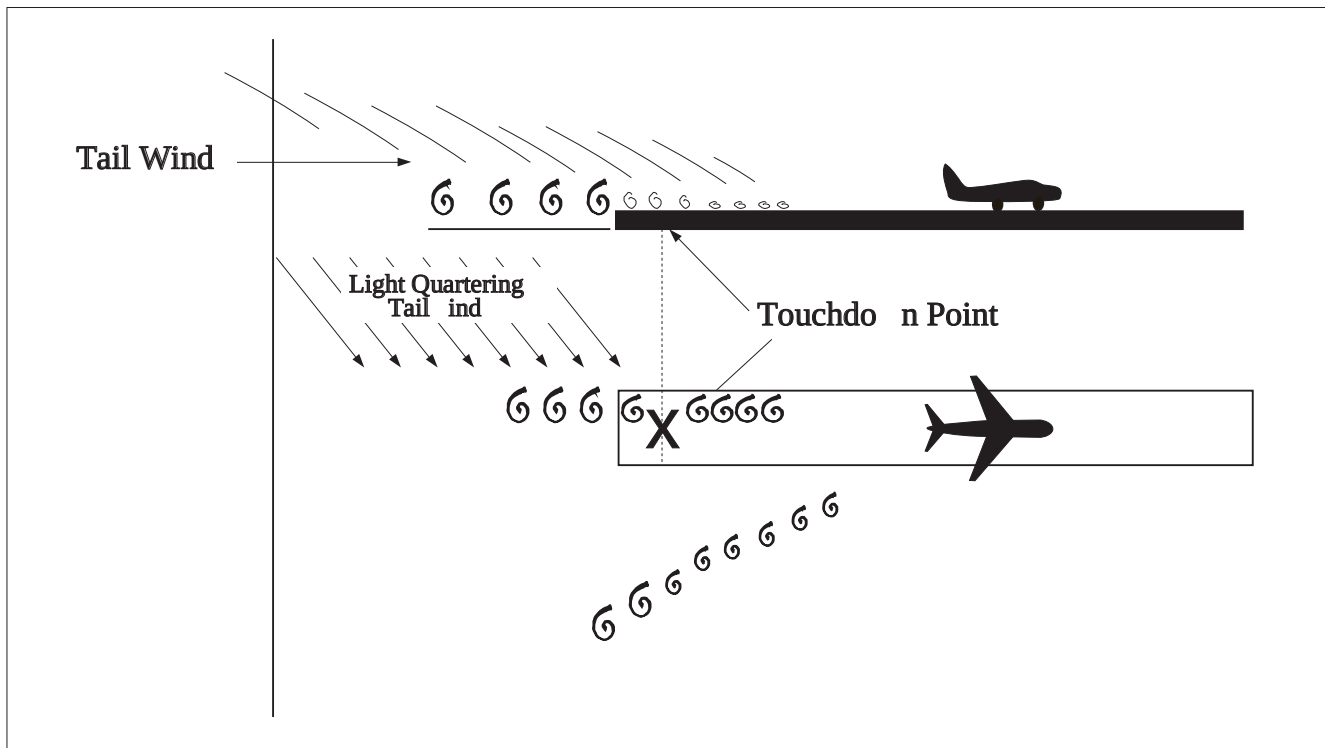

7-3-5. Operations Problem Areas

a. A wake encounter can be catastrophic. In 1972 at Fort Worth a DC-9 got too close to a DC-10 that 10 miles back rolled caught a wingtip and cart wheeled coming to rest in an inverted position on the runway. All aboard were killed. Serious and even fatal GA accidents induced by wake vortices are not uncommon. However a wake encounter is not necessarily hazardous. It can be one or more rolls with varying severity depending upon the direction of the encounter, height of the generating aircraft, size of the encountering aircraft, distance from the generating aircraft, and point of vortex encounter. The probability of induced roll increases when the encountering aircraft's heading is generally aligned with the flight path of the generating aircraft.

b. **AVOID THE AREA BELOW AND BEHIND THE GENERATING AIRCRAFT ESPECIALLY AT LOW ALTITUDE WHERE EVEN A MOMENTARY WAKE ENCOUNTER COULD BE HAZARDOUS.** This is not easy to do. Some accidents have occurred even though the pilot of the trailing aircraft had carefully noted that the aircraft in front was at a considerably lower altitude. Unfortunately this does not ensure that the flight path of the lead aircraft will be below that of the trailing aircraft.

c. Pilots should be particularly alert in calm wind conditions and situations where the vortices could

1. Remain in the touchdown area
2. Drift from aircraft operating on a nearby runway
3. Sink into the takeoff or landing path from a crossing runway
4. Sink into the traffic pattern from other airport operations
5. Sink into the flight path of VFR aircraft operating on the hemispheric altitude 500 feet below

d. Pilots of all aircraft should visualize the location of the vortex trail behind larger aircraft and use proper vortex avoidance procedures to achieve safe operation. It is especially important that pilots of larger aircraft plan or adjust their flight paths to minimize vortex exposure to other aircraft.

7-3-6. Vortex Avoidance Procedures

a. Under certain conditions airport traffic controllers apply procedures for separating IFR aircraft. If a pilot accepts a clearance to visually follow a preceding aircraft, the pilot accepts responsibility for separation and wake turbulence avoidance. The controllers will also provide to VFR aircraft with whom they are in communication and which in the tower's opinion may be adversely affected by wake turbulence from a larger aircraft, the position, altitude, and direction of flight of larger aircraft followed by the phrase **CAUTION - WAKE TURBULENCE**. After issuing the caution for wake turbulence, the airport traffic controllers generally do not provide additional information to the following aircraft unless the airport traffic controllers know the following aircraft is overtaking the preceding aircraft. **WHETHER OR NOT A WARNING OR INFORMATION HAS BEEN GIVEN, HOWEVER, THE PILOT IS EXPECTED TO ADJUST AIRCRAFT OPERATIONS AND FLIGHT PATH AS NECESSARY TO PRECLUDE SERIOUS WAKE ENCOUNTERS.** When any doubt exists about maintaining safe separation distances between aircraft during approaches, pilots should ask the control tower for updates on separation distance and aircraft groundspeed.

b. The following vortex avoidance procedures are recommended for the various situations:

1. Landing behind a larger aircraft- same runway. Stay at or above the larger aircraft's final approach flight path-note its touchdown point-land beyond it.

2. Landing behind a larger aircraft- when parallel runway is closer than 2,500 feet. Consider possible drift to your runway. Stay at or above the larger aircraft's final approach flight path- note its touchdown point.

3. Landing behind a larger aircraft- crossing runway. Cross above the larger aircraft's flight path.

4. Landing behind a departing larger aircraft- same runway. Note the larger aircraft's rotation point- land well prior to rotation point.

5. Landing behind a departing larger aircraft- crossing runway. Note the larger aircraft's rotation point- if past the intersection- continue the approach- land prior to the intersection. If larger aircraft rotates prior to the intersection, avoid flight

below the larger aircraft's flight path. Abandon the approach unless a landing is ensured well before reaching the intersection.

6. Departing behind a larger aircraft. Note the larger aircraft's rotation point and rotate prior to the larger aircraft's rotation point. Continue climbing above the larger aircraft's climb path until turning clear of the larger aircraft's wake. Avoid subsequent headings which will cross below and behind a larger aircraft. Be alert for any critical takeoff situation which could lead to a vortex encounter.

7. Intersection takeoffs—same runway. Be alert to adjacent larger aircraft operations, particularly upwind of your runway. If intersection takeoff clearance is received, avoid subsequent heading which will cross below a larger aircraft's path.

8. Departing or landing after a larger aircraft executing a low approach, missed approach, or touch-and-go landing. Because vortices settle and move laterally near the ground, the vortex hazard may exist along the runway and in your flight path after a larger aircraft has executed a low approach, missed approach, or a touch-and-go landing, particularly in light quartering wind conditions. You should ensure that an interval of at least 2 minutes has elapsed before your takeoff or landing.

9. En route VFR (thousand-foot altitude plus 500 feet). Avoid flight below and behind a large aircraft's path. If a larger aircraft is observed above on the same track, meeting or overtaking, adjust your position laterally, preferably upwind.

7-3-7. Helicopters

In a slow hover, taxi, or stationary hover near the surface, helicopter main rotors generate downwash producing high velocity outwash vortices to a distance approximately three times the diameter of the rotor. When rotor downwash hits the surface, the resulting outwash vortices have behavioral characteristics similar to wing tip vortices produced by fixed-wing aircraft. However, the vortex circulation is outward up and around and away from the main rotors in all directions. Pilots of small aircraft should avoid operating within three rotor diameters of any helicopter in a slow hover, taxi, or stationary hover. In forward flight, departing or landing, helicopters produce a pair of strong, high-speed trailing vortices similar to wing tip vortices of larger

fixed-wing aircraft. Pilots of small aircraft should use caution when operating behind or crossing behind landing and departing helicopters.

7-3-8. Pilot Responsibility

a. Government and industry groups are making concerted efforts to minimize or eliminate the hazards of trailing vortices. However, the flight disciplines necessary to ensure vortex avoidance during VFR operations must be exercised by the pilot. Vortex visualization and avoidance procedures should be exercised by the pilot using the same degree of concern as in collision avoidance.

b. Wake turbulence may be encountered by aircraft in flight as well as when operating on the airport movement area.

REFERENCE—

Pilot/Controller Glossary Term—Wake Turbulence.

c. Pilots are reminded that in operations conducted behind all aircraft, acceptance of instructions from ATC in the following situations is an acknowledgment that the pilot will ensure safe takeoff and landing intervals and accepts the responsibility for providing wake turbulence separation.

1. Traffic information

2. Instructions to follow an aircraft and

3. The acceptance of a visual approach clearance

d. For operations conducted behind **heavy** aircraft, ATC will specify the word **heavy** when this information is known. Pilots of **heavy** aircraft should always use the word **heavy** in radio communications.

e. Heavy and large jet aircraft operators should use the following procedures during an approach to landing. These procedures establish a dependable baseline from which pilots of in-trail lighter aircraft may reasonably expect to make effective flight path adjustments to avoid serious wake vortex turbulence.

1. Pilots of aircraft that produce strong wake vortices should make every attempt to fly on the established glidepath, not above it, or if glidepath guidance is not available, to fly as closely as possible to a 3-1 glidepath, not above it.

EXAMPLE—

Fly 3,000 feet at 10 miles from touchdown, 1,500 feet at 5 miles, 1,200 feet at 4 miles, and so on to touchdown.

2. Pilots of aircraft that produce strong wake vortices should fly as closely as possible to the approach course centerline or to the extended centerline of the runway of intended landing as appropriate to conditions

f. Pilots operating lighter aircraft on visual approaches in-trail to aircraft producing strong wake vortices should use the following procedures to assist in avoiding wake turbulence. These procedures apply only to those aircraft that are on visual approaches

1. Pilots of lighter aircraft should fly on or above the glidepath. Glidepath reference may be furnished by an ILS, by a visual approach slope system, by other ground-based approach slope guidance systems, or by other means. In the absence of visible glidepath guidance, pilots may very nearly duplicate a 3-degree glideslope by adhering to the 3 to 1 glidepath principle.

EXAMPLE—

Fly 3,000 feet at 10 miles from touchdown, 1,500 feet at 5 miles, 1,200 feet at 4 miles, and so on to touchdown.

2. If the pilot of the lighter following aircraft has visual contact with the preceding heavier aircraft and also with the runway, the pilot may further adjust for possible wake vortex turbulence by the following practices:

(a) Pick a point of landing no less than 1,000 feet from the arrival end of the runway.

(b) Establish a line-of-sight to that landing point that is above and in front of the heavier preceding aircraft.

(c) When possible, note the point of landing of the heavier preceding aircraft and adjust point of intended landing as necessary.

EXAMPLE—

A puff of smoke may appear at the 1,000-foot markings of the runway, showing that touchdown was that point; therefore, adjust point of intended landing to the 1,500-foot markings.

(d) Maintain the line-of-sight to the point of intended landing above and ahead of the heavier preceding aircraft; maintain it to touchdown.

(e) Land beyond the point of landing of the preceding heavier aircraft.

3. During visual approaches, pilots may ask ATC for updates on separation and groundspeed with

respect to heavier preceding aircraft, especially when there is any question of safe separation from wake turbulence.

7-3-9. Air Traffic Wake Turbulence Separations

a. Because of the possible effects of wake turbulence, controllers are required to apply no less than specified minimum separation for aircraft operating behind a **heavy** jet and, in certain instances, behind large **nonheavy** aircraft, i.e., B757 aircraft.

1. Separation is applied to aircraft operating directly behind a **heavy/B757** jet at the same altitude or less than 1,000 feet below:

(a) **Heavy** jet behind **heavy** jet—4 miles

(b) **Large/heavy** behind **B757**—4 miles

(c) **Small** behind **B757**—5 miles

(d) **Small/large** aircraft behind **heavy** jet—5 miles

2. Also, separation measured at the time the preceding aircraft is over the landing threshold is provided to small aircraft:

(a) **Small** aircraft landing behind **heavy** jet—6 miles

(b) **Small** aircraft landing behind **B757**—5 miles

(c) **Small** aircraft landing behind **large** aircraft—4 miles

REFERENCE—

Pilot/Controller Glossary Term—Aircraft Classes.

3. Additionally, appropriate time or distance intervals are provided to departing aircraft:

(a) Two minutes or the appropriate 4 or 5 mile radar separation when takeoff behind a **heavy/B757** jet will be:

(1) From the same threshold

(2) On a crossing runway and protected flight paths will cross

(3) From the threshold of a parallel runway when staggered ahead of that of the adjacent runway by less than 500 feet and when the runways are separated by less than 2,500 feet

NOTE—

Controllers may not reduce or waive these intervals.

b. A 3-minute interval will be provided when a **small** aircraft will takeoff

1. From an intersection on the same runway same or opposite direction behind a departing **large** aircraft

2. In the opposite direction on the same runway behind a large aircraft takeoff or low/missed approach

NOTE—

This 3-minute interval may be waived upon specific pilot request.

c. A 3-minute interval will be provided for all aircraft taking off when the operations are as described in subparagraph b1 and 2 above the preceding aircraft is a **heavy/B757** et and the operations are on either the same runway or parallel

runways separated by less than 2 500 feet
Controllers may not reduce or waive this interval

d. Pilots may request additional separation i.e. 2 minutes instead of 4 or 5 miles for wake turbulence avoidance. This request should be made as soon as practical on ground control and at least before taxiing onto the runway

NOTE—

14 CFR Section 91.3(a) states: “The pilot-in-command of an aircraft is directly responsible for and is the final authority as to the operation of that aircraft.”

e. Controllers may anticipate separation and need not withhold a takeoff clearance for an aircraft departing behind a **large/heavy** aircraft if there is reasonable assurance the required separation will exist when the departing aircraft starts takeoff roll

Section 4. Bird Hazards and Flight Over National Refuges, Parks, and Forests

7-4-1. Migratory Bird Activity

a. Bird strike risk increases because of bird migration during the months of March through April and August through November

b. The altitudes of migrating birds vary with winds aloft weather fronts terrain elevations cloud conditions and other environmental variables While over 90 percent of the reported bird strikes occur at or below 3 000 feet AGL strikes at higher altitudes are common during migration Ducks and geese are frequently observed up to 7 000 feet AGL and pilots are cautioned to minimize en route flying at lower altitudes during migration

c. Considered the greatest potential hazard to aircraft because of their size abundance or habit of flying in dense flocks are gulls terns vultures hawks owls egrets blackbirds and starlings Four major migratory flyways exist in the U.S. The Atlantic flyway parallels the Atlantic Coast The Mississippi Flyway stretches from Canada through the Great Lakes and follows the Mississippi River The Central Flyway represents a broad area east of the Rockies stretching from Canada through Central America The Pacific Flyway follows the west coast and overflies major parts of Washington Oregon and California There are also numerous smaller flyways which cross these major north-south migratory routes

7-4-2. Reducing Bird Strike Risks

a. The most serious strikes are those involving ingestion into an engine turboprops and turbine jet engines or windshield strikes These strikes can result in emergency situations requiring prompt action by the pilot

b. Engine ingestions may result in sudden loss of power or engine failure Review engine out procedures especially when operating from airports with known bird hazards or when operating near high bird concentrations

c. Windshield strikes have resulted in pilots experiencing confusion disorientation loss of communications and aircraft control problems Pilots are encouraged to review their emergency procedures before flying in these areas

d. When encountering birds en route climb to avoid collision because birds in flocks generally distribute themselves down and with lead birds being at the highest altitude

e. Avoid overflight of known areas of bird concentration and flying at low altitudes during bird migration Charted wildlife refuges and other natural areas contain unusually high local concentration of birds which may create a hazard to aircraft

7-4-3. Reporting Bird Strikes

Pilots are urged to report any bird or other wildlife strike using FAA Form 5200-7 Bird/Other Wildlife Strike Report Appendix 1 Additional forms are available at any FSS at any FAA Regional Office or at <http://wildlife-mitigation.tc.faa.gov> The data derived from these reports are used to develop standards to cope with this potential hazard to aircraft and for documentation of necessary habitat control on airports

7-4-4. Reporting Bird and Other Wildlife Activities

If you observe birds or other animals on or near the runway request airport management to disperse the wildlife before taking off Also contact the nearest FAA ARTCC FSS or tower including non-Federal towers regarding large flocks of birds and report the

- a.** Geographic location
- b.** Bird type geese ducks gulls etc
- c.** Approximate numbers
- d.** Altitude
- e.** Direction of bird flight path

7-4-5. Pilot Advisories on Bird and Other Wildlife Hazards

Many airports advise pilots of other wildlife hazards caused by large animals on the runway through the A/FD and the NOTAM system. Collisions of landing and departing aircraft and animals on the runway are increasing and are not limited to rural airports. These accidents have also occurred at several major airports. Pilots should exercise extreme caution when warned of the presence of wildlife on and in the vicinity of airports. If you observe deer or other large animals in close proximity to movement areas, advise the FSS, tower or airport management.

7-4-6. Flights Over Charted U.S. Wildlife Refuges, Parks, and Forest Service Areas

a. The landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service, or U.S. Forest Service without authorization from the respective agency. Exceptions include:

1. When forced to land due to an emergency beyond the control of the operator
2. At officially designated landing sites
3. An approved official business of the Federal Government

b. Pilots are requested to maintain a minimum altitude of 2,000 feet above the surface of the following: National Parks, Monuments, Seashores, Lakeshores, Recreation Areas, and Scenic Riverways.

administered by the National Park Service, National Wildlife Refuges, Big Game Refuges, Game Ranges, and Wildlife Ranges administered by the U.S. Fish and Wildlife Service, and Wilderness and Primitive areas administered by the U.S. Forest Service.

NOTE-

FAA Advisory Circular AC 91-36, Visual Flight Rules (VFR) Flight Near Noise-Sensitive Areas, defines the surface of a national park area (including parks, forests, primitive areas, wilderness areas, recreational areas, national seashores, national monuments, national lakeshores, and national wildlife refuge and range areas) as: the highest terrain within 2,000 feet laterally of the route of flight, or the upper-most rim of a canyon or valley.

c. Federal statutes prohibit certain types of flight activity and/or provide altitude restrictions over designated U.S. Wildlife Refuges, Parks, and Forest Service Areas. These designated areas, for example: Boundary Waters Canoe Wilderness Areas, Minnesota, Haleakala National Park, Hawaii, Yosemite National Park, California, and Grand Canyon National Park, Arizona, are charted on Sectional Charts.

d. Federal regulations also prohibit airdrops by parachute or other means of persons, cargo, or objects from aircraft on lands administered by the three agencies without authorization from the respective agency. Exceptions include:

1. Emergencies involving the safety of human life or
2. Threat of serious property loss

Section 5. Potential Flight Hazards

7-5-1. Accident Cause Factors

a. The 10 most frequent cause factors for general aviation accidents that involve the pilot in command are

1. **Inadequate preflight preparation and/or planning.**
2. **Failure to obtain and/or maintain flying speed.**
3. **Failure to maintain direction control.**
4. **Improper level off.**
5. **Failure to see and avoid objects or obstructions.**
6. **Mismanagement of fuel.**
7. **Improper inflight decisions or planning.**
8. **Misjudgment of distance and speed.**
9. **Selection of unsuitable terrain.**
10. **Improper operation of flight controls.**

b. This list remains relatively stable and points out the need for continued refresher training to establish a higher level of flight proficiency for all pilots. A part of the FAA's continuing effort to promote increased aviation safety is the Aviation Safety Program. For information on Aviation Safety Program activities contact your nearest Flight Standards District Office.

c. **Alertness.** Be alert at all times, especially when the weather is good. Most pilots pay attention to business when they are operating in full IFR weather conditions, but strangely, air collisions almost invariably have occurred under ideal weather conditions. Unlimited visibility appears to encourage a sense of security, which is not at all justified. Considerable information of value may be obtained by listening to advisories being issued in the terminal area, even though controller workload may prevent a pilot from obtaining individual service.

d. **Giving Way.** If you think another aircraft is too close to you, give way instead of waiting for the other pilot to respect the right of way to which you may be

entitled. It is a lot safer to pursue the right of way angle after you have completed your flight.

7-5-2. VFR in Congested Areas

A high percentage of near midair collisions occur below 8 000 feet AGL and within 30 miles of an airport. When operating VFR in these highly congested areas, whether you intend to land at an airport within the area or are just flying through it, it is recommended that extra vigilance be maintained and that you monitor an appropriate control frequency. Normally the appropriate frequency is an approach control frequency. By such monitoring action you can get the picture of the traffic in your area. When the approach controller has radar, radar traffic advisories may be given to VFR pilots upon request.

REFERENCE—

AIM, Paragraph 4-1-15 Radar Traffic Information Service.

7-5-3. Obstructions To Flight

a. **General.** Many structures exist that could significantly affect the safety of your flight when operating below 500 feet AGL and particularly below 200 feet AGL. While 14 CFR Part 91.119 allows flight below 500 AGL when over sparsely populated areas or open water, such operations are very dangerous. At and below 200 feet AGL there are numerous power lines, antenna towers, etc., that are not marked and lighted as obstructions and therefore may not be seen in time to avoid a collision. Notices to Airmen (NOTAMs) are issued on those lighted structures experiencing temporary light outages. However, some time may pass before the FAA is notified of these outages, and the NOTAM issued, thus pilot vigilance is imperative.

b. **Antenna Towers.** Extreme caution should be exercised when flying less than 2 000 feet AGL because of numerous skeletal structures, such as radio and television antenna towers that exceed 1 000 feet AGL, with some extending higher than 2 000 feet AGL. Most skeletal structures are supported by guy wires, which are very difficult to see in good weather and can be invisible at dusk or during periods of reduced visibility. These wires can extend about 1 500 feet horizontally from a structure, therefore, all skeletal structures should be avoided horizontally by

at least 2 000 feet. Additionally, new features may not be on your current chart because the information was not received prior to the printing of the chart.

c. Overhead Wires. Overhead transmission and utility lines often span approaches to runways, natural flyways such as lakes, rivers, gorges, and canyons, and cross other landmarks pilots frequently follow, such as highways, railroad tracks, etc. As with antenna towers, these high voltage/power lines or the supporting structures of these lines may not always be readily visible and the wires may be virtually impossible to see under certain conditions. In some locations, the supporting structures of overhead transmission lines are equipped with unique sequence flashing white strobe light systems to indicate that there are wires between the structures. However, many power lines do not require notice to the FAA and therefore are not marked and/or lighted. Many of those that do require notice do not exceed 200 feet AGL or meet the Obstruction Standard of 14 CFR Part 77 and therefore are not marked and/or lighted. All pilots are cautioned to remain extremely vigilant for these power lines or their supporting structures when following natural flyways or during the approach and landing phase. This is particularly important for seaplane and/or float equipped aircraft when landing on or departing from unfamiliar lakes or rivers.

d. Other Objects/Structures. There are other objects or structures that could adversely affect your flight, such as construction cranes near an airport, newly constructed buildings, new towers, etc. Many of these structures do not meet charting requirements or may not yet be charted because of the charting cycle. Some structures do not require obstruction marking and/or lighting and some may not be marked and lighted even though the FAA recommended it.

7-5-4. Avoid Flight Beneath Unmanned Balloons

a. The majority of unmanned free balloons currently being operated have extended below them either a suspension device to which the payload or instrument package is attached, or a trailing wire antenna, or both. In many instances, these balloon subsystems may be invisible to the pilot until the aircraft is close to the balloon, thereby creating a potentially dangerous situation. Therefore, good judgment on the part of the pilot dictates that aircraft

should remain well clear of all unmanned free balloons and flight below them should be avoided at all times.

b. Pilots are urged to report any unmanned free balloons sighted to the nearest FAA ground facility with which communication is established. Such information will assist FAA ATC facilities to identify and flight follow unmanned free balloons operating in the airspace.

7-5-5. Unmanned Aircraft Systems

a. Unmanned Aircraft Systems (UAS) formerly referred to as Unmanned Aerial Vehicles (UAVs) or drones, are having an increasing operational presence in the NAS. Once the exclusive domain of the military, UAS are now being operated by various entities. Although these aircraft are unmanned, UAS are flown by a remotely located pilot and crew. Physical and performance characteristics of unmanned aircraft vary greatly and unlike model aircraft that typically operate lower than 400 feet AGL, UA may be found operating at virtually any altitude and any speed. Sizes of UA can be as small as several pounds to as large as a commercial transport aircraft. UAS come in various categories including airplane, rotorcraft, powered-lift, tilt-rotor, and lighter-than-air. Propulsion systems of UAS include a broad range of alternatives from piston powered and turbojet engines to battery and solar-powered electric motors.

b. To ensure segregation of UAS operations from other aircraft, the military typically conducts UAS operations within restricted or other special use airspace. However, UAS operations are now being approved in the NAS outside of special use airspace through the use of FAA-issued Certificates of Waiver or Authorization (COA) or through the issuance of a special airworthiness certificate (COA) and special airworthiness approvals authorize UAS flight operations to be contained within specific geographic boundaries and altitudes, usually require coordination with an ATC facility, and typically require the issuance of a NOTAM describing the operation to be conducted. UAS approvals also require observers to provide see-and-avoid capability to the UAS crew and to provide the necessary compliance with 14 CFR Section 91.113. For UAS operations approved at or above FL180, UAS operate under the same requirements as that of manned aircraft, i.e., flights

are operated under instrument flight rules are in communication with ATC and are appropriately equipped

c. UAS operations may be approved at either controlled or uncontrolled airports and are typically disseminated by NOTAM. In all cases, approved UAS operations must comply with all applicable regulations and/or special provisions specified in the COA or in the operating limitations of the special airworthiness certificate. At uncontrolled airports, UAS operations are advised to operate well clear of all known manned aircraft operations. Pilots of manned aircraft are advised to follow normal operating procedures and are urged to monitor the CTAF for any potential UAS activity. At controlled airports, local ATC procedures may be in place to handle UAS operations and should not require any special procedures from manned aircraft entering or departing the traffic pattern or operating in the vicinity of the airport.

d. In addition to approved UAS operations described above, a recently approved agreement between the FAA and the Department of Defense authorizes small UAS operations wholly contained within Class G airspace and in no instance greater than 1200 feet AGL over military owned or leased property. These operations do not require any special authorization as long as the UA remains within the lateral boundaries of the military installation as well as other provisions including the issuance of a NOTAM. Unlike special use airspace, these areas may not be depicted on an aeronautical chart.

e. There are several factors a pilot should consider regarding UAS activity in an effort to reduce potential flight hazards. Pilots are urged to exercise increased vigilance when operating in the vicinity of restricted or other special use airspace, military operations areas, and any military installation. Areas with a preponderance of UAS activity are typically noted on sectional charts advising pilots of this activity. Since the size of a UA can be very small, they may be difficult to see and track. If a UA is encountered during flight, as with manned aircraft, never assume that the pilot or crew of the UAS can see you. Maintain increased vigilance with the UA and always be prepared for evasive action if necessary. Always check NOTAMs for potential UAS activity along the intended route of flight and exercise increased vigilance in areas specified in the NOTAM.

7-5-6. Mountain Flying

a. Your first experience of flying over mountainous terrain, particularly if most of your flight time has been over the flatlands of the Midwest, could be a *never-to-be-forgotten nightmare* if proper planning is not done and if you are not aware of the potential hazards awaiting. Those familiar section lines are not present in the mountains; those flat level fields for forced landings are practically nonexistent; abrupt changes in wind direction and velocity occur; severe updrafts and downdrafts are common, particularly near or above abrupt changes of terrain such as cliffs or rugged areas; even the clouds look different and can build up with startling rapidity. Mountain flying need not be hazardous if you follow the recommendations below.

b. **File a Flight Plan.** Plan your route to avoid topography which could prevent a safe forced landing. The route should be over populated areas and well known mountain passes. Sufficient altitude should be maintained to permit gliding to a safe landing in the event of engine failure.

c. Don't fly a light aircraft when the winds aloft at your proposed altitude exceed 35 miles per hour. Expect the winds to be of much greater velocity over mountain passes than reported a few miles from them. Approach mountain passes with as much altitude as possible. Downdrafts of from 1,500 to 2,000 feet per minute are not uncommon on the leeward side.

d. Don't fly near or above abrupt changes in terrain. Severe turbulence can be expected, especially in high wind conditions.

e. **Understand Mountain Obscuration.** The term Mountain Obscuration (MTOS) is used to describe a visibility condition that is distinguished from IFR because ceilings, by definition, are described as above ground level (AGL). In mountainous terrain, clouds can form at altitudes significantly higher than the weather reporting station and at the same time, nearby mountaintops may be obscured by low visibility. In these areas, the ground level can also vary greatly over a small area. Be aware if operating VFR-on-top, you could be operating closer to the terrain than you think because the tops of mountains are hidden in a cloud deck below. MTOS areas are identified daily on The Aviation Weather Center located at <http://www.aviationweather.gov>.

f. Some canyons run into a dead end. Don't fly so far up a canyon that you get trapped. ALWAYS BE ABLE TO MAKE A 180 DEGREE TURN.

g. VFR flight operations may be conducted at night in mountainous terrain with the application of sound judgment and common sense. Proper pre flight planning giving ample consideration to winds and weather knowledge of the terrain and pilot experience in mountain flying are prerequisites for safety of flight. Continuous visual contact with the surface and obstructions is a major concern and flight operations under an overcast or in the vicinity of clouds should be approached with extreme caution.

h. When landing at a high altitude field the same indicated airspeed should be used as at low elevation fields. *Remember:* that due to the less dense air at altitude this same indicated airspeed actually results in higher true airspeed, a faster landing speed, and more important, a longer landing distance. During gusty wind conditions which often prevail at high altitude fields a power approach and power landing is recommended. Additionally, due to the faster groundspeed, your takeoff distance will increase considerably over that required at low altitudes.

i. **Effects of Density Altitude.** Performance figures in the aircraft owner's handbook for length of takeoff run, horsepower, rate of climb, etc., are generally based on standard atmosphere conditions: 59 degrees Fahrenheit, 15 degrees Celsius, pressure 29.92 inches of mercury at sea level. However, inexperienced pilots as well as experienced pilots may run into trouble when they encounter an altogether different set of conditions. This is particularly true in hot weather and at higher elevations. Aircraft operations at altitudes above sea level and at higher than standard temperatures are commonplace in mountainous areas. Such operations quite often result in a drastic reduction of aircraft performance capabilities because of the changing air density. Density altitude is a measure of air density. It is not to be confused with pressure altitude, true altitude, or absolute altitude. It is not to be used as a height reference, but as a determining criteria in the performance capability of an aircraft. Air density

decreases with altitude. As air density decreases, density altitude increases. The further effects of high temperature and high humidity are cumulative, resulting in an increasing high density altitude condition. High density altitude reduces all aircraft performance parameters. To the pilot, this means that the normal horsepower output is reduced, propeller efficiency is reduced, and a higher true airspeed is required to sustain the aircraft throughout its operating parameters. It means an increase in runway length requirements for takeoff and landings, and decreased rate of climb. An average small airplane, for example, requiring 1,000 feet for takeoff at sea level under standard atmospheric conditions will require a takeoff run of approximately 2,000 feet at an operational altitude of 5,000 feet.

NOTE—

A turbo-charged aircraft engine provides some slight advantage in that it provides sea level horsepower up to a specified altitude above sea level.

1. **Density Altitude Advisories.** At airports with elevations of 2,000 feet and higher, control towers and FSSs will broadcast the advisory. Check Density Altitude when the temperature reaches a predetermined level. These advisories will be broadcast on appropriate tower frequencies or where available, ATIS. FSSs will broadcast these advisories as a part of Local Airport Advisory and on TWEB.

2. These advisories are provided by air traffic facilities as a reminder to pilots that high temperatures and high field elevations will cause significant changes in aircraft characteristics. The pilot retains the responsibility to compute density altitude when appropriate as a part of preflight duties.

NOTE—

All FSSs will compute the current density altitude upon request.

j. **Mountain Wave.** Many pilots go all their lives without understanding what a mountain wave is. Quite a few have lost their lives because of this lack of understanding. One need not be a licensed meteorologist to understand the mountain wave phenomenon.

1. Mountain waves occur when air is being blown over a mountain range or even the ridge of a sharp bluff area. As the air hits the upwind side of the range, it starts to climb, thus creating what is generally a smooth updraft, which turns into a turbulent downdraft as the air passes the crest of the ridge. From this point, for many miles downwind, there will be a series of downdrafts and updrafts. Satellite photos of the Rockies have shown mountain waves extending as far as 700 miles downwind of the range. Along the east coast area, such photos of the Appalachian chain have picked up the mountain wave phenomenon over a hundred miles eastward. All it takes to form a mountain wave is wind blowing across the range at 15 knots or better at an intersection angle of not less than 30 degrees.

2. Pilots from flatland areas should understand a few things about mountain waves in order to stay out of trouble. When approaching a mountain range from the upwind side, generally the best there will usually be a smooth updraft; therefore, it is not quite as dangerous an area as the lee of the range. From the leeward side, it is always a good idea to add an extra thousand feet or so of altitude because downdrafts can exceed the climb capability of the aircraft. Never expect an updraft when approaching a mountain chain from the leeward. Always be prepared to cope with a downdraft and turbulence.

3. When approaching a mountain ridge from the downwind side, it is recommended that the ridge be approached at approximately a 45 degree angle to the horizontal direction of the ridge. This permits a safer retreat from the ridge with less stress on the aircraft should severe turbulence and downdraft be experienced. If severe turbulence is encountered, simultaneously reduce power and adjust pitch until aircraft approaches maneuvering speed, then adjust power and trim to maintain maneuvering speed and fly away from the turbulent area.

7-5-7. Use of Runway Half-way Signs at Unimproved Airports

When installed, runway half-way signs provide the pilot with a reference point to judge takeoff acceleration trends. Assuming that the runway length is appropriate for takeoff, considering runway

condition and slope, elevation, aircraft weight, and temperature, typical takeoff acceleration should allow the airplane to reach 70 percent of lift-off airspeed by the midpoint of the runway. The rule of thumb is that should airplane acceleration not allow the airspeed to reach this value by the midpoint, the takeoff should be aborted, as it may not be possible to lift off in the remaining runway.

Several points are important when considering using this rule of thumb:

a. Airspeed indicators in small airplanes are not required to be evaluated at speeds below stalling and may not be usable at 70 percent of lift-off airspeed.

b. This rule of thumb is based on a uniform surface condition. Puddles, soft spots, areas of tall and/or wet grass, loose gravel, etc., may impede acceleration or even cause deceleration. Even if the airplane achieves 70 percent of lift-off airspeed by the midpoint, the condition of the remainder of the runway may not allow further acceleration. The entire length of the runway should be inspected prior to takeoff to ensure a usable surface.

c. This rule of thumb applies only to runway required for actual lift-off. In the event that obstacles affect the takeoff climb path, appropriate distance must be available after lift-off to accelerate to best angle of climb speed and to clear the obstacles. This will in effect require the airplane to accelerate to a higher speed by midpoint, particularly if the obstacles are close to the end of the runway. In addition, this technique does not take into account the effects of upslope or tailwinds on takeoff performance. These factors will also require greater acceleration than normal and, under some circumstances, prevent takeoff entirely.

d. Use of this rule of thumb does not alleviate the pilot's responsibility to comply with applicable Federal Aviation Regulations, the limitations and performance data provided in the FAA approved Airplane Flight Manual (AFM) or in the absence of an FAA approved AFM, other data provided by the aircraft manufacturer.

In addition to their use during takeoff, runway half-way signs offer the pilot increased awareness of his or her position along the runway during landing operations.

NOTE–

No FAA standard exists for the appearance of the runway half-way sign. FIG 7–5–1 shows a graphical depiction of a typical runway half-way sign.

7–5–8. Seaplane Safety

a. Acquiring a seaplane class rating affords access to many areas not available to landplane pilots. Adding a seaplane class rating to your pilot certificate can be relatively uncomplicated and inexpensive. However, more effort is required to become a safe, efficient, competent bush pilot. The natural hazards of the backwoods have given way to modern man-made hazards. Except for the far north, the available bodies of water are no longer the exclusive domain of the airman. Seaplane pilots must be vigilant for hazards such as electric power lines, power sail and row boats, rafts, mooring lines, water skiers, swimmers, etc.

**FIG 7–5–1
Typical Runway Half-way Sign**



b. Seaplane pilots must have a thorough understanding of the right-of-way rules as they apply to aircraft versus other vessels. Seaplane pilots are expected to know and adhere to both the U.S. Coast Guard's USCG Navigation Rules International-Inland and 14 CFR Section 91.115 Right-of-Way Rules Water Operations. The navigation rules of the road are a set of collision avoidance rules as they apply to aircraft on the water. A seaplane is considered a vessel when on the water for the purposes of these collision avoidance rules. In general, a seaplane on the water must keep well clear

of all vessels and avoid impeding their navigation. The CFR requires in part that aircraft operating on the water shall insofar as possible keep clear of all vessels and avoid impeding their navigation and shall give way to any vessel or other aircraft that is given the right-of-way. This means that a seaplane should avoid boats and commercial shipping when on the water. If on a collision course, the seaplane should slow, stop, or maneuver to the right of way from the bow of the oncoming vessel. Also, while on the surface with an engine running, an aircraft must give way to all nonpowered vessels. Since a seaplane in the water may not be as maneuverable as one in the air, the aircraft on the water has right of way over one in the air, and one taking off has right of way over one landing. A seaplane is exempt from the USCG safety equipment requirements, including the requirements for Personal Flotation Devices (PFD). Requiring seaplanes on the water to comply with USCG equipment requirements in addition to the FAA equipment requirements could be an unnecessary burden on seaplane owners and operators.

c. Unless they are under Federal jurisdiction, navigable bodies of water are under the jurisdiction of the state, or in a few cases privately owned. Unless they are specifically restricted, aircraft have as much right to operate on these bodies of water as other vessels. To avoid problems, check with Federal or local officials in advance of operating on unfamiliar waters. In addition to the agencies listed in TBL 7–5–1, the nearest Flight Standards District Office can usually offer some practical suggestions as well as regulatory information. If you land on a restricted body of water because of an inflight emergency, or in ignorance of the restrictions you have violated, report as quickly as practical to the nearest local official having jurisdiction and explain your situation.

d. When operating a seaplane over or into remote areas, appropriate attention should be given to survival gear. Minimum kits are recommended for summer and winter and are required by law for flight into sparsely settled areas of Canada and Alaska. Alaska State Department of Transportation and Canadian Ministry of Transport officials can provide specific information on survival gear requirements. The kit should be assembled in one container and be easily reachable and preferably floatable.

TBL 7-5-1

Jurisdictions Controlling Navigable Bodies of Water

Authority to Consult For Use of a Body of Water		
Location	Authority	Contact
Wilderness Area	U S Department of Agriculture Forest Service	Local forest ranger
National Forest	USDA Forest Service	Local forest ranger
National Park	U S Department of the Interior National Park Service	Local park ranger
Indian Reservation	USDI Bureau of Indian Affairs	Local Bureau office
State Park	State government or state forestry or park service	Local state aviation office for further information
Canadian National and Provincial Parks	Supervised and restricted on an individual basis from province to province and by different departments of the Canadian government consult Canadian Flight Information Manual and/or Water Aerodrome Supplement	Park Superintendent in an emergency

e. The FAA recommends that each seaplane owner or operator provide flotation gear for occupants any time a seaplane operates on or near water 14 CFR Section 91.205(b)(12) requires approved flotation gear for aircraft operated for hire over water and beyond power off gliding distance from shore. FAA approved gear differs from that required for navigable waters under USCG rules. FAA approved life vests are inflatable designs as compared to the USCG's noninflatable PFDs that may consist of solid bulky material. Such USCG PFDs are impractical for seaplanes and other aircraft because they may block passage through the relatively narrow exits available to pilots and passengers. Life vests approved under Technical Standard Order (TSO) TSO-C13E contain fully inflatable compartments. The wearer inflates the compartments AFTER exiting the aircraft primarily by independent CO₂ cartridges with an oral inflation tube as a backup. The flotation gear also contains a water activated self-illuminating signal light. The fact that pilots and

passengers can easily don and wear inflatable life vests when not inflated provides maximum effectiveness and allows for unrestricted movement. It is imperative that passengers are briefed on the location and proper use of available PFDs prior to leaving the dock.

f. The FAA recommends that seaplane owners and operators obtain Advisory Circular (AC) 91-69 Seaplane Safety for 14 CFR Part 91 Operations free from the U.S. Department of Transportation Subsequent Distribution Office SVC-121.23 Ardmore East Business Center 3341 Q 75th Avenue Landover MD 20785 fax 301 386-5394. The USCG Navigation Rules International-Inland COMDTINST M 16672.2B is available for a fee from the Government Printing Office by facsimile request to 202 512-2250 and can be ordered using Mastercard or Visa.

7-5-9. Flight Operations in Volcanic Ash

a. Severe volcanic eruptions which send ash and sulphur dioxide (SO₂) gas into the upper atmosphere occur some where around the world several times each year. Flying into a volcanic ash cloud can be exceedingly dangerous. A B747-200 lost all four engines after such an encounter and a B747-400 had the same nearly catastrophic experience. Piston-powered aircraft are less likely to lose power but severe damage is almost certain to ensue after an encounter with a volcanic ash cloud which is only a few hours old.

b. Most important is to avoid any encounter with volcanic ash. The ash plume may not be visible especially in instrument conditions or at night and even if visible it is difficult to distinguish visually between an ash cloud and an ordinary weather cloud. Volcanic ash clouds are not displayed on airborne or ATC radar. The pilot must rely on reports from air traffic controllers and other pilots to determine the location of the ash cloud and use that information to remain well clear of the area. Additionally, the presence of a sulphur like odor throughout the cabin may indicate the presence of SO₂ emitted by volcanic activity but may or may not indicate the presence of volcanic ash. Every attempt should be made to remain on the upwind side of the volcano.

c. It is recommended that pilots encountering an ash cloud should immediately reduce thrust to idle altitude permitting and reverse course in order to

escape from the cloud. Ash clouds may extend for hundreds of miles and pilots should not attempt to fly through or climb out of the cloud. In addition, the following procedures are recommended:

1. Disengage the autothrottle if engaged. This will prevent the autothrottle from increasing engine thrust.

2. Turn on continuous ignition.

3. Turn on all accessory airbleeds including all air conditioning packs, nacelles, and wing anti-ice. This will provide an additional engine stall margin by reducing engine pressure.

d. The following has been reported by flightcrews who have experienced encounters with volcanic dust clouds:

1. Smoke or dust appearing in the cockpit.

2. An acrid odor similar to electrical smoke.

3. Multiple engine malfunctions, such as compressor stalls, increasing EGT, torching from tailpipe, and flameouts.

4. At night, St. Elmo's fire or other static discharges accompanied by a bright orange glow in the engine inlets.

5. A fire warning in the forward cargo area.

e. It may become necessary to shut down and then restart engines to prevent exceeding EGT limits. Volcanic ash may block the pitot system and result in unreliable airspeed indications.

f. If you see a volcanic eruption and have not been previously notified of it, you may have been the first person to observe it. In this case, immediately contact ATC and alert them to the existence of the eruption. If possible, use the Volcanic Activity Reporting form (VAR) depicted in Appendix 2 of this manual. Items 1 through 8 of the VAR should be transmitted immediately. The information requested in items 9 through 16 should be passed after landing. If a VAR form is not immediately available, relay enough information to identify the position and nature of the volcanic activity. Do not become unnecessarily alarmed if there is merely steam or very low level eruptions of ash.

g. When landing at airports where volcanic ash has been deposited on the runway, be aware that even a thin layer of dry ash can be detrimental to braking

action. Wet ash on the runway may also reduce effectiveness of braking. It is recommended that reverse thrust be limited to minimum practical to reduce the possibility of reduced visibility and engine ingestion of airborne ash.

h. When departing from airports where volcanic ash has been deposited, it is recommended that pilots avoid operating in visible airborne ash. Allow ash to settle before initiating takeoff roll. It is also recommended that flap extension be delayed until initiating the before takeoff checklist and that a rolling takeoff be executed to avoid blowing ash back into the air.

7-5-10. Emergency Airborne Inspection of Other Aircraft

a. Providing airborne assistance to another aircraft may involve flying in very close proximity to that aircraft. Most pilots receive little, if any, formal training or instruction in this type of flying activity. Close proximity flying without sufficient time to plan, i.e., in an emergency situation, coupled with the stress involved in a perceived emergency, can be hazardous.

b. The pilot in the best position to assess the situation should take the responsibility of coordinating the airborne intercept and inspection and take into account the unique flight characteristics and differences of the categories of aircraft involved.

c. Some of the safety considerations are:

1. Area, direction, and speed of the intercept.

2. Aerodynamic effects, i.e., rotorcraft downwash.

3. Minimum safe separation distances.

4. Communications requirements, lost communications procedures, coordination with ATC.

5. Suitability of diverting the distressed aircraft to the nearest safe airport, and

6. Emergency actions to terminate the intercept.

d. Close proximity, inflight inspection of another aircraft is uniquely hazardous. The pilot-in-command of the aircraft experiencing the problem/emergency must not relinquish control of the situation and/or jeopardize the safety of their aircraft. The maneuver must be accomplished with minimum risk to both aircraft.

7-5-11. Precipitation Static

a. Precipitation static is caused by aircraft in flight coming in contact with uncharged particles. These particles can be rain, snow, fog, sleet, hail, volcanic ash, dust, any solid or liquid particles. When the aircraft strikes these neutral particles, the positive element of the particle is reflected away from the aircraft and the negative particle adheres to the skin of the aircraft. In a very short period of time, a substantial negative charge will develop on the skin of the aircraft. If the aircraft is not equipped with static dischargers or has an ineffective static discharger system, when a sufficient negative voltage level is reached, the aircraft may go into CORONA. That is, it will discharge the static electricity from the extremities of the aircraft, such as the wing tips, horizontal stabilizer, vertical stabilizer, antenna, propeller tips, etc. This discharge of static electricity is what you will hear in your headphones and is what we call P-static.

b. A review of pilot reports often shows different symptoms with each problem that is encountered. The following list of problems is a summary of many pilot reports from many different aircraft. Each problem is caused by P-static:

1. Complete loss of VHF communications
2. Erroneous magnetic compass readings 30 percent in error
3. High pitched squeal on audio
4. Motor boat sound on audio
5. Loss of all avionics in clouds
6. VLF navigation system inoperative most of the time
7. Erratic instrument readouts
8. Weak transmissions and poor receptivity of radios
9. St. Elmo's Fire on windshield

c. Each of these symptoms is caused by one general problem on the airframe. This problem is the inability of the accumulated charge to flow easily to the wing tips and tail of the airframe and properly discharge to the airstream.

d. Static dischargers work on the principle of creating a relatively easy path for discharging negative charges that develop on the aircraft by using a discharger with fine metal points, carbon coated rods, or carbon wicks rather than wait until a large charge is developed and discharged off the trailing edges of the aircraft that will interfere with avionics equipment. This process offers approximately 50 decibels (dB) static noise reduction, which is adequate in most cases to be below the threshold of noise that could cause interference in avionics equipment.

e. It is important to remember that precipitation static problems can only be corrected with the proper number of quality static dischargers properly installed on a properly bonded aircraft. P-static is indeed a problem in the all-weather operation of the aircraft, but there are effective ways to combat it. All possible methods of reducing the effects of P-static should be considered so as to provide the best possible performance in the flight environment.

f. A wide variety of discharger designs is available on the commercial market. The inclusion of well-designed dischargers may be expected to improve airframe noise in P-static conditions by as much as 50 dB. Essentially, the discharger provides a path by which accumulated charge may leave the airframe quietly. This is generally accomplished by providing a group of tiny corona points to permit onset of corona-current flow at a low aircraft potential. Additionally, aerodynamic design of dischargers to permit corona to occur at the lowest possible atmospheric pressure also lowers the corona threshold. In addition to permitting a low-potential discharge, the discharger will minimize the radiation of radio frequency (RF) energy, which accompanies the corona discharge, in order to minimize effects of RF components at communications and navigation frequencies on avionics performance. These effects are reduced through resistive attachment of the corona points to the airframe, preserving direct current connection but attenuating the higher-frequency components of the discharge.

g. Each manufacturer of static dischargers offers information concerning appropriate discharger location on specific airframes. Such locations emphasize the trailing outboard surfaces of wings and horizontal tail surfaces, plus the tip of the vertical stabilizer. Here, charge tends to accumulate on the airframe.

Sufficient dischargers must be provided to allow for current-carrying capacity which will maintain airframe potential below the corona threshold of the trailing edges

h. In order to achieve full performance of avionics equipment the static discharge system will require periodic maintenance. A pilot knowledgeable of P-static causes and effects is an important element in assuring optimum performance by early recognition of these types of problems

7-5-12. Light Amplification by Stimulated Emission of Radiation (Laser) Operations and Reporting Illumination of Aircraft

a. Lasers have many applications. Of concern to users of the National Airspace System are those laser events that may affect pilots, e.g., outdoor laser light shows or demonstrations for entertainment and advertisements at special events and theme parks. Generally, the beams from these events appear as bright blue-green in color, however they may be red, yellow, or white. However, some laser systems produce light which is invisible to the human eye.

b. FAA regulations prohibit the disruption of aviation activity by any person on the ground or in the air. The FAA and the Food and Drug Administration, the Federal agency that has the responsibility to enforce compliance with Federal requirements for laser systems and laser light show products, are working together to ensure that operators of these devices do not pose a hazard to aircraft operators.

c. Pilots should be aware that illumination from these laser operations are able to create temporary vision impairment miles from the actual location. In addition, these operations can produce permanent eye damage. Pilots should make themselves aware of where these activities are being conducted and avoid these areas if possible.

d. Recent and increasing incidents of unauthorized illumination of aircraft by lasers, as well as the proliferation and increasing sophistication of laser devices available to the general public, dictates that the FAA, in coordination with other government agencies, take action to safeguard flights from these unauthorized illuminations.

e. Pilots should report laser illumination activity to the controlling Air Traffic Control facilities, Federal Contract Towers or Flight Service Stations as soon as possible after the event. The following information should be included:

1. UTC Date and Time of Event
2. Call Sign or Aircraft Registration Number
3. Type Aircraft
4. Nearest Major City
5. Altitude
6. Location of Event: Latitude/Longitude and/or Fixed Radial Distance (FRD)
7. Brief Description of the Event and any other Pertinent Information

f. Pilots are also encouraged to complete the Laser Beam Exposure Questionnaire located on the FAA Laser Safety Initiative website at <http://www.faa.gov/about/initiatives/lasers/> and submit electronically per the directions on the questionnaire as soon as possible after landing.

g. When a laser event is reported to an air traffic facility, a general caution warning will be broadcast on all appropriate frequencies every five minutes for 20 minutes and broadcasted on the ATIS for one hour following the report.

PHRASEOLOGY-

UNAUTHORIZED LASER ILLUMINATION EVENT, (UTC time), (location), (altitude), (color), (direction).

EXAMPLE-

"Unauthorized laser illumination event, at 0100z, 8 mile final runway 18R at 3,000 feet, green laser from the southwest."

REFERENCE-

FAAO 7110.65, *Unauthorized Laser Illumination of Aircraft, Para 10-2-14.*
FAAO 7210.3, *Reporting Laser Illumination of Aircraft, Para 2-1-27.*

h. When these activities become known to the FAA, Notices to Airmen (NOTAMs) are issued to inform the aviation community of the events. Pilots should consult NOTAMs or the Special Notices section of the Airport/Facility Directory for information regarding these activities.

7–5–13. Flying in Flat Light and White Out Conditions

a. Flat Light. Flat light is an optical illusion also known as **sector or partial white out**. It is not as severe as white out but the condition causes pilots to lose their depth-of-field and contrast in vision. Flat light conditions are usually accompanied by overcast skies inhibiting any visual clues. Such conditions can occur anywhere in the world primarily in snow-covered areas but can occur in dust sand mud flats or on glassy water. Flat light can completely obscure features of the terrain creating an inability to distinguish distances and closure rates. As a result of this reflected light it can give pilots the illusion that they are ascending or descending when they may actually be flying level. However with good judgment and proper training and planning it is possible to safely operate an aircraft in flat light conditions.

b. White Out. As defined in meteorological terms white out occurs when a person becomes engulfed in a uniformly white glow. The glow is a result of being surrounded by blowing snow dust sand mud or water. There are no shadows no horizon or clouds and all depth-of-field and orientation are lost. A white out situation is severe in that there are no visual references. Flying is not recommended in any white out situation. Flat light conditions can lead to a white out environment quite rapidly and both atmospheric conditions are insidious they sneak up on you as your visual references slowly begin to disappear. White out has been the cause of several aviation accidents.

c. Self Induced White Out. This effect typically occurs when a helicopter takes off or lands on a snow-covered area. The rotor down wash picks up particles and re-circulates them through the rotor down wash. The effect can vary in intensity depending upon the amount of light on the surface. This can happen on the sunniest brightest day with good contrast everywhere. However when it happens there can be a complete loss of visual clues. If the pilot has not prepared for this immediate loss of visibility the results can be disastrous. Good planning does not prevent one from encountering flat light or white out conditions.

d. Never take off in a white out situation.

1. Realize that in flat light conditions it may be possible to depart but not to return to that site. During takeoff make sure you have a reference point. Do not lose sight of it until you have a departure reference point in view. Be prepared to return to the takeoff reference if the departure reference does not come into view.

2. Flat light is common to snow skiers. One way to compensate for the lack of visual contrast and depth-of-field loss is by wearing amber tinted lenses also known as blue blockers. Special note of caution. Eye wear is not ideal for every pilot. Take into consideration personal factors – age light sensitivity and ambient lighting conditions.

3. So what should a pilot do when all visual references are lost?

(a) Trust the cockpit instruments

(b) Execute a 180 degree turnaround and start looking for outside references

(c) Above all – fly the aircraft

e. Landing in Low Light Conditions. When landing in a low light condition – use extreme caution. Look for intermediate reference points in addition to checkpoints along each leg of the route for course confirmation and timing. The lower the ambient light becomes the more reference points a pilot should use.

f. Airport Landings.

1. Look for features around the airport or approach path that can be used in determining depth perception. Buildings towers vehicles or other aircraft serve well for this measurement. Use something that will provide you with a sense of height above the ground in addition to orienting you to the runway.

2. Be cautious of snow drifts and snow banks – anything that can distinguish the edge of the runway. Look for subtle changes in snow texture or shading to identify ridges or changes in snow depth.

g. Off-Airport Landings.

1. In the event of an off-airport landing pilots have used a number of different visual cues to gain reference. Use whatever you must to create the contrast you need. Natural references seem to work best: trees rocks snow ribs etc.

- (a) Over flight
- (b) Use of markers
- (c) Weighted flags
- (d) Smoke bombs
- (e) Any colored rags
- (f) Dye markers
- (g) Kool-aid
- (h) Trees or tree branches

2. It is difficult to determine the depth of snow in areas that are level. Dropping items from the aircraft to use as reference points should be used as a visual aid only and not as a primary landing reference. Unless your marker is biodegradable, be sure to retrieve it after landing. Never put yourself in a position where no visual references exist.

3. Abort landing if blowing snow obscures your reference. Make your decisions early. Don't assume you can pick up a lost reference point when you get closer.

4. Exercise extreme caution when flying from sunlight into shade. Physical awareness may tell you that you are flying straight but you may actually be in a spiral dive with centrifugal force pressing against you. Having no visual references enhances this illusion. Just because you have a good visual reference does not mean that it's safe to continue. There may be snow-covered terrain not visible in the direction that you are traveling. Getting caught in a no visual reference situation can be fatal.

h. Flying Around a Lake.

1. When flying along lakeshores, use them as a reference point. Even if you can see the other side, realize that your depth perception may be poor. It is easy to fly into the surface. If you must cross the lake, check the altimeter frequently and maintain a safe altitude while you still have a good reference. Don't descend below that altitude.

2. The same rules apply to seemingly flat areas of snow. If you don't have good references, avoid going there.

i. Other Traffic. Be on the lookout for other traffic in the area. Other aircraft may be using your same reference point. Chances are greater of

colliding with someone traveling in the same direction as you than someone flying in the opposite direction.

j. Ceilings. Low ceilings have caught many pilots off guard. Clouds do not always form parallel to the surface or at the same altitude. Pilots may try to compensate for this by flying with a slight bank and thus creating a descending turn.

k. Glaciers. Be conscious of your altitude when flying over glaciers. The glaciers may be rising faster than you are climbing.

7-5-14. Operations in Ground Icing Conditions

a. The presence of aircraft airframe icing during takeoff, typically caused by improper or no deicing of the aircraft being accomplished prior to flight, has contributed to many recent accidents in turbine aircraft. The General Aviation Joint Steering Committee (GAJSC) is the primary vehicle for government-industry cooperation, communication, and coordination on GA accident mitigation. The Turbine Aircraft Operations Subgroup (TAOS)

works to mitigate accidents in turbine aircraft. While there is sufficient information and guidance currently available regarding the effects of icing on aircraft and methods for deicing, the TAOS has developed a list of recommended actions to further assist pilots and operators in this area.

While the efforts of the TAOS specifically focus on turbine aircraft, it is recognized that their recommendations are applicable to and can be adapted for the pilot of a small piston-powered aircraft too.

b. The following recommendations are offered:

1. Ensure that your aircraft's lift-generating surfaces are COMPLETELY free of contamination before flight through a tactile (hands-on) check of the critical surfaces when feasible. Even when otherwise permitted, operators should avoid smooth or polished frost on lift-generating surfaces as an acceptable preflight condition.

2. Review and refresh your cold weather standard operating procedures.

3. Review and be familiar with the Airplane Flight Manual (AFM) limitations and procedures necessary to deal with icing conditions prior to flight as well as in flight.

4. Protect your aircraft while on the ground if possible from sleet and freezing rain by taking advantage of aircraft hangars

5. Take full advantage of the opportunities available at airports for deicing. Do not refuse deicing services simply because of cost

6. Always consider canceling or delaying a flight if weather conditions do not support a safe operation

c. If you haven't already developed a set of Standard Operating Procedures for cold weather operations, they should include

1. Procedures based on information that is applicable to the aircraft operated, such as AFM limitations and procedures

2. Concise and easy to understand guidance that outlines best operational practices

3. A systematic procedure for recognizing, evaluating and addressing the associated icing risk and offer clear guidance to mitigate this risk

4. An aid, such as a checklist or reference cards that is readily available during normal day-to-day aircraft operations

d. There are several sources for guidance relating to airframe icing, including

1. <http://aircrafticing.grc.nasa.gov/index.html>

2. <http://www.ibac.org/is-bao/isbao.htm>

3. http://www.natasafety1st.org/bus_deice.htm

4. Advisory Circular AC 91-74 Pilot Guide Flight in Icing Conditions

5. AC 135-17 Pilot Guide Small Aircraft Ground Deicing

6. AC 135-9 FAR Part 135 Icing Limitations

7. AC 120-60 Ground Deicing and Anti-icing Program

8. AC 135-16 Ground Deicing and Anti-icing Training and Checking

The FAA Approved Deicing Program Updates is published annually as a Flight Standards Information Bulletin for Air Transportation and contains detailed information on deicing and anti-icing procedures and

holdover times. It may be accessed at the following web site by selecting the current year's information bulletins


http://www.faa.gov/library/manuals/examiners_inspectors/8400/fsat

7-5-15. Avoid Flight in the Vicinity of Thermal Plumes (Smoke Stacks and Cooling Towers)

a. Flight Hazards Exist Around Thermal Plumes. Thermal plumes are defined as visible or invisible emissions from power plants, industrial production facilities, or other industrial systems that release large amounts of vertically directed unstable gases. High temperature exhaust plumes may cause significant air disturbances such as turbulence and vertical shear. Other identified potential hazards include, but are not necessarily limited to, reduced visibility, oxygen depletion, engine particulate contamination, exposure to gaseous oxides, and/or icing. Results of encountering a plume may include airframe damage, aircraft upset, and/or engine damage/failure. These hazards are most critical during low altitude flight, especially during takeoff and landing.

b. When able, a pilot should fly upwind of possible thermal plumes. When a plume is visible via smoke or a condensation cloud, remain clear and realize a plume may have both visible and invisible characteristics. Exhaust stacks, without visible plumes, may still be in full operation, and airspace in the vicinity should be treated with caution. As with mountain wave turbulence or clear air turbulence, an invisible plume may be encountered unexpectedly. Cooling towers, power plant stacks, exhaust fans, and other similar structures are depicted in FIG 7-5-2. Whether plumes are visible or invisible, the total extent of their unstable air is difficult to ascertain. FAA studies are underway to further characterize the effects of thermal plumes as exhaust effluents. Until the results of these studies are known and possible changes to rules and policy are identified and/or published, pilots are encouraged to exercise caution when flying in the vicinity of thermal plumes. Pilots are encouraged to reference the Airport/Facility Directory where amplifying notes may caution pilots and identify the location of structures emitting thermal plumes.

FIG 7-5-2
Plumes

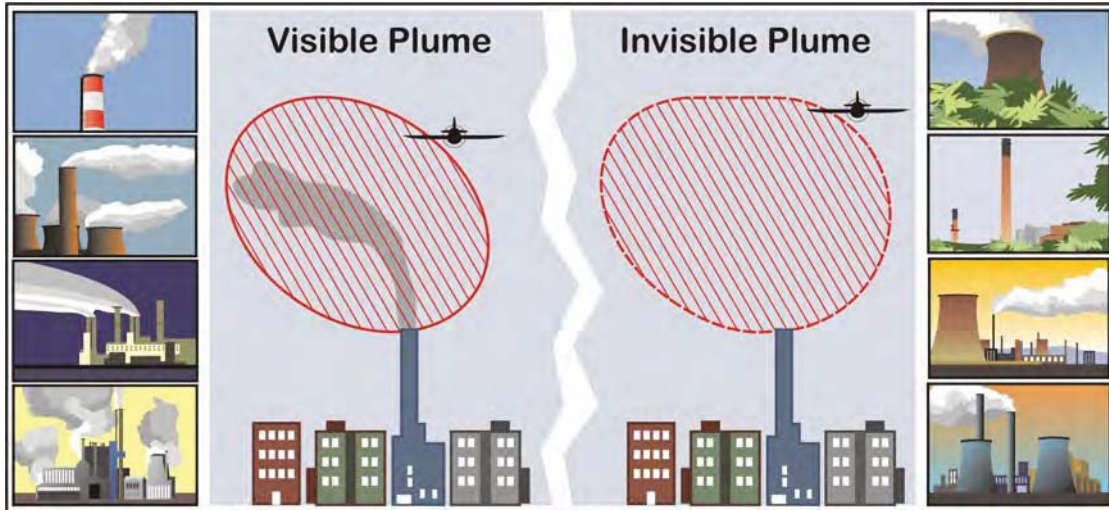

Section 6. Safety, Accident, and Hazard Reports

7-6-1. Aviation Safety Reporting Program

a. The FAA has established a voluntary Aviation Safety Reporting Program designed to stimulate the free and unrestricted flow of information concerning deficiencies and discrepancies in the aviation system. This is a positive program intended to ensure the safest possible system by identifying and correcting unsafe conditions before they lead to accidents. The primary objective of the program is to obtain information to evaluate and enhance the safety and efficiency of the present system.

b. This cooperative safety reporting program invites pilots, controllers, flight attendants, maintenance personnel and other users of the airspace system or any other person to file written reports of actual or potential discrepancies and deficiencies involving the safety of aviation operations. The operations covered by the program include departure en route, approach and landing operations and procedures, air traffic control procedures and equipment, crew and air traffic control communications, aircraft cabin operations, aircraft movement on the airport, near midair collisions, aircraft maintenance and record keeping and airport conditions or services.

c. The report should give the date, time, location, persons and aircraft involved, if applicable, nature of the event, and all pertinent details.

d. To ensure receipt of this information, the program provides for the waiver of certain disciplinary actions against persons, including pilots and air traffic controllers, who file timely written reports concerning potentially unsafe incidents. To be considered timely, reports must be delivered or postmarked within 10 days of the incident unless that period is extended for good cause. Reports should be submitted on NASA ARC Forms 277, which are available free of charge, postage prepaid, at FAA Flight Standards District Offices and Flight Service Stations, and from NASA ASRS, PO Box 189, Moffet Field, CA 94035.

e. The FAA utilizes the National Aeronautics and Space Administration (NASA) to act as an independent third party to receive and analyze reports submitted under the program. This program is

described in AC 00-46, Aviation Safety Reporting Program.

7-6-2. Aircraft Accident and Incident Reporting

a. Occurrences Requiring Notification. The operator of an aircraft must immediately and by the most expeditious means available, notify the nearest National Transportation Safety Board (NTSB) Field Office when:

1. An aircraft accident or any of the following listed incidents occur:

(a) Flight control system malfunction or failure

(b) Inability of any required flight crew member to perform their normal flight duties as a result of injury or illness

(c) Failure of structural components of a turbine engine excluding compressor and turbine blades and vanes

(d) Inflight fire

(e) Aircraft collide in flight

(f) Damage to property other than the aircraft, estimated to exceed \$25,000 for repair, including materials and labor, or fair market value in the event of total loss, whichever is less

(g) For large multi-engine aircraft, more than 12,500 pounds maximum certificated takeoff weight:

(1) Inflight failure of electrical systems which requires the sustained use of an emergency bus powered by a back up source such as a battery, auxiliary power unit, or air driven generator to retain flight control or essential instruments

(2) Inflight failure of hydraulic systems that results in sustained reliance on the sole remaining hydraulic or mechanical system for movement of flight control surfaces

(3) Sustained loss of the power or thrust produced by two or more engines, and

(4) An evacuation of aircraft in which an emergency egress system is utilized

2. An aircraft is overdue and is believed to have been involved in an accident

b. Manner of Notification.

1. The most expeditious method of notification to the NTSB by the operator will be determined by the circumstances existing at that time. The NTSB has advised that any of the following could be considered examples of the type of notification that could be acceptable

(a) Direct telephone notification

(b) Telegraphic notification

(c) Notification to the FAA should in turn notify the NTSB by direct communication i.e. dispatch or telephone

c. Items to be Included in Notification. The notification required above must contain the following information if available

1. Type, nationality and registration marks of the aircraft

2. Name of owner and operator of the aircraft

3. Name of the pilot in command

4. Date and time of the accident or incident

5. Last point of departure and point of intended landing of the aircraft

6. Position of the aircraft with reference to some easily defined geographical point

7. Number of persons aboard, number killed and number seriously injured

8. Nature of the accident or incident, the weather and the extent of damage to the aircraft so far as is known and

9. A description of any explosives, radioactive materials or other dangerous articles carried

d. Follow-up Reports.

1. The operator must file a report on NTSB Form 6120.1 or 6120.2 available from NTSB Field Offices or from the NTSB, Washington, DC 20594

(a) Within 10 days after an accident

(b) When, after 7 days, an overdue aircraft is still missing

(c) A report on an incident for which notification is required as described in subparagraph a.1 must be filed only as requested by an authorized representative of the NTSB

2. Each crew member if physically able at the time the report is submitted must attach a statement setting forth the facts, conditions and circumstances relating to the accident or incident as they appeared. If the crew member is incapacitated, a statement must be submitted as soon as physically possible

e. Where to File the Reports.

1. The operator of an aircraft must file with the NTSB Field Office nearest the accident or incident any report required by this section

2. The NTSB Field Offices are listed under U.S. Government in the telephone directories in the following cities: Anchorage, AK; Atlanta, GA; Chicago, IL; Denver, CO; Fort Worth, TX; Los Angeles, CA; Miami, FL; Parsippany, NJ; Seattle, WA

7-6-3. Near Midair Collision Reporting

a. Purpose and Data Uses. The primary purpose of the Near Midair Collision (NMAC) Reporting Program is to provide information for use in enhancing the safety and efficiency of the National Airspace System. Data obtained from NMAC reports are used by the FAA to improve the quality of FAA services to users and to develop programs, policies and procedures aimed at the reduction of NMAC occurrences. All NMAC reports are thoroughly investigated by Flight Standards Facilities in coordination with Air Traffic Facilities. Data from these investigations are transmitted to FAA Headquarters in Washington, DC, where they are compiled and analyzed and where safety programs and recommendations are developed.

b. Definition. A near midair collision is defined as an incident associated with the operation of an aircraft in which a possibility of collision occurs as a result of proximity of less than 500 feet to another aircraft or a report is received from a pilot or a flight crew member stating that a collision hazard existed between two or more aircraft.

c. Reporting Responsibility. It is the responsibility of the pilot and/or flight crew to determine whether a near midair collision did actually occur and, if so, to initiate a NMAC report. Be specific as

ATC will not interpret a casual remark to mean that a NMAC is being reported. The pilot should state "I wish to report a near midair collision."

d. Where to File Reports. Pilots and/or flight crew members involved in NMAC occurrences are urged to report each incident immediately:

1. By radio or telephone to the nearest FAA ATC facility or FSS
2. In writing in lieu of the above to the nearest Flight Standards District Office (FSDO)

e. Items to be Reported.

1. Date and time (UTC) of incident
2. Location of incident and altitude
3. Identification and type of reporting aircraft
aircraft destination name and home base of pilot
4. Identification and type of other aircraft
aircraft destination name and home base of pilot
5. Type of flight plans station altimeter setting used
6. Detailed weather conditions at altitude or flight level
7. Approximate courses of both aircraft
indicate if one or both aircraft were climbing or descending
8. Reported separation in distance at first sighting proximity at closest point horizontally and vertically and length of time in sight prior to evasive action
9. Degree of evasive action taken if any from both aircraft if possible
10. Injuries if any

f. Investigation. The FSDO in whose area the incident occurred is responsible for the investigation and reporting of NMACs.

g. Existing radar communication and weather data will be examined in the conduct of the investigation. When possible, all cockpit crew members will be interviewed regarding factors involving the NMAC incident. Air traffic controllers will be interviewed in cases where one or more of the involved aircraft was provided ATC service. Both flight and ATC procedures will be evaluated. When

the investigation reveals a violation of an FAA regulation enforcement action will be pursued.

7-6-4. Unidentified Flying Object (UFO) Reports

a. Persons wanting to report UFO/unexplained phenomena activity should contact a UFO/unexplained phenomena reporting data collection center such as Bigelow Aerospace Advanced Space Studies (BAASS) voice 1-877-979-7444 or e-mail Reporting@baass.org the National UFO Reporting Center, etc.

b. If concern is expressed that life or property might be endangered, report the activity to the local law enforcement department.

7-6-5. Safety Alerts For Operators (SAFO) and Information For Operators (InFO)

a. SAFOs contain important safety information that is often time critical. A SAFO may contain information and/or recommended non-regulatory action to be taken by the respective operators or parties identified in the SAFO. The audience for SAFOs varies with each subject and may include Air carrier certificate holders, air operator certificate holders, general aviation operators, directors of safety, directors of operations, directors of maintenance, fractional ownership program managers, training center managers, accountable managers at repair stations, and other parties as applicable.

b. InFOs are similar to SAFOs but contain valuable information for operators that should help them meet administrative requirements or certain regulatory requirements with relatively low urgency or impact in safety.

c. The SAFO and InFO system provides a means to rapidly distribute this information to operators and can be found at

http://www.faa.gov/other_visit/aviation_industry/airline_operators/airline_safety/safo and
http://www.faa.gov/other_visit/aviation_industry/airline_operators/airline_safety/info

or search key word FAA SAFO or FAA INFO. Free electronic subscription is available on the ALL SAFOs or ALL InFOs page of the website.

Chapter 8. Medical Facts for Pilots

Section 1. Fitness for Flight

8-1-1. Fitness For Flight

a. Medical Certification.

1. All pilots except those flying gliders and free air balloons must possess valid medical certificates in order to exercise the privileges of their airman certificates. The periodic medical examinations required for medical certification are conducted by designated Aviation Medical Examiners who are physicians with a special interest in aviation safety and training in aviation medicine.

2. The standards for medical certification are contained in 14 CFR Part 67. Pilots who have a history of certain medical conditions described in these standards are mandatorily disqualified from flying. These medical conditions include a personality disorder manifested by overt acts, a psychosis, alcoholism, drug dependence, epilepsy, an unexplained disturbance of consciousness, myocardial infarction, angina pectoris, and diabetes requiring medication for its control. Other medical conditions may be temporarily disqualifying, such as acute infections, anemia, and peptic ulcer. Pilots who do not meet medical standards may still be qualified under special issuance provisions or the exemption process. This may require that either additional medical information be provided or practical flight tests be conducted.

3. Student pilots should visit an Aviation Medical Examiner as soon as possible in their flight training in order to avoid unnecessary training expenses should they not meet the medical standards. For the same reason, the student pilot who plans to enter commercial aviation should apply for the highest class of medical certificate that might be necessary in the pilot's career.

CAUTION-

The CFRs prohibit a pilot who possesses a current medical certificate from performing crewmember duties while the pilot has a known medical condition or increase of a known medical condition that would make the pilot unable to meet the standards for the medical certificate.

b. Illness.

1. Even a minor illness suffered in day to day living can seriously degrade performance of many piloting tasks vital to safe flight. Illness can produce fever and distracting symptoms that can impair judgment, memory, alertness, and the ability to make calculations. Although symptoms from an illness may be under adequate control with a medication, the medication itself may decrease pilot performance.

2. The safest rule is not to fly while suffering from any illness. If this rule is considered too stringent for a particular illness, the pilot should contact an Aviation Medical Examiner for advice.

c. Medication.

1. Pilot performance can be seriously degraded by both prescribed and over the counter medications as well as by the medical conditions for which they are taken. Many medications, such as tranquilizers, sedatives, strong pain relievers, and cough suppressant preparations, have primary effects that may impair judgment, memory, alertness, coordination, vision, and the ability to make calculations. Others, such as antihistamines, blood pressure drugs, muscle relaxants, and agents to control diarrhea and motion sickness, have side effects that may impair the same critical functions. Any medication that depresses the nervous system, such as a sedative, tranquilizer, or antihistamine, can make a pilot much more susceptible to hypoxia.

2. The CFRs prohibit pilots from performing crewmember duties while using any medication that affects the faculties in any way contrary to safety. The safest rule is not to fly as a crewmember while taking any medication, unless approved to do so by the FAA.

d. Alcohol.

1. Extensive research has provided a number of facts about the hazards of alcohol consumption and flying. As little as one ounce of liquor, one bottle of beer, or four ounces of wine can impair flying skills, with the alcohol consumed in these drinks being detectable in the breath and blood for at least 3 hours. Even after the body completely destroys a moderate amount of alcohol, a pilot can still be severely

impaired for many hours by hangover. There is simply no way of increasing the destruction of alcohol or alleviating a hangover. Alcohol also renders a pilot much more susceptible to disorientation and hypoxia.

2. A consistently high alcohol related fatal aircraft accident rate serves to emphasize that alcohol and flying are a potentially lethal combination. The CFRs prohibit pilots from performing crew member duties within 8 hours after drinking any alcoholic beverage or while under the influence of alcohol. However, due to the slow destruction of alcohol, a pilot may still be under influence 8 hours after drinking a moderate amount of alcohol. Therefore, an excellent rule is to allow at least 12 to 24 hours between bottle and throttle, depending on the amount of alcoholic beverage consumed.

e. Fatigue.

1. Fatigue continues to be one of the most treacherous hazards to flight safety, as it may not be apparent to a pilot until serious errors are made. Fatigue is best described as either acute (short term) or chronic (long term).

2. A normal occurrence of everyday living, acute fatigue is the tiredness felt after long periods of physical and mental strain, including strenuous muscular effort, immobility, heavy mental workload, strong emotional pressure, monotony, and lack of sleep. Consequently, coordination and alertness, so vital to safe pilot performance, can be reduced. Acute fatigue is prevented by adequate rest and sleep, as well as by regular exercise and proper nutrition.

3. Chronic fatigue occurs when there is not enough time for full recovery between episodes of acute fatigue. Performance continues to fall off, and judgment becomes impaired so that unarranted risks may be taken. Recovery from chronic fatigue requires a prolonged period of rest.

4. **OBSTRUCTIVE SLEEP APNEA (OSA).** OSA is now recognized as an important preventable factor identified in transportation accidents. OSA interrupts the normal restorative sleep necessary for normal functioning and is associated with chronic illnesses such as hypertension, heart attack, stroke, obesity, and diabetes. Symptoms include snoring, excessive daytime sleepiness, intermittent prolonged breathing pauses while sleeping, memory impairment,

and lack of concentration. There are many available treatments which can reverse the day time symptoms and reduce the chance of an accident. OSA can be easily treated. Most treatments are acceptable for medical certification upon demonstrating effective treatment. If you have any symptoms described above, or neck size over 17 inches in men or 16 inches in women, or a body mass index greater than 30, you should be evaluated for sleep apnea by a sleep medicine specialist.

http://www.cdc.gov/healthyweight/assessing/bmi/adult_bmi/english_bmi_calculator/bmi_calculator.html With treatment, you can avoid or delay the onset of these chronic illnesses and prolong a quality life.

f. Stress.

1. Stress from the pressures of everyday living can impair pilot performance, often in very subtle ways. Difficulties, particularly at work, can occupy thought processes enough to markedly decrease alertness. Distraction can so interfere with judgment that unarranted risks are taken, such as flying into deteriorating weather conditions to keep on schedule. Stress and fatigue (see above) can be an extremely hazardous combination.

2. Most pilots do not leave stress on the ground. Therefore, when more than usual difficulties are being experienced, a pilot should consider delaying flight until these difficulties are satisfactorily resolved.

g. Emotion.

Certain emotionally upsetting events, including a serious argument, death of a family member, separation or divorce, loss of job, and financial catastrophe, can render a pilot unable to fly an aircraft safely. The emotions of anger, depression, and anxiety from such events not only decrease alertness but also may lead to taking risks that border on self-destruction. Any pilot who experiences an emotionally upsetting event should not fly until satisfactorily recovered from it.

h. Personal Checklist. Aircraft accident statistics show that pilots should be conducting preflight checklists on themselves as well as their aircraft. For pilot impairment contributes to many more accidents than failures of aircraft systems. A personal checklist, which includes all of the categories of pilot impairment as discussed in this section, that can be

easily committed to memory is being distributed by the FAA in the form of a wallet-sized card

i. PERSONAL CHECKLIST. *I'm physically and mentally safe to fly; not being impaired by:*

Illness

Medication

Stress

Alcohol

Fatigue

Emotion

8-1-2. Effects of Altitude

a. Hypoxia.

1. Hypoxia is a state of oxygen deficiency in the body sufficient to impair functions of the brain and other organs. Hypoxia from exposure to altitude is due only to the reduced barometric pressures encountered at altitude for the concentration of oxygen in the atmosphere remains about 21 percent from the ground out to space.

2. Although a deterioration in night vision occurs at a cabin pressure altitude as low as 5 000 feet, other significant effects of altitude hypoxia usually do not occur in the normal healthy pilot below 12 000 feet. From 12 000 to 15 000 feet of altitude, judgment, memory, alertness, coordination, and ability to make calculations are impaired, and headache, drowsiness, dizziness, and either a sense of well-being, euphoria, or belligerence occur. The effects appear following increasingly shorter periods of exposure to increasing altitude. In fact, pilot performance can seriously deteriorate within 15 minutes at 15 000 feet.

3. At cabin pressure altitudes above 15 000 feet, the periphery of the visual field grays out to a point where only central vision remains, tunnel vision. A blue coloration, cyanosis, of the fingernails and lips develops. The ability to take corrective and protective action is lost in 20 to 30 minutes at 18 000 feet and

5 to 12 minutes at 20 000 feet, followed soon thereafter by unconsciousness.

4. The altitude at which significant effects of hypoxia occur can be lowered by a number of factors. Carbon monoxide inhaled in smoking or from exhaust fumes lowered hemoglobin, anemia, and certain medications can reduce the oxygen-carrying capacity of the blood to the degree that the amount of oxygen provided to body tissues will already be equivalent to the oxygen provided to the tissues when exposed to a cabin pressure altitude of several thousand feet. Small amounts of alcohol and low doses of certain drugs, such as antihistamines, tranquilizers, sedatives, and analgesics, can, through their depressant action, render the brain much more susceptible to hypoxia. Extreme heat and cold, fever, and anxiety increase the body's demand for oxygen and hence its susceptibility to hypoxia.

5. The effects of hypoxia are usually quite difficult to recognize, especially when they occur gradually. Since symptoms of hypoxia do not vary in an individual, the ability to recognize hypoxia can be greatly improved by experiencing and witnessing the effects of hypoxia during an altitude chamber flight. The FAA provides this opportunity through aviation physiology training, which is conducted at the FAA Civil Aeromedical Institute and at many military facilities across the U.S. To attend the Physiological Training Program at the Civil Aeromedical Institute, Mike Monroney Aeronautical Center, Oklahoma City, OK, contact by telephone 405-954-6212 or by writing Aerospace Medical Education Division, AAM-400, CAMI, Mike Monroney Aeronautical Center, P.O. Box 25082, Oklahoma City, OK 73125.

NOTE-

To attend the physiological training program at one of the military installations having the training capability, an application form and a fee must be submitted. Full particulars about location, fees, scheduling procedures, course content, individual requirements, etc., are contained in the Physiological Training Application, Form Number AC 3150-7, which is obtained by contacting the accident prevention specialist or the office forms manager in the nearest FAA office.

6. Hypoxia is prevented by heeding factors that reduce tolerance to altitude: by enriching the inspired air with oxygen from an appropriate oxygen system and by maintaining a comfortable, safe cabin pressure altitude. For optimum protection, pilots are encouraged to use supplemental oxygen above

10 000 feet during the day and above 5 000 feet at night. The CFRs require that at the minimum flight crew be provided with and use supplemental oxygen after 30 minutes of exposure to cabin pressure altitudes between 12 500 and 14 000 feet and immediately on exposure to cabin pressure altitudes above 14 000 feet. Every occupant of the aircraft must be provided with supplemental oxygen at cabin pressure altitudes above 15 000 feet.

b. Ear Block.

1. As the aircraft cabin pressure decreases during ascent, the expanding air in the middle ear pushes the eustachian tube open, and by escaping down it to the nasal passages, equalizes in pressure with the cabin pressure. But during descent, the pilot must periodically open the eustachian tube to equalize pressure. This can be accomplished by swallowing, yawning, tensing muscles in the throat, or if these do not work, by a combination of closing the mouth, pinching the nose closed, and attempting to blow through the nostrils (Valsalva maneuver).

2. Either an upper respiratory infection, such as a cold or sore throat, or a nasal allergic condition can produce enough congestion around the eustachian tube to make equalization difficult. Consequently, the difference in pressure between the middle ear and aircraft cabin can build up to a level that will hold the eustachian tube closed, making equalization difficult if not impossible. The problem is commonly referred to as an ear block.

3. An ear block produces severe ear pain and loss of hearing that can last from several hours to several days. Rupture of the ear drum can occur in flight or after landing. Fluid can accumulate in the middle ear and become infected.

4. An ear block is prevented by not flying with an upper respiratory infection or nasal allergic condition. Adequate protection is usually not provided by decongestant sprays or drops to reduce congestion around the eustachian tubes. Oral decongestants have side effects that can significantly impair pilot performance.

5. If an ear block does not clear shortly after landing, a physician should be consulted.

c. Sinus Block.

1. During ascent and descent, air pressure in the sinuses equalizes with the aircraft cabin pressure through small openings that connect the sinuses to the nasal passages. Either an upper respiratory infection, such as a cold or sinusitis, or a nasal allergic condition can produce enough congestion around an opening to slow equalization, and as the difference in pressure between the sinus and cabin mounts, eventually plug the opening. This sinus block occurs most frequently during descent.

2. A sinus block can occur in the frontal sinuses located above each eyebrow, or in the maxillary sinuses located in each upper cheek. It will usually produce excruciating pain over the sinus area. A maxillary sinus block can also make the upper teeth ache. Bloody mucus may discharge from the nasal passages.

3. A sinus block is prevented by not flying with an upper respiratory infection or nasal allergic condition. Adequate protection is usually not provided by decongestant sprays or drops to reduce congestion around the sinus openings. Oral decongestants have side effects that can impair pilot performance.

4. If a sinus block does not clear shortly after landing, a physician should be consulted.

d. Decompression Sickness After Scuba Diving.

1. A pilot or passenger who intends to fly after scuba diving should allow the body sufficient time to rid itself of excess nitrogen absorbed during diving. If not, decompression sickness due to evolved gas can occur during exposure to low altitude and create a serious inflight emergency.

2. The recommended waiting time before going to flight altitudes of up to 8 000 feet is at least 12 hours after diving, which has not required controlled ascent, nondecompression stop diving, and at least 24 hours after diving, which has required controlled ascent, decompression stop diving. The waiting time before going to flight altitudes above 8 000 feet should be at least 24 hours after any SCUBA dive. These recommended altitudes are actual flight altitudes above mean sea level (AMSL) and not pressurized cabin altitudes. This takes into consideration the risk of decompression of the aircraft during flight.

8-1-3. Hyperventilation in Flight

a. Hyperventilation or an abnormal increase in the volume of air breathed in and out of the lungs can occur subconsciously when a stressful situation is encountered in flight. As hyperventilation blows off excessive carbon dioxide from the body, a pilot can experience symptoms of lightheadedness, suffocation, drowsiness, tingling in the extremities, and coolness and react to them with even greater hyperventilation. Incapacitation can eventually result from incoordination, disorientation, and painful muscle spasms. Finally, unconsciousness can occur.

b. The symptoms of hyperventilation subside within a few minutes after the rate and depth of breathing are consciously brought back under control. The buildup of carbon dioxide in the body can be hastened by controlled breathing in and out of a paper bag held over the nose and mouth.

c. Early symptoms of hyperventilation and hypoxia are similar. Moreover, hyperventilation and hypoxia can occur at the same time. Therefore, if a pilot is using an oxygen system when symptoms are experienced, the oxygen regulator should immediately be set to deliver 100 percent oxygen, and then the system checked to assure that it has been functioning effectively before giving attention to rate and depth of breathing.

8-1-4. Carbon Monoxide Poisoning in Flight

a. Carbon monoxide is a colorless, odorless, and tasteless gas contained in exhaust fumes. When breathed even in minute quantities over a period of time, it can significantly reduce the ability of the blood to carry oxygen. Consequently, effects of hypoxia occur.

b. Most heaters in light aircraft work by air flowing over the manifold. Use of these heaters while exhaust fumes are escaping through manifold cracks and seals is responsible every year for several nonfatal and fatal aircraft accidents from carbon monoxide poisoning.

c. A pilot who detects the odor of exhaust or experiences symptoms of headache, drowsiness, or dizziness while using the heater should suspect carbon monoxide poisoning and immediately shut off the heater and open air vents. If symptoms are

severe or continue after landing, medical treatment should be sought.

8-1-5. Illusions in Flight

a. **Introduction.** Many different illusions can be experienced in flight. Some can lead to spatial disorientation. Others can lead to landing errors. Illusions rank among the most common factors cited as contributing to fatal aircraft accidents.

b. Illusions Leading to Spatial Disorientation.

1. Various complex motions and forces and certain visual scenes encountered in flight can create illusions of motion and position. Spatial disorientation from these illusions can be prevented only by visual reference to reliable, fixed points on the ground or to flight instruments.

2. **The leans.** An abrupt correction of a banked attitude which has been entered too slowly to stimulate the motion sensing system in the inner ear can create the illusion of banking in the opposite direction. The disoriented pilot will roll the aircraft back into its original dangerous attitude, or if level flight is maintained, will feel compelled to lean in the perceived vertical plane until this illusion subsides.

(a) **Coriolis illusion.** An abrupt head movement in a prolonged constant rate turn that has ceased stimulating the motion sensing system can create the illusion of rotation or movement in an entirely different axis. The disoriented pilot will maneuver the aircraft into a dangerous attitude in an attempt to stop rotation. This most overwhelming of all illusions in flight may be prevented by not making sudden, extreme head movements, particularly while making prolonged constant rate turns under IFR conditions.

(b) **Graveyard spin.** A proper recovery from a spin that has ceased stimulating the motion sensing system can create the illusion of spinning in the opposite direction. The disoriented pilot will return the aircraft to its original spin.

(c) **Graveyard spiral.** An observed loss of altitude during a coordinated constant rate turn that has ceased stimulating the motion sensing system can create the illusion of being in a descent with the wings level. The disoriented pilot will pull back on the controls, tightening the spiral and increasing the loss of altitude.

(d) **Somatogravic illusion.** A rapid acceleration during takeoff can create the illusion of being

in a nose up attitude. The disoriented pilot will push the aircraft into a nose low or dive attitude. A rapid deceleration by a quick reduction of the throttles can have the opposite effect. With the disoriented pilot pulling the aircraft into a nose up or stall attitude.

(e) Inversion illusion. An abrupt change from climb to straight and level flight can create the illusion of tumbling backwards. The disoriented pilot will push the aircraft abruptly into a nose low attitude possibly intensifying this illusion.

(f) Elevator illusion. An abrupt upward vertical acceleration usually by an updraft can create the illusion of being in a climb. The disoriented pilot will push the aircraft into a nose low attitude. An abrupt downward vertical acceleration usually by a downdraft has the opposite effect. With the disoriented pilot pulling the aircraft into a nose up attitude.

(g) False horizon. Sloping cloud formations, an obscured horizon, a dark scene, spread light ground lights and stars, and certain geometric patterns of ground light can create illusions of not being aligned correctly with the actual horizon. The disoriented pilot will place the aircraft in a dangerous attitude.

(h) Autokinesis. In the dark, a static light will appear to move about when stared at for many seconds. The disoriented pilot will lose control of the aircraft in attempting to align it with the light.

3. Illusions Leading to Landing Errors.

(a) Various surface features and atmospheric conditions encountered in landing can create illusions of incorrect height above and distance from the runway threshold. Landing errors from these illusions can be prevented by anticipating them during approaches, aerial visual inspection of unfamiliar airports before landing, using electronic glide slope or VASI systems when available, and maintaining optimum proficiency in landing procedures.

(b) Runway width illusion. A narrower than usual runway can create the illusion that the aircraft is at a higher altitude than it actually is. The pilot who does not recognize this illusion will fly a lower approach with the risk of striking objects along the approach path or landing short. A wider than usual runway can have the opposite effect. With the

risk of leveling out high and landing hard or overshooting the runway.

(c) Runway and terrain slopes illusion. An upsloping runway, upsloping terrain, or both can create the illusion that the aircraft is at a higher altitude than it actually is. The pilot who does not recognize this illusion will fly a lower approach. A downsloping runway, downsloping approach terrain, or both can have the opposite effect.

(d) Featureless terrain illusion. An absence of ground features, as when landing over water, darkened areas, and terrain made featureless by snow, can create the illusion that the aircraft is at a higher altitude than it actually is. The pilot who does not recognize this illusion will fly a lower approach.

(e) Atmospheric illusions. Rain on the windshield can create the illusion of greater height and atmospheric haze the illusion of being at a greater distance from the runway. The pilot who does not recognize these illusions will fly a lower approach. Penetration of fog can create the illusion of pitching up. The pilot who does not recognize this illusion will steepen the approach, often quite abruptly.

(f) Ground lighting illusions. Lights along a straight path, such as a road, and even lights on moving trains can be mistaken for runway and approach lights. Bright runway and approach lighting systems, especially where floodlights illuminate the surrounding terrain, may create the illusion of less distance to the runway. The pilot who does not recognize this illusion will fly a higher approach. Conversely, the pilot overflying terrain which has floodlights to provide height cues may make a lower than normal approach.

8-1-6. Vision in Flight

a. Introduction. Of the body senses, vision is the most important for safe flight. Major factors that determine how effectively vision can be used are the level of illumination and the technique of scanning the sky for other aircraft.

b. Vision Under Dim and Bright Illumination.

1. Under conditions of dim illumination, small print and colors on aeronautical charts and aircraft instruments become unreadable unless adequate cockpit lighting is available. Moreover, another aircraft must be much closer to be seen unless its navigation lights are on.

2. In darkness vision becomes more sensitive to light a process called dark adaptation. Although exposure to total darkness for at least 30 minutes is required for complete dark adaptation a pilot can achieve a moderate degree of dark adaptation within 20 minutes under dim red cockpit lighting. Since red light severely distorts colors especially on aeronautical charts and can cause serious difficulty in focusing the eyes on objects inside the aircraft its use is advisable only where optimum outside night vision capability is necessary. Even so white cockpit lighting must be available when needed for map and instrument reading especially under IFR conditions. Dark adaptation is impaired by exposure to cabin pressure altitudes above 5 000 feet carbon monoxide inhaled in smoking and from exhaust fumes deficiency of Vitamin A in the diet and by prolonged exposure to bright sunlight. Since any degree of dark adaptation is lost within a few seconds of viewing a bright light a pilot should close one eye when using a light to preserve some degree of night vision.

3. Excessive illumination especially from light reflected off the canopy surfaces inside the aircraft clouds water snow and desert terrain can produce glare with uncomfortable stinging watering of the eyes and even temporary blindness. Sunglasses for protection from glare should absorb at least 85 percent of visible light 15 percent transmittance and all colors equally neutral transmittance with negligible image distortion from refractive and prismatic errors.

c. Scanning for Other Aircraft.

1. Scanning the sky for other aircraft is a key factor in collision avoidance. It should be used continuously by the pilot and copilot or right seat passenger to cover all areas of the sky visible from the cockpit. Although pilots must meet specific visual acuity requirements the ability to read an eye chart does not ensure that one will be able to efficiently spot other aircraft. Pilots must develop an effective scanning technique which maximizes one's visual capabilities. The probability of spotting a potential collision threat obviously increases with the time spent looking outside the cockpit. Thus one must use timesharing techniques to efficiently scan the surrounding airspace while monitoring instruments as well.

2. While the eyes can observe an approximate 200 degree arc of the horizon at one glance only a very small center area called the fovea in the rear of the eye has the ability to send clear sharply focused messages to the brain. All other visual information that is not processed directly through the fovea will be of less detail. An aircraft at a distance of 7 miles which appears in sharp focus within the foveal center of vision would have to be as close as $\frac{7}{10}$ of a mile in order to be recognized if it were outside of foveal vision. Because the eyes can focus only on this narrow viewing area effective scanning is accomplished with a series of short regularly spaced eye movements that bring successive areas of the sky into the central visual field. Each movement should not exceed 10 degrees and each area should be observed for at least 1 second to enable detection. Although horizontal back and forth eye movements seem preferred by most pilots each pilot should develop a scanning pattern that is most comfortable and then adhere to it to assure optimum scanning.

3. Studies show that the time a pilot spends on visual tasks inside the cabin should represent no more than $\frac{1}{4}$ to $\frac{1}{3}$ of the scan time outside or no more than 4 to 5 seconds on the instrument panel for every 16 seconds outside. Since the brain is already trained to process sight information that is presented from left to right one may find it easier to start scanning over the left shoulder and proceed across the windshield to the right.

4. Pilots should realize that their eyes may require several seconds to refocus when switching views between items in the cockpit and distant objects. The eyes will also tire more quickly when forced to adjust to distances immediately after close up focus as required for scanning the instrument panel. Eye fatigue can be reduced by looking from the instrument panel to the left wing past the wing tip to the center of the first scan quadrant when beginning the exterior scan. After having scanned from left to right allow the eyes to return to the cabin along the right wing from its tip inward. Once back inside one should automatically commence the panel scan.

5. Effective scanning also helps avoid empty field myopia. This condition usually occurs when flying above the clouds or in a haze layer that provides nothing specific to focus on outside the aircraft. This causes the eyes to relax and seek a

comfortable focal distance which may range from 10 to 30 feet. For the pilot, this means looking without seeing which is dangerous.

8-1-7. Aerobatic Flight

a. Pilots planning to engage in aerobatics should be aware of the physiological stresses associated with accelerative forces during aerobatic maneuvers. Many prospective aerobatic trainees enthusiastically enter aerobatic instruction but find their first experiences with G forces to be unanticipated and very uncomfortable. To minimize or avoid potential adverse effects, the aerobatic instructor and trainee must have a basic understanding of the physiology of G force adaptation.

b. Forces experienced with a rapid push over maneuver result in the blood and body organs being displaced toward the head. Depending on forces involved and individual tolerance, a pilot may experience discomfort, headache, red out, and even unconsciousness.

c. Forces experienced with a rapid pull up maneuver result in the blood and body organ displacement toward the lower part of the body away from the head. Since the brain requires continuous blood circulation for an adequate oxygen supply, there is a physiologic limit to the time the pilot can tolerate higher forces before losing consciousness. As the blood circulation to the brain decreases as a result of forces involved, a pilot will experience narrowing of visual fields, gray out, black out, and unconsciousness. Even a brief loss of consciousness in a maneuver can lead to improper control movement causing structural failure of the aircraft or collision with another object or terrain.

d. In steep turns, the centrifugal forces tend to push the pilot into the seat, thereby resulting in blood and body organ displacement toward the lower part of the body as in the case of rapid pull up maneuvers and with the same physiologic effects and symptoms.

e. Physiologically, humans progressively adapt to imposed strains and stress and with practice any maneuver will have decreasing effect. Tolerance to G forces is dependent on human physiology and the individual pilot. These factors include the skeletal anatomy, the cardiovascular architecture, the nervous system, the quality of the blood, the general physical state, and experience and recency of exposure. The

pilot should consult an Aviation Medical Examiner prior to aerobatic training and be aware that poor physical condition can reduce tolerance to accelerative forces.

f. The above information provides pilots with a brief summary of the physiologic effects of G forces. It does not address methods of counteracting these effects. There are numerous references on the subject of G forces during aerobatics available to pilots. Among these are *G Effects on the Pilot During Aerobatics* (FAA-AM-72-28) and *G Incapacitation in Aerobatic Pilots: A Flight Hazard* (FAA-AM-82-13). These are available from the National Technical Information Service, Springfield, Virginia 22161.

REFERENCE-

FAA AC 91-61, *A Hazard in Aerobatics: Effects of G-forces on Pilots*.

8-1-8. Judgment Aspects of Collision Avoidance

a. **Introduction.** The most important aspects of vision and the techniques to scan for other aircraft are described in paragraph 8-1-6, *Vision in Flight*. Pilots should also be familiar with the following information to reduce the possibility of mid-air collisions.

b. **Determining Relative Altitude.** Use the horizon as a reference point. If the other aircraft is above the horizon, it is probably on a higher flight path. If the aircraft appears to be below the horizon, it is probably flying at a lower altitude.

c. **Taking Appropriate Action.** Pilots should be familiar with rules on right of way so if an aircraft is on an obvious collision course, one can take immediate evasive action, preferably in compliance with applicable Federal Aviation Regulations.

d. **Consider Multiple Threats.** The decision to climb, descend, or turn is a matter of personal judgment, but one should anticipate that the other pilot may also be making a quick maneuver. Watch the other aircraft during the maneuver and begin your scanning again immediately since there may be other aircraft in the area.

e. **Collision Course Targets.** Any aircraft that appears to have no relative motion and stays in one scan quadrant is likely to be on a collision course. Also, if a target shows no lateral or vertical motion but increases in size, *take evasive action*.

f. **Recognize High Hazard Areas.**

1. Air ways especially near VORs and Class B Class C Class D and Class E surface areas are places where aircraft tend to cluster

2. Remember most collisions occur during days when the weather is good Being in a radar environment still requires vigilance to avoid collisions

g. Cockpit Management. Studying maps checklists and manuals before flight with other proper preflight planning e.g. noting necessary radio frequencies and organizing cockpit materials can reduce the amount of time required to look at these items during flight permitting more scan time

h. Windshield Conditions. Dirty or bug smeared windshields can greatly reduce the ability of pilots to see other aircraft Keep a clean windshield

i. Visibility Conditions. Smoke haze dust rain and flying towards the sun can also greatly reduce the ability to detect targets

j. Visual Obstructions in the Cockpit.

1. Pilots need to move their heads to see around blind spots caused by fixed aircraft structures such as door posts wings etc It will be necessary at times to maneuver the aircraft e.g. lift a wing to facilitate seeing

2. Pilots must ensure curtains and other cockpit objects e.g. maps on glare shield are removed and stored during flight

k. Lights On.

1. Day or night use of exterior lights can greatly increase the conspicuity of any aircraft

2. Keep interior lights low at night

l. ATC Support. ATC facilities often provide radar traffic advisories on a workload permitting basis Flight through Class C and Class D airspace requires communication with ATC Use this support whenever possible or when required

Chapter 9. Aeronautical Charts and Related Publications

Section 1. Types of Charts Available

9-1-1. General

Civil aeronautical charts for the U S and its territories and possessions are produced by Aeronautical Navigation Products AeroNav http://www.faa.gov/air_traffic/flight_info/aeronav which is part of FAA's Air Traffic Organization Mission Support Services

9-1-2. Obtaining Aeronautical Charts

a. Most charts and publications described in this Chapter can be obtained by subscription or one-time sales from

Aeronautical Navigation Products AeroNav
Logistics Group AJV-372
Federal Aviation Administration
10201 Good Luck Road
Glenn Dale MD 20769-9700
Telephone 1-800-638-8972 Toll free within U S
301-436-8301
301-436-6829 FA
e-mail 9-AMC-Chartsales faa.gov

b. Public sales of charts and publications are also available through a network of FAA chart agents primarily located at or near major civil airports. A listing of products, dates of latest editions and agents is available at the AeroNav Web site http://www.faa.gov/air_traffic/flight_info/aeronav

9-1-3. Selected Charts and Products Available

VFR Navigation Charts
IFR Navigation Charts
Planning Charts
Supplementary Charts and Publications
Digital Products

9-1-4. General Description of each Chart Series


a. VFR Navigation Charts.

1. Sectional Aeronautical Charts. Sectional Charts are designed for visual navigation of slow to medium speed aircraft. The topographic information consists of contour lines, shaded relief, drainage patterns, and an extensive selection of visual checkpoints and landmarks used for flight under VFR. Cultural features include cities and towns, roads, railroads, and other distinct landmarks. The aeronautical information includes visual and radio aids to navigation, airports, controlled airspace, special-use airspace, obstructions, and related data. Scale 1 inch = 6.86nm/1 500 000 60 x 20 inches folded to 5 x 10 inches. Revised semiannually except most Alaskan charts are revised annually. See FIG 9-1-1 and FIG 9-1-11.

2. VFR Terminal Area Charts (TAC). TACs depict the airspace designated as Class B airspace. While similar to sectional charts, TACs have more detail because the scale is larger. The TAC should be used by pilots intending to operate to or from airfields within or near Class B or Class C airspace. Areas with TAC coverage are indicated by a • on the Sectional Chart indexes. Scale 1 inch = 3.43nm/1 250 000. Charts are revised semiannually except Puerto Rico-Virgin Islands revised annually. See FIG 9-1-1 and FIG 9-1-11.

3. World Aeronautical Chart (WAC). WACs cover land areas for navigation by moderate speed aircraft operating at high altitudes. Included are city tints, principal roads, railroads, distinctive landmarks, drainage patterns, and relief. Aeronautical information includes visual and radio aids to navigation, airports, airways, special-use airspace, and obstructions. Because of a smaller scale, WACs do not show as much detail as sectional or TACs and therefore are not recommended for exclusive use by pilots of low speed, low altitude aircraft. Scale 1 inch = 13.7nm/1 1 000 000 60 x 20 inches folded to 5 x 10 inches. WACs are revised annually except for a few in Alaska and the Caribbean which are revised biennially. See FIG 9-1-12 and FIG 9-1-13.

FIG 9-1-1
Sectional and VFR Terminal Area Charts for the Conterminous U.S.,
Hawaii, Puerto Rico, and Virgin Islands

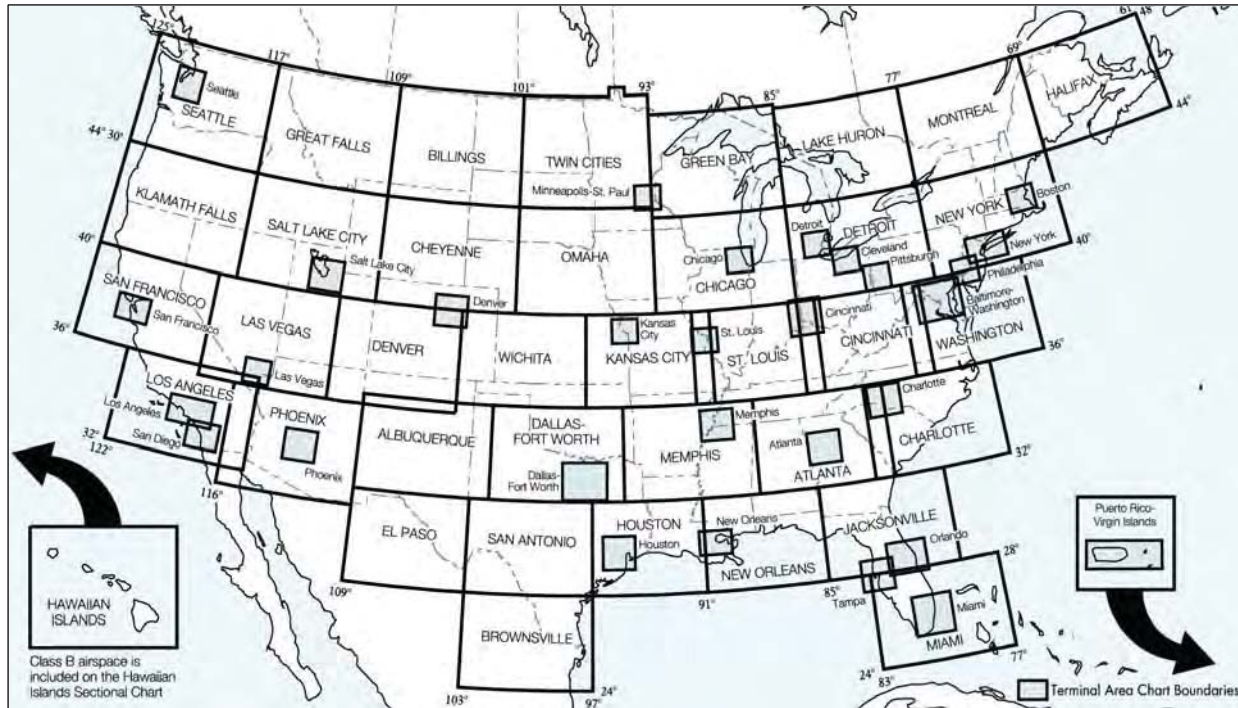

4. U.S. Gulf Coast VFR Aeronautical Chart.

The Gulf Coast Chart is designed primarily for helicopter operation in the Gulf of Mexico area. Information depicted includes offshore mineral leasing areas and blocks, oil drilling platforms, and high density helicopter activity areas. Scale 1 inch = 13.7 nm / 1:100,000. 55 x 27 inches folded to 5 x 10 inches. Revised annually.

5. Grand Canyon VFR Aeronautical Chart.

Covers the Grand Canyon National Park area and is designed to promote aviation safety, flight freedoms, and facilitate VFR navigation in this popular area. The chart contains aeronautical information for general aviation VFR pilots on one side and commercial VFR air tour operators on the other side.

6. Helicopter Route Charts. A three-color chart series which shows current aeronautical information useful to helicopter pilots navigating in areas with high concentrations of helicopter activity. Information depicted includes helicopter routes, four classes of heliports with associated frequency and lighting capabilities, NAVAIDs, and obstructions. In addition, pictorial symbols, roads, and easily identified geographical features are portrayed. Helicopter charts have a longer life span than other

chart products and may be current for several years. All new editions of these charts are printed on a durable plastic material. Helicopter Route Charts are updated as requested by the FAA. Scale 1 inch = 13.7 nm / 1:100,000. 34 x 30 inches folded to 5 x 10 inches.

b. IFR Navigation Charts.

1. IFR Enroute Low Altitude Charts (Conterminous U.S. and Alaska). Enroute low altitude charts provide aeronautical information for navigation under IFR conditions below 18,000 feet MSL. This four-color chart series includes airspace limits, controlled airspace, VHF NAVAIDs, frequency identification, channel, geographic coordinates, airports, terminal air/ground communications, minimum en route and obstruction clearance altitudes, airway distances, reporting points, special use airspace, and military training routes. Scales vary from 1 inch = 5 nm to 1 inch = 20 nm. 50 x 20 inches folded to 5 x 10 inches. Charts revised every 56 days. *Area charts* show congested terminal areas at a large scale. They are included with subscriptions to any conterminous U.S. Set Low, Full set, East or West sets.

See FIG 9-1-2 and FIG 9-1-4

FIG 9-1-2
Enroute Low Altitude Instrument Charts for the Conterminous U.S. (Includes Area Charts)


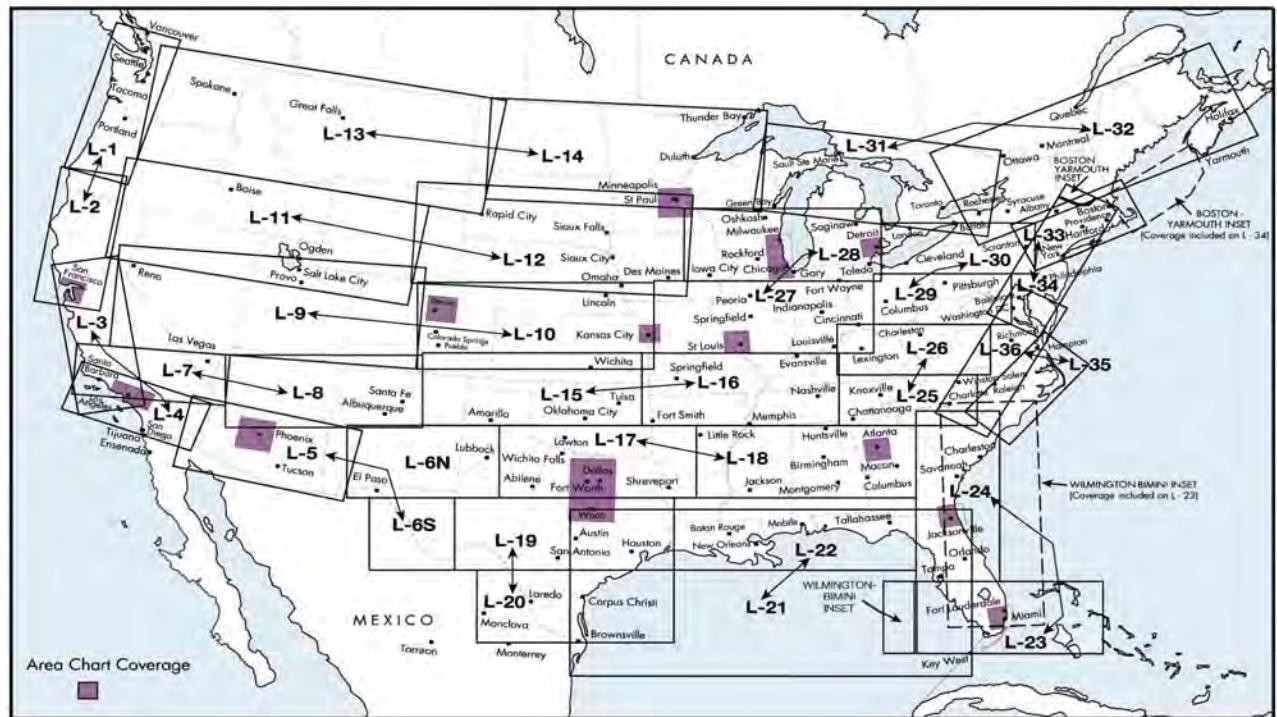


FIG 9-1-3
Enroute High Altitude Charts for the Conterminous U.S.

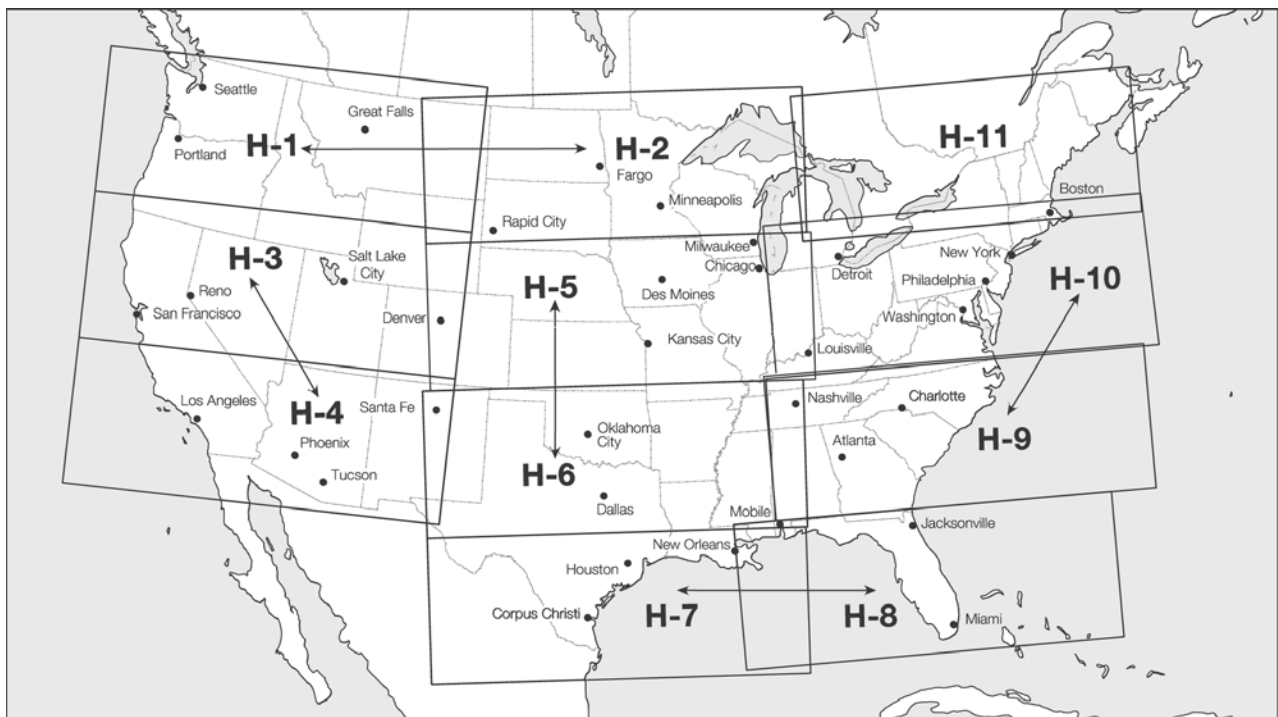

2. IFR Enroute High Altitude Charts (Conterminous U.S. and Alaska). Enroute high altitude charts are designed for navigation at or above 18 000 feet MSL. This four-color chart series includes the enroute structure, VHF NAVAIDs, and

frequency identification channel geographic coordinates, selected airports, reporting points. Scales vary from 1 inch = 45nm to 1 inch = 18nm. 55 x 20 inches, folded to 5 x 10 inches. Revised every 56 days. See FIG 9-1-3 and FIG 9-1-5.

**FIG 9-1-4
Alaska Enroute Low Altitude Chart**


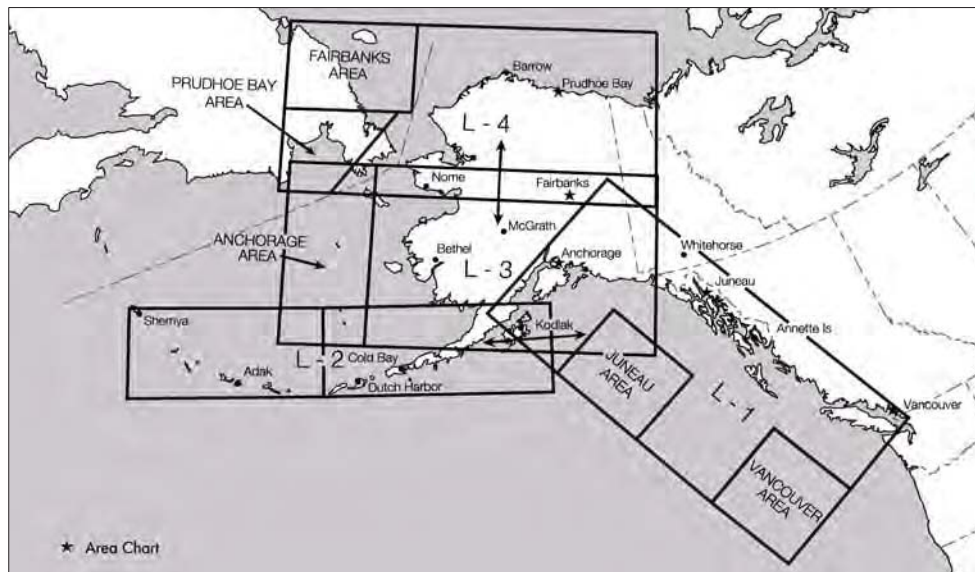


**FIG 9-1-5
Alaskan Enroute High Altitude Chart**

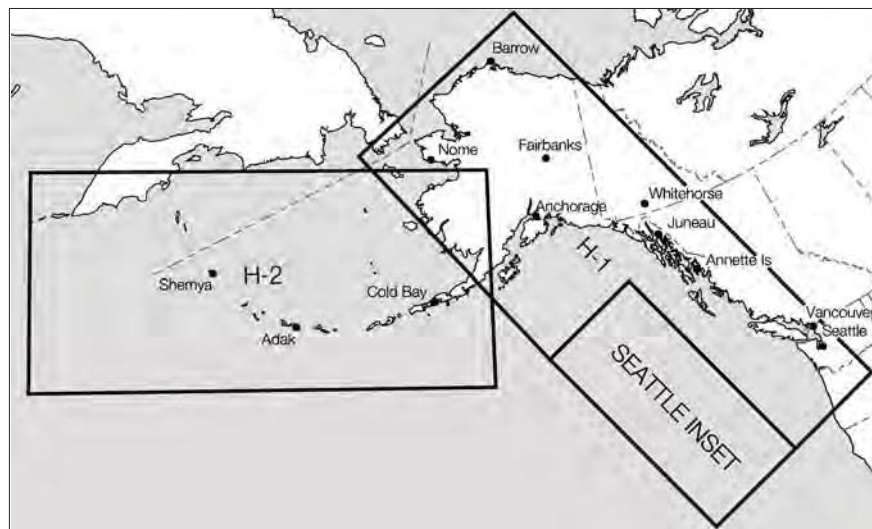

3. U.S. Terminal Procedures Publication (TPP). TPPs are published in 24 loose-leaf or perfect bound volumes covering the conterminous U.S., Puerto Rico and the Virgin Islands. A Change Notice is published at the midpoint between revisions in bound volume format and is available on the internet for free download at the AeroNav web site. See FIG 9-1-9. The TPPs include:

(a) Instrument Approach Procedure (IAP) Charts. IAP charts portray the aeronautical data that is required to execute instrument approaches to airports. Each chart depicts the IAP, all related navigation data, communications information, and an airport sketch. Each procedure is designated for use with a specific electronic navigational aid, such as ILS, VOR, NDB, RNAV, etc.

(b) Instrument Departure Procedure (DP) Charts. DP charts are designed to expedite clearance delivery and to facilitate transition between takeoff and en route operations. They furnish pilots departure routing, clearance information in graphic and textual form.

(c) Standard Terminal Arrival (STAR) Charts. STAR charts are designed to expedite ATC arrival procedures and to facilitate transition between en route and instrument approach operations. They depict preplanned IFR/ATC arrival procedures in graphic and textual form. Each STAR procedure is presented as a separate chart and may serve either a single airport or more than one airport in a given geographic area.

(d) Airport Diagrams. Full page airport diagrams are designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating geodetic position navigational systems aboard aircraft. Airport diagrams are available for free download at the AeroNav website.

4. Alaska Terminal Procedures Publication. This publication contains all terminal flight procedures for civil and military aviation in Alaska. Included are IAP charts, DP charts, STAR charts, airport diagrams, radar minimums, and supplementary support data such as IFR alternate minimums, take-off minimums, rate of descent tables, rate of climb tables, and inoperative components tables. Volume is 5-3/8 x 8-1/4 inch, top bound. Publication


revised every 56 days with provisions for a Terminal Change Notice as required.

c. Planning Charts.

1. U.S. IFR/VFR Low Altitude Planning Chart. This chart is designed for preflight and en route flight planning for IFR/VFR flights. Depiction includes low altitude airways and mileage, NAVAIDs, airports, special use airspace, cities, times, zones, major drainage, a directory of airports with their airspace classification, and a mileage table showing great circle distances between major airports. Scale 1 inch = 47nm/1:340,000. Chart revised annually and is available either folded or unfolded for wall mounting. See FIG 9-1-6.

2. Gulf of Mexico and Caribbean Planning Chart. This is a VFR planning chart on the reverse side of the *Puerto Rico – Virgin Islands VFR Terminal Area Chart*. Information shown includes mileage between airports of entry, a selection of special use airspace, and a directory of airports with their available services. Scale 1 inch = 85nm/1:619,217. 60 x 20 inches, folded to 5 x 10 inches. Chart revised annually. See FIG 9-1-6.

FIG 9-1-6
Planning Charts

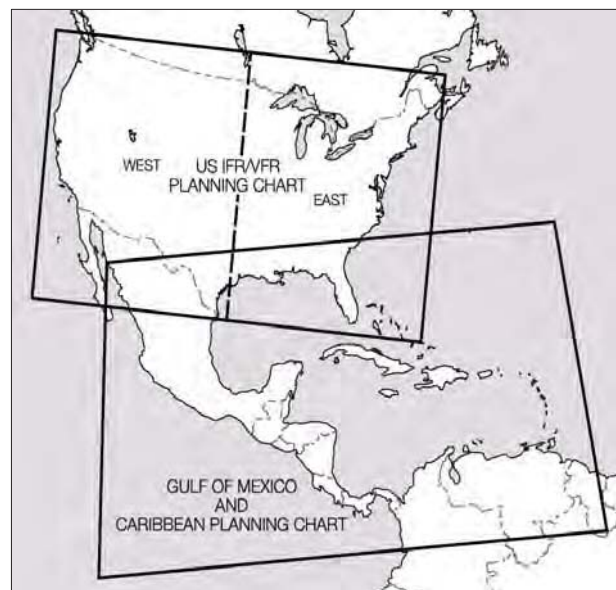

3. Charted VFR Flyway Planning Charts. This chart is printed on the reverse side of selected TAC charts. The coverage is the same as the associated TAC. Flyway planning charts depict flight paths and altitudes recommended for use to bypass high traffic areas. Ground references are provided as

a guide for visual orientation. Fly way planning charts are designed for use in conjunction with TACs and sectional charts and are not to be used for navigation. Chart scale 1 inch = 343nm/1:250,000.

d. Supplementary Charts and Publications.

1. Airport/Facility Directory (A/FD). This 7-volume booklet series contains data on airports, seaplane bases, heliports, NAVAIDs, communications data, weather data sources, airspace, special notices, and operational procedures. Coverage includes the conterminous U.S., Puerto Rico, and the Virgin Islands. The A/FD shows data that cannot be readily depicted in graphic form, e.g., airport hours of operations, types of fuel available, runway widths, lighting codes, etc. The A/FD also provides a means for pilots to update visual charts between edition dates. A/FD is published every 56 days. While sectional and Terminal Area Charts are generally revised every six months. The VFR Chart Update Bulletins are available for free download from the AeroNav web site. Volumes are side-bound 5-3/8 x 8-1/4 inches. See FIG 9-1-10.

2. Supplement Alaska. This is a civil/military flight information publication issued by FAA every 56 days. It is a single volume booklet designed for use with appropriate IFR or VFR charts. The Supplement Alaska contains an A/FD, airport sketches, communications data, weather data sources, airspace, listing of navigational facilities, and special notices and procedures. Volume is side-bound 5-3/8 x 8-1/4 inches.

3. Chart Supplement Pacific. This supplement is designed for use with appropriate VFR or IFR enroute charts. Included in this one-volume booklet are the A/FD, communications data, weather data sources, airspace, navigational facilities, special notices, and Pacific area procedures, IAP charts, DP charts, STAR charts, airport diagrams, radar minimums, and supporting data for the Hawaiian and

Pacific Islands are included. The manual is published every 56 days. Volume is side-bound 5-3/8 x 8-1/4 inches.

4. North Pacific Route Charts. These charts are designed for FAA controllers to monitor transoceanic flights. They show established intercontinental air routes, including reporting points with geographic positions. Composite Chart Scale 1 inch = 164nm/1:12,000,000. 48 x 41-1/2 inches. Area Charts Scale 1 inch = 95.9nm/1:7,000,000. 52 x 40-1/2 inches. All charts shipped unfolded. Charts revised every 56 days. See FIG 9-1-8.

5. North Atlantic Route Chart. Designed for FAA controllers to monitor transatlantic flights, this 5-color chart shows oceanic control areas, coastal navigation aids, oceanic reporting points, and NAVAID geographic coordinates. Full Size Chart Scale 1 inch = 113.1nm/1:8,250,000. Chart is shipped flat only. Half Size Chart Scale 1 inch = 150.8nm/1:11,000,000. Chart is 29-3/4 x 20-1/2 inches, shipped folded to 5 x 10 inches only. Chart revised every 56 weeks. See FIG 9-1-7.

FIG 9-1-7

North Atlantic Route Charts


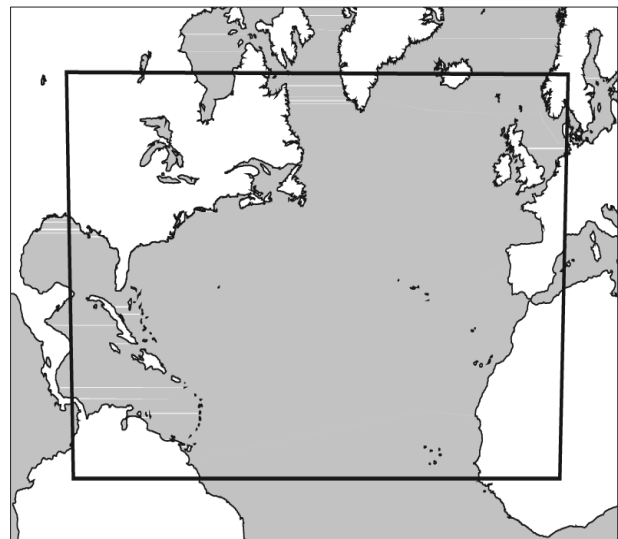


FIG 9-1-8
North Pacific Oceanic Route Charts

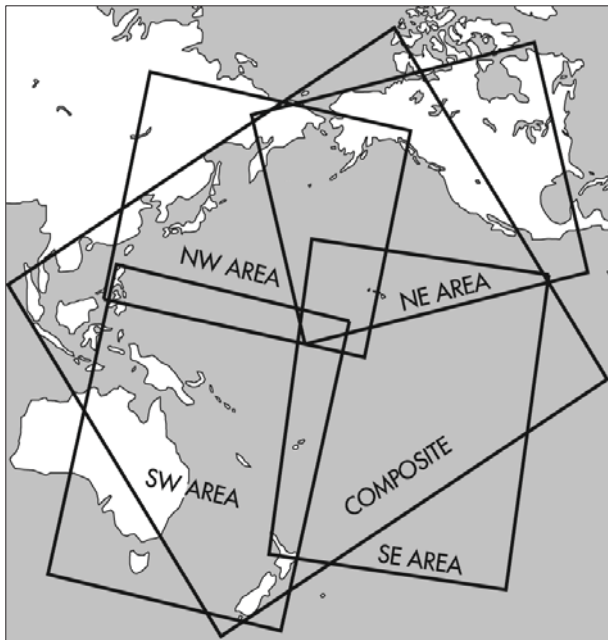

6. Airport Obstruction Charts (OC). The OC is a 1:12,000 scale graphic depicting 14 CFR Part 77 Objects Affecting Navigable Airspace, surfaces, a representation of objects that penetrate these surfaces, aircraft movement and apron areas, navigational aids, prominent airport buildings, and a selection of roads and other planimetric detail in the airport vicinity. Also included are tabulations of runway and other operational data.

7. FAA Aeronautical Chart User's Guide. A booklet designed to be used as a teaching aid and reference document. It describes the substantial amount of information provided on FAA's aeronautical charts and publications. It includes explanations and illustrations of chart terms and symbols organized by chart type. The user's guide is available for free download at the AeroNav website.

e. Digital Products.

1. The Digital Aeronautical Information CD (DAICD). The DAICD is a combination of the NAVAID Digital Data File, the Digital Chart Supplement, and the Digital Obstacle File on one Compact Disk. These three digital products are no

longer sold separately. The files are updated every 56 days and are available by subscription only.

(a) The NAVAID Digital Data File. This file contains a current listing of NAVAIDs that are compatible with the National Airspace System. This file contains all NAVAIDs including ILS and its components in the U.S., Puerto Rico, and the Virgin Islands, plus bordering facilities in Canada, Mexico, and the Atlantic and Pacific areas.

(b) The Digital Obstacle File. This file describes all obstacles of interest to aviation users in the U.S., with limited coverage of the Pacific, Caribbean, Canada, and Mexico. The obstacles are assigned unique numerical identifiers, accuracy codes, and listed in order of ascending latitude within each state or area.

(c) The Digital Aeronautical Chart Supplement (DACS). The DACS is specifically designed to provide digital airspace data not otherwise readily available. The supplement includes a *Change Notice* for IAPFI data at the mid-point between revisions. The *Change Notice* is available only by free download from the AeroNav website.

The DACS individual data files are:

ENHIGH.DAT High altitude airways, continuous U.S.
ENLOW.DAT Low altitude airways, continuous U.S.
IAPFI.DAT Selected instrument approach procedure, NAVAID, and fix data
MTRFI.DAT Military training routes data
ALHIGH.DAT Alaska high altitude airways data
ALLOW.DAT Alaska low altitude airways data
PR.DAT Puerto Rico airways data
HAWAII.DAT Hawaii airways data
BAHAMA.DAT Bahamas routes data
OCEANIC.DAT Oceanic routes data
STARS.DAT Standard terminal arrivals data
DP.DAT Instrument departure procedures data
LOPREF.DAT Preferred low altitude IFR routes data
HIPREF.DAT Preferred high altitude IFR routes data
ARF.DAT Air route radar facilities data
ASR.DAT Airport surveillance radar facilities data

2. The National Flight Database (NFD) (ARINC 424 [Ver 13 & 15]). The NFD is a basic digital dataset modeled to an international standard which can be used as a basis to support GPS navigation. Initial data elements included are Airport and Helicopter Records, VHF and NDB Navigation aids, en route waypoints and airways. Additional data elements will be added in subsequent releases to include departure procedures, standard terminal arrivals, and GPS/RNAV instrument approach procedures. The database is updated every 28 days. The data is available by subscription only and is distributed on CD-ROM or by ftp download.

3. Sectional Raster Aeronautical Charts (SRAC). These digital VFR charts are geo-referenced scanned images of FAA sectional charts. Additional digital data may easily be overlaid on the raster image using commonly available Geographic Information System software. Data such as weather, temporary flight restrictions, obstacles, or other geospatial data can be combined with SRAC data to support a variety of needs. Most SRACs are provided in two halves, a north side and a south side. The file resolution is 200 dots per inch and the data is 8-bit color. The data is provided as a GeoTIFF and distributed on DVD-R media. The root mean square error of the transformation will not exceed two pixels. SRACs DVDs are updated every 28 days and are available by subscription only.

FIG 9-1-9
U.S. Terminal Publication Volumes

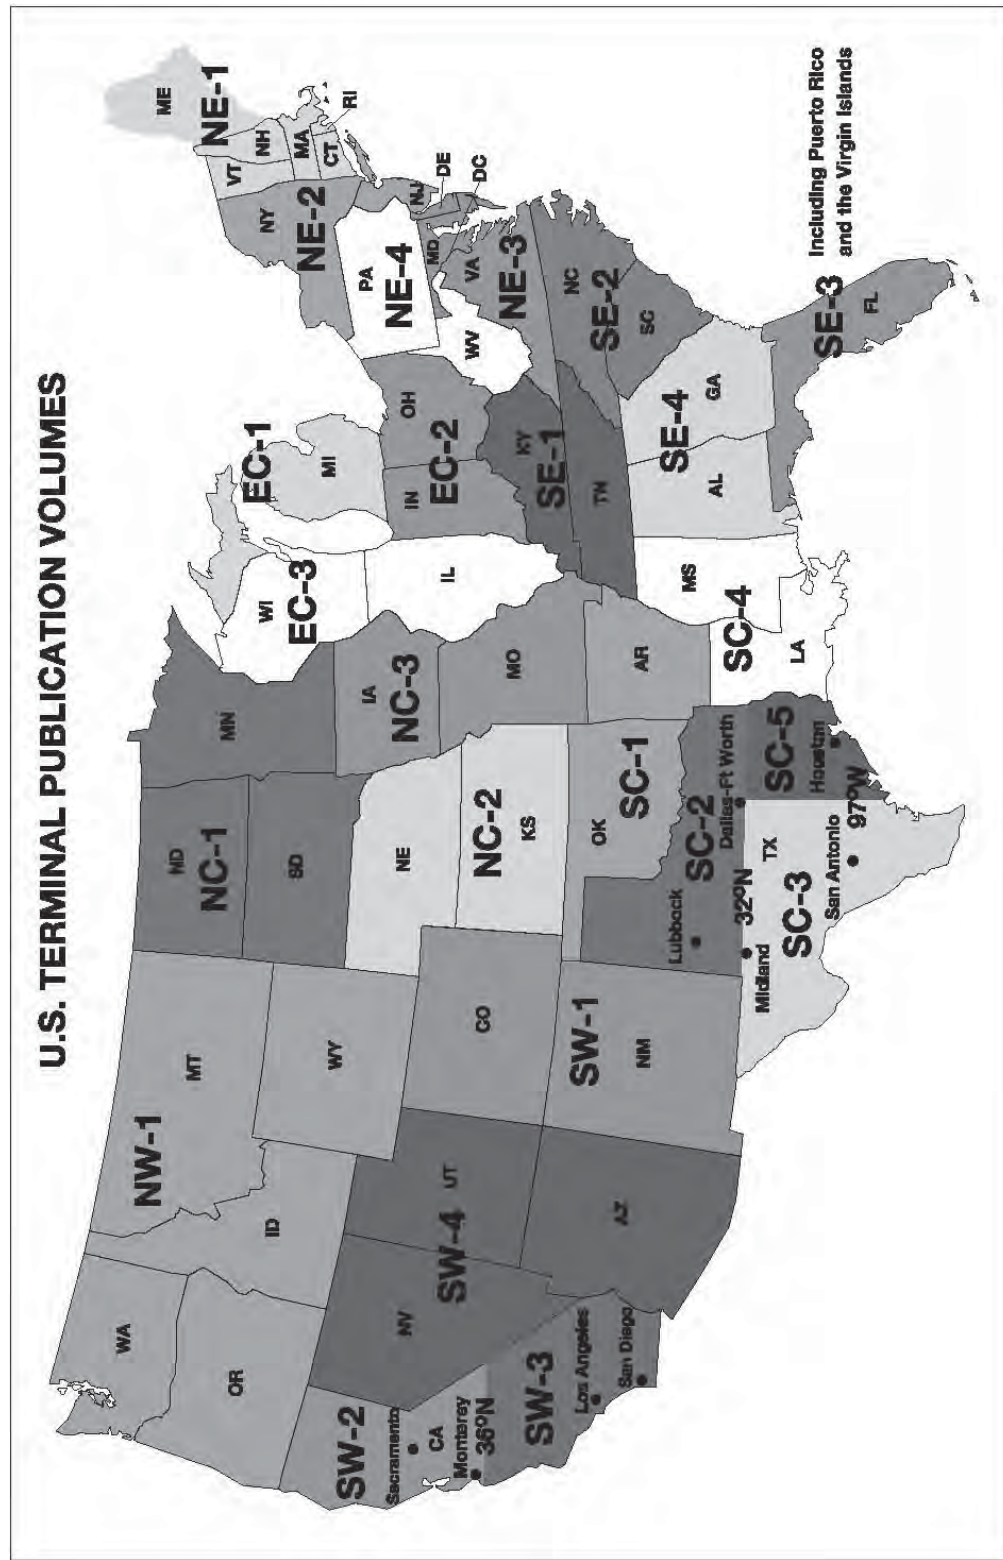


FIG 9-1-10
Airport/Facility Directory Geographic Areas

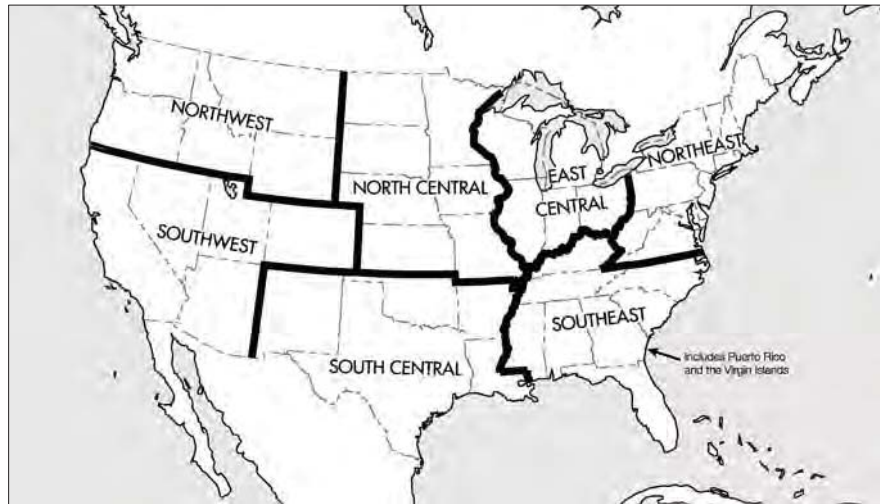


FIG 9-1-11
Sectional and VFR Terminal Area Charts for Alaska

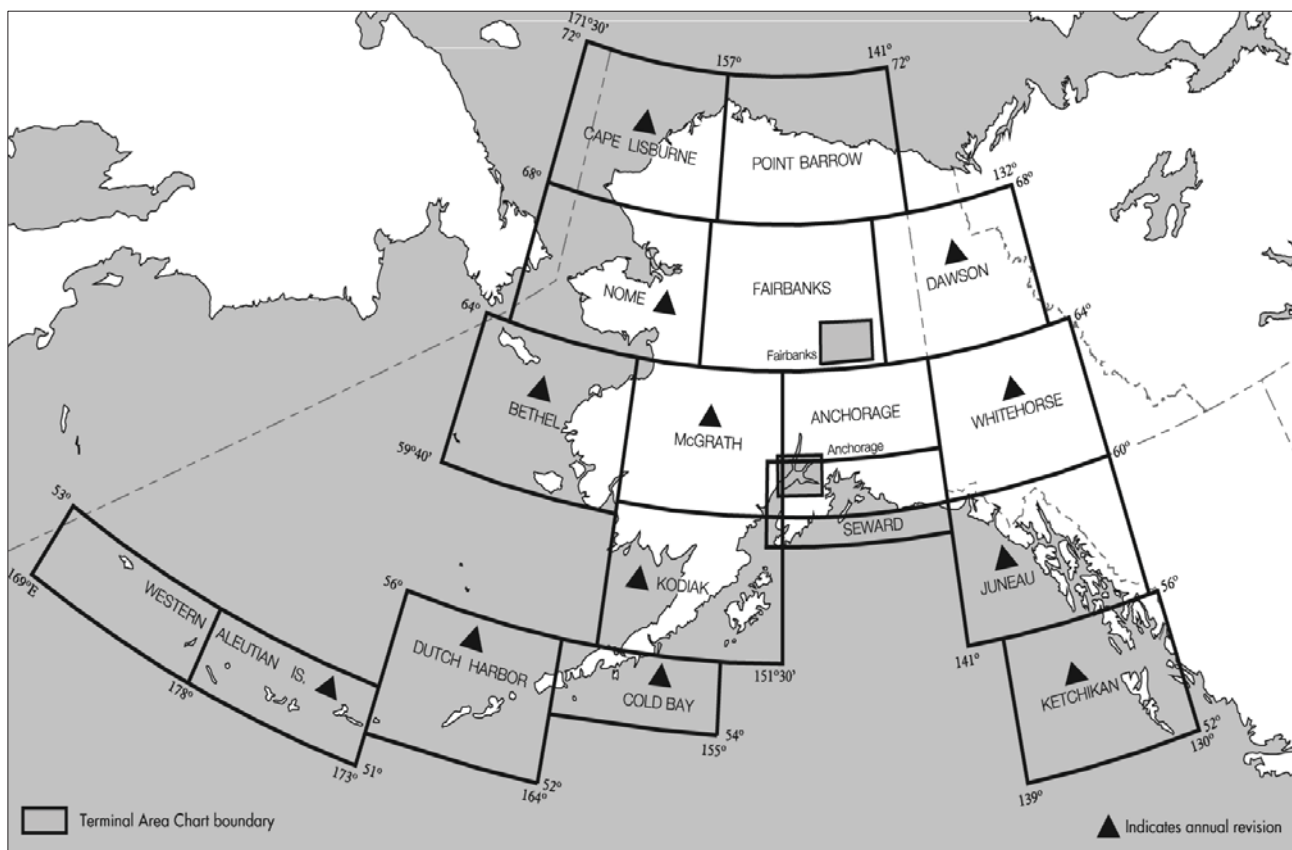


FIG 9-1-12
World Aeronautical Charts for Alaska


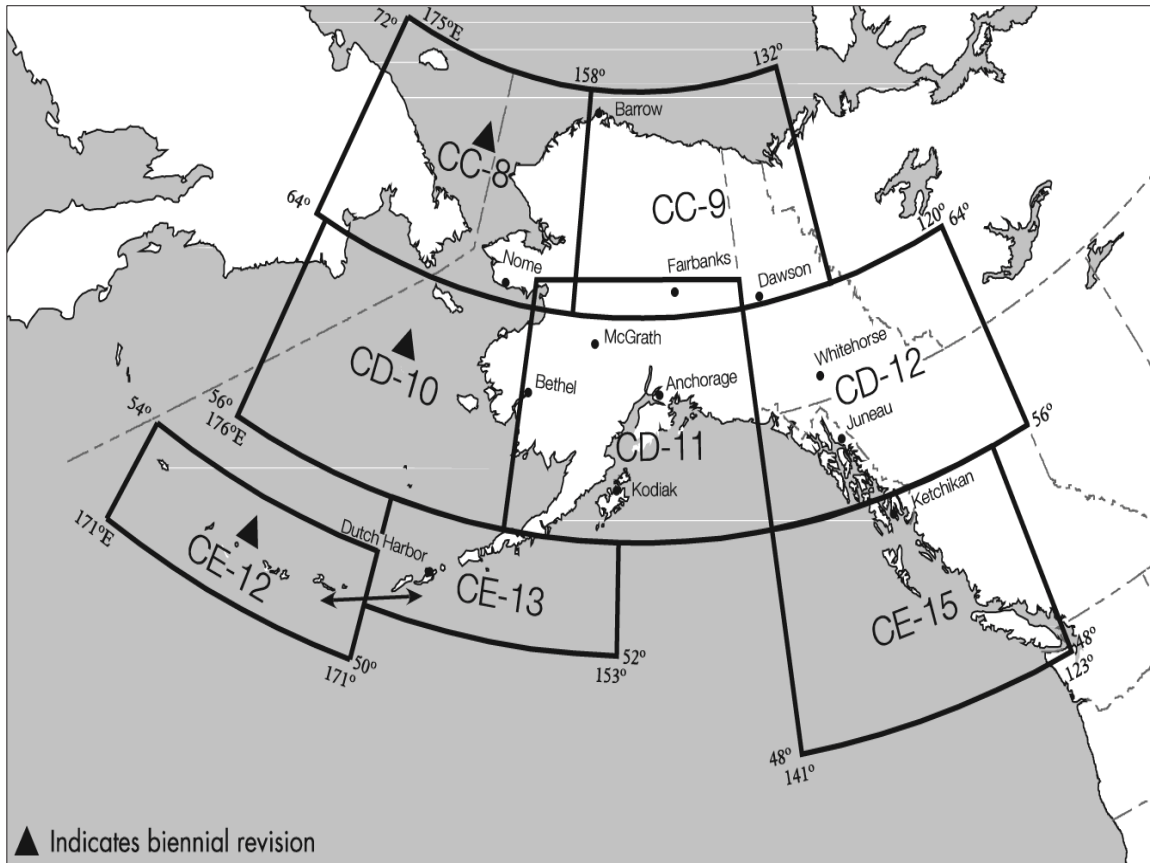


FIG 9-1-13
World Aeronautical Charts for the Conterminous U.S.
Mexico, and the Caribbean Areas

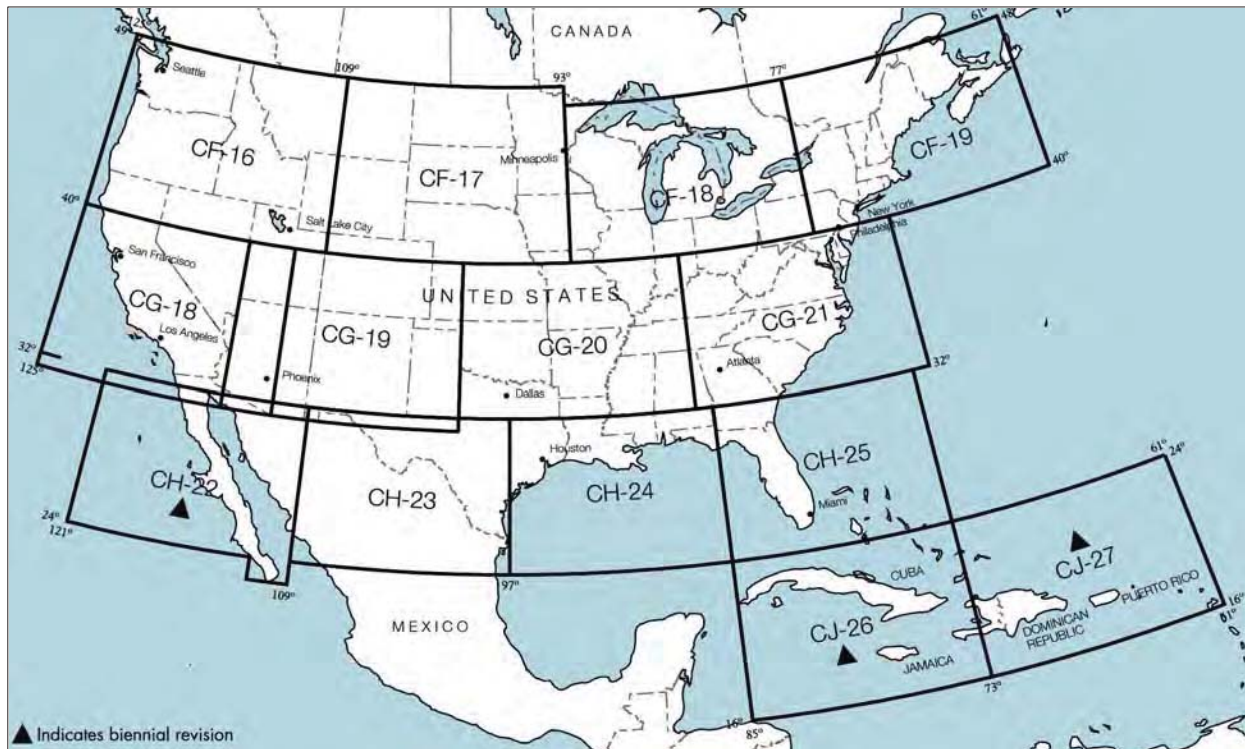

9-1-5. Where and How to Get Charts of Foreign Areas

a. National Geospatial-Intelligence Agency (NGA) Products. For the latest information regarding publication availability visit the NGA Web site <https://www.nga.mil/ProductsServices/Aeronautical/Pages/default.aspx>

1. Flight Information Publication (FLIP) Planning Documents.

General Planning GP
 Area Planning
 Area Planning – Special Use Airspace –
 Planning Charts

2. FLIP Enroute Charts and Chart Supplements.

Pacific Australasia and Antarctica
 U S – IFR and VFR Supplements
 Flight Information Handbook
 Caribbean and South America – Lo Altitude
 Caribbean and South America – High Altitude
 Europe North Africa and Middle East –
 Lo Altitude
 Europe North Africa and Middle East –
 High Altitude
 Africa
 Eastern Europe and Asia
 Area Arrival Charts

3. FLIP Instrument Approach Procedures (IAPs).

Africa
 Canada and North Atlantic
 Caribbean and South America
 Eastern Europe and Asia
 Europe North Africa and Middle East
 Pacific Australasia and Antarctica
 VFR Arrival/Departure Routes – Europe and Korea
 U S

4. Miscellaneous DOD Charts and Products.

Aeronautical Chart Updating Manual CHUM
 DOD Weather Plotting Charts WPC
 Tactical Pilotage Charts TPC
 Operational Navigation Charts ONC
 Global Navigation and Planning Charts GNC
 Jet Navigation Charts JNC and Universal Jet
 Navigation Charts JNU
 Jet Navigation Charts JNCA
 Aerospace Planning Charts ASC
 Oceanic Planning Charts OPC
 Joint Operations Graphics – Air JOG–A
 Standard Index Charts SIC
 Universal Plotting Sheet VP–OS
 Sight Reduction Tables for Air Navigation PUB249
 Plotting Sheets VP–30
 Dial–Up Electronic CHUM

b. Canadian Charts. Information on available Canadian charts and publications may be obtained from designated FAA chart agents or by contacting the

NAV CANADA
 Aeronautical Publications
 Sales and Distribution Unit
 P O Box 9840 Station T
 Ottawa Ontario K1G 6S8 Canada
 Telephone 613–744–6393 or 1–866–731–7827
 Fax 613–744–7120 or 1–866–740–9992

c. Mexican Charts. Information on available Mexican charts and publications may be obtained by contacting

Dirección de Navegación Aérea
 Blvd Puerto Aéreo 485
 Zona Federal Del Aeropuerto Int l
 15620 Mexico D F
 Mexico

d. International Civil Aviation Organization (ICAO). A free *ICAO Publications and Audio–Visual Training Aids Catalogue* is available from

International Civil Aviation Organization
 ATTN Document Sales Unit
 999 University Street
 Montreal Quebec
 H3C 5H7 Canada
 Telephone 514 954–8022
 Fax 514 954–6769
 E–mail sales unit icao.org
 Internet <http://www.icao.org/cgi/goto.pl?icao/en/sales.htm>
 Sitatex ULCA A
 Telex 05–24513

Chapter 10. Helicopter Operations

Section 1. Helicopter IFR Operations

10-1-1. Helicopter Flight Control Systems

a. The certification requirements for helicopters to operate under Instrument Flight Rules (IFR) are contained in 14 CFR Part 27 Airworthiness Standards Normal Category Rotorcraft and 14 CFR Part 29 Airworthiness Standards Transport Category Rotorcraft. To meet these requirements, helicopter manufacturers usually utilize a set of stabilization and/or Automatic Flight Control Systems (AFCSs).

b. Typically, these systems fall into the following categories:

1. Aerodynamic surfaces which impart some stability or control capability not found in the basic VFR configuration.

2. Trim systems which provide a cyclic centering effect. These systems typically involve a magnetic brake/spring device and may also be controlled by a four-way switch on the cyclic. This is a system that supports hands-on flying of the helicopter by the pilot.

3. Stability Augmentation Systems (SASs) which provide short-term rate damping control inputs to increase helicopter stability. Like trim systems, SAS supports hands-on flying.

4. Attitude Retention Systems (ATTs) which return the helicopter to a selected attitude after a disturbance. Changes in desired attitude can be accomplished usually through a four-way beep switch or by actuating a force trim switch on the cyclic, setting the attitude manually, and releasing. Attitude retention may be a SAS function or may be the basic hands-off autopilot function.

5. Autopilot Systems (APs) which provide for hands-off flight along specified lateral and vertical paths, including heading, altitude, vertical speed, navigation tracking, and approach. These systems

typically have a control panel for mode selection and system for indication of mode status. Autopilots may or may not be installed with an associated Flight Director System (FD). Autopilots typically control the helicopter about the roll and pitch axes, cyclic control, but may also include yaw axis pedal control and collective control servos.

6. FDs which provide visual guidance to the pilot to fly specific selected lateral and vertical modes of operation. The visual guidance is typically provided as either a dual cue, commonly known as a cross-pointer, or single cue, commonly known as a vee-bar, presentation superimposed over the attitude indicator. Some FDs also include a collective cue. The pilot manipulates the helicopter's controls to satisfy these commands, yielding the desired flight path, or may couple the flight director to the autopilot to perform automatic flight along the desired flight path. Typically, flight director mode control and indication is shared with the autopilot.

- c. In order to be certificated for IFR operation, a specific helicopter may require the use of one or more of these systems in any combination.

- d. In many cases, helicopters are certificated for IFR operations with either one or two pilots. Certain equipment is required to be installed and functional for two pilot operations, and typically, additional equipment is required for single pilot operation. These requirements are usually described in the limitations section of the Rotorcraft Flight Manual (RFM).

- e. In addition, the RFM also typically defines systems and functions that are required to be in operation or engaged for IFR flight in either the single or two pilot configuration. Often, particularly in two pilot operation, this level of augmentation is less than the full capability of the installed systems. Like single pilot operation, may require a higher level of augmentation.

f. The RFM also identifies other specific limitations associated with IFR flight. Typically, these limitations include, but are not limited to:

1. Minimum equipment required for IFR flight in some cases, for both single pilot and two pilot operations

2. V_{mini} minimum speed – IFR

NOTE–

The manufacturer may also recommend a minimum IFR airspeed during instrument approach.

3. V_{nei} never exceed speed – IFR

4. Maximum approach angle

5. Weight and center of gravity limits

6. Aircraft configuration limitations, such as aircraft door positions and external loads

7. Aircraft system limitations, generators, inverters, etc.

8. System testing requirements, many avionics and AFCS/AP/FD systems incorporate a self-test feature

9. Pilot action requirements, such as the pilot must have his/her hands and feet on the controls during certain operations, such as during instrument approach below certain altitudes

g. It is very important that pilots be familiar with the IFR requirements for their particular helicopter. Within the same make, model, and series of helicopter, variations in the installed avionics may change the required equipment or the level of augmentation for a particular operation.

h. During flight operations, pilots must be aware of the mode of operation of the augmentation systems and the control logic and functions employed. For example, during an ILS approach using a particular system in the three-cue mode, lateral, vertical, and collective cues, the flight

director *collective cue* responds to glideslope deviation, while the horizontal bar of the cross-pointer responds to airspeed deviations. The same system, while flying an ILS in the two-cue mode, provides for the *horizontal bar* to respond to glideslope deviations. This concern is particularly significant when operating using two pilots. Pilots should have an established set of procedures and responsibilities for the control of flight director/auto pilot modes for the various phases of flight. Not only does a full understanding of the system modes provide for a higher degree of accuracy in control of the helicopter, it is the basis for crew identification of a faulty system.

i. Relief from the prohibition to takeoff with any inoperative instruments or equipment may be provided through a Minimum Equipment List, see 14 CFR Section 91.213 and 14 CFR Section 135.179, Inoperative Instruments and Equipment. In many cases, a helicopter configured for single pilot IFR may depart IFR with certain equipment inoperative provided a crew of two pilots is used. Pilots are cautioned to ensure the pilot-in-command and second-in-command meet the requirements of 14 CFR Section 61.58, Pilot-in-Command Proficiency Check, Operation of Aircraft Requiring More Than One Pilot Flight Crewmember, and 14 CFR Section 61.55, Second-in-Command Qualifications, or 14 CFR Part 135, Operating Requirements, Commuter and On-Demand Operations, Subpart E, Flight Crewmember Requirements, and Subpart G, Crewmember Testing Requirements, as appropriate.

j. Experience has shown that modern AFCS/AP/FD equipment installed in IFR helicopters can, in some cases, be very complex. This complexity requires the pilots to obtain and maintain a high level of knowledge of system operation, limitations, failure indications, and reversionary modes. In some cases, this may only be reliably accomplished through formal training.

10-1-2. Helicopter Instrument Approaches

a. Helicopters are capable of flying any published 14 CFR Part 97 Standard Instrument Approach Procedures (SIAPs) for which they are properly equipped subject to the following limitations and conditions:

1. Helicopters flying conventional non-Copter SIAPs may reduce the visibility minima to not less than one-half the published Category A landing visibility minima or $1/4$ statute mile visibility/1200 RVR whichever is greater unless the procedure is annotated with **Visibility Reduction by Helicopters NA**. This annotation means that there are penetrations of the final approach obstacle identification surface (OIS) and that the 14 CFR Section 97.3 visibility reduction rule does not apply and you must take precaution to avoid any obstacles in the visual segment. No reduction in MDA/DA is permitted. The helicopter may initiate the final approach segment at speeds up to the upper limit of the highest approach category authorized by the procedure but must be slowed to no more than 90 KIAS at the missed approach point (MAP) in order to apply the visibility reduction. Pilots are cautioned that such a decelerating approach may make early identification of wind shear on the approach path difficult or impossible. If required, use the Inoperative Components and Visual Aids Table provided in the front cover of the U.S. Terminal Procedures Volume to derive the Category A minima before applying the 14 CFR Section 97.3 d-1 rule.

2. Helicopters flying Copter SIAPs may use the published minima with no reductions allowed. The maximum airspeed is 90 KIAS on any segment of the approach or missed approach.

3. Helicopters flying GPS Copter SIAPs must limit airspeed to 90 KIAS or less when flying any segment of the procedure except speeds must be limited to no more than 70 KIAS on the final and missed approach segments. Military GPS Copter SIAPs are limited to no more than 90 KIAS throughout the procedure. If annotated, holding may

also be limited to no more than 70 KIAS. Use the published minima; no reductions allowed.

NOTE-

Obstruction clearance surfaces are based on the aircraft speed and have been designed on these approaches for 70 knots. If the helicopter is flown at higher speeds, it may fly outside of protected airspace. Some helicopters have a V_{MINI} greater than 70 knots; therefore, they cannot meet the 70 knot limitation to conduct this type of procedure. Some helicopter autopilots, when used in the "go-around" mode, are programmed with a V_{YI} greater than 70 knots, therefore when using the autopilot "go-around" mode, they cannot meet the 70 knot limitation to conduct this type of approach. It may be possible to use the autopilot for the missed approach in the other than the "go-around" mode and meet the 70 knot limitation to conduct this type of approach. When operating at speeds other than V_{YI} or V_Y , performance data may not be available in the RFM to predict compliance with climb gradient requirements. Pilots may use observed performance in similar weight/altitude/temperature/speed conditions to evaluate the suitability of performance. Pilots are cautioned to monitor climb performance to ensure compliance with procedure requirements.

4. TBL 10-1-1 summarizes these requirements.

5. Even in better weather conditions reported at or above landing minima, some combinations of reduced cockpit cutoff angle, minimal approach/runway lighting, and high MDA/DH coupled with a low visibility minima, the pilot may not be able to identify the required visual references during the approach, or those references may only be visible in a very small portion of the pilot's available field of view. Even if identified by the pilot, these visual references may not support normal maneuvering and normal rates of descent to landing. The effect of such a combination may be exacerbated by other conditions such as rain on the windshield or incomplete windshield defogging coverage.

6. Pilots are cautioned to be prepared to execute a missed approach even though weather conditions may be reported at or above landing minima.

NOTE-

See paragraph 5-4-21 Missed Approach, for additional information on missed approach procedures.

TBL 10-1-1

Helicopter Use of Standard Instrument Approach Procedures

Procedure	Helicopter Visibility Minima	Helicopter MDA/DA	Maximum Speed Limitations
Conventional (non-Copter)	The greater of one half the Category A visibility minima $\frac{1}{4}$ statute mile visibility or 1200 RVR	As published for Category A	The helicopter may initiate the final approach segment at speeds up to the upper limit of the highest Approach Category authorized by the procedure but must be slowed to no more than 90 KIAS at the MAP in order to apply the visibility reduction
Copter Procedure	As published	As published	90 KIAS when on a published route/track
GPS Copter Procedure	As published	As published	90 KIAS when on a published route or track Except 70 KIAS when on the final approach or missed approach segment and if annotated in holding Military procedures are limited to 90 KIAS for all segments

NOTE—

Several factors effect the ability of the pilot to acquire and maintain the visual references specified in 14 CFR Section 91.175(c), even in cases where the flight visibility may be at the minimum derived by TBL 10-1-1. These factors include, but are not limited to:

1. Cockpit cutoff angle (the angle at which the cockpit or other airframe structure limits downward visibility below the horizon).

2. Combinations of high MDA/DH and low visibility minimum, such as a conventional nonprecision approach with a reduced helicopter visibility minima (per 14 CFR Section 97.3).

3. Type, configuration, and intensity of approach and runway lighting systems.

4. Type of obscuring phenomenon and/or windshield contamination.

10–1–3. Helicopter Approach Procedures to VFR Heliports

a. Helicopter approaches may be developed for heliports that do not meet the design standards for an IFR heliport. The majority of IFR approaches to VFR heliports are developed in support of helicopter emergency medical services (HEMS) operators. These approaches can be developed from conventional NAVAIDs or a RNAV system including GPS. They are developed either as a Special Approach (pilot training is required for special procedures due to their unique characteristics) or a public approach (no special training required). These instrument procedures are developed as either an approach designed to a specific landing site or an approach designed to a point-in-space.

1. Approach to a specific landing site. The approach is aligned to a missed approach point from which a landing can be accomplished with a maximum course change of 30 degrees. The visual segment from the MAP to the landing site is evaluated for obstacle hazards. These procedures are annotated **PROCEED VISUALLY FROM NAMED MAP OR CONDUCT THE SPECIFIED MISSED APPROACH**.

(a) This phrase requires the pilot to either acquire and maintain visual contact with the landing site at or prior to the MAP or execute a missed approach. The visibility minimum is based on the distance from the MAP to the landing site among other factors.

(b) The pilot is required to maintain the published minimum visibility throughout the visual segment.

(c) Similar to an approach to a runway, the missed approach segment protection is not provided between the MAP and the landing site, and obstacle or terrain avoidance from the MAP to the landing site is the responsibility of the pilot.

(d) Upon reaching the MAP defined on the approach procedure or as soon as practicable after reaching the MAP, the pilot advises ATC whether proceeding visually and canceling IFR or complying with the missed approach instructions. See paragraph 5–1–15, Canceling IFR Flight Plan.

(e) At least one of the following visual references must be visible or identifiable before the pilot may proceed visually:

- (1) FATO or FATO lights
- (2) TLOF or TLOF lights
- (3) Heliport Instrument Lighting System

HILS

(4) Heliport Approach Lighting System or lead-in lights

(5) Visual Glideslope Indicator (VGS)

(6) Windsock or windsock lights. See note below.

(7) Heliport beacon. See note below.

(8) Other facilities or systems approved by the Flight Technologies and Procedures Division (AFS–400).

NOTE–

Windsock lights and heliport beacons should be located within 500 ft of the TLOF.

2. Approach to a Point-in-Space (PinS). At locations where the MAP is located more than 2 SM from the landing site or the path from the MAP to the landing site is populated with obstructions which require avoidance actions or requires turns greater than 30 degrees, a PinS procedure may be developed. These approaches are annotated **PROCEED VFR FROM NAMED MAP OR CONDUCT THE SPECIFIED MISSED APPROACH**.

(a) These procedures require the pilot at or prior to the MAP to determine if the published minimum visibility or the weather minimums required by the operating rule or operations specifications (whichever is higher) is available to safely transition from IFR to VFR flight. If not, the pilot must execute a missed approach. For Part 135 operations, pilots may not begin the instrument approach unless the latest weather report indicates that the weather conditions are at or above the authorized IFR minimums or the VFR weather minimums as required by the class of airspace, operating rule and/or Operations Specifications (whichever is higher).

(b) Visual contact with the landing site is not required; however, the pilot must maintain the appropriate VFR weather minimums throughout the visual segment. The visibility is limited to no lower

than that published in the procedure until canceling IFR

(c) IFR obstruction clearance areas are not applied to the VFR segment between the MAP and the landing site. Obstacle or terrain avoidance from the MAP to the landing site is the responsibility of the pilot.

(d) Upon reaching the MAP defined on the approach procedure or as soon as practicable after reaching the MAP, the pilot advises ATC whether proceeding VFR and canceling IFR or complying with the missed approach instructions. See paragraph 5-1-15, Canceling IFR Flight Plan.

(e) If the visual segment penetrates Class B, C, or D airspace, pilots are responsible for obtaining a Special VFR clearance when required.

10-1-4. The Gulf of Mexico Grid System

a. On October 8, 1998, the Southeast Regional Office of the FAA, with assistance from the Helicopter Safety Advisory Conference (HSAC), implemented the world's first Instrument Flight Rules (IFR) Grid System in the Gulf of Mexico. This navigational route structure is completely independent of ground-based navigation aids (NAVAIDs) and was designed to facilitate helicopter IFR operations to offshore destinations. The Grid System is defined by over 300 offshore waypoints located 20 minutes apart latitude and longitude. Flight plan routes are routinely defined by just 4 segments: departure point/lat/long, first en route grid waypoint, last en route grid waypoint prior to approach procedure, and destination point/lat/long. There are over 4,000 possible offshore landing sites. Upon reaching the waypoint prior to the destination, the pilot may execute an Offshore Standard Approach Procedure (OSAP), a Helicopter En Route Descent Areas (HEDA) approach, or an Airborne Radar Approach (ARA). For more information on these helicopter instrument procedures, refer to FAA AC 90-80B, Approval of Offshore Standard Approach Procedures, Airborne Radar Approaches, and Helicopter En Route Descent Areas, on the FAA web site <http://www.faa.gov> under Advisory Circulars. The return flight plan is just the reverse with the requested stand-alone GPS approach contained in the remarks section.

1. The large number, over 300, of waypoints in the grid system makes it difficult to assign phonetically pronounceable names to the waypoints that could be meaningful to pilots and controllers. A unique naming system was adopted that enables pilots and controllers to derive the fix position from the name. The five-letter names are derived as follows:

(a) The waypoints are divided into sets of 3 columns each. A three-letter identifier identifying a geographical area or a NAVAID to the north represents each set.

(b) Each column in a set is named after its position, i.e., left (L), center (C), and right (R).

(c) The rows of the grid are named alphabetically from north to south, starting with A for the northernmost row.

EXAMPLE-

LCHRC would be pronounced "Lake Charles Romeo Charlie." The waypoint is in the right-hand column of the Lake Charles VOR set, in row C (third south from the northernmost row).

2. In December 2009, significant improvements to the Gulf of Mexico grid system were realized with the introduction of ATC separation services using ADS-B. In cooperation with the oil and gas services industry, HSAC and Helicopter Association International (HAI), the FAA installed an infrastructure of ADS-B ground stations, weather stations, AWOS, and VHF remote communication outlets (RCO) throughout a large area of the Gulf of Mexico. This infrastructure allows the FAA's Houston ARTCC to provide domestic-like air traffic control service in the offshore area beyond 12nm from the coastline to hundreds of miles offshore to aircraft equipped with ADS-B. Properly equipped aircraft can now be authorized to receive more direct routing, domestic en route separation minima, and real-time flight following. Operators who do not have authorization to receive ATC separation services using ADS-B will continue to use the low-altitude grid system and receive procedural separation from Houston ARTCC. Non-ADS-B equipped aircraft also benefit from improved VHF communication and expanded weather information coverage.

3. Three requirements must be met for operators to file IFR flight plans utilizing the grid:

(a) The helicopter must be equipped for IFR operations and equipped with IFR approved GPS navigational units

(b) The operator must obtain prior written approval from the appropriate Flight Standards District Office through a Letter of Authorization or Operations Specification as appropriate

(c) The operator must be a signatory to the Houston ARTCC Letter of Agreement

4. Operators who wish to benefit from ADS-B based ATC separation services must meet the following additional requirements

(a) The Operator's installed ADS-B Out equipment must meet the performance requirements of one of the following FAA Technical Standard Orders TSO or later revisions TSO-C154c Universal Access Transceiver UAT Automatic Dependent Surveillance–Broadcast ADS-B Equipment or TSO-C166b Extended Suffix Automatic

Dependent Surveillance–Broadcast ADS-B and Traffic Information

(b) Flight crews must comply with the procedures prescribed in the Houston ARTCC Letter of Agreement dated December 17, 2009 or later

NOTE–

The unique ADS-B architecture in the Gulf of Mexico depends upon reception of an aircraft's Mode C in addition to the other message elements described in 14 CFR 91.227. Flight crews must be made aware that loss of Mode C also means that ATC will not receive the aircraft's ADS-B signal.

5. FAA/AeroNav publishes the grid system waypoints on the IFR Gulf of Mexico Vertical Flight Reference Chart. A commercial equivalent is also available. The chart is updated annually and is available from a FAA chart agent or FAA directly web site address

http://www.faa.gov/air_traffic/flight_info/aeronav

Section 2. Special Operations

10-2-1. Offshore Helicopter Operations

a. Introduction

The offshore environment offers unique applications and challenges for helicopter pilots. The mission demands the nature of oil and gas exploration and production facilities and the flight environment—either terrain obstacles, traffic demand, special practices, techniques and procedures not found in other flight operations. Several industry organizations have risen to the task of reducing risks in offshore operations, including the Helicopter Safety Advisory Conference (HSAC) (<http://www.hsac.org>) and the Offshore Committee of the Helicopter Association International (HAI) (<http://www.rotor.com>). The following recommended practices for offshore helicopter operations are based on guidance developed by HSAC for use in the Gulf of Mexico and provided here with their permission. While not regulatory, these recommended practices provide aviation and oil and gas industry operators with useful information in developing procedures to avoid certain hazards of offshore helicopter operations.

NOTE—

Like all aviation practices, these recommended practices are under constant review. In addition to normal procedures for comments, suggested changes, or corrections to the AIM (contained in the Preface), any questions or feedback concerning these recommended procedures may also be directed to the HSAC through the feedback feature of the HSAC web site (<http://www.hsac.org>).

b. Passenger Management on and about Heliport Facilities

1. Background. Several incidents involving offshore helicopter passengers have highlighted the potential for incidents and accidents on and about the heliport area. The following practices will minimize risks to passengers and others involved in heliport operations.

2. Recommended Practices

(a) Heliport facilities should have a designated and posted passenger waiting area which is clear of the heliport, heliport access points, and stairways.

(b) Arriving passengers and cargo should be unloaded and cleared from the heliport and access route prior to loading departing passengers and cargo.

(c) Where a flight crew consists of more than one pilot, one crew member should supervise the unloading/loading process from outside the aircraft.

(d) Where practical, a designated facility employee should assist with loading/unloading, etc.

c. Crane-Helicopter Operational Procedures

1. Background. Historical experience has shown that catastrophic consequences can occur when industry safe practices for crane/helicopter operations are not observed. The following recommended practices are designed to minimize risks during crane and helicopter operations.

2. Recommended Practices

(a) Personnel awareness

(1) Crane operators and pilots should develop a mutual understanding and respect of the others' operational limitations and cooperate in the spirit of safety.

(2) Pilots need to be aware that crane operators sometimes cannot release the load to cradle the crane boom, such as when attached to wire line lubricators or supporting diving bells, and

(3) Crane operators need to be aware that helicopters require warm up before takeoff, a 10-minute cool down before shutdown, and cannot circle for extended lengths of time because of fuel consumption.

(b) It is recommended that when helicopters are approaching, maneuvering, taking off, or running on the heliport, cranes be shutdown and the operator leave the cab. Cranes not in use must have their booms cradled, if feasible. If in use, the crane's boom(s) are to be pointed away from the heliport and the crane shutdown for helicopter operations.

(c) Pilots will not approach, land on, takeoff, or have rotor blades turning on heliports or structures not complying with the above practice.

(d) It is recommended that cranes on offshore platforms rigs vessels or any other facility which could interfere with helicopter operations including approach/departure paths

(1) Be equipped with a red rotating beacon or red high intensity strobe light connected to the system powering the crane indicating the crane is under power

(2) Be designed to allow the operator a maximum view of the helideck area and should be equipped with side-angle mirrors to eliminate blind spots and

(3) Have their boom tips headache balls and hooks painted with high visibility international orange

d. Helicopter/Tanker Operations

1. Background. The interface of helicopters and tankers during shipboard helicopter operations is complex and may be hazardous unless appropriate procedures are coordinated among all parties. The following recommended practices are designed to minimize risks during helicopter/tanker operations

2. Recommended Practices

(a) Management flight operations personnel and pilots should be familiar with and apply the operating safety standards set forth in Guide to Helicopter/Ship Operations International Chamber of Shipping Third Edition 5-89 as amended establishing operational guidelines/standards and safe practices sufficient to safeguard helicopter/tanker operations

(b) Appropriate plans approvals and communications must be accomplished prior to reaching the vessel allowing tanker crews sufficient time to perform required safety preparations and position crew members to receive or dispatch a helicopter safely

(c) Appropriate approvals and direct communications with the bridge of the tanker must be maintained throughout all helicopter/tanker operations

(d) Helicopter/tanker operations including landings/departures must not be conducted until the helicopter pilot-in-command has received and acknowledged permission from the bridge of the tanker

(e) Helicopter/tanker operations must not be conducted during product/cargo transfer

(f) Generally permission will not be granted to land on tankers during mooring operations or while maneuvering alongside another tanker

e. Helideck/Heliport Operational Hazard Warning(s) Procedures

1. Background

(a) A number of operational hazards can develop on or near offshore helidecks or onshore heliports that can be minimized through procedures for proper notification or visual warning to pilots. Examples of hazards include but are not limited to

(1) Perforating operations subparagraph f

(2) H₂S gas presence subparagraph g

(3) Gas venting subparagraph h or

(4) Closed helidecks or heliports subparagraph i unspecified cause

(b) These and other operational hazards are currently minimized through timely dissemination of a written Notice to Airmen (NOTAM) for pilots by helicopter companies and operators. A NOTAM provides a written description of the hazard time and duration of occurrence and other pertinent information. AN POTENTIAL HAZARD should be communicated to helicopter operators or company aviation departments as early as possible to allow the NOTAM to be activated

(c) To supplement the existing NOTAM procedure and further assist in reducing these hazards a standardized visual signal on the helideck/heliport will provide a positive indication to an approaching helicopter of the status of the landing area. Recommended Practices have been developed to reinforce the NOTAM procedures and standardized visual signals

f. Drilling Rig Perforating Operations: Helideck/Heliport Operational Hazard Warning(s)/Procedure(s)

1. Background. A critical step in the oil well completion process is perforation which involves the use of explosive charges in the drill pipe to open the pipe to oil or gas deposits. Explosive charges used in conjunction with perforation operations offshore can potentially be prematurely detonated by radio

transmissions including those from helicopters. The following practices are recommended:

2. Recommended Practices

(a) Personnel Conducting Perforating Operations. Whenever perforating operations are scheduled and operators are concerned that radio transmissions from helicopters in the vicinity may jeopardize the operation, personnel conducting perforating operations should take the following precautionary measures:

(1) Notify company aviation departments, helicopter operators or bases, and nearby manned platforms of the pending perforation operation so the Notice to Airmen (NOTAM) system can be activated for the perforation operation and the temporary helideck closure.

(2) Close the deck and make the radio warning clearly visible to passing pilots: install a temporary marking described in subparagraph 10-2-1i1b with the words NO RADIO stenciled in red on the legs of the diagonals. The letters should be 24 inches high and 12 inches wide. See FIG 10-2-1.

(3) The marker should be installed during the time that charges may be affected by radio transmissions.

(b) Pilots

(1) Pilots when operating within 1 000 feet of a known perforation operation or observing the helideck with red NO RADIO warning indicating perforation operations are underway, will avoid radio transmissions from or near the helideck within 1 000 feet and will not land on the deck if the warning is present. In addition to communications radios, radio transmissions are also emitted by aircraft radar

transponders, radar altimeters, and DME equipment and ELTs.

(2) Whenever possible, make radio calls to the platform being approached or to the Flight Following Communications Center at least one mile out on approach. Ensure all communications are complete outside the 1 000 foot hazard distance. If no response is received or if the platform is not radio equipped, further radio transmissions should not be made until visual contact with the deck indicates it is open for operation. No flight.

g. Hydrogen Sulfide Gas Helideck/Heliport Operational Hazard Warning(s)/Procedures

1. Background. Hydrogen sulfide (H_2S) gas. Hydrogen sulfide gas in higher concentrations (300–500 ppm) can cause loss of consciousness within a few seconds and presents a hazard to pilots on/near offshore helidecks. When operating in offshore areas that have been identified to have concentrations of hydrogen sulfide gas, the following practices are recommended:

2. Recommended Practices

(a) Pilots


(1) Ensure approved protective air packs are available for emergency use by the crew on the helicopter.

(2) If shutdown on a helideck, request the supervisor in charge provide a briefing on location of protective equipment and safety procedures.

(3) If while flying near a helideck and the visual red beacon alarm is observed or an unusually strong odor of rotten eggs is detected, immediately don the protective air pack, exit to an area upwind, and notify the suspected source field of the hazard.

FIG 10-2-1

Closed Helideck Marking – No Radio

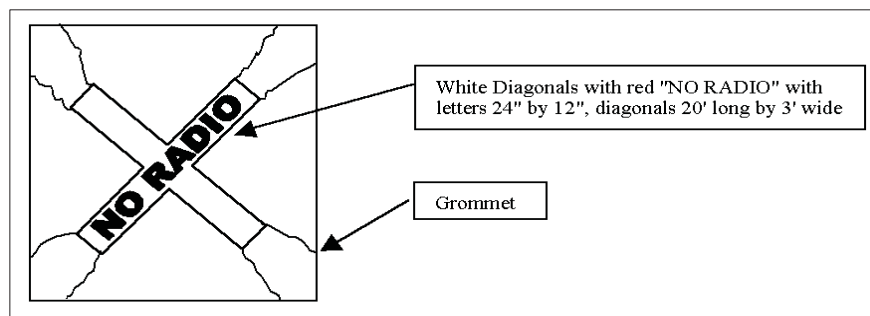

(b) Oil Field Supervisors

(1) If presence of hydrogen sulfide is detected a red rotating beacon or red high intensity strobe light adjacent to the primary helideck stairwell or wind indicator on the structure should be turned on to provide visual warning of hazard. If the beacon is to be located near the stairwell the State of Louisiana Offshore Heliport Design Guide and FAA Advisory Circular AC 150/5390-2A Heliport Design Guide should be reviewed to ensure proper clearance on the helideck.

(2) Notify nearby helicopter operators and bases of the hazard and advise when hazard is cleared.

(3) Provide a safety briefing to include location of protective equipment to all arriving personnel.

(4) Wind socks or indicator should be clearly visible to provide upwind indication for the pilot.

h. Gas Venting Helideck/Heliport Operational Hazard Warning(s)/Procedures – Operations Near Gas Vent Booms

1. Background. Ignited flare booms can release a large volume of natural gas and create a hot fire and intense heat with little time for the pilot to react. Like unignited gas vents can release reasonably large volumes of methane gas under certain conditions. Thus operations conducted very near unignited gas vents require precautions to prevent inadvertent ingestion of combustible gases by the helicopter engine(s). The following practices are recommended.

2. Pilots

(a) Gas will drift upwards and downwind of the vent. Plan the approach and takeoff to observe and avoid the area downwind of the vent remaining as far away as practicable from the open end of the vent boom.

(b) Do not attempt to start or land on an offshore helideck when the deck is downwind of a gas vent unless properly trained personnel verify conditions are safe.

3. Oil Field Supervisors

(a) During venting of large amounts of unignited natural gas a red rotating beacon or red high intensity strobe light adjacent to the primary helideck stairwell or wind indicator should be turned on to provide visible warning of hazard. If the beacon is to be located near the stairwell the State of Louisiana Offshore Heliport Design Guide and FAA Advisory Circular AC 150/5390-2A Heliport Design Guide should be reviewed to ensure proper clearance from the helideck.

(b) Notify nearby helicopter operators and bases of the hazard for planned operations.

(c) Wind socks or indicator should be clearly visible to provide upwind indication for the pilot.

i. Helideck/Heliport Operational Warning(s)/Procedure(s) – Closed Helidecks or Heliports

1. Background. A white marked diagonally from corner to corner across a helideck or heliport touchdown area is the universally accepted visual indicator that the landing area is closed for safety of other reasons and that helicopter operations are not permitted. The following practices are recommended.


(a) **Permanent Closing.** If a helideck or heliport is to be permanently closed diagonals of the same size and location as indicated above should be used but the markings should be painted on the landing area.

NOTE–

White Decks: If a helideck is painted white, then international orange or yellow markings can be used for the temporary or permanent diagonals.

(b) **Temporary Closing.** A temporary marker can be used for hazards of an interim nature. This marker could be made from vinyl or other durable material in the shape of a diagonal. The marker should be white with legs at least 20 feet long and 3 feet in width. This marker is designed to be quickly secured and removed from the deck using grommets and rope ties. The duration, time, location, and nature of these temporary closings should be provided to and coordinated with company aviation departments, nearby helicopter bases, and helicopter operators supporting the area. These markers **MUST** be removed when the hazard no longer exists. See FIG 10-2-2.

FIG 10-2-2
Closed Helideck Marking

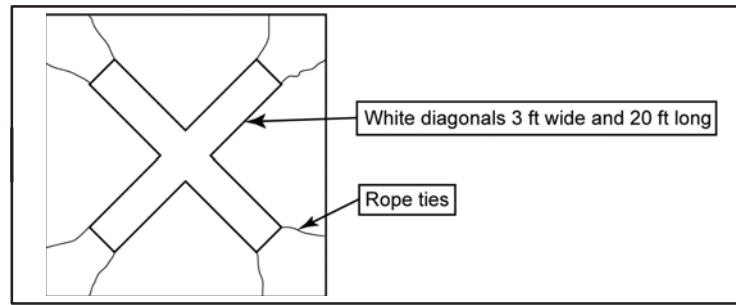

j. Offshore (VFR) Operating Altitudes for Helicopters

1. Background. Mid-air collisions constitute a significant percentage of total fatal offshore helicopter accidents. A method of reducing this risk is the use of coordinated VFR cruising altitudes. To enhance safety through standardized vertical separation of helicopters when flying in the offshore environment, it is recommended that helicopter operators flying in a particular area establish a cooperatively developed Standard Operating Procedure (SOP) for VFR operating altitudes. An example of such an SOP is contained in this example.

2. Recommended Practice Example

(a) Field Operations. Without compromising minimum safe operating altitudes, helicopters working within an offshore field constituting a cluster should use altitudes not to exceed 500 feet.

(b) En Route Operations

(1) Helicopters operating below 750 AGL should avoid transitioning through offshore fields.

(2) Helicopters en route to and from offshore locations below 3,000 feet, weather permitting, should use en route altitudes as outlined in TBL 10-2-1.

TBL 10-2-1

Magnetic Heading	Altitude
0° to 179°	750
	1750
	2750
180°-359°	1250
	2250

(c) Area Agreements. See HSAC Area Agreement Maps for operating procedures for onshore high density traffic locations.

NOTE-

Pilots of helicopters operating VFR above 3,000 feet above the surface should refer to the current Federal Aviation Regulations (14 CFR Part 91), and paragraph 3-1-4 Basic VFR Weather Minimums, of the AIM.

(d) Landing Lights. Aircraft landing lights should be on to enhance aircraft identification.

(1) During takeoff and landings.

(2) In congested helicopter or fixed wing traffic areas.

(3) During reduced visibility or

(4) Anytime safety could be enhanced.

k. Offshore Helidecks/Landing Communications

1. Background. To enhance safety and provide appropriate time to prepare for helicopter operations, the following is recommended when anticipating a landing on an offshore helideck.

2. Recommended Practices

(a) Before landing on an offshore helideck, pilots are encouraged to establish communications with the company owning or operating the helideck if frequencies exist for that purpose.

(b) When impracticable or if frequencies do not exist, pilots or operations personnel should attempt to contact the company owning or operating the helideck by telephone. Contact should be made before the pilot departs home base/point of departure to advise of intentions and obtain landing permission if necessary.

NOTE–

It is recommended that communications be established a minimum of 10 minutes prior to planned arrival time. This practice may be a requirement of some offshore owner/operators.

NOTE–

1. See subparagraph 10–2–d for Tanker Operations.
2. Private use Heliport. Offshore heliports are privately owned/operated facilities and their use is limited to persons having prior authorization to utilize the facility.

1. Two (2) Helicopter Operations on Offshore Helidecks

1. Background. Standardized procedures can enhance the safety of operating a second helicopter on an offshore helideck enabling pilots to determine/maintain minimum operational parameters. Orientation of the parked helicopter on the helideck wind and other factors may prohibit multi-helicopter operations. More conservative Rotor Diameter (RD) clearances may be required under differing conditions i.e. temperature, wet deck wind velocity/direction/gusts, obstacles, approach/departure angles, etc. Operations are at the pilot's discretion.

2. Recommended Practice. Helideck size, structural strength capability, and type of main rotor on the parked and operating helicopter will aid in determining accessibility by a second helicopter. Pilots should determine that multi-helicopter deck operations are permitted by the helideck owner/operator.

3. Recommended Criteria

(a) Minimum one-third rotor diameter clearance ($\frac{1}{3}$ RD). The landing helicopter maintains a minimum $\frac{1}{3}$ RD clearance between the tips of its turning rotor and the closest part of a parked and secured helicopter rotors stopped and tied down.

(b) Three foot parking distance from deck edge (3'). Helicopters operating on an offshore helideck land or park the helicopter with a skid/heel assembly no closer than 3 feet from helideck edge.

(c) Tiedowns. Main rotors on all helicopters that are shut down be properly secured tied down to prevent the rotor blades from turning.

(d) Medium transport and larger helicopters should not land on any offshore helideck where a light

helicopter is parked unless the light helicopter is properly secured to the helideck and has main rotor tied down.

(e) Helideck owners/operators should ensure that the helideck has a serviceable anti-skid surface.

4. Weight and limitations markings on helideck. The helideck weight limitations should be displayed by markings visible to the pilot see State of Louisiana Offshore Heliport Design Guide and FAA Advisory Circular AC 150/5390–2A Heliport Design Guide.

NOTE–

Some offshore helideck owners/operators have restrictions on the number of helicopters allowed on a helideck. When helideck size permits, multiple (more than two) helicopter operations are permitted by some operators.

m. Helicopter Rapid Refueling Procedures (HRR)

1. Background. Helicopter Rapid Refueling (HRR) engine s/rotors operating can be conducted safely when utilizing trained personnel and observing safe practices. This recommended practice provides minimum guidance for HRR as outlined in National Fire Protection Association (NFPA) and industry practices. For detailed guidance please refer to National Fire Protection Association (NFPA) Document 407 Standard for Aircraft Fuel Servicing 1990 edition including 1993 HRR Amendment.

NOTE–

Certain operators prohibit HRR, or “hot refueling,” or may have specific procedures for certain aircraft or refueling locations. See the General Operations Manual and/or Operations Specifications to determine the applicable procedures or limitations.

2. Recommended Practices

(a) Only turbine-engine helicopters fueled with JET A or JET A–1 with fueling ports located below any engine exhausts may be fueled while an onboard engine s is are operating.

(b) Helicopter fueling while an onboard engine s is are operating should only be conducted under the following conditions:

(1) A properly certificated and current pilot is at the controls and a trained refueler attending the fuel nozzle during the entire fuel servicing process. The pilot monitors the fuel quantity and signals the refueler when quantity is reached.

(2) No electrical storms thunderstorms are present within 10 nautical miles Lightning can travel great distances beyond the actual thunder storm

(3) Passengers disembark the helicopter and move to a safe location prior to HRR operations When the pilot-in-command deems it necessary for passenger safety that they remain onboard passengers should be briefed on the evacuation route to follow to clear the area

(4) Passengers not board or disembark during HRR operations nor should cargo be loaded or unloaded

(5) Only designated personnel trained in HRR operations should conduct HRR Written authorization to include safe handling of the fuel and equipment See your Company Operations/Safety Manual for detailed instructions

(6) All doors windows and access points allowing entry to the interior of the helicopter that are adjacent to or in the immediate vicinity of the fuel inlet ports kept closed during HRR operations

(7) Pilots ensure that appropriate electrical/electronic equipment is placed in standby-off position to preclude the possibility of electrical discharge or other fire hazard such as i.e. weather radar is on standby and no radio transmissions are made keying of the microphone/transmitter Remember in addition to communications radios radio transmissions are also emitted by aircraft radar transponders radar altimeters DME equipment and ELTs

(8) Smoking be prohibited in and around the helicopter during all HRR operations

The HRR procedures are critical and present associated hazards requiring attention to detail regarding quality control weather conditions static electricity bonding and spill/fires potential

Any activity associated with rotors turning i.e. refueling embarking/disembarking loading/unloading baggage/freight etc personnel should only approach the aircraft when authorized to do so Approach should be made via safe approach path/alkay or arc – **remain clear of all rotors.**

NOTE–

1. *Marine vessels, barges etc.: Vessel motion presents additional potential hazards to helicopter operations (blade flex, aircraft movement).*

2. *See National Fire Protection Association (NFPA) Document 407, “Standard for Aircraft Fuel Servicing” for specifics regarding non-HRR (routine refueling operations).*

10–2–2. Helicopter Night VFR Operations

a. Effect of Lighting on Seeing Conditions in Night VFR Helicopter Operations

NOTE–

This guidance was developed to support safe night VFR helicopter emergency medical services (HEMS) operations. The principles of lighting and seeing conditions are useful in any night VFR operation.

While ceiling and visibility significantly affect safety in night VFR operations lighting conditions also have a profound effect on safety Even in conditions in which visibility and ceiling are determined to be visual meteorological conditions the ability to discern unlighted or low contrast objects and terrain at night may be compromised The ability to discern these objects and terrain is the seeing condition and is related to the amount of natural and man made lighting available and the contrast reflectivity and texture of surface terrain and obstruction features In order to conduct operations safely seeing conditions must be accounted for in the planning and execution of night VFR operations

Night VFR seeing conditions can be described by identifying high lighting conditions and low lighting conditions

1. High lighting conditions exist when one of two sets of conditions are present

(a) The sky cover is less than broken less than 5/8 cloud cover the time is between the local Moon rise and Moon set and the lunar disk is at least 50% illuminated or

(b) The aircraft is operated over surface lighting which at least provides for the lighting of prominent obstacles the identification of terrain features shorelines valleys hills mountains slopes and a horizontal reference by which the pilot may control the helicopter For example this surface lighting may be the result of

(1) Extensive cultural lighting man-made such as a built-up area of a city

(2) Significant reflected cultural lighting such as the illumination caused by the reflection of a major metropolitan area's lighting reflecting off a cloud ceiling or

(3) Limited cultural lighting combined with a high level of natural reflectivity of celestial illumination such as that provided by a surface covered by snow or a desert surface

2. Low lighting conditions are those that do not meet the high lighting conditions requirements

3. Some areas may be considered a high lighting environment only in specific circumstances. For example, some surfaces such as a forest with limited cultural lighting normally have little reflectivity requiring dependence on significant moonlight to achieve a high lighting condition. However, when that same forest is covered with snow, its reflectivity may support a high lighting condition based only on starlight. Similarly, a desolate area with little cultural lighting such as a desert may have such inherent natural reflectivity that it may be considered a high lighting conditions area regardless of season provided the cloud cover does not prevent starlight from being reflected from the surface. Other surfaces such as areas of open water may never have enough reflectivity or cultural lighting to ever be characterized as a high lighting area

4. Through the accumulation of night flying experience in a particular area, the operator will develop the ability to determine, prior to departure, which areas can be considered supporting high or low lighting conditions. Without that operational experience, low lighting considerations should be applied by operators for both pre-flight planning and operations until high lighting conditions are observed or determined to be regularly available

b. Astronomical Definitions and Background Information for Night Operations

1. Definitions

(a) **Hori on** Wherever one is located on or near the Earth's surface, the Earth is perceived as essentially flat and therefore as a plane. If there are no visual obstructions, the apparent intersection of the sky with the Earth's plane surface is the hori on, which appears as a circle centered at the observer. For rise/set computations, the observer's eye is considered to be on the surface of the Earth so that the

hori on is geometrically exactly 90 degrees from the local vertical direction

(b) **Rise Set** During the course of a day, the Earth rotates once on its axis, causing the phenomena of rising and setting. All celestial bodies—the Sun, Moon, stars, and planets—seem to appear in the sky at the hori on to the East of any particular place, then to cross the sky and again disappear at the hori on to the West. Because the Sun and Moon appear as circular disks and not as points of light, a definition of rise or set must be very specific because not all of either body is seen to rise or set at once.

(c) **Sunrise and sunset** refer to the times when the upper edge of the disk of the Sun is on the hori on, considered unobstructed relative to the location of interest. Atmospheric conditions are assumed to be average, and the location is in a level region on the Earth's surface.

(d) **Moonrise and moonset** times are computed for exactly the same circumstances as for sunrise and sunset. However, moonrise and moonset may occur at any time during a 24-hour period and consequently, it is often possible for the Moon to be seen during daylight and to have moonless nights. It is also possible that a moonrise or moonset does not occur relative to a specific place on a given date.

(e) **Transit** The transit time of a celestial body refers to the instant that its center crosses an imaginary line in the sky—the observer's meridian—running from north to south.

(f) **T ilight** Before sunrise and again after sunset, there are intervals of time known as twilight during which there is natural light provided by the upper atmosphere, which does receive direct sunlight and reflects part of it toward the Earth's surface.

(g) **Civil twilight** is defined to begin in the morning and to end in the evening when the center of the Sun is geometrically 6 degrees below the hori on. This is the limit at which twilight illumination is sufficient under good weather conditions for terrestrial objects to be clearly distinguished.

2. Title 14 of the Code of Federal Regulations applies these concepts and definitions in addressing the definition of night. Section 1.1—the requirement for aircraft lighting. Section 91.209—and pilot recency of night experience. Section 61.67.


c. Information on Moon Phases and Changes in the Percentage of the Moon Illuminated

From any location on the Earth the Moon appears to be a circular disk which at any specific time is illuminated to some degree by direct sunlight. During each lunar orbit a lunar month we see the Moon's appearance change from not visibly illuminated through partially illuminated to fully illuminated


then back through partially illuminated to not illuminated again. There are eight distinct traditionally recognized stages called phases. The phases designate both the degree to which the Moon is illuminated and the geometric appearance of the illuminated part. These phases of the Moon in the sequence of their occurrence starting from New Moon are listed in FIG 10-2-3.

FIG 10-2-3


Phases of the Moon




New Moon – The Moon's unilluminated side is facing the Earth. The Moon is not visible except during a solar eclipse.




Waxing Crescent – The Moon appears to be partly but less than one-half illuminated by direct sunlight. The fraction of the Moon's disk that is illuminated is increasing.




First Quarter – One-half of the Moon appears to be illuminated by direct sunlight. The fraction of the Moon's disk that is illuminated is increasing.




Waxing Gibbous – The Moon appears to be more than one-half but not fully illuminated by direct sunlight. The fraction of the Moon's disk that is illuminated is increasing.




Full Moon – The Moon's illuminated side is facing the Earth. The Moon appears to be completely illuminated by direct sunlight.



Waning Gibbous – The Moon appears to be more than one-half but not fully illuminated by direct sunlight. The fraction of the Moon's disk that is illuminated is decreasing.



Last Quarter – One-half of the Moon appears to be illuminated by direct sunlight. The fraction of the Moon's disk that is illuminated is decreasing.



Waning Crescent – The Moon appears to be partly but less than one-half illuminated by direct sunlight. The fraction of the Moon's disk that is illuminated is decreasing.

1. The percent of the Moon's surface illuminated is a more refined quantitative description of the Moon's appearance than is the phase. Considering the Moon as a circular disk, at New Moon the percent illuminated is 0; at First and Last Quarters it is 50; and at Full Moon it is 100. During the crescent phases the percent illuminated is between 0 and 50, and during gibbous phases it is between 50 and 100.

2. For practical purposes, phases of the Moon and the percent of the Moon illuminated are independent of the location on the Earth from where the Moon is observed. That is, all the phases occur at the same time regardless of the observer's position.

3. For more detailed information, refer to the United States Naval Observatory site referenced below.

d. Access to Astronomical Data for Determination of Moon Rise, Moon Set, and Percentage of Lunar Disk Illuminated

1. Astronomical data for the determination of Moon rise and set and Moon phase may be obtained from the United States Naval Observatory using an interactive query available at <http://aa.usno.navy.mil/>

2. Click on "Data Services" and then on "Complete Sun and Moon Data for One Day."

3. You can obtain the times of sunrise, sunset, moonrise, moonset, transits of the Sun and Moon, and the beginning and end of civil twilight along with information on the Moon's phase by specifying the date and location in one of the two forms on this web page and clicking on the "Get data" button at the end of the form. Form A is used for cities or towns in the U.S. or its territories; Form B for all other locations. An example of the data available from this site is shown in TBL 10-2-2.

4. Additionally, a yearly table may be constructed for a particular location by using the "Table of Sunrise/Sunset, Moonrise/Moonset, or Twilight Times for an Entire Year" selection.

TBL 10-2-2

Sample of Astronomical Data Available from the Naval Observatory

The following information is provided for New Orleans, Orleans Parish, Louisiana (longitude W90.1, latitude N30.0)	
Tuesday 29 May 2007	Central Daylight Time
SUN	
Begin civil twilight	5:34 a.m.
Sunrise	6:01 a.m.
Sun transit	12:58 p.m.
Sunset	7:55 p.m.
End civil twilight	8:22 p.m.
MOON	
Moonrise	5:10 p.m. on preceding day
Moonset	4:07 a.m.
Moonrise	6:06 p.m.
Moon transit	11:26 p.m.
Moonset	4:41 a.m. on following day
Phase of the Moon on 29 May: waxing gibbous; 95% of the Moon's visible disk illuminated	
Full Moon on 31 May 2007 at 8:04 p.m. Central Daylight Time	

10-2-3. Landing Zone Safety

a. This information is provided for use by helicopter emergency medical services (HEMS) pilots, program managers, medical personnel, law enforcement, fire, and rescue personnel to further their understanding of the safety issues concerning Landing Zones (LZs). It is recommended that HEMS operators establish working relationships with the ground responder organizations they may come in contact with in their flight operations and share this information in order to establish a common frame of reference for LZ selection operations and safety.

b. The information provided is largely based on the booklet *Landing Zone – Preparing the Landing Zone* issued by National Emergency Medical Services Pilots Association NEMSPA and the guidance developed by the University of Tennessee Medical Center's LIFESTAR program and is used with their permission. For additional information go to <http://www.nemspa.org/>


c. Information concerning the estimation of wind velocity is based on the Beaufort Scale. See <http://www.spc.noaa.gov/faq/tornado/beaufort.html> for more information.

d. Selecting a Scene LZ

1. If the situation requires the use of a helicopter, first check to see if there is an area large enough to land a helicopter safely.

FIG 10-2-4

Recommended Minimum Landing Zone Dimensions

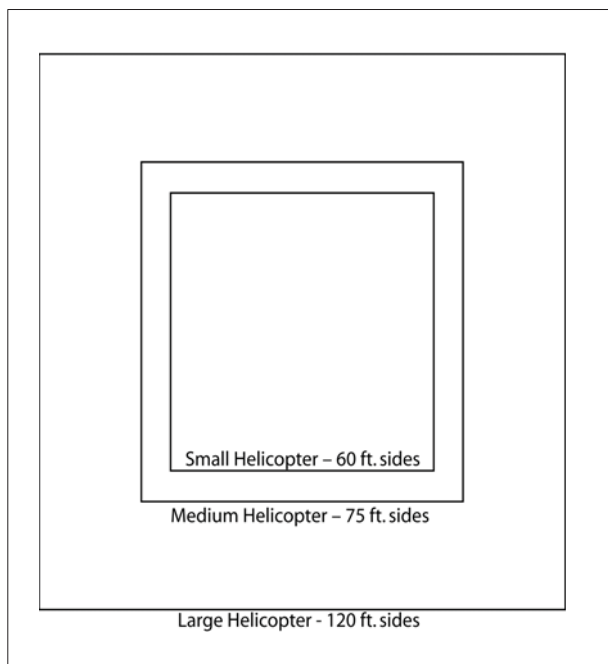

2. For the purposes of FIG 10-2-4 the following are provided as examples of relative helicopter size.

(a) Small Helicopter Bell 206/407 Eurocopter AS-350/355 BO-105 BK-117

(b) Medium Helicopter Bell UH-1 Huey and derivatives Bell 212/412 Bell 222/230/430 Sikorsky S-76 Eurocopter SA-365

(c) Large Helicopter Boeing Chinook Eurocopter Puma Sikorsky H-60 series Blackhawk SK-92

3. The LZ should be level, firm and free of loose debris that could possibly blow up into the rotor system.

4. The LZ should be clear of people, vehicles and obstructions such as trees, poles and wires. Remember that wires are difficult to see from the air. The LZ must also be free of stumps, brush, post and large rocks. See FIG 10-2-5.

FIG 10-2-5

Landing Zone Hazards



5. Keep spectators back at least 200 feet. Keep emergency vehicles 100 feet away and have fire equipment if available standing by. Ground personnel should wear eye protection if available during landing and takeoff operations. To avoid loose objects being blown around in the LZ, hats should be removed if helmets are worn, chin straps must be securely fastened.

6. Fire fighters, if available, should not do so in the LZ if it is extremely dusty.

e. Helping the Flightcrew Locate the Scene


1. If the L coordinator has access to a GPS unit the exact latitude and longitude of the L should be relayed to the HEMS pilot. If unable to contact the pilot directly relay the information to the HEMS ground communications specialist for relaying to the pilot so that they may locate your scene more efficiently. Recognize that the aircraft may approach from a direction different than the direct path from the takeoff point to the scene as the pilot may have to detour around terrain obstructions or weather en route.

2. Especially in daylight hours mountainous and densely populated areas can make sighting a scene from the air difficult. Often the L coordinator on the ground will be asked if she or he can see or hear the helicopter.

3. Flightcrews use a clock reference method for directing one another's attention to a certain direction from the aircraft. The nose of the aircraft is always 12 o'clock, the right side is 3 o'clock, etc. When the L coordinator sees the aircraft he/she should use this method to assist the flightcrew by indicating the scene's clock reference position from the nose of the aircraft. For example, Accident scene is located at your 2 o'clock position. See FIG 10-2-6.

FIG 10-2-6

"Clock" System for Identifying Positions Relative to the Nose of the Aircraft

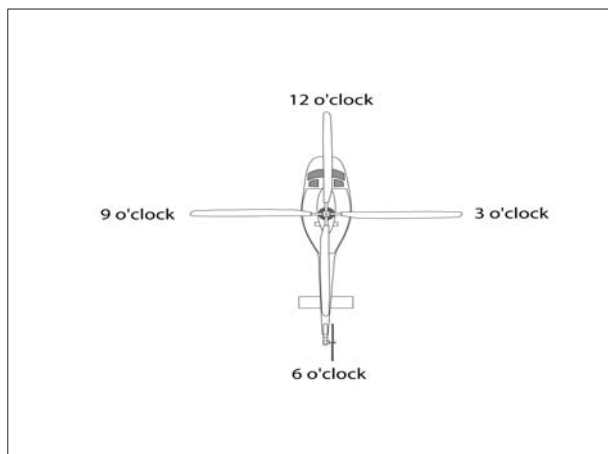

4. When the helicopter approaches the scene it will normally orbit at least one time as the flight crew observes the wind direction and obstacles that could interfere with the landing. This is often referred to as the high reconnaissance maneuver.

f. Wind Direction and Touchdown Area

1. Determine from which direction the wind is blowing. Helicopters normally land and takeoff into the wind.

2. If contact can be established with the pilot either directly or indirectly through the HEMS ground communications specialist describe the wind in terms of the direction the wind is *from* and the speed.

3. Common natural sources of wind direction information are smoke, dust, vegetation movement, water streaks, and waves. Flags, pennants, streamers can also be used. When describing the direction use the compass direction from which the wind is blowing, example: from the North-West.

4. Wind speed can be measured by small hand-held measurement devices or an observer's estimate can be used to provide velocity information. The wind value should be reported in knots, nautical miles per hour. If unable to numerically measure wind speed use TBL 10-2-3 to estimate velocity. Also report if the wind conditions are gusty or if the wind direction or velocity is variable or has changed recently.

5. If any obstacles exist ensure their description, position, and approximate height are communicated to the pilot on the initial radio call.

TBL 10-2-3

Table of Common References for Estimating Wind Velocity

Wind (Knots)	Wind Classification	Appearance of Wind Effects	
		On the Water	On Land
Less than 1	Calm	Sea surface smooth and mirror-like	Calm smoke rises vertically
1-3	Light Air	Scaly ripples no foam crests	Smoke drift indicates wind direction wind vanes are still
4-6	Light Breeze	Small wavelets crests glassy no breaking	Wind felt on face leaves rustle vanes begin to move
7-10	Gentle Breeze	Large wavelets crests begin to break scattered whitecaps	Leaves and small trees constantly moving light flags extended
11-16	Moderate Breeze	Small waves 1-4 ft becoming longer numerous whitecaps	Dust leaves and loose paper lifted small tree branches move
17-21	Fresh Breeze	Moderate waves 4-8 ft taking longer form many whitecaps some spray	Small trees in leaf begin to sway
22-27	Strong Breeze	Larger waves 8-13 ft whitecaps common more spray	Larger tree branches moving whistling in trees
28-33	Near Gale	Sea heaps up waves 13-20 ft white foam streaks off breakers	Whole trees moving resistance felt walking against wind
34-40	Gale	Moderately high 13-20 ft waves of greater length edges of crests begin to break into spindrift foam blown in streaks	Whole trees in motion resistance felt walking against wind
41-47	Strong Gale	High waves 20 ft sea begins to roll dense streaks of foam spray may reduce visibility	Slight structural damage occurs slate blown off roofs
48-55	Storm	Very high waves 20-30 ft with overhanging crests sea white with densely blown foam heavy rolling lowered visibility	Seldom experienced on land trees broken or uprooted considerable structural damage
56-63	Violent Storm	Exceptionally high 30-45 ft waves foam patches cover sea visibility more reduced	
64	Hurricane	Air filled with foam waves over 45 ft sea completely white with driving spray visibility greatly reduced	


EXAMPLE-

Wind from the South-East, estimated speed 15 knots. Wind shifted from North-East about fifteen minutes ago, and is gusty.

g. Night LZs

1. There are several ways to light a night LZ

(a) Mark the touchdown area with five lights or road flares—one in each corner and one indicating the direction of the wind. See FIG 10-2-7

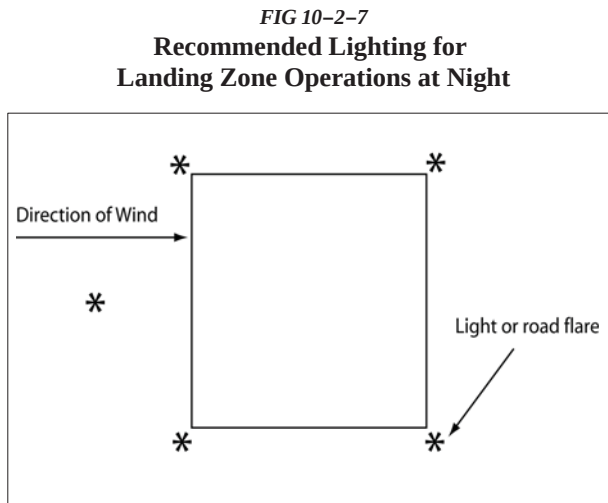

NOTE—

Road flares are an intense source of ignition and may be unsuitable or dangerous in certain conditions. In any case, they must be closely managed and firefighting equipment should be present when used. Other light sources are preferred, if available.

(b) If chemical light sticks may be used, care should be taken to assure they are adequately secured against being dislodged by the helicopter's rotor wash.

(c) Another method of marking a LZ uses four emergency vehicles with their low beam headlights aimed toward the intended landing area.

(d) A third method for marking a LZ uses two vehicles. Have the vehicles direct their headlight beams into the wind, crossing at the center of the LZ. If fire/rescue personnel are available, the reflective stripes on their bunker gear will assist the pilot greatly.

2. At night, spotlights, flood lights, and hand lights used to define the LZ are not to be pointed at the helicopter. However, they are helpful when pointed toward utility poles, trees, or other hazards to the landing aircraft. White lights such as spotlights, flashbulbs, and hi-beam headlights ruin the pilot's night vision and temporarily blind him. Red lights, however, are very helpful in finding accident

locations and do not affect the pilot's night vision as significantly.

3. As in Day LZ operations, ensure radio contact is accomplished between ground and air, if possible.

h. Ground Guide

1. When the helicopter is in sight, one person should assist the LZ Coordinator by guiding the helicopter into a safe landing area. In selecting an LZ, the Coordinator recognizes that medical personnel usually are very busy with the patient at this time. It is recommended that the LZ Coordinator be someone other than a medical responder, if possible. Eye protection should be worn. The ground guide should stand with his/her back to the wind and his/her arms raised over his/her head, flashlights in each hand for night operations.

2. The pilot will confirm the LZ sighting by radio. If possible, once the pilot has identified the LZ, the ground guide should move out of the LZ.

3. As the helicopter turns into the wind and begins a descent, the LZ coordinator should provide assistance by means of radio contact or utilize the unsafe signal to wave off the helicopter if the LZ is not safe (see FIG 10-2-8). The LZ Coordinator should be far enough from the touchdown area that he/she can still maintain visual contact with the pilot.

i. Assisting the Crew

1. After the helicopter has landed, do not approach the helicopter. The crew will approach you.

2. Be prepared to assist the crew by providing security for the helicopter. If asked to provide security, allow no one but the crew to approach the aircraft.

3. Once the patient is prepared and ready to load, allow the crew to open the doors to the helicopter and guide the loading of the patient.

4. When approaching or departing the helicopter, always be aware of the tail rotor and always follow the directions of the crew. Working around a running helicopter can be potentially dangerous. The environment is very noisy and with exhaust gases and rotor wash often windy. In scene operations, the surface may be uneven, soft, or slippery, which can lead to tripping. Be very careful of your footing in this environment.

5. The tail rotor poses a special threat to working around a running helicopter. The tail rotor turns many times faster than the main rotor and is often invisible even at idle engine power. Avoid walking towards the tail of a helicopter beyond the end of the cabin unless specifically directed by the crew.

NOTE–

Helicopters typically have doors on the sides of the cabin, but many use aft mounted “clamshell” type doors for loading and unloading patients on litters or stretchers. When using these doors, it is important to avoid moving any further aft than necessary to operate the doors and load/unload the patient. Again, always comply with the crew’s instructions.

j. General Rules

1. When working around helicopters always approach and depart from the front never from the rear. Approaching from the rear can increase your risk of being struck by the tail rotor which when at operating engine speed is nearly invisible.

2. To prevent injury or damage from the main rotor never raise anything over your head.

3. If the helicopter landed on a slope approach and depart from the down slope side only.

4. When the helicopter is loaded and ready for take off keep the departure path free of vehicles and spectators. In an emergency this area is needed to execute a landing.

k. Hazardous Chemicals and Gases

1. Responding to accidents involving hazardous materials requires special handling by fire/rescue units on the ground. Equally important are the preparations and considerations for helicopter operations in these areas.

2. Hazardous materials of concern are those which are toxic, poisonous, flammable, explosive, irritating, or radioactive in nature. Helicopter ambulance crews normally don’t carry protective suits or breathing apparatuses to protect them from hazardous materials.

3. The helicopter ambulance crew must be told of hazardous materials on the scene in order to avoid

the contamination of the crew. Patients/victims contaminated by hazardous materials may require special precautions in packaging before loading on the aircraft for the medical crew’s protection or may be transported by other means.

4. Hazardous chemicals and gases may be fatal to the unprotected person if inhaled or absorbed through the skin.

5. Upon initial radio contact the helicopter crew must be made aware of any hazardous gases in the area. Never assume that the crew has already been informed. If the aircraft were to fly through the hazardous gases the crew could be poisoned and/or the engines could develop mechanical problems.


6. Poisonous or irritating gases may cling to a victim’s clothing and go unnoticed until the patient is loaded and the doors of the helicopter are closed. To avoid possible compromise of the crew all of these patients must be decontaminated prior to loading.

l. Hand Signals

1. If unable to make radio contact with the HEMS pilot use the following signals:

FIG 10–2–8

Recommended Landing Zone Ground Signals

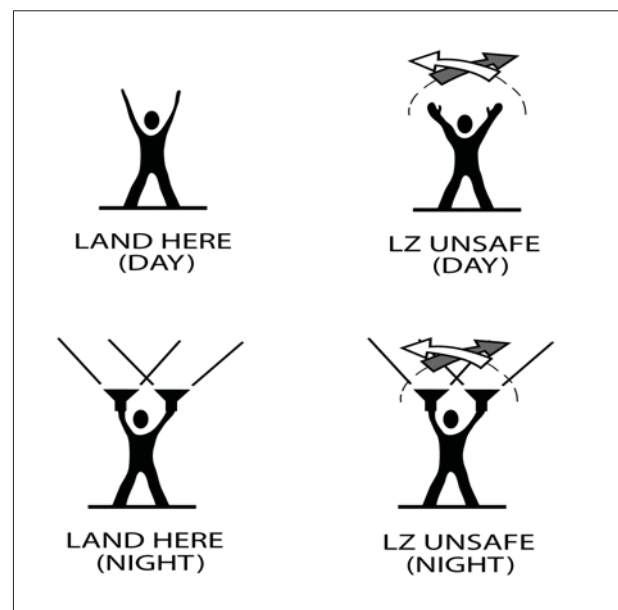

m. Emergency Situations

1. In the event of a helicopter accident in the vicinity of the L consider the following

(a) Emergency Exits:

(1) Doors and emergency exits are typically prominently marked. If possible, operators should familiarize ground responders with the door system on their helicopter in preparation for an emergency event.

(2) In the event of an accident during the L operation, be cautious of hazards such as sharp and jagged metal, plastic, windows, glass, any rotating components such as the rotors, and fire sources such as the fuel tanks and the engine.

(b) Fire Suppression:

Helicopters used in HEMS operations are usually powered by turboshaft engines, which use jet fuel. Civil HEMS aircraft typically carry between 50 and 250 gallons of fuel, depending upon the size of the helicopter and planned flight duration, and the fuel remaining after flying to the scene. Use water to control heat and use foam over fuel to keep vapors from ignition sources.

10-2-4. Emergency Medical Service (EMS) Multiple Helicopter Operations

a. Background. EMS helicopter operators often overlap other EMS operator areas. Standardized procedures can enhance the safety of operating multiple helicopters to landing zones, LZs, and to hospital heliports. Communication is the key to successful operations and in maintaining organization between helicopters, ground units, and communication centers. EMS helicopter operators, which operate in the same areas, should establish joint operating procedures and provide them to related agencies.

b. Recommended Procedures.

1. Landing Zone Operations. The first helicopter to arrive on-scene should establish communications with the ground unit at least 10 NMs from the LZ to receive a LZ briefing and to provide ground control the number of helicopters that can be expected. An attempt should be made to contact other helicopters on 123.025 to pass on to them pertinent LZ information and the ground unit's frequency. Subsequent helicopters arriving on scene should

establish communications on 123.025 at least 10 NMs from the LZ. After establishing contact on 123.025, they should contact the ground unit for additional information. All helicopters should monitor 123.025 at all times.

(a) If the landing zone is not established by the ground unit, when the first helicopter arrives, then the first helicopter should establish altitude and orbit location requirements for the other arriving helicopters. Recommended altitude separation between helicopters is 500 feet, weather and airspace permitting. Helicopters can orbit on cardinal headings from the scene coordinates. See FIG 10-2-9.

(b) Upon landing in the LZ, the first helicopter should update the other helicopters on the LZ conditions, i.e., space, hazards, and terrain.

(c) Before initiating any helicopter movement to leave the LZ, all operators should attempt to contact other helicopters on 123.025 and state their position and route of flight intentions for departing the LZ.


2. Hospital Operations. Because many hospitals require landing permission and have established procedures, frequencies to monitor primary and secondary routes for approaches and departures, and orbiting areas, if the heliport is occupied, pilots should always receive a briefing from the appropriate facility, communication center, flight following, etc., before proceeding to the hospital.

(a) In the event of multiple helicopters coming into the hospital heliport, the helicopter nearest to the heliport should contact other inbound helicopters on 123.025 and establish intentions. Follow the guidelines established in the LZ operations.

(b) To facilitate approach times, the pilot-in-command of the helicopter occupying the hospital heliport should advise any other operators, whether the patient will be off-loaded with the rotor blades turning or stopped, and the approximate time to do so.

(c) Before making any helicopter movement to leave the hospital heliport, all operators should attempt to contact other helicopters on 123.025 and state their position and route of flight intentions for departing the heliport.

FIG 10-2-9
EMS Multiple Helicopter LZ/Heliport Operation

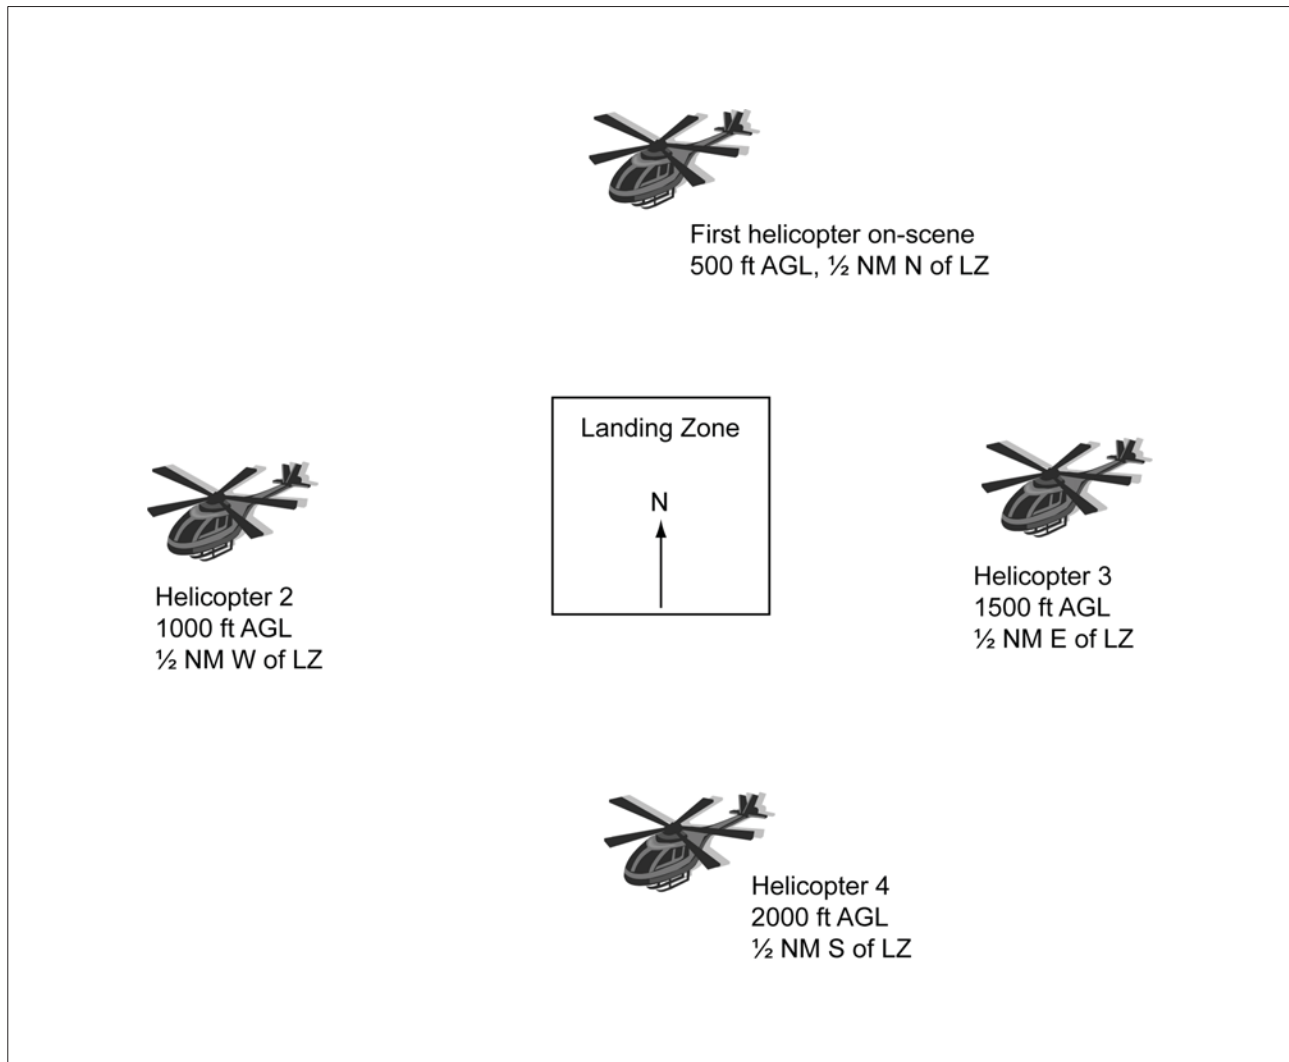

NOTE—

If the LZ/hospital heliport weather conditions or airspace altitude restrictions prohibit the recommended vertical separation, 1 NM separations should be kept between helicopter orbit areas.

Appendix 1. Bird/Other Wildlife Strike Report

Form Approved OMB NO. 2120-0018																																																					
BIRD/OTHER WILDLIFE STRIKE REPORT																																																					
1. Name of Operator		2. Aircraft Make/Model		3. Engine Make/Model																																																	
4. Aircraft Registration		5. Date of Incident ____/____/____ Month Day Year		6. Local Time of Incident ☐ Dawn ☐ Dusk ☐ Day ☐ Night ☐ AM ☐ PM — HR — MIN																																																	
7. Airport Name		8. Runway Used		9. Location if En Route (Nearest Town/Reference & State)																																																	
10. Height (AGL)		11. Speed (IAS)																																																			
12. Phase of Flight		13. Part(s) of Aircraft Struck or Damaged																																																			
☐ A. Parked ☐ B. Taxi ☐ C. Take-off Run ☐ D. Climb ☐ E. En Route ☐ F. Descent ☐ G. Approach ☐ H. Landing Roll		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%; text-align: center;">Struck</th> <th style="width: 25%; text-align: center;">Damaged</th> </tr> </thead> <tbody> <tr><td>A. Radome</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>B. Windshield</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>C. Nose</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>D. Engine No. 1</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>E. Engine No. 2</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>F. Engine No. 3</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>G. Engine No. 4</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> </tbody> </table>			Struck	Damaged	A. Radome	☐	☐	B. Windshield	☐	☐	C. Nose	☐	☐	D. Engine No. 1	☐	☐	E. Engine No. 2	☐	☐	F. Engine No. 3	☐	☐	G. Engine No. 4	☐	☐	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%; text-align: center;">Struck</th> <th style="width: 25%; text-align: center;">Damaged</th> </tr> </thead> <tbody> <tr><td>H. Propeller</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>I. Wing/Rotor</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>J. Fuselage</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>K. Landing Gear</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>L. Tail</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>M. Lights</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>N. Other:</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> </tbody> </table>			Struck	Damaged	H. Propeller	☐	☐	I. Wing/Rotor	☐	☐	J. Fuselage	☐	☐	K. Landing Gear	☐	☐	L. Tail	☐	☐	M. Lights	☐	☐	N. Other:	☐	☐
	Struck	Damaged																																																			
A. Radome	☐	☐																																																			
B. Windshield	☐	☐																																																			
C. Nose	☐	☐																																																			
D. Engine No. 1	☐	☐																																																			
E. Engine No. 2	☐	☐																																																			
F. Engine No. 3	☐	☐																																																			
G. Engine No. 4	☐	☐																																																			
	Struck	Damaged																																																			
H. Propeller	☐	☐																																																			
I. Wing/Rotor	☐	☐																																																			
J. Fuselage	☐	☐																																																			
K. Landing Gear	☐	☐																																																			
L. Tail	☐	☐																																																			
M. Lights	☐	☐																																																			
N. Other:	☐	☐																																																			
		(Specify, if "N. Other" is checked)																																																			
14. Effect on Flight		15. Sky Condition		16. Precipitation																																																	
☐ None ☐ Aborted Take-Off ☐ Precautionary Landing ☐ Engines Shut Down ☐ Other: (Specify)		☐ No Cloud ☐ Some Cloud ☐ Overcast		☐ Fog ☐ Rain ☐ Snow ☐ None																																																	
17. Bird/Other Wildlife Species		18. Number of birds seen and/or struck		19. Size of Bird(s)																																																	
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 33%;">Number of Birds</th> <th style="width: 33%; text-align: center;">Seen</th> <th style="width: 33%; text-align: center;">Struck</th> </tr> </thead> <tbody> <tr><td>1</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>2-10</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>11-100</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> <tr><td>more than 100</td><td style="text-align: center;">☐</td><td style="text-align: center;">☐</td></tr> </tbody> </table>	Number of Birds	Seen	Struck	1	☐	☐	2-10	☐	☐	11-100	☐	☐	more than 100	☐	☐	☐ Small ☐ Medium ☐ Large																																			
Number of Birds	Seen	Struck																																																			
1	☐	☐																																																			
2-10	☐	☐																																																			
11-100	☐	☐																																																			
more than 100	☐	☐																																																			
20. Pilot Warned of Birds ☐ Yes ☐ No																																																					
21. Remarks (Describe damage, injuries and other pertinent information)																																																					
DAMAGE / COST INFORMATION																																																					
22. Aircraft time out of service:		23. Estimated cost of repairs or replacement (U.S. \$):		24. Estimated other cost (U.S. \$) (e.g. loss of revenue, fuel, hotels):																																																	
_____ hours		\$ _____		\$ _____																																																	
Reported by (Optional)		Title		Date																																																	
Paperwork Reduction Act Statement: The information collected on this form is necessary to allow the Federal Aviation Administration to assess the magnitude and severity of the wildlife-aircraft strike problem in the U.S. The information is used in determining the best management practices for reducing the hazard to aviation safety caused by wildlife-aircraft strikes. We estimate that it will take approximately <u>5 minutes</u> to complete the form. If you wish to make any comments concerning the accuracy of this burden estimate and any suggestions for reducing this burden, send those comments to the Federal Aviation Administration, Management Staff, ARP-10, 800 Independence Avenue, SW, Washington, DC 20591. The information collected is voluntary. Please note that an agency may not conduct or sponsor, and a person is not required to respond to, a collection of information unless it displays a currently valid OMB control number. The OMB control number associated with this collection is 2120-0045.																																																					

U.S. Department
of Transportation
**Federal Aviation
Administration**
800 Independence Ave., S.W.
Washington, D C 20591

Official Business
Penalty for Private Use, \$300

BUSINESS REPLY MAIL

FIRST CLASS

PERMIT NO. 12438

WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE FEDERAL AVIATION ADMINISTRATION

Federal Aviation Administration
Office of Airport Safety and Standards, AAS-310
800 Independence Avenue, SW
WASHINGTON, DC 20591



NO POSTAGE
NECESSARY
IF MAILED IN
THE UNITED
STATES

FOLD AND TAPE HERE

Appendix 2. Volcanic Activity Reporting Form (VAR)

Date _____		
SECTION 1 - Transmit to ATC via radio	1. Aircraft Identification	
	2. Position	
	3. Time (UTC)	
	4. Flight level or altitude	
	5. Position/location of volcanic activity or ash cloud	
	6. Air temperature	
	7. Wind	
	8. Supplementary Information (Brief description of activity including vertical and lateral extent of the ash cloud, horizontal movement, rate of growth, etc., as available.)	
SECTION 2 - Complete and forward as directed	Mark the appropriate box(s)	
	9. <i>Density of ash cloud</i>	☐ wispy ☐ moderately dense ☐ very dense
	10. <i>Color of ash</i>	☐ white ☐ light gray ☐ dark gray ☐ black
	11. <i>Eruption</i>	☐ continuous ☐ intermittent ☐ not visible
	12. <i>Position of activity</i>	☐ summit ☐ side ☐ single ☐ multiple ☐ not observed
	13. <i>Other observed features of eruption</i>	☐ lightning ☐ glow ☐ large rocks ☐ ash fallout ☐ mushroom cloud ☐ none
	14. <i>Effect on aircraft</i>	☐ communications ☐ navigation system ☐ engines ☐ pitot static ☐ windscreen ☐ other windows ☐ none
	15. <i>Other effects</i>	☐ turbulence ☐ St. Elmo's fire ☐ fumes ☐ ash deposits
	16. <i>Other information deemed useful</i>	
	Forward completed form via mail to: Global Volcanism Program NHB-119 Smithsonian Institution Washington, DC 20560 E-mail address GVN volcano si edu Or Fax to: Global Volcanism Program (202) 357-2476	

Appendix 3. Abbreviations/Acronyms

As used in this manual the following abbreviations/acronyms have the meanings indicated

Abbreviation/ Acronym	Meaning
AAWU	Alaskan Aviation Weather Unit
AAS	Airport Advisory Service
AC	Advisory Circular
ACAR	Aircraft Communications Addressing and Reporting System
ADCUS	Advise Customs
ADDIS	Aviation Digital Data Service
ADF	Automatic Direction Finder
ADI	Air Defense Identification Zone
ADS-B	Automatic Dependent Surveillance-Broadcast
AeroNav	Aeronautical Navigation Products
AFB	Air Force Base
AFCS	Automatic Flight Control System
A/FD	Airport/Facility Directory
AFIS	Automatic Flight Information Service
AFM	Aircraft Flight Manual
AGL	Above Ground Level
AHRS	Attitude Heading Reference System
AIM	Aeronautical Information Manual
AIRMET	Airmen's Meteorological Information
ALD	Available Landing Distance
ALS	Approach Light Systems
AMSL	Above Mean Sea Level
ANP	Actual Navigation Performance
AOCC	Airline Operations Control Center
AP	Autopilot System
APV	Approach with Vertical Guidance
AR	Authorization Required
ARENA	Areas Noted for Attention
ARFF IC	Aircraft Rescue and Fire Fighting Incident Commander
ARINC	Aeronautical Radio Incorporated
ARO	Airport Reservations Office
ARSA	Airport Radar Service Area
ARSR	Air Route Surveillance Radar
ARTCC	Air Route Traffic Control Center
ARTS	Automated Radar Terminal System
ASDE-	Airport Surface Detection Equipment - Model
ASOS	Automated Surface Observing System
ASR	Airport Surveillance Radar

Abbreviation/ Acronym	Meaning
ASRS	Aviation Safety Reporting System
ATC	Air Traffic Control
ATCRBS	Air Traffic Control Radar Beacon System
ATCSCC	Air Traffic Control System Command Center
ATCT	Airport Traffic Control Tower
ATD	Along-Track Distance
ATIS	Automatic Terminal Information Service
ATT	Attitude Retention System
AWC	Aviation Weather Center
AWOS	Automated Weather Observing System
AWSS	Automated Weather Sensor System
AWTT	Aviation Weather Technology Transfer
AWW	Severe Weather Forecast Alert
BAASS	Bigelow Aerospace Advanced Space Studies
BBS	Bulletin Board System
BC	Back Course
BECMG	Becoming group
C/A	Coarse Acquisition
CARTS	Common Automated Radar Terminal System ARTS to include ARTS IIIE and ARTS IIE
CAT	Clear Air Turbulence
CD	Controller Display
CDI	Course Deviation Indicator
CDR	Coded Departure Route
CERAP	Combined Center/RAPCON
CFA	Controlled Firing Area
CFIT	Controlled Flight into Terrain
CFR	Code of Federal Regulations
COA	Certificate of Waiver or Authorization
CPDLC	Controller Pilot Data Link Communications
CTAF	Common Traffic Advisory Frequency
CVFP	Charted Visual Flight Procedure
CVRS	Computerized Voice Reservation System
CWA	Center Weather Advisory
CWSU	Center Weather Service Unit
DA	Decision Altitude
DCA	Ronald Reagan Washington National Airport
DCP	Data Collection Package
DER	Departure End of Runway

Abbreviation/ Acronym	Meaning
DH	Decision Height
DME	Distance Measuring Equipment
DME/N	Standard DME
DME/P	Precision DME
DOD	Department of Defense
DP	Instrument Departure Procedure
DPU	Data Processor Unit
DRT	Diversion Recovery Tool
DRVSM	Domestic Reduced Vertical Separation Minimum
DUATS	Direct User Access Terminal System
DVA	Diverse Vector Area
DVFR	Defense Visual Flight Rules
DVRSN	Diversion
EDCT	Expect Departure Clearance Time
EFAS	En Route Flight Advisory Service
EFV	Enhanced Flight Visibility
EFVS	Enhanced Flight Vision System
ELT	Emergency Locator Transmitter
EMAS	Engineered Materials Arresting System
EPE	Estimate of Position Error
ESV	Expanded Service Volume
ETA	Estimated Time of Arrival
ETD	Estimated Time of Departure
ETE	Estimated Time En Route
EWINS	Enhanced Weather Information System
EWR	Newark International Airport
FA	Area Forecast
FAA	Federal Aviation Administration
FAF	Final Approach Fix
FAROS	Final Approach Runway Occupancy Signal
FAWP	Final Approach Waypoint
FB	Fly-by
FCC	Federal Communications Commission
FD	Flight Director System
FDC	Flight Data Center
FDE	Fault Detection and Exclusion
FIR	Flight Information Region
FIS	Flight Information Service
FISDL	Flight Information Services Data Link
FLIP	Flight Information Publication
FMS	Flight Management System
FMSP	Flight Management System Procedure
FO	Fly-over
FPA	Flight Path Angle
FPV	Flight Path Vector
FPNM	Feet Per Nautical Mile

Abbreviation/ Acronym	Meaning
FSDO	Flight Standards District Office
FSS	Flight Service Station
GBAS	Ground Based Augmentation System
GEO	Geostationary Satellite
GLS	GBAS Landing System
GNSS	Global Navigation Satellite System
GNSSP	Global Navigation Satellite System Panel
GPS	Global Positioning System
GRI	Group Repetition Interval
GSD	Geographical Situation Display
GUS	Ground Uplink Station
HAT	Height Above Touchdown
HDTA	High Density Traffic Airports
HEMS	Helicopter Emergency Medical Services
HIRL	High Intensity Runway Lights
HIWAS	Hazardous Inflight Weather Advisory Service
HRR	Helicopter Rapid Refueling Procedures
HUD	Head-Up Display
H	Hertz
IAF	Initial Approach Fix
IAP	Instrument Approach Procedure
IAS	Indicated Air Speed
IAWP	Initial Approach Waypoint
ICAO	International Civil Aviation Organization
IF	Intermediate Fix
IFIM	International Flight Information Manual
IFR	Instrument Flight Rules
ILS	Instrument Landing System
ILS/PRM	Instrument Landing System/Precision Runway Monitor
IM	Inner Marker
IMC	Instrument Meteorological Conditions
InFO	Information For Operators
INS	Inertial Navigation System
IOC	Initial Operational Capability
IR	IFR Military Training Route
IRU	Inertial Reference Unit
ITWS	Integrated Terminal Weather System
JFK	John F Kennedy International Airport
kH	Kilohertz
LAA	Local Airport Advisory
LAAS	Local Area Augmentation System
LAHSO	Land and Hold Short Operations
LAWRS	Limited Aviation Weather Reporting Station
LDA	Localizer Type Directional Aid

Abbreviation/ Acronym	Meaning
LDA/PRM	Localizer Type Directional Aid/Precision Runway Monitor
LGA	LaGuardia Airport
LIRL	Low Intensity Runway Lights
LLWAS	Low Level Wind Shear Alert System
LLWAS NE	Low Level Wind Shear Alert System Network Expansion
LLWAS-RS	Low Level Wind Shear Alert System Relocation/Sustainment
LNAV	Lateral Navigation
LOC	Localizer
LOP	Line-of-position
LORAN	Long Range Navigation System
LP	Localizer Performance
LPV	Localizer Performance with Vertical Guidance
LUAW	Line Up and Wait
L	Landing zone
MAHWP	Missed Approach Holding Waypoint
MAP	Missed Approach Point
MAWP	Missed Approach Waypoint
MDA	Minimum Descent Altitude
MEA	Minimum En Route Altitude
MEARTS	Micro En Route Automated Radar Tracking System
METAR	Aviation Routine Weather Report
MH	Megahertz
MIRL	Medium Intensity Runway Lights
MLS	Micro wave Landing System
MM	Middle Marker
MOA	Military Operations Area
MOCA	Minimum Obstruction Clearance Altitude
MRA	Minimum Reception Altitude
MRB	Magnetic Reference Bearing
MSA	Minimum Safe Altitude
MSAW	Minimum Safe Altitude Warning
MSL	Mean Sea Level
MTI	Moving Target Indicator
MTOS	Mountain Obscuration
MTR	Military Training Route
MVA	Minimum Vectoring Altitude
MWA	Mountain Wave Activity
MWO	Meteorological Watch Office
NAS	National Airspace System
NASA	National Aeronautics and Space Administration
NAVAID	Navigational Aid
NAVCEN	Coast Guard Navigation Center

Abbreviation/ Acronym	Meaning
NCWF	National Convective Weather Forecast
NDB	Nondirectional Radio Beacon
NE RAD	Next Generation Weather Radar
NFDC	National Flight Data Center
NGA	National Geospatial-Intelligence Agency
NM	Nautical Mile
NMAC	Near Midair Collision
NOAA	National Oceanic and Atmospheric Administration
NOPAC	North Pacific
NoPT	No Procedure Turn Required
NOTAM	Notice to Airmen
NPA	Nonprecision Approach
NRS	Navigation Reference System
NSA	National Security Area
NSW	No Significant Weather
NTAP	Notices to Airmen Publication
NTSB	National Transportation Safety Board
NT	No Transgression zone
NWS	National Weather Service
OAT	Outside Air Temperature
OBS	Omni-bearing Selector
ODP	Obstacle Departure Procedure
OIS	Operational Information System
OIS	Obstacle Identification Surface
OM	Outer Marker
ORD	Chicago O'Hare International Airport
PA	Precision Approach
PAPI	Precision Approach Path Indicator
PAR	Precision Approach Radar
PAR	Preferred Arrival Route
PC	Personal Computer
P/CG	Pilot/Controller Glossary
PDC	Pre-departure Clearance
PFD	Personal Flotation Device
PinS	Point-in-Space
PIREP	Pilot Weather Report
POB	Persons on Board
POF	Precision Obstacle Free zone
POI	Principal Operations Inspector
PPS	Precise Positioning Service
PRM	Precision Runway Monitor
PT	Procedure Turn
QICP	Qualified Internet Communications Provider
RA	Resolution Advisory

Abbreviation/ Acronym	Meaning
RAA	Remote Advisory Airport
RAIM	Receiver Autonomous Integrity Monitoring
STMP	Special Traffic Management Program
SWSL	Supplemental Weather Service Locations
RAIS	Remote Airport Information Service
RBDT	Ribbon Display Terminals
RCAG	Remote Center Air/Ground
RCC	Rescue Coordination Center
RCLS	Run way Centerline Lighting System
RCO	Remote Communications Outlet
RD	Rotor Diameter
REIL	Run way End Identifier Lights
REL	Run way Entrance Lights
RFM	Rotorcraft Flight Manual
RIL	Run way Intersection Lights
RLIM	Run way Light Intensity Monitor
RMI	Radio Magnetic Indicator
RNAV	Area Navigation
RNP	Required Navigation Performance
ROC	Required Obstacle Clearance
RPAT	RNP Parallel Approach Run way Transitions
RVR	Run way Visual Range
RVSM	Reduced Vertical Separation Minimum
RWSL	Run way Status Light
SAFO	Safety Alerts For Operators
SAM	System Area Monitor
SAR	Search and Rescue
SAS	Stability Augmentation System
SBAS	Satellite-based Augmentation System
SCAT-1 DGPS	Special Category I Differential GPS
SDF	Simplified Directional Facility
SFL	Se quenced Flashing Lights
SFR	Special Flight Rules
SIAP	Standard Instrument Approach Procedure
SID	Standard Instrument Departure
SIGMET	Significant Meteorological Information
SM	Statute Mile
SMGCS	Surface Movement Guidance Control System
SNR	Signal-to-noise Ratio
SOIA	Simultaneous Offset Instrument Approaches
SOP	Standard Operating Procedure
SPC	Storm Prediction Center
SPS	Standard Positioning Service
STAR	Standard Terminal Arrival

Abbreviation/ Acronym	Meaning
STARS	Standard Terminal Automation Replacement System
TA	Traffic Advisory
TAA	Terminal Arrival Area
TAC	Terminal Area Chart
TACAN	Tactical Air Navigation
TAF	Aerodrome Forecast
TAS	True Air Speed
TCAS	Traffic Alert and Collision Avoidance System
TCH	Threshold Crossing Height
TD	Time Difference
TDLS	To er Data Link System
TDWR	Terminal Doppler Weather Radar
TD	Touchdo n one
TD E	Touchdo n one Elevation
TD L	Touchdo n one Lights
TEC	To er En Route Control
THL	Takeoff Hold Lights
TIBS	Telephone Information Briefing Service
TIS	Traffic Information Service
TIS-B	Traffic Information Service-Broadcast
TLS	Transponder Landing System
TPP	Terminal Procedures Publications
TRSA	Terminal Radar Service Area
TSO	Technical Standard Order
TWEB	Transcribed Weather Broadcast
TWIB	Terminal Weather Information for Pilots System
UA	Unmanned Aircraft
UAS	Unmanned Aircraft System
UAV	Unmanned Aerial Vehicle
UFO	Unidentified Flying Ob ect
UHF	Ultrahigh Fre uency
U S	United States
USCG	United States Coast Guard
UTC	Coordinated Universal Time
UWS	Urgent Weather SIGMET
VAR	Volcanic Activity Reporting
VASI	Visual Approach Slope Indicator
VCOA	Visual Climb Over the Airport
VDA	Vertical Descent Angle
VDP	Visual Descent Point
VFR	Visual Flight Rules
VGSI	Visual Glide Slope Indicator
VHF	Very High Fre uency
VIP	Video Integrator Processor

Abbreviation/ Acronym	Meaning
VMC	Visual Meteorological Conditions
V _{MINI}	Instrument flight minimum speed utilized in complying with minimum limit speed requirements for instrument flight
VNAV	Vertical Navigation
V _{NE}	Never exceed speed
V _{NEI}	Instrument flight never exceed speed utilized instead of V _{NE} for compliance with maximum limit speed requirements for instrument flight
VOR	Very High Frequency Omni-directional Range
VORTAC	VHF Omni-directional Range/Tactical Air Navigation
VOT	VOR Test Facility
VR	VFR Military Training Route
V _{REF}	The reference landing approach speed usually about 1.3 times V _{so} plus 50 percent of the wind gust speed in excess of the mean wind speed
V _{SO}	The stalling speed or the minimum steady flight speed in the landing configuration at maximum weight
VTF	Vector to Final
VV	Vertical Visibility

Abbreviation/ Acronym	Meaning
VVI	Vertical Velocity Indicator
V	Speed for best rate of climb
V _I	Instrument climb speed utilized instead of V for compliance with the climb requirements for instrument flight
WA	AIRMET
WAAS	Wide Area Augmentation System
WAC	World Aeronautical Chart
WFO	Weather Forecast Office
WGS-84	World Geodetic System of 1984
WMO	World Meteorological Organization
WMS	Wide-Area Master Station
WMSC	Weather Message Switching Center
WMSCR	Weather Message Switching Center Replacement
WP	Waypoint
WRS	Wide-Area Ground Reference Station
WS	SIGMET
WSO	Weather Service Office
WSP	Weather System Processor
WST	Convective Significant Meteorological Information
WW	Severe Weather Watch Bulletin

PILOT/CONTROLLER GLOSSARY

PURPOSE

a. This Glossary was compiled to promote a common understanding of the terms used in the Air Traffic Control system. It includes those terms which are intended for pilot/controller communications. Those terms most frequently used in pilot/controller communications are printed in ***bold italics***. The definitions are primarily defined in an operational sense applicable to both users and operators of the National Airspace System. Use of the Glossary will preclude any misunderstandings concerning the system's design, function, and purpose.

b. Because of the international nature of flying, terms used in the Lexicon published by the International Civil Aviation Organization (ICAO) are included when they differ from FAA definitions. These terms are followed by ICAO. For the reader's convenience, there are also cross references to related terms in other parts of the Glossary and to other documents, such as the Code of Federal Regulations (CFR) and the Aeronautical Information Manual (AIM).

c. This Glossary will be revised as necessary to maintain a common understanding of the system.

EXPLANATION OF CHANGES

d. Terms Added

BOTTOM ALTITUDE
CLIMB VIA
DEFENSE AREA
DESCEND VIA
FUSED TARGET
FUSION
GROSS NAVIGATION ERROR
ISR
INSTRUMENT APPROACH OPERATIONS (ICAO)
LIGHT-SPORT AIRCRAFT
TAKEOFF ROLL
TOP ALTITUDE

e. Terms Modified

INSTRUMENT APPROACH PROCEDURE
LANDING MINIMUMS
RESUME NORMAL SPEED
TARGET
ULTRALIGHT VEHICLE
WHEN ABLE

f. Editorial/format changes were made where necessary. Revision bars were not used due to the insignificant nature of the changes.

A

AAI–

(See ARRIVAL AIRCRAFT INTERVAL.)

AAR–

(See AIRPORT ARRIVAL RATE.)

ABBREVIATED IFR FLIGHT PLANS– An authorization by ATC requiring pilots to submit only that information needed for the purpose of ATC. It includes only a small portion of the usual IFR flight plan information. In certain instances, this may be only aircraft identification, location, and pilot request. Other information may be requested if needed by ATC for separation/control purposes. It is frequently used by aircraft which are airborne and desire an instrument approach or by aircraft which are on the ground and desire a climb to VFR on top.

(See VFR-ON-TOP.)

(Refer to AIM.)

ABEAM– An aircraft is abeam a fix point or object when that fix point or object is approximately 90 degrees to the right or left of the aircraft track. Abeam indicates a general position rather than a precise point.

ABORT– To terminate a preplanned aircraft maneuver, e.g., an aborted takeoff.

ACC ICAO –

(See ICAO term AREA CONTROL CENTER.)

ACCELERATE STOP DISTANCE AVAILABLE– The runway plus stopway length declared available and suitable for the acceleration and deceleration of an airplane aborting a takeoff.

ACCELERATE STOP DISTANCE AVAILABLE ICAO – The length of the take off run available plus the length of the stopway if provided.

ACDO–

(See AIR CARRIER DISTRICT OFFICE.)

ACKNOWLEDGE– Let me know that you have received and understood this message.

ACL–

(See AIRCRAFT LIST.)

ACLS–

(See AUTOMATIC CARRIER LANDING SYSTEM.)

ACLT–

(See ACTUAL CALCULATED LANDING TIME.)

ACROBATIC FLIGHT– An intentional maneuver involving an abrupt change in an aircraft's attitude, an abnormal attitude, or abnormal acceleration not necessary for normal flight.

(See ICAO term ACROBATIC FLIGHT.)

(Refer to 14 CFR Part 91.)

ACROBATIC FLIGHT ICAO – Maneuvers intentionally performed by an aircraft involving an abrupt change in its attitude, an abnormal attitude, or an abnormal variation in speed.

ACTIVE RUNWAY –

(See RUNWAY IN USE/ACTIVE RUNWAY/DUTY RUNWAY.)

ACTUAL CALCULATED LANDING TIME– ACLT is a flight's frozen calculated landing time. An actual time determined at free calculated landing time, FCLT, or meter list display interval, MLDI, for the adapted vertex for each arrival aircraft based upon runway configuration, airport acceptance rate, airport arrival delay period, and other metered arrival aircraft. This time is either the vertex time of arrival, VTA, of the aircraft or the tentative calculated landing time, TCLT, /ACLT of the previous aircraft plus the arrival aircraft interval, AAI, whichever is later. This time will not be updated in response to the aircraft's progress.

ACTUAL NAVIGATION PERFORMANCE ANP –

(See REQUIRED NAVIGATION PERFORMANCE.)

ADDITIONAL SERVICES– Advisory information provided by ATC which includes but is not limited to the following:

a. Traffic advisories

b. Vectors when requested by the pilot to assist aircraft receiving traffic advisories to avoid observed traffic

c. Altitude deviation information of 300 feet or more from an assigned altitude as observed on a verified reading correctly automatic altitude readout, Mode C

d. Advisories that traffic is no longer a factor

e. Weather and chaff information

f. Weather assistance

g. Bird activity information

h. Holding pattern surveillance Additional services are provided to the extent possible contingent only upon the controller's capability to fit them into the performance of higher priority duties and on the basis of limitations of the radar volume of traffic frequency congestion and controller workload The controller has complete discretion for determining if he/she is able to provide or continue to provide a service in a particular case The controller's reason not to provide or continue to provide a service in a particular case is not subject to question by the pilot and need not be made known to him/her

(See TRAFFIC ADVISORIES.)

(Refer to AIM.)

ADF–

(See AUTOMATIC DIRECTION FINDER.)

ADI –

(See AIR DEFENSE IDENTIFICATION ZONE.)

ADL –

(See ARRIVAL DELAY.)

ADMINISTRATOR– The Federal Aviation Administrator or any person to whom he/she has delegated his/her authority in the matter concerned

ADR–

(See AIRPORT DEPARTURE RATE.)

ADS ICAO –

(See ICAO term AUTOMATIC DEPENDENT SURVEILLANCE.)

ADS-B–

(See AUTOMATIC DEPENDENT SURVEILLANCE–BROADCAST.)

ADS-C–

(See AUTOMATIC DEPENDENT SURVEILLANCE–CONTRACT.)

ADVISE INTENTIONS– Tell me what you plan to do

ADVISOR – Advice and information provided to assist pilots in the safe conduct of flight and aircraft movement

(See ADVISORY SERVICE.)

ADVISOR FREQUENCY – The appropriate frequency to be used for Airport Advisory Service (See LOCAL AIRPORT ADVISORY.) (See UNICOM.)

(Refer to ADVISORY CIRCULAR NO. 90-42.)

(Refer to AIM.)

ADVISOR SERVICE– Advice and information provided by a facility to assist pilots in the safe conduct of flight and aircraft movement

(See ADDITIONAL SERVICES.)

(See EN ROUTE FLIGHT ADVISORY SERVICE.)

(See LOCAL AIRPORT ADVISORY.)

(See RADAR ADVISORY.)

(See SAFETY ALERT.)

(See TRAFFIC ADVISORIES.)

(Refer to AIM.)

AERIAL REFUELING– A procedure used by the military to transfer fuel from one aircraft to another during flight

(Refer to VFR/IFR Wall Planning Charts.)

AERODROME– A defined area on land or water including any buildings installations and equipment intended to be used either wholly or in part for the arrival departure and movement of aircraft

AERODROME BEACON ICAO – Aeronautical beacon used to indicate the location of an aerodrome from the air

AERODROME CONTROL SERVICE ICAO – Air traffic control service for aerodrome traffic

AERODROME CONTROL TOWER ICAO – A unit established to provide air traffic control service to aerodrome traffic

AERODROME ELEVATION ICAO – The elevation of the highest point of the landing area

AERODROME TRAFFIC CIRCUIT ICAO – The specified path to be flown by aircraft operating in the vicinity of an aerodrome

AERONAUTICAL BEACON– A visual NAVAID displaying flashes of white and/or colored light to indicate the location of an airport a heliport a landmark a certain point of a Federal airway in mountainous terrain or an obstruction

(See AIRPORT ROTATING BEACON.)

(Refer to AIM.)

AERONAUTICAL CHART– A map used in air navigation containing all or part of the following

topographic features hazards and obstructions navigation aids navigation routes designated airspace and airports Commonly used aeronautical charts are

a. Sectional Aeronautical Charts 1:500,000 – Designed for visual navigation of slow or medium speed aircraft Topographic information on these charts features the portrayal of relief and a judicious selection of visual check points for VFR flight Aeronautical information includes visual and radio aids to navigation airports controlled airspace restricted areas obstructions and related data

b. VFR Terminal Area Charts 1:250,000 – Depict Class B airspace which provides for the control or segregation of all the aircraft within Class B airspace The chart depicts topographic information and aeronautical information which includes visual and radio aids to navigation airports controlled airspace restricted areas obstructions and related data

c. World Aeronautical Charts WAC 1:1,000,000 – Provide a standard series of aeronautical charts covering land areas of the world at a size and scale convenient for navigation by moderate speed aircraft Topographic information includes cities and towns principal roads railroads distinctive landmarks drainage and relief Aeronautical information includes visual and radio aids to navigation airports airways restricted areas obstructions and other pertinent data

d. En Route Low Altitude Charts– Provide aeronautical information for en route instrument navigation IFR in the low altitude stratum Information includes the portrayal of airways limits of controlled airspace position identification and frequencies of radio aids selected airports minimum en route and minimum obstruction clearance altitudes airway distances reporting points restricted areas and related data Area charts which are a part of this series furnish terminal data at a larger scale in congested areas

e. En Route High Altitude Charts– Provide aeronautical information for en route instrument navigation IFR in the high altitude stratum Information includes the portrayal of jet routes

identification and frequencies of radio aids selected airports distances time zones special use airspace and related information

f. Instrument Approach Procedures IAP Charts– Portray the aeronautical data which is required to execute an instrument approach to an airport These charts depict the procedures including all related data and the airport diagram Each procedure is designated for use with a specific type of electronic navigation system including NDB TACAN VOR ILS/MLS and RNAV These charts are identified by the type of navigational aids which provide final approach guidance

g. Instrument Departure Procedure DP Charts– Designed to expedite clearance delivery and to facilitate transition between takeoff and en route operations Each DP is presented as a separate chart and may serve a single airport or more than one airport in a given geographical location

h. Standard Terminal Arrival STAR Charts– Designed to expedite air traffic control arrival procedures and to facilitate transition between en route and instrument approach operations Each STAR procedure is presented as a separate chart and may serve a single airport or more than one airport in a given geographical location

i. Airport Taxi Charts– Designed to expedite the efficient and safe flow of ground traffic at an airport These charts are identified by the official airport name e.g. Ronald Reagan Washington National Airport

(See ICAO term AERONAUTICAL CHART.)

AERONAUTICAL CHART ICAO – A representation of a portion of the earth its culture and relief specifically designated to meet the requirements of air navigation

AERONAUTICAL INFORMATION MANUAL AIM – A primary FAA publication whose purpose is to instruct airmen about operating in the National Airspace System of the U.S. It provides basic flight information ATC Procedures and general instructional information concerning health medical factors affecting flight safety accident and hazard reporting and types of aeronautical charts and their use

AERONAUTICAL INFORMATION PUBLICATION AIP ICAO – A publication issued by or with the authority of a State and containing aeronautical information of a lasting character essential to air navigation

A/FD–

(See AIRPORT/FACILITY DIRECTORY.)

AFFIRMATIVE– es

AFIS–

(See AUTOMATIC FLIGHT INFORMATION SERVICE – ALASKA FSSs ONLY.)

AFP–

(See AIRSPACE FLOW PROGRAM.)

AIM–

(See AERONAUTICAL INFORMATION MANUAL.)

AIP ICAO –

(See ICAO term AERONAUTICAL INFORMATION PUBLICATION.)

AIR CARRIER DISTRICT OFFICE– An FAA field office serving an assigned geographical area staffed with Flight Standards personnel serving the aviation industry and the general public on matters related to the certification and operation of scheduled air carriers and other large aircraft operations

AIR DEFENSE EMERGENCY – A military emergency condition declared by a designated authority. This condition exists when an attack upon the continental U.S., Alaska, Canada, or U.S. installations in Greenland by hostile aircraft or missiles is considered probable, is imminent, or is taking place

(Refer to AIM.)

AIR DEFENSE IDENTIFICATION ONE ADI – The area of airspace over land or water extending upward from the surface within which the ready identification, the location, and the control of aircraft are required in the interest of national security

a. Domestic Air Defense Identification One ADI – An ADI within the United States along an international boundary of the United States

b. Coastal Air Defense Identification One ADI – Over the coastal waters of the United States

c. Distant Early Warning Identification One DEWI – An ADI over the coastal waters of the State of Alaska

d. Land-Based Air Defense Identification One ADI – Over U.S. metropolitan areas which is activated and deactivated as needed with dimensions, activation dates and other relevant information disseminated via NOTAM

Note: ADIZ locations and operating and flight plan requirements for civil aircraft operations are specified in 14 CFR Part 99.

(Refer to AIM.)

AIR NAVIGATION FACILITY – Any facility used in, available for use in, or designed for use in aid of air navigation including landing areas, lights, any apparatus or equipment for disseminating weather information for signaling, for radio directional finding, or for radio or other electrical communication, and any other structure or mechanism having a similar purpose for guiding or controlling flight in the air or the landing and takeoff of aircraft

(See NAVIGATIONAL AID.)

AIR ROUTE SURVEILLANCE RADAR– Air route traffic control center (ARTCC) radar used primarily to detect and display an aircraft's position while en route between terminal areas. The ARSR enables controllers to provide radar air traffic control service when aircraft are within the ARSR coverage. In some instances, ARSR may enable an ARTCC to provide terminal radar services similar to but usually more limited than those provided by a radar approach control.

AIR ROUTE TRAFFIC CONTROL CENTER– A facility established to provide air traffic control service to aircraft operating on IFR flight plans within controlled airspace and principally during the en route phase of flight. When equipment capabilities and controller workload permit, certain advisory/assistance services may be provided to VFR aircraft.

(See EN ROUTE AIR TRAFFIC CONTROL SERVICES.)

(Refer to AIM.)

AIR TAXI– Used to describe a helicopter/VTOL aircraft movement conducted above the surface but normally not above 100 feet AGL. The aircraft may proceed either via hover taxi or flight at speeds more than 20 knots. The pilot is solely responsible for selecting a safe airspeed/altitude for the operation being conducted.

(See HOVER TAXI.)

(Refer to AIM.)

AIR TRAFFIC– Aircraft operating in the air or on an airport surface exclusive of loading ramps and parking areas

(See ICAO term AIR TRAFFIC.)

AIR TRAFFIC ICAO – All aircraft in flight or operating on the maneuvering area of an aerodrome

AIR TRAFFIC CLEARANCE– An authorization by air traffic control for the purpose of preventing collision between known aircraft for an aircraft to proceed under specified traffic conditions within controlled airspace. The pilot in command of an aircraft may not deviate from the provisions of a visual flight rules (VFR) or instrument flight rules (IFR) air traffic clearance except in an emergency or unless an amended clearance has been obtained. Additionally, the pilot may request a different clearance from that which has been issued by air traffic control (ATC) if information available to the pilot makes another course of action more practicable or if aircraft equipment limitations or company procedures forbid compliance with the clearance issued. Pilots may also request clarification or amendment as appropriate any time a clearance is not fully understood or considered unacceptable because of safety of flight. Controllers should, in such instances and to the extent of operational practicality and safety, honor the pilot's request. 14 CFR Part 91.3(a) states: "The pilot in command of an aircraft is directly responsible for, and is the final authority as to, the operation of that aircraft. THE PILOT IS RESPONSIBLE TO REQUEST AN AMENDED CLEARANCE if ATC issues a clearance that could cause a pilot to deviate from a rule or regulation or in the pilot's opinion could place the aircraft in jeopardy."

(See ATC INSTRUCTIONS.)

(See ICAO term AIR TRAFFIC CONTROL CLEARANCE.)

AIR TRAFFIC CONTROL– A service operated by appropriate authority to promote the safe, orderly, and expeditious flow of air traffic

(See ICAO term AIR TRAFFIC CONTROL SERVICE.)

AIR TRAFFIC CONTROL CLEARANCE ICAO – Authorization for an aircraft to proceed under conditions specified by an air traffic control unit

Note 1: For convenience, the term air traffic control clearance is frequently abbreviated to clearance when used in appropriate contexts.

Note 2: The abbreviated term clearance may be prefixed by the words taxi, takeoff, departure, en route, approach or landing to indicate the particular portion of flight to which the air traffic control clearance relates.

AIR TRAFFIC CONTROL SERVICE–

(See AIR TRAFFIC CONTROL.)

AIR TRAFFIC CONTROL SERVICE ICAO – A service provided for the purpose of

a. Preventing collisions

1. Between aircraft and

2. On the maneuvering area between aircraft and obstructions

b. Expediting and maintaining an orderly flow of air traffic

AIR TRAFFIC CONTROL SPECIALIST– A person authorized to provide air traffic control service

(See AIR TRAFFIC CONTROL.)

(See FLIGHT SERVICE STATION.)

(See ICAO term CONTROLLER.)

AIR TRAFFIC CONTROL SYSTEM COMMAND CENTER ATCSCC – An Air Traffic Tactical Operations facility responsible for monitoring and managing the flow of air traffic throughout the NAS, producing a safe, orderly, and expeditious flow of traffic while minimizing delays. The following functions are located at the ATCSCC:

a. Central Altitude Reservation Function (CARF) Responsible for coordinating planning and approving special user requirements under the Altitude Reservation (ALTRV) concept

(See ALTITUDE RESERVATION.)

b. Airport Reservation Office (ARO) Responsible for approving IFR flights at designated high density traffic airports: John F. Kennedy LaGuardia and Ronald Reagan Washington National during specified hours

(Refer to 14 CFR Part 93.)

(Refer to AIRPORT/FACILITY DIRECTORY.)

c. U S Notice to Airmen NOTAM Office Responsible for collecting maintaining and distributing NOTAMs for the U S civilian and military as well as international aviation communities (See NOTICE TO AIRMEN.)

d. Weather Unit Monitor all aspects of weather for the U S that might affect aviation including cloud cover visibility winds precipitation thunderstorms icing turbulence and more Provide forecasts based on observations and on discussions with meteorologists from various National Weather Service offices FAA facilities airlines and private weather services

AIR TRAFFIC SERVICE– A generic term meaning

- a.** Flight Information Service
- b.** Alerting Service
- c.** Air Traffic Advisory Service
- d.** Air Traffic Control Service
 - 1.** Area Control Service
 - 2.** Approach Control Service or
 - 3.** Airport Control Service

AIR TRAFFIC SERVICE ATS ROUTES – The term ATS Route is a generic term that includes VOR Federal airways colored Federal airways jet routes and RNAV routes The term ATS route does not replace these more familiar route names but serves only as an overall title when listing the types of routes that comprise the United States route structure

AIRBORNE– An aircraft is considered airborne when all parts of the aircraft are off the ground

AIRBORNE DELAY – Amount of delay to be encountered in airborne holding

AIRCRAFT– Devices that are used or intended to be used for flight in the air and when used in air traffic control terminology may include the flight crew (See ICAO term AIRCRAFT.)

AIRCRAFT ICAO – Any machine that can derive support in the atmosphere from the reactions of the air other than the reactions of the air against the earth's surface

AIRCRAFT APPROACH CATEGORY – A grouping of aircraft based on a speed of 1.3 times the stall speed in the landing configuration at maximum gross landing weight An aircraft must fit in only one

category If it is necessary to maneuver at speeds in excess of the upper limit of a speed range for a category the minimums for the category for that speed must be used For example an aircraft which falls in Category A but is circling to land at a speed in excess of 91 knots must use the approach Category B minimums when circling to land The categories are as follows

- a.** Category A– Speed less than 91 knots
- b.** Category B– Speed 91 knots or more but less than 121 knots
- c.** Category C– Speed 121 knots or more but less than 141 knots
- d.** Category D– Speed 141 knots or more but less than 166 knots
- e.** Category E– Speed 166 knots or more (Refer to 14 CFR Part 97.)

AIRCRAFT CLASSES– For the purposes of Wake Turbulence Separation Minima ATC classifies aircraft as Heavy Large and Small as follows

- a.** Heavy– Aircraft capable of takeoff weights of 300 000 pounds or more whether or not they are operating at this weight during a particular phase of flight
- b.** Large– Aircraft of more than 41 000 pounds maximum certificated takeoff weight up to but not including 300 000 pounds
- c.** Small– Aircraft of 41 000 pounds or less maximum certificated takeoff weight (Refer to AIM.)

AIRCRAFT CONFLICT– Predicted conflict within URET of two aircraft or between aircraft and airspace A Red alert is used for conflicts when the predicted minimum separation is 5 nautical miles or less A Yellow alert is used when the predicted minimum separation is between 5 and approximately 12 nautical miles A Blue alert is used for conflicts between an aircraft and predefined airspace (See USER REQUEST EVALUATION TOOL.)

AIRCRAFT LIST ACL – A view available within URET that lists aircraft currently in or predicted to be in a particular sector's airspace The view contains textual flight data information in line format and may be sorted into various orders based on the specific needs of the sector team

(See USER REQUEST EVALUATION TOOL.)

AIRCRAFT SURGE LAUNCH AND RECOVER – Procedures used at USAF bases to provide increased launch and recovery rates in instrument flight rules conditions. ASLAR is based on

a. Reduced separation between aircraft which is based on time or distance. Standard arrival separation applies between participants including multiple flights until the DRAG point. The DRAG point is a published location on an ASLAR approach where aircraft landing second in a formation slows to a predetermined airspeed. The DRAG point is the reference point at which MARSAs apply as expanding elements effect separation within a flight or between subsequent participating flights.

b. ASLAR procedures shall be covered in a Letter of Agreement between the responsible USAF military ATC facility and the concerned Federal Aviation Administration facility. Initial Approach Fix spacing requirements are normally addressed as a minimum.

AIRMEN'S METEOROLOGICAL INFORMATION–

(See AIRMET.)

AIRMET– In flight weather advisories issued only to amend the area forecast concerning weather phenomena which are of operational interest to all aircraft and potentially hazardous to aircraft having limited capability because of lack of equipment, instrumentation, or pilot qualifications. AIRMETs concern weather of less severity than that covered by SIGMETs or Convective SIGMETs. AIRMETs cover moderate icing, moderate turbulence, sustained winds of 30 knots or more at the surface, widespread areas of ceilings less than 1,000 feet and/or visibility less than 3 miles, and extensive mountain obscurement.

(See AWW.)

(See CONVECTIVE SIGMET.)

(See CWA.)

(See SIGMET.)

(Refer to AIM.)

AIRPORT– An area on land or water that is used or intended to be used for the landing and takeoff of aircraft and includes its buildings and facilities, if any.

AIRPORT ADVISOR AREA– The area within ten miles of an airport without a control tower or where

the tower is not in operation and on which a Flight Service Station is located.

(See LOCAL AIRPORT ADVISORY.)

(Refer to AIM.)

AIRPORT ARRIVAL RATE (AAR) – A dynamic input parameter specifying the number of arriving aircraft which an airport or airspace can accept from the ARTCC per hour. The AAR is used to calculate the desired interval between successive arrival aircraft.

AIRPORT DEPARTURE RATE (ADR) – A dynamic parameter specifying the number of aircraft which can depart an airport and the airspace can accept per hour.

AIRPORT ELEVATION– The highest point of an airport's usable runways measured in feet from mean sea level.

(See TOUCHDOWN ZONE ELEVATION.)

(See ICAO term AERODROME ELEVATION.)

AIRPORT/FACILITY DIRECTOR – A publication designed primarily as a pilot's operational manual containing all airports, seaplane bases, and heliports open to the public including communications data, navigational facilities, and certain special notices and procedures. This publication is issued in seven volumes according to geographical area.

AIRPORT LIGHTING– Various lighting aids that may be installed on an airport. Types of airport lighting include:

a. Approach Light System (ALS) – An airport lighting facility which provides visual guidance to landing aircraft by radiating light beams in a directional pattern by which the pilot aligns the aircraft with the extended centerline of the runway on his/her final approach for landing. Condenser Discharge Sequential Flashing Lights/Sequenced Flashing Lights may be installed in conjunction with the ALS at some airports. Types of Approach Light Systems are:

1. ALSF 1– Approach Light System with Sequenced Flashing Lights in ILS Cat I configuration.

2. ALSF 2– Approach Light System with Sequenced Flashing Lights in ILS Cat II configuration. The ALSF 2 may operate as an SSALR when weather conditions permit.

3. SSALF– Simplified Short Approach Light System with Sequenced Flashing Lights.

4. SSALR– Simplified Short Approach Light System with Run way Alignment Indicator Lights

5. MALSF– Medium Intensity Approach Light System with Sequenced Flashing Lights

6. MALSR– Medium Intensity Approach Light System with Run way Alignment Indicator Lights

7. RLLS– Run way Lead in Light System Consists of one or more series of flashing lights installed at or near ground level that provides positive visual guidance along an approach path either curving or straight where special problems exist with hazardous terrain obstructions or noise abatement procedures

8. RAIL– Run way Alignment Indicator Lights– Sequenced Flashing Lights which are installed only in combination with other light systems

9. ODALS– Omnidirectional Approach Light System consists of seven omnidirectional flashing lights located in the approach area of a nonprecision run way Five lights are located on the run way centerline extended with the first light located 300 feet from the threshold and extending at equal intervals up to 1 500 feet from the threshold The other two lights are located one on each side of the run way threshold at a lateral distance of 40 feet from the run way edge or 75 feet from the run way edge when installed on a run way equipped with a VASI

(Refer to FAAO JO 6850.2, VISUAL GUIDANCE LIGHTING SYSTEMS.)

b. Run way Lights/Run way Edge Lights– Lights having a prescribed angle of emission used to define the lateral limits of a run way Run way lights are uniformly spaced at intervals of approximately 200 feet and the intensity may be controlled or preset

c. Touchdown Lighting– Two rows of transverse light bars located symmetrically about the run way centerline normally at 100 foot intervals The basic system extends 3 000 feet along the run way

d. Run way Centerline Lighting– Flush centerline lights spaced at 50 foot intervals beginning 75 feet from the landing threshold and extending to within 75 feet of the opposite end of the run way

e. Threshold Lights– Fixed green lights arranged symmetrically left and right of the run way centerline identifying the run way threshold

f. Run way End Identifier Lights REIL – Two synchronized flashing lights one on each side of the

run way threshold which provide rapid and positive identification of the approach end of a particular run way

g. Visual Approach Slope Indicator VASI – An airport lighting facility providing vertical visual approach slope guidance to aircraft during approach to landing by radiating a directional pattern of high intensity red and white focused light beams which indicate to the pilot that he/she is on path if he/she sees red/ white above path if white/ white and below path if red/red Some airports serving large aircraft have three bar VASIs which provide two visual glide paths to the same run way

h. Precision Approach Path Indicator PAPI – An airport lighting facility similar to VASI providing vertical approach slope guidance to aircraft during approach to landing PAPIs consist of a single row of either two or four lights normally installed on the left side of the run way and have an effective visual range of about 5 miles during the day and up to 20 miles at night PAPIs radiate a directional pattern of high intensity red and white focused light beams which indicate that the pilot is on path if the pilot sees an equal number of white lights and red lights with white to the left of the red above path if the pilot sees more white than red lights and below path if the pilot sees more red than white lights

i. Boundary Lights– Lights defining the perimeter of an airport or landing area

(Refer to AIM.)

AIRPORT MARKING AIDS– Markings used on run way and taxi way surfaces to identify a specific run way a run way threshold a centerline a hold line etc A run way should be marked in accordance with its present usage such as

a. Visual

b. Nonprecision instrument

c. Precision instrument

(Refer to AIM.)

AIRPORT REFERENCE POINT ARP – The approximate geometric center of all usable run way surfaces

AIRPORT RESERVATION OFFICE– Office responsible for monitoring the operation of slot controlled airports It receives and processes requests for unscheduled operations at slot controlled airports

AIRPORT ROTATING BEACON– A visual NAVAID operated at many airports At civil airports

alternating white and green flashes indicate the location of the airport. At military airports, the beacons flash alternately white and green but are differentiated from civil beacons by dualpeaked too quick white flashes between the green flashes.

(See INSTRUMENT FLIGHT RULES.)

(See SPECIAL VFR OPERATIONS.)

(See ICAO term AERODROME BEACON.)

(Refer to AIM.)

AIRPORT STREAM FILTER ASF – An on/off filter that allows the conflict notification function to be inhibited for arrival streams into single or multiple airports to prevent nuisance alerts.

AIRPORT SURFACE DETECTION EQUIPMENT

ASDE – Surveillance equipment specifically designed to detect aircraft vehicular traffic and other objects on the surface of an airport and to present the image on a tower display. Used to augment visual observation by tower personnel of aircraft and/or vehicular movements on runways and taxiways. There are three ASDE systems deployed in the NAS:

a. **ASDE-3** – a Surface Movement Radar

b. **ASDE** – a system that uses a wide-band Surface Movement Radar and multilateration. Data from these two sources are fused and presented on a digital display.

c. **ASDE-3** – an ASDE – system that uses the ASDE-3 Surface Movement Radar.

AIRPORT SURVEILLANCE RADAR – Approach control radar used to detect and display an aircraft's position in the terminal area. ASR provides range and azimuth information but does not provide elevation data. Coverage of the ASR can extend up to 60 miles.

AIRPORT TAI CHARTS –

(See AERONAUTICAL CHART.)

AIRPORT TRAFFIC CONTROL SERVICE – A service provided by a controller for aircraft operating on the movement area and in the vicinity of an airport.

(See MOVEMENT AREA.)

(See TOWER.)

(See ICAO term AERODROME CONTROL SERVICE.)

AIRPORT TRAFFIC CONTROL TOWER –

(See TOWER.)

AIRSPACE CONFLICT – Predicted conflict of an aircraft and active Special Activity Airspace (SAA).

AIRSPACE FLOW PROGRAM AFP – AFP is a Traffic Management (TM) process administered by the Air Traffic Control System Command Center (ATCSCC). Here, aircraft are assigned an Expected Departure Clearance Time (EDCT) in order to manage capacity and demand for a specific area of the National Airspace System (NAS). The purpose of the program is to mitigate the effects of en route constraints. It is a flexible program and may be implemented in various forms depending upon the needs of the air traffic system.

AIRSPACE HIERARCHY – Within the airspace classes, there is a hierarchy and, in the event of an overlap of airspace, Class A preempts Class B, Class B preempts Class C, Class C preempts Class D, Class D preempts Class E, and Class E preempts Class G.

AIRSPEED – The speed of an aircraft relative to its surrounding air mass. The unqualified term "airspeed" means one of the following:

a. **Indicated Airspeed** – The speed shown on the aircraft airspeed indicator. This is the speed used in pilot/controller communications under the general term "airspeed."

(Refer to 14 CFR Part 1.)

b. **True Airspeed** – The airspeed of an aircraft relative to undisturbed air. Used primarily in flight planning and en route portion of flight. When used in pilot/controller communications, it is referred to as "true airspeed" and not shortened to "airspeed."

AIRSTART – The starting of an aircraft engine while the aircraft is airborne, preceded by engine shutdown during training flights or by actual engine failure.

AIRWAY – A Class E airspace area established in the form of a corridor, the centerline of which is defined by radio navigational aids.

(See FEDERAL AIRWAYS.)

(See ICAO term AIRWAY.)

(Refer to 14 CFR Part 71.)

(Refer to AIM.)

AIRWAY ICAO – A control area or portion thereof established in the form of corridor equipped with radio navigational aids.

AIRWAY BEACON – Used to mark airway segments in remote mountain areas. The light flashes Morse Code to identify the beacon site.

(Refer to AIM.)

AIT –

(See AUTOMATED INFORMATION TRANSFER.)

ALERFA Alert Phase ICAO – A situation herein apprehension exists as to the safety of an aircraft and its occupants

ALERT– A notification to a position that there is an aircraft to aircraft or aircraft to airspace conflict as detected by Automated Problem Detection APD

ALERT AREA–

(See SPECIAL USE AIRSPACE.)

ALERT NOTICE– A request originated by a flight service station FSS or an air route traffic control center ARTCC for an extensive communication search for overdue unreported or missing aircraft

ALERTING SERVICE– A service provided to notify appropriate organizations regarding aircraft in need of search and rescue aid and assist such organizations as required

ALNOT–

(See ALERT NOTICE.)

ALONG-TRACK DISTANCE ATD – The distance measured from a point in space by systems using area navigation reference capabilities that are not subject to slant range errors

ALPHANUMERIC DISPLAY – Letters and numerals used to show identification altitude beacon code and other information concerning a target on a radar display

(See AUTOMATED RADAR TERMINAL SYSTEMS.)

ALTERNATE AERODROME ICAO – An aerodrome to which an aircraft may proceed when it becomes either impossible or inadvisable to proceed to or to land at the aerodrome of intended landing

Note: The aerodrome from which a flight departs may also be an en-route or a destination alternate aerodrome for the flight.

ALTERNATE AIRPORT– An airport at which an aircraft may land if a landing at the intended airport becomes inadvisable

(See ICAO term ALTERNATE AERODROME.)

ALTIMETER SETTING– The barometric pressure reading used to adjust a pressure altimeter for variations in existing atmospheric pressure or to the standard altimeter setting 29.92

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

ALTITUDE– The height of a level point or object measured in feet Above Ground Level AGL or from Mean Sea Level MSL

(See FLIGHT LEVEL.)

a. MSL Altitude– Altitude expressed in feet measured from mean sea level

b. AGL Altitude– Altitude expressed in feet measured above ground level

c. Indicated Altitude– The altitude as shown by an altimeter. On a pressure or barometric altimeter it is altitude as shown uncorrected for instrument error and uncompensated for variation from standard atmospheric conditions

(See ICAO term ALTITUDE.)

ALTITUDE ICAO – The vertical distance of a level a point or an object considered as a point measured from mean sea level MSL

ALTITUDE READOUT– An aircraft's altitude transmitted via the Mode C transponder feature that is visually displayed in 100 foot increments on a radar scope having readout capability

(See ALPHANUMERIC DISPLAY.)

(See AUTOMATED RADAR TERMINAL SYSTEMS.)

(Refer to AIM.)

ALTITUDE RESERVATION– Airspace utilization under prescribed conditions normally employed for the mass movement of aircraft or other special user requirements which cannot otherwise be accomplished. ALTRVs are approved by the appropriate FAA facility

(See AIR TRAFFIC CONTROL SYSTEM COMMAND CENTER.)

ALTITUDE RESTRICTION– An altitude or altitudes stated in the order flow which are to be maintained until reaching a specific point or time. Altitude restrictions may be issued by ATC due to traffic terrain or other airspace considerations

ALTITUDE RESTRICTIONS ARE CANCELED–

Adherence to previously imposed altitude restrictions is no longer required during a climb or descent

ALTRV–

(See ALTITUDE RESERVATION.)

AMVER–

(See AUTOMATED MUTUAL-ASSISTANCE VESSEL RESCUE SYSTEM.)

APB–

(See AUTOMATED PROBLEM DETECTION BOUNDARY.)

APD–

(See AUTOMATED PROBLEM DETECTION.)

APDIA–

(See AUTOMATED PROBLEM DETECTION INHIBITED AREA.)

APPROACH CLEARANCE– Authorization by ATC for a pilot to conduct an instrument approach. The type of instrument approach for which a clearance and other pertinent information is provided in the approach clearance is required.

(See CLEARED APPROACH.)

(See INSTRUMENT APPROACH PROCEDURE.)

(Refer to AIM.)

(Refer to 14 CFR Part 91.)

APPROACH CONTROL FACILITY – A terminal ATC facility that provides approach control service in a terminal area.

(See APPROACH CONTROL SERVICE.)

(See RADAR APPROACH CONTROL FACILITY.)

APPROACH CONTROL SERVICE– Air traffic control service provided by an approach control facility for arriving and departing VFR/IFR aircraft and, on occasion, en route aircraft. At some airports not served by an approach control facility, the ARTCC provides limited approach control service.

(See ICAO term APPROACH CONTROL SERVICE.)

(Refer to AIM.)

APPROACH CONTROL SERVICE ICAO – Air traffic control service for arriving or departing controlled flights.

APPROACH GATE– An imaginary point used within ATC as a basis for vectoring aircraft to the final approach course. The gate will be established along the final approach course 1 mile from the final approach fix on the side away from the airport and will be no closer than 5 miles from the landing threshold.

APPROACH LIGHT SYSTEM–

(See AIRPORT LIGHTING.)

APPROACH SEQUENCE– The order in which aircraft are positioned while on approach or awaiting approach clearance.

(See LANDING SEQUENCE.)

(See ICAO term APPROACH SEQUENCE.)

APPROACH SEQUENCE ICAO – The order in which two or more aircraft are cleared to approach to land at the aerodrome.

APPROACH SPEED– The recommended speed contained in aircraft manuals used by pilots when making an approach to landing. This speed will vary for different segments of an approach as well as for aircraft weight and configuration.

APPROPRIATE ATS AUTHORITY ICAO – The relevant authority designated by the State responsible for providing air traffic services in the airspace concerned. In the United States, the appropriate ATS authority is the Program Director for Air Traffic Planning and Procedures, ATP 1.

APPROPRIATE AUTHORITY –

a. Regarding flight over the high seas, the relevant authority is the State of Registry.

b. Regarding flight over other than the high seas, the relevant authority is the State having sovereignty over the territory being overflown.

APPROPRIATE OBSTACLE CLEARANCE

MINIMUM ALTITUDE– Any of the following:

(See MINIMUM EN ROUTE IFR ALTITUDE.)

(See MINIMUM IFR ALTITUDE.)

(See MINIMUM OBSTRUCTION CLEARANCE ALTITUDE.)

(See MINIMUM VECTORING ALTITUDE.)

APPROPRIATE TERRAIN CLEARANCE

MINIMUM ALTITUDE– Any of the following:

(See MINIMUM EN ROUTE IFR ALTITUDE.)

(See MINIMUM IFR ALTITUDE.)

(See MINIMUM OBSTRUCTION CLEARANCE ALTITUDE.)

(See MINIMUM VECTORING ALTITUDE.)

APRON– A defined area on an airport or heliport intended to accommodate aircraft for purposes of loading or unloading passengers or cargo, refueling, parking, or maintenance. With regard to seaplanes, a ramp is used for access to the apron from the water.

(See ICAO term APRON.)

APRON ICAO – A defined area on a land aerodrome intended to accommodate aircraft for purposes of loading or unloading passengers, mail, or cargo, refueling, parking, or maintenance.

ARC– The track over the ground of an aircraft flying at a constant distance from a navigational aid by reference to distance measuring equipment (DME).

AREA CONTROL CENTER ICAO – An air traffic control facility primarily responsible for ATC services being provided IFR aircraft during the en route phase of flight. The U.S. equivalent facility is an air route traffic control center (ARTCC).

AREA NAVIGATION RNAV – A method of navigation which permits aircraft operation on any desired flight path within the coverage of ground- or space-based navigation aids or within the limits of the capability of self-contained aids or a combination of these.

Note: Area navigation includes performance-based navigation as well as other operations that do not meet the definition of performance-based navigation.

AREA NAVIGATION RNAV APPROACH CONFIGURATION

a. STANDARD T– An RNAV approach whose design allows direct flight to any one of three initial approach fixes (IAF) and eliminates the need for procedure turns. The standard design is to align the procedure on the extended centerline with the missed approach point (MAP) at the runway threshold, the final approach fix (FAF), and the initial approach/intermediate fix (IAF/IF). The other two IAFs will be established perpendicular to the IF.

b. MODIFIED T– An RNAV approach design for single or multiple runways where terrain or operational constraints do not allow for the standard T. The T may be modified by increasing or decreasing the angle from the corner IAFs to the IF or by eliminating one or both corner IAFs.

c. STANDARD I– An RNAV approach design for a single runway with both corner IAFs eliminated. Course reversal or radar vectoring may be required at busy terminals with multiple runways.

d. TERMINAL ARRIVAL AREA (TAA) – The TAA is controlled airspace established in conjunction with the Standard or Modified T and I RNAV approach configurations. In the standard TAA, there are three areas: straight-in, left base, and right base. The arc boundaries of the three areas of the TAA are published portions of the approach and allow aircraft to transition from the en route structure directly to the nearest IAF. TAAs will also eliminate or reduce feeder routes, departure extensions, and procedure turns or course reversal.

1. STRAIGHT IN AREA– A 30NM arc centered on the IF bounded by a straight line extending through the IF perpendicular to the intermediate course.

2. LEFT BASE AREA– A 30NM arc centered on the right corner IAF. The area shares a boundary with the straight-in area except that it extends out for 30NM from the IAF and is bounded on the other side by a line extending from the IF through the FAF to the arc.

3. RIGHT BASE AREA– A 30NM arc centered on the left corner IAF. The area shares a boundary with the straight-in area except that it extends out for 30NM from the IAF and is bounded on the other side by a line extending from the IF through the FAF to the arc.

AREA NAVIGATION RNAV GLOBAL POSITIONING SYSTEM (GPS) PRECISION RUNWAY MONITORING (PRM) APPROACH – A GPS approach which requires vertical guidance used in lieu of an ILS PRM approach to conduct approaches to parallel runways whose extended centerlines are separated by less than 4,300 feet and at least 3,000 feet. Where closely spaced independent approaches are permitted. Also used in lieu of an ILS PRM and/or LDA PRM approach to conduct Simultaneous Offset Instrument Approach (SOIA) operations.

ARINC– An acronym for Aeronautical Radio, Inc., a corporation largely owned by a group of airlines. ARINC is licensed by the FCC as an aeronautical station and contracted by the FAA to provide communications support for air traffic control and meteorological services in portions of international airspace.

ARMY AVIATION FLIGHT INFORMATION BULLETIN– A bulletin that provides air operation data covering Army National Guard and Army Reserve aviation activities.

ARO–

(See AIRPORT RESERVATION OFFICE.)

ARRESTING SYSTEM– A safety device consisting of two major components: namely, engaging or catching devices and energy absorption devices for the purpose of arresting both tailhook and/or nontailhook equipped aircraft. It is used to prevent aircraft from overrunning runways when the aircraft cannot be stopped after landing or during aborted

takeoff Arresting systems have various names e.g. arresting gear hook device wire barrier cable
(See ABORT.)
(Refer to AIM.)

ARRIVAL AIRCRAFT INTERVAL– An internally generated program in hundredths of minutes based upon the AAR AAI is the desired optimum interval between successive arrival aircraft over the vertex

ARRIVAL CENTER– The ARTCC having jurisdiction for the impacted airport

ARRIVAL DELTA – A parameter which specifies a period of time in which no aircraft will be metered for arrival at the specified airport

ARRIVAL SECTOR– An operational control sector containing one or more meter fixes

ARRIVAL SECTOR ADVISOR LIST– An ordered list of data on arrivals displayed at the PVD/MDM of the sector which controls the meter fix

ARRIVAL SEQUENCING PROGRAM– The automated program designed to assist in sequencing aircraft destined for the same airport

ARRIVAL TIME– The time an aircraft touches down on arrival

ARSR–
(See AIR ROUTE SURVEILLANCE RADAR.)

ARTCC–
(See AIR ROUTE TRAFFIC CONTROL CENTER.)

ARTS–
(See AUTOMATED RADAR TERMINAL SYSTEMS.)

ASDA–
(See ACCELERATE-STOP DISTANCE AVAILABLE.)

ASDA ICAO –
(See ICAO Term ACCELERATE-STOP DISTANCE AVAILABLE.)

ASDE–
(See AIRPORT SURFACE DETECTION EQUIPMENT.)

ASF–
(See AIRPORT STREAM FILTER.)

ASLAR–
(See AIRCRAFT SURGE LAUNCH AND RECOVERY.)

ASP–
(See ARRIVAL SEQUENCING PROGRAM.)

ASR–
(See AIRPORT SURVEILLANCE RADAR.)

ASR APPROACH–
(See SURVEILLANCE APPROACH.)

ASSOCIATED– A radar target displaying a data block with flight identification and altitude information
(See UNASSOCIATED.)

ATC–
(See AIR TRAFFIC CONTROL.)

ATC ADVISES– Used to prefix a message of noncontrol information when it is relayed to an aircraft by other than an air traffic controller
(See ADVISORY.)

ATC ASSIGNED AIRSPACE– Airspace of defined vertical/lateral limits assigned by ATC for the purpose of providing air traffic segregation between the specified activities being conducted within the assigned airspace and other IFR air traffic
(See SPECIAL USE AIRSPACE.)

ATC CLEARANCE–
(See AIR TRAFFIC CLEARANCE.)

ATC CLEARS– Used to prefix an ATC clearance when it is relayed to an aircraft by other than an air traffic controller

ATC INSTRUCTIONS– Directives issued by air traffic control for the purpose of requiring a pilot to take specific actions e.g. Turn left heading to five zero Go around Clear the runway
(Refer to 14 CFR Part 91.)

ATC PREFERRED ROUTE NOTIFICATION– URET notification to the appropriate controller of the need to determine if an ATC preferred route needs to be applied based on destination airport
(See ROUTE ACTION NOTIFICATION.)
(See USER REQUEST EVALUATION TOOL.)

ATC PREFERRED ROUTES– Preferred routes that are not automatically applied by Host

ATC REQUESTS– Used to prefix an ATC request when it is relayed to an aircraft by other than an air traffic controller

ATC SECURITY SERVICES – Communications and security tracking provided by an ATC facility in support of the DHS the DOD or other Federal security elements in the interest of national security. Such security services are only applicable within designated areas. ATC security services do not include ATC basic radar services or flight following.

ATC SECURITY SERVICES POSITION – The position responsible for providing ATC security services as defined. This position does not provide ATC IFR separation or VFR flight following services but is responsible for providing security services in an area comprising airspace assigned to one or more ATC operating sectors. This position may be combined with control positions.

ATC SECURITY TRACKING – The continuous tracking of aircraft movement by an ATC facility in support of the DHS the DOD or other security elements for national security using radar, i.e., radar tracking or other means, e.g., manual tracking without providing basic radar services including traffic advisories or other ATC services not defined in this section.

ATCAA–

(See ATC ASSIGNED AIRSPACE.)

ATCRBS–

(See RADAR.)

ATCSCC–

(See AIR TRAFFIC CONTROL SYSTEM COMMAND CENTER.)

ATCT–

(See TOWER.)

ATD–

(See ALONG-TRACK DISTANCE.)

ATIS–

(See AUTOMATIC TERMINAL INFORMATION SERVICE.)

ATIS ICAO –

(See ICAO Term AUTOMATIC TERMINAL INFORMATION SERVICE.)

ATS ROUTE ICAO – A specified route designed for channelling the flow of traffic as necessary for the provision of air traffic services.

Note: The term “ATS Route” is used to mean variously, airway, advisory route, controlled or uncontrolled route, arrival or departure, etc.

AUTOLAND APPROACH– An autoland approach is a precision instrument approach to touchdown and in some cases through the landing rollout. An autoland approach is performed by the aircraft autopilot which is receiving position information and/or steering commands from onboard navigation equipment.

Note: Autoland and coupled approaches are flown in VFR and IFR. It is common for carriers to require their crews to fly coupled approaches and autoland approaches (if certified) when the weather conditions are less than approximately 4,000 RVR.

(See COUPLED APPROACH.)

AUTOMATED INFORMATION TRANSFER– A precoordinated process specifically defined in facility directives during which a transfer of altitude control and/or radar identification is accomplished without verbal coordination between controllers using information communicated in a full data block.

AUTOMATED MUTUAL ASSISTANCE VESSEL RESCUE SYSTEM– A facility which can deliver in a matter of minutes a surface picture (SURPIC) of vessels in the area of a potential or actual search and rescue incident including their predicted positions and their characteristics.

(See FAAO JO 7110.65, Para 10–6–4, INFLIGHT CONTINGENCIES.)

AUTOMATED PROBLEM DETECTION (APD) – An Automation Processing capability that compares trajectories in order to predict conflicts.

AUTOMATED PROBLEM DETECTION BOUNDARY (APB) – The adapted distance beyond a facility's boundary defining the airspace within which URET performs conflict detection.

(See USER REQUEST EVALUATION TOOL.)

AUTOMATED PROBLEM DETECTION INHIBITED AREA (APDIA) – Airspace surrounding a terminal area within which APD is inhibited for all flights within that airspace.

AUTOMATED RADAR TERMINAL SYSTEMS

ARTS – A generic term for several tracking systems included in the Terminal Automation Systems (TAS). ARTS plus a suffix roman numeral denotes a major modification to that system.

a. ARTS IIIA The Radar Tracking and Beacon Tracking Level (RT&BTL) of the modular programmable automated radar terminal system. ARTS IIIA detects tracks and predicts primary as well as secondary radar derived aircraft targets. This

more sophisticated computer driven system upgrades the existing ARTS III system by providing improved tracking continuous data recording and fail soft capabilities

b. Common ARTS Includes ARTS IIE ARTS IIIE and ARTS IIIE ith ACD see DTAS which combines functionalities of the previous ARTS systems

c. Programmable Indicator Data Processor PIDP The PIDP is a modification to the AN/TP -42 interrogator system currently installed in fixed RAPCONs The PIDP detects tracks and predicts secondary radar aircraft targets These are displayed by means of computer-generated symbols and alphanumeric characters depicting flight identification aircraft altitude ground speed and flight plan data Although primary radar targets are not tracked they are displayed coincident ith the secondary radar targets as ell as ith the other symbols and alphanumerics The system has the capability of interfacing ith ARTCCs

AUTOMATED WEATHER S STEM- Any of the automated eather sensor platforms that collect eather data at airports and disseminate the eather information via radio and/or landline The systems currently consist of the Automated Surface Observing System ASOS Automated Weather Sensor System AWSS and Automated Weather Observation System AWOS

AUTOMATED UNICOM- Provides completely automated eather radio check capability and airport advisory information on an Automated UNICOM system These systems offer a variety of features typically selectable by microphone clicks on the UNICOM frequency Availability ill be published in the Airport/Facility Directory and approach charts

AUTOMATIC ALTITUDE REPORT-
(See ALTITUDE READOUT.)

AUTOMATIC ALTITUDE REPORTING- That function of a transponder which responds to Mode C interrogations by transmitting the aircraft's altitude in 100 foot increments

AUTOMATIC CARRIER LANDING S STEM- U S Navy final approach e uipment consisting of precision tracking radar coupled to a computer data link to provide continuous information to the aircraft monitoring capability to the pilot and a backup approach system

AUTOMATIC DEPENDENT SURVEILLANCE ADS ICAO - A surveillance technique in which aircraft automatically provide via a data link data derived from on-board navigation and position fixing systems including aircraft identification four dimensional position and additional data as appropriate

AUTOMATIC DEPENDENT SURVEILLANCE-BROADCAST ADS B - A surveillance system in which an aircraft or vehicle to be detected is fitted ith cooperative e uipment in the form of a data link transmitter The aircraft or vehicle periodically broadcasts its GPS-derived position and other information such as velocity over the data link which is received by a ground-based transmitter/receiver transceiver for processing and display at an air traffic control facility

(See GLOBAL POSITIONING SYSTEM.)

(See GROUND-BASED TRANSCEIVER.)

AUTOMATIC DEPENDENT SURVEILLANCE-CONTRACT ADS-C - A data link position reporting system controlled by a ground station that establishes contracts ith an aircraft's avionics that occur automatically whenever specific events occur or specific time intervals are reached

AUTOMATIC DIRECTION FINDER- An aircraft radio navigation system which senses and indicates the direction to a L/MF nondirectional radio beacon NDB ground transmitter Direction is indicated to the pilot as a magnetic bearing or as a relative bearing to the longitudinal axis of the aircraft depending on the type of indicator installed in the aircraft In certain applications such as military ADF operations may be based on airborne and ground transmitters in the VHF/UHF frequency spectrum

(See BEARING.)

(See NONDIRECTIONAL BEACON.)

AUTOMATIC FLIGHT INFORMATION SERVICE AFIS - ALASKA FSSs ONL - The continuous broadcast of recorded non-control information at airports in Alaska here a FSS provides local airport advisory service The AFIS broadcast automates the repetitive transmission of essential but routine information such as eather ind altimeter favored runway breaking action airport NOTAMs and other applicable information The information is continuously broadcast over a discrete VHF radio frequency usually the ASOS/AWSS/AWOS frequency

AUTOMATIC TERMINAL INFORMATION SERVICE– The continuous broadcast of recorded noncontrol information in selected terminal areas. Its purpose is to improve controller effectiveness and to relieve frequency congestion by automating the repetitive transmission of essential but routine information. e.g., Los Angeles information Alfa One three zero zero Coordinated Universal Time Weather measured ceiling two thousand overcast visibility three miles smoke temperature seven one degree point five seven wind two five zero at five altimeter two nine nine six I L S Runway Two Five Left approach in use Runway Two Five Right closed advise you have Alfa

(See ICAO term AUTOMATIC TERMINAL INFORMATION SERVICE.)

(Refer to AIM.)

AUTOMATIC TERMINAL INFORMATION SERVICE ICAO – The provision of current routine information to arriving and departing aircraft by means of continuous and repetitive broadcasts throughout the day or a specified portion of the day

AUTOROTATION– A rotorcraft flight condition in which the lifting rotor is driven entirely by action of the air when the rotorcraft is in motion

a. Autorotative Landing/Touchdown Autorotation Used by a pilot to indicate that the landing will be made without applying power to the rotor

b. Low Level Autorotation Commences at an altitude well below the traffic pattern usually below

100 feet AGL and is used primarily for tactical military training

c. 180 degrees Autorotation Initiated from a downwind heading and is commenced well inside the normal traffic pattern. Go around may not be possible during the latter part of this maneuver

AVAILABLE LANDING DISTANCE ALD – The portion of a runway available for landing and roll out for aircraft cleared for LAHSO. This distance is measured from the landing threshold to the hold short point

AVIATION WEATHER SERVICE– A service provided by the National Weather Service (NWS) and FAA which collects and disseminates pertinent weather information for pilots, aircraft operators, and ATC. Available aviation weather reports and forecasts are displayed at each NWS office and FAA FSS

(See EN ROUTE FLIGHT ADVISORY SERVICE.)

(See TRANSCRIBED WEATHER BROADCAST.)

(See WEATHER ADVISORY.)

(Refer to AIM.)

AWW–

(See SEVERE WEATHER FORECAST ALERTS.)

AZIMUTH MLS – A magnetic bearing extending from an MLS navigation facility

Note: Azimuth bearings are described as magnetic and are referred to as “azimuth” in radio telephone communications.

B

BACK-TAXI– A term used by air traffic controllers to taxi an aircraft on the runway opposite to the traffic flow. The aircraft may be instructed to back taxi to the beginning of the runway or at some point before reaching the runway end for the purpose of departure or to exit the runway.

BASE LEG–

(See TRAFFIC PATTERN.)

BEACON–

(See AERONAUTICAL BEACON.)

(See AIRPORT ROTATING BEACON.)

(See AIRWAY BEACON.)

(See MARKER BEACON.)

(See NONDIRECTIONAL BEACON.)

(See RADAR.)

BEARING– The horizontal direction to or from any point usually measured clockwise from true north, magnetic north, or some other reference point through 360 degrees.

(See NONDIRECTIONAL BEACON.)

BELOW MINIMUMS– Weather conditions below the minimums prescribed by regulation for the particular action involved, e.g., landing minimums, takeoff minimums.

BLAST FENCE– A barrier that is used to divert or dissipate jet or propeller blast.

BLAST PAD– A surface adjacent to the ends of a runway provided to reduce the erosive effect of jet blast and propeller wash.

BLIND SPEED– The rate of departure or closing of a target relative to the radar antenna at which cancellation of the primary radar target by moving target indicator (MTI) circuits in the radar equipment causes a reduction or complete loss of signal.

(See ICAO term BLIND VELOCITY.)

BLIND SPOT– An area from which radio transmissions and/or radar echoes cannot be received. The term is also used to describe portions of the airport not visible from the control tower.

BLIND TRANSMISSION–

(See TRANSMITTING IN THE BLIND.)

BLIND VELOCITY– ICAO – The radial velocity of a moving target such that the target is not seen on primary radars fitted with certain forms of fixed echo suppression.

BLIND ONE–

(See BLIND SPOT.)

BLOCKED– Phraseology used to indicate that a radio transmission has been distorted or interrupted due to multiple simultaneous radio transmissions.

BOTTOM ALTITUDE– In reference to published altitude restrictions on a STAR or STAR runway transition, the lowest altitude authorized.

BOUNDARY LIGHTS–

(See AIRPORT LIGHTING.)

BRAKING ACTION (GOOD, FAIR, POOR, OR NIL)– A report of conditions on the airport movement area providing a pilot with a degree/quality of braking that he/she might expect. Braking action is reported in terms of good, fair, poor, or nil. (See RUNWAY CONDITION READING.)

BRAKING ACTION ADVISORIES– When tower controllers have received runway braking action reports which include the terms fair, poor, or nil, or whenever weather conditions are conducive to deteriorating or rapidly changing runway braking conditions, the tower will include on the ATIS broadcast the statement "Braking action advisories are in effect" on the ATIS broadcast. During the time braking action advisories are in effect, ATC will issue the latest braking action report for the runway in use to each arriving and departing aircraft. Pilots should be prepared for deteriorating braking conditions and should request current runway condition information if not volunteered by controllers. Pilots should also be prepared to provide a descriptive runway condition report to controllers after landing.

BREAKOUT– A technique to direct aircraft out of the approach stream. In the context of close parallel operations, a breakout is used to direct threatened aircraft away from a deviating aircraft.

BROADCAST– Transmission of information for which an acknowledgement is not expected.

(See ICAO term BROADCAST.)

BROADCAST ICAO – A transmission of information relating to air navigation that is not addressed to a specific station or stations

C

CALCULATED LANDING TIME– A term that may be used in place of tentative or actual calculated landing time whichever applies

CALL FOR RELEASE– Wherein the overlying ARTCC requires a terminal facility to initiate verbal coordination to secure ARTCC approval for release of a departure into the en route environment

CALL UP– Initial voice contact between a facility and an aircraft using the identification of the unit being called and the unit initiating the call
(Refer to AIM.)

CANADIAN MINIMUM NAVIGATION PERFORMANCE SPECIFICATION AIRSPACE– That portion of Canadian domestic airspace within which MNPS separation may be applied

CARDINAL ALTITUDES– Odd or Even thousand foot altitudes or flight levels e.g. 5 000 6 000 7 000 FL 250 FL 260 FL 270

(See ALTITUDE.)

(See FLIGHT LEVEL.)

CARDINAL FLIGHT LEVELS–
(See CARDINAL ALTITUDES.)

CAT–
(See CLEAR-AIR TURBULENCE.)

CATCH POINT– A fix/ waypoint that serves as a transition point from the high altitude waypoint navigation structure to an arrival procedure STAR or the low altitude ground-based navigation structure

CEILING– The heights above the earth's surface of the lowest layer of clouds or obscuring phenomena that is reported as broken overcast or obscuration and not classified as thin or partial

(See ICAO term CEILING.)

CEILING ICAO – The height above the ground or water of the base of the lowest layer of cloud below 6 000 meters 20 000 feet covering more than half the sky

CENRAP–
(See CENTER RADAR ARTS PRESENTATION/PROCESSING.)

CENRAP PLUS–
(See CENTER RADAR ARTS PRESENTATION/PROCESSING-PLUS.)

CENTER–
(See AIR ROUTE TRAFFIC CONTROL CENTER.)

CENTER S AREA– The specified airspace within which an air route traffic control center ARTCC provides air traffic control and advisory service
(See AIR ROUTE TRAFFIC CONTROL CENTER.)
(Refer to AIM.)

CENTER RADAR ARTS PRESENTATION/PROCESSING– A computer program developed to provide a back up system for airport surveillance radar in the event of a failure or malfunction. The program uses air route traffic control center radar for the processing and presentation of data on the ARTS IIA or IIIA displays

CENTER RADAR ARTS PRESENTATION/PROCESSING PLUS– A computer program developed to provide a back up system for airport surveillance radar in the event of a terminal secondary radar system failure. The program uses a combination of Air Route Traffic Control Center Radar and terminal airport surveillance radar primary targets displayed simultaneously for the processing and presentation of data on the ARTS IIA or IIIA displays

CENTER TRACON AUTOMATION SYSTEM CTAS – A computerized set of programs designed to aid Air Route Traffic Control Centers and TRACONs in the management and control of air traffic

CENTER WEATHER ADVISOR – An unscheduled weather advisory issued by Center Weather Service Unit meteorologists for ATC use to alert pilots of existing or anticipated adverse weather conditions within the next 2 hours. A CWA may modify or redefine a SIGMET

(See AWW.)

(See AIRMET.)

(See CONVECTIVE SIGMET.)

(See SIGMET.)

(Refer to AIM.)

CENTRAL EAST PACIFIC– An organized route system between the U.S. West Coast and Hawaii

CEP–

(See CENTRAL EAST PACIFIC.)

CERAP–

(See COMBINED CENTER-RAPCON.)

CERTIFIED TOWER RADAR DISPLAY CTRD – A FAA radar display certified for use in the NAS

CFR–

(See CALL FOR RELEASE.)

CHAFF– Thin narrow metallic reflectors of various lengths and frequency responses used to reflect radar energy. These reflectors are then dropped from aircraft and allowed to drift down and result in large targets on the radar display

CHARTED VFR FLYWAYS– Charted VFR Flyways are flight paths recommended for use to bypass areas heavily traversed by large turbine powered aircraft. Pilot compliance with recommended flyways and associated altitudes is strictly voluntary. VFR Flyway Planning charts are published on the back of existing VFR Terminal Area charts

CHARTED VISUAL FLIGHT PROCEDURE APPROACH– An approach conducted while operating on an instrument flight rules (IFR) flight plan which authorizes the pilot of an aircraft to proceed visually and clear of clouds to the airport via visual landmarks and other information depicted on a charted visual flight procedure. This approach must be authorized and under the control of the appropriate air traffic control facility. Weather minimums required are depicted on the chart

CHASE– An aircraft flown in proximity to another aircraft normally to observe its performance during training or testing

CHASE AIRCRAFT–

(See CHASE.)

CIRCLE TO LAND MANEUVER– A maneuver initiated by the pilot to align the aircraft with a runway for landing when a straight in landing from an instrument approach is not possible or is not desirable. At tower controlled airports this maneuver is made only after ATC authorization has been

obtained and the pilot has established required visual reference to the airport

(See CIRCLE TO RUNWAY.)

(See LANDING MINIMUMS.)

(Refer to AIM.)

CIRCLE TO RUNWAY (RUNWAY NUMBER)–

Used by ATC to inform the pilot that he/she must circle to land because the runway in use is other than the runway aligned with the instrument approach procedure. When the direction of the circling maneuver in relation to the airport/runway is required the controller will state the direction (eight cardinal compass points) and specify a left or right downwind or base leg as appropriate. e.g. Cleared VOR Runway Three Six Approach circle to Runway T o T o or Circle north east of the airport for a right downwind to Runway T o T o

(See CIRCLE-TO-LAND MANEUVER.)

(See LANDING MINIMUMS.)

(Refer to AIM.)

CIRCLING APPROACH–

(See CIRCLE-TO-LAND MANEUVER.)

CIRCLING MANEUVER–

(See CIRCLE-TO-LAND MANEUVER.)

CIRCLING MINIMA–

(See LANDING MINIMUMS.)

CLASS A AIRSPACE–

(See CONTROLLED AIRSPACE.)

CLASS B AIRSPACE–

(See CONTROLLED AIRSPACE.)

CLASS C AIRSPACE–

(See CONTROLLED AIRSPACE.)

CLASS D AIRSPACE–

(See CONTROLLED AIRSPACE.)

CLASS E AIRSPACE–

(See CONTROLLED AIRSPACE.)

CLASS G AIRSPACE– That airspace not designated as Class A, B, C, D or E

CLEAR AIR TURBULENCE (CAT) – Turbulence encountered in air where no clouds are present. This term is commonly applied to high level turbulence associated with wind shear. CAT is often encountered in the vicinity of the jet stream

(See WIND SHEAR.)

(See JET STREAM.)

CLEAR OF THE RUNWAY –

a. Taxiing aircraft which is approaching a runway is clear of the runway when all parts of the

aircraft are held short of the applicable runway holding position marking

b. A pilot or controller may consider an aircraft high is exiting or crossing a runway to be clear of the runway when all parts of the aircraft are beyond the runway edge and there are no restrictions to its continued movement beyond the applicable runway holding position marking

c. Pilots and controllers shall exercise good judgement to ensure that adequate separation exists between all aircraft on runways and taxiways at airports with inadequate runway edge lines or holding position markings

CLEARANCE–

(See AIR TRAFFIC CLEARANCE.)

CLEARANCE LIMIT– The fix point or location to which an aircraft is cleared when issued an air traffic clearance

(See ICAO term CLEARANCE LIMIT.)

CLEARANCE LIMIT ICAO – The point to which an aircraft is granted an air traffic control clearance

CLEARANCE VOID IF NOT OFF BY (TIME)–

Used by ATC to advise an aircraft that the departure clearance is automatically canceled if takeoff is not made prior to a specified time. The pilot must obtain a new clearance or cancel his/her IFR flight plan if not off by the specified time

(See ICAO term CLEARANCE VOID TIME.)

CLEARANCE VOID TIME ICAO – A time specified by an air traffic control unit at which a clearance ceases to be valid unless the aircraft concerned has already taken action to comply therewith

CLEARED APPROACH– ATC authorization for an aircraft to execute any standard or special instrument approach procedure for that airport. Normally, an aircraft will be cleared for a specific instrument approach procedure

(See CLEARED (Type of) APPROACH.)

(See INSTRUMENT APPROACH PROCEDURE.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

CLEARED (Type of) APPROACH– ATC authorization for an aircraft to execute a specific instrument

approach procedure to an airport. e.g. Cleared ILS Runway Three Six Approach

(See APPROACH CLEARANCE.)

(See INSTRUMENT APPROACH PROCEDURE.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

CLEARED AS FILED– Means the aircraft is cleared to proceed in accordance with the route of flight filed in the flight plan. This clearance does not include the altitude DP or DP Transition

(See REQUEST FULL ROUTE CLEARANCE.)

(Refer to AIM.)

CLEARED FOR TAKEOFF– ATC authorization for an aircraft to depart. It is predicated on known traffic and known physical airport conditions

CLEARED FOR THE OPTION– ATC authorization for an aircraft to make a touch and go, low approach, missed approach, stop and go, or full stop landing at the discretion of the pilot. It is normally used in training so that an instructor can evaluate a student's performance under changing situations

(See OPTION APPROACH.)

(Refer to AIM.)

CLEARED THROUGH– ATC authorization for an aircraft to make intermediate stops at specified airports without refiling a flight plan while en route to the clearance limit

CLEARED TO LAND– ATC authorization for an aircraft to land. It is predicated on known traffic and known physical airport conditions

CLEARWA – An area beyond the takeoff runway under the control of airport authorities within which terrain or fixed obstacles may not extend above specified limits. These areas may be required for certain turbine powered operations and the size and upward slope of the clearway will differ depending on when the aircraft was certificated

(Refer to 14 CFR Part 1.)

CLIMB TO VFR– ATC authorization for an aircraft to climb to VFR conditions within Class B, C, D, and E surface areas when the only weather limitation is restricted visibility. The aircraft must remain clear of clouds while climbing to VFR

(See SPECIAL VFR CONDITIONS.)

(Refer to AIM.)

CLIMBOUT– That portion of flight operation between takeoff and the initial cruising altitude

CLIMB VIA An abbreviated ATC clearance that requires compliance with the procedure lateral path associated speed restrictions and altitude restrictions along the cleared route or procedure

CLOSE PARALLEL RUNWAY Two parallel runways whose extended centerlines are separated by less than 4 300 feet having a Precision Runway Monitoring (PRM) system that permits simultaneous independent ILS approaches

CLOSED RUNWAY – A runway that is unusable for aircraft operations. Only the airport management/military operations office can close a runway

CLOSED TRAFFIC– Successive operations involving takeoffs and landings or low approaches where the aircraft does not exit the traffic pattern

CLOUD– A cloud is a visible accumulation of minute water droplets and/or ice particles in the atmosphere above the Earth's surface. Cloud differs from ground fog, fog, or ice fog only in that the latter are by definition in contact with the Earth's surface

CLT–

(See CALCULATED LANDING TIME.)

CLUTTER– In radar operations, clutter refers to the reception and visual display of radar returns caused by precipitation, chaff, terrain, numerous aircraft targets, or other phenomena. Such returns may limit or preclude ATC from providing services based on radar

(See CHAFF.)

(See GROUND CLUTTER.)

(See PRECIPITATION.)

(See TARGET.)

(See ICAO term RADAR CLUTTER.)

CMNPS–

(See CANADIAN MINIMUM NAVIGATION PERFORMANCE SPECIFICATION AIRSPACE.)

COASTAL FIX – A navigation aid or intersection where an aircraft transitions between the domestic route structure and the oceanic route structure

CODES– The number assigned to a particular multiple pulse reply signal transmitted by a transponder

(See DISCRETE CODE.)

COMBINED CENTER RAPCON– An air traffic facility which combines the functions of an ARTCC and a radar approach control facility

(See AIR ROUTE TRAFFIC CONTROL CENTER.)

(See RADAR APPROACH CONTROL FACILITY.)

COMMON POINT– A significant point over which two or more aircraft will report passing or have reported passing before proceeding on the same or diverging tracks. To establish/maintain longitudinal separation, a controller may determine a common point not originally in the aircraft's flight plan and then clear the aircraft to fly over the point

(See SIGNIFICANT POINT.)

COMMON PORTION–

(See COMMON ROUTE.)

COMMON ROUTE– That segment of a North American Route between the inland navigation facility and the coastal fix

OR

COMMON ROUTE– Typically the portion of a RNAV STAR between the en route transition end point and the runway transition start point, however the common route may only consist of a single point that joins the en route and runway transitions

COMMON TRAFFIC ADVISORY FREQUENCY

CTAF – A frequency designed for the purpose of carrying out airport advisory practices while operating to or from an airport without an operating control tower. The CTAF may be a UNICOM, Multicom, FSS, or tower frequency and is identified in appropriate aeronautical publications

(Refer to AC 90-42, Traffic Advisory Practices at Airports Without Operating Control Towers.)

COMPASS LOCATOR– A low power low or medium frequency (L/MF) radio beacon installed at the site of the outer or middle marker of an instrument landing system (ILS). It can be used for navigation at distances of approximately 15 miles or as authorized in the approach procedure

a. Outer Compass Locator (LOM) – A compass locator installed at the site of the outer marker of an instrument landing system

(See OUTER MARKER.)

b. Middle Compass Locator LMM – A compass locator installed at the site of the middle marker of an instrument landing system

(See MIDDLE MARKER.)

(See ICAO term LOCATOR.)

COMPASS ROSE– A circle graduated in degrees printed on some charts or marked on the ground at an airport. It is used as a reference to either true or magnetic direction.

COMPL WITH RESTRICTIONS– An ATC instruction that requires an aircraft being vectored back onto an arrival or departure procedure to comply with all altitude and/or speed restrictions depicted on the procedure. This term may be used in lieu of repeating each remaining restriction that appears on the procedure.

COMPOSITE FLIGHT PLAN– A flight plan which specifies VFR operation for one portion of flight and IFR for another portion. It is used primarily in military operations.

(Refer to AIM.)

COMPOSITE ROUTE SYSTEM– An organized oceanic route structure incorporating reduced lateral spacing between routes in which composite separation is authorized.

COMPOSITE SEPARATION– A method of separating aircraft in a composite route system here by management of route and altitude assignments, a combination of half the lateral minimum specified for the area concerned and half the vertical minimum is applied.

COMPULSORY REPORTING POINTS– Reporting points which must be reported to ATC. They are designated on aeronautical charts by solid triangles or filed in a flight plan as fixes selected to define direct routes. These points are geographical locations which are defined by navigation aids/fixtures. Pilots should discontinue position reporting over compulsory reporting points when informed by ATC that their aircraft is in radar contact.

CONFIDENCE MANEUVER– A confidence maneuver consists of one or more turns, a climb or descent, or other maneuver to determine if the pilot in command (PIC) is able to receive and comply with ATC instructions.

CONFLICT ALERT– A function of certain air traffic control automated systems designed to alert radar

controllers to existing or pending situations between tracked targets known IFR or VFR aircraft that require his/her immediate attention/action.

(See MODE C INTRUDER ALERT.)

CONFLICT RESOLUTION– The resolution of potential conflicts between aircraft that are radar identified and in communication with ATC by ensuring that radar targets do not touch. Pertinent traffic advisories shall be issued when this procedure is applied.

Note: This procedure shall not be provided utilizing mosaic radar systems.

CONFORMANCE– The condition established when an aircraft's actual position is within the conformance region constructed around that aircraft at its position according to the trajectory associated with the aircraft's Current Plan.

CONFORMANCE REGION– A volume bounded laterally, vertically, and longitudinally within which an aircraft must be at a given time in order to be in conformance with the Current Plan Trajectory for that aircraft. At a given time, the conformance region is determined by the simultaneous application of the lateral, vertical, and longitudinal conformance bounds for the aircraft at the position defined by time and aircraft's trajectory.

CONSOLAN– A low frequency long distance NAVAID used principally for transoceanic navigations.

CONTACT–

a. Establish communication with followed by the name of the facility and, if appropriate, the frequency to be used.

b. A flight condition wherein the pilot ascertains the attitude of his/her aircraft and navigates by visual reference to the surface.

(See CONTACT APPROACH.)

(See RADAR CONTACT.)

CONTACT APPROACH– An approach wherein an aircraft on an IFR flight plan, having an air traffic control authorization, operating clear of clouds with at least 1 mile flight visibility and a reasonable expectation of continuing to the destination airport in those conditions, may deviate from the instrument approach procedure and proceed to the destination airport by visual reference to the surface. This approach will only be authorized when requested by

the pilot and the reported ground visibility at the destination airport is at least 1 statute mile

(Refer to AIM.)

CONTAMINATED RUNWAY – A runway is considered contaminated whenever standing water, ice, snow, slush, frost in any form, heavy rubber, or other substances are present. A runway is contaminated with respect to rubber deposits or other friction-degrading substances when the average friction value for any 500-foot segment of the runway within the ALD fails below the recommended minimum friction level and the average friction value in the adjacent 500-foot segments falls below the maintenance planning friction level.

CONTERMINOUS U.S. – The 48 adjoining States and the District of Columbia.

CONTINENTAL UNITED STATES – The 49 States located on the continent of North America and the District of Columbia.

CONTINUE – When used as a control instruction, should be followed by another word or words clarifying what is expected of the pilot. Example: continue taxi, continue descent, continue inbound, etc.

CONTROL AREA (ICAO) – A controlled airspace extending upwards from a specified limit above the earth.

CONTROL SECTOR – An airspace area of defined horizontal and vertical dimensions for which a controller or group of controllers has air traffic control responsibility, normally within an air route traffic control center or an approach control facility. Sectors are established based on predominant traffic flows, altitude strata, and controller workload. Pilot communications during operations within a sector are normally maintained on discrete frequencies assigned to the sector.

(See DISCRETE FREQUENCY.)

CONTROL SLASH – A radar beacon slash representing the actual position of the associated aircraft. Normally, the control slash is the one closest to the interrogating radar beacon site. When ARTCC radar is operating in narrow-band digitized mode, the control slash is converted to a target symbol.

CONTROLLED AIRSPACE – An airspace of defined dimensions within which air traffic control

service is provided to IFR flights and to VFR flights in accordance with the airspace classification.

a. Controlled airspace is a generic term that covers Class A, Class B, Class C, Class D, and Class E airspace.

b. Controlled airspace is also that airspace within which all aircraft operators are subject to certain pilot qualifications, operating rules, and equipment requirements in 14 CFR Part 91. For specific operating requirements, please refer to 14 CFR Part 91. For IFR operations in any class of controlled airspace, a pilot must file an IFR flight plan and receive an appropriate ATC clearance. Each Class B, Class C, and Class D airspace area designated for an airport contains at least one primary airport around which the airspace is designated for specific designations and descriptions of the airspace classes; please refer to 14 CFR Part 71.

c. Controlled airspace in the United States is designated as follows:

1. CLASS A – Generally, that airspace from 18,000 feet MSL up to and including FL 600, including the airspace overlying the waters within 12 nautical miles of the coast of the 48 contiguous States and Alaska. Unless otherwise authorized, all persons must operate their aircraft under IFR.

2. CLASS B – Generally, that airspace from the surface to 10,000 feet MSL surrounding the nation's busiest airports in terms of airport operations or passenger enplanements. The configuration of each Class B airspace area is individually tailored and consists of a surface area and two or more layers, some Class B airspace areas resemble upside-down wedding cakes, and is designed to contain all published instrument procedures. Once an aircraft enters the airspace, an ATC clearance is required for all aircraft to operate in the area, and all aircraft that are so cleared receive separation services within the airspace. The cloud clearance requirement for VFR operations is clear of clouds.

3. CLASS C – Generally, that airspace from the surface to 4,000 feet above the airport elevation, charted in MSL, surrounding those airports that have an operational control tower, are serviced by a radar approach control, and that have a certain number of IFR operations or passenger enplanements. Although the configuration of each Class C area is individually tailored, the airspace usually consists of a surface area with a 5-nautical-mile (NM) radius, a circle with a 10-NM radius that extends no

lower than 1 200 feet up to 4 000 feet above the airport elevation and an outer area that is not charted. Each person must establish two-way radio communications with the ATC facility providing air traffic services prior to entering the airspace and thereafter maintain those communications while within the airspace. VFR aircraft are only separated from IFR aircraft within the airspace.

(See OUTER AREA.)

4. CLASS D– Generally that airspace from the surface to 2 500 feet above the airport elevation not charted in MSL surrounding those airports that have an operational control tower. The configuration of each Class D airspace area is individually tailored and when instrument procedures are published the airspace will normally be designed to contain the procedures. Arrival extensions for instrument approach procedures may be Class D or Class E airspace. Unless otherwise authorized each person must establish two-way radio communications with the ATC facility providing air traffic services prior to entering the airspace and thereafter maintain those communications while in the airspace. No separation services are provided to VFR aircraft.

5. CLASS E– Generally if the airspace is not Class A, Class B, Class C, or Class D and it is controlled airspace, it is Class E airspace. Class E airspace extends upward from either the surface or a designated altitude to the overlying or adjacent controlled airspace. When designated as a surface area, the airspace will be configured to contain all instrument procedures. Also in this class are Federal airways airspace beginning at either 700 or 1 200 feet AGL used to transition to/from the terminal or en route environment, en route domestic and offshore airspace areas designated below 18 000 feet MSL. Unless designated at a lower altitude, Class E airspace begins at 14 500 MSL over the United States, including that airspace overlying the waters within 12 nautical miles of the coast of the 48 contiguous States and Alaska, up to but not including 18 000 feet MSL, and the airspace above FL 600.

CONTROLLED AIRSPACE ICAO – An airspace of defined dimensions within which air traffic control service is provided to IFR flights and to VFR flights in accordance with the airspace classification.

Note: Controlled airspace is a generic term which covers ATS airspace Classes A, B, C, D, and E.

CONTROLLED TIME OF ARRIVAL– Arrival time assigned during a Traffic Management Program. This time may be modified due to adjustments or user options.

CONTROLLER–

(See AIR TRAFFIC CONTROL SPECIALIST.)

CONTROLLER ICAO – A person authorized to provide air traffic control services.

CONTROLLER PILOT DATA LINK COMMUNICATIONS CPDLC – A two-way digital communications system that conveys textual air traffic control messages between controllers and pilots using ground or satellite based radio relay stations.

CONVECTIVE SIGMET– A weather advisory concerning convective weather significant to the safety of all aircraft. Convective SIGMETs are issued for tornadoes, lines of thunderstorms, embedded thunderstorms of any intensity level, areas of thunderstorms greater than or equal to VIP level 4 with an area coverage of $\frac{4}{10}$ 40 or more, and hail $\frac{3}{4}$ inch or greater.

(See AIRMET.)

(See AWW.)

(See CWA.)

(See SIGMET.)

(Refer to AIM.)

CONVECTIVE SIGNIFICANT METEOROLOGICAL INFORMATION–

(See CONVECTIVE SIGMET.)

COORDINATES– The intersection of lines of reference, usually expressed in degrees/minutes/seconds of latitude and longitude, used to determine position or location.

COORDINATION FIX – The fix in relation to which facilities will handoff transfer control of an aircraft or coordinate flight progress data. For terminal facilities, it may also serve as a clearance for arriving aircraft.

COPTER–

See HELICOPTER.

CORRECTION– An error has been made in the transmission and the correct version follows.

COUPLED APPROACH– A coupled approach is an instrument approach performed by the aircraft autopilot, which is receiving position information and/or steering commands from onboard navigation.

equipment. In general, coupled nonprecision approaches must be discontinued and flown manually at altitudes lower than 50 feet below the minimum

descent altitude, and coupled precision approaches must be flown manually below 50 feet AGL.

Note: Coupled and autoland approaches are flown in VFR and IFR. It is common for carriers to require their crews to fly coupled approaches and autoland approaches (if certified) when the weather conditions are less than approximately 4,000 RVR.

(See AUTOLAND APPROACH.)

COURSE–

a. The intended direction of flight in the horizontal plane measured in degrees from north

b. The ILS localizer signal pattern usually specified as the front course or the back course

c. The intended track along a straight curved or segmented MLS path

(See BEARING.)

(See INSTRUMENT LANDING SYSTEM.)

(See MICROWAVE LANDING SYSTEM.)

(See RADIAL.)

CPDLC–

(See CONTROLLER PILOT DATA LINK COMMUNICATIONS.)

CPL ICAO –

(See ICAO term CURRENT FLIGHT PLAN.)

CRITICAL ENGINE– The engine which upon failure would most adversely affect the performance or handling qualities of an aircraft

CROSS (FIX) AT (ALTITUDE)– Used by ATC when a specific altitude restriction at a specified fix is required

CROSS (FIX) AT OR ABOVE (ALTITUDE)– Used by ATC when an altitude restriction at a specified fix is required. It does not prohibit the aircraft from crossing the fix at a higher altitude than specified, however the higher altitude may not be one that will violate a succeeding altitude restriction or altitude assignment

(See ALTITUDE RESTRICTION.)

(Refer to AIM.)

CROSS (FIX) AT OR BELOW (ALTITUDE)– Used by ATC when a maximum crossing altitude at a specific fix is required. It does not prohibit the aircraft from crossing the fix at a lower altitude, however it must be at or above the minimum IFR altitude

(See ALTITUDE RESTRICTION.)

(See MINIMUM IFR ALTITUDES.)

(Refer to 14 CFR Part 91.)

CROSSWIND–

a. When used concerning the traffic pattern the word means crosswind leg
(See TRAFFIC PATTERN.)

b. When used concerning wind conditions the word means a wind not parallel to the runway or the path of an aircraft

(See CROSSWIND COMPONENT.)

CROSSWIND COMPONENT– The wind component measured in knots at 90 degrees to the longitudinal axis of the runway

CRUISE– Used in an ATC clearance to authorize a pilot to conduct flight at any altitude from the minimum IFR altitude up to and including the altitude specified in the clearance. The pilot may level off at any intermediate altitude within this block of airspace. Climb/descent within the block is to be made at the discretion of the pilot. However, once the pilot starts descent and verbally reports leaving an altitude in the block, he/she may not return to that altitude without additional ATC clearance. Further, it is approval for the pilot to proceed to and make an approach at destination airport and can be used in conjunction with

a. An airport clearance limit at locations with a standard/special instrument approach procedure. The CFRs require that if an instrument letdown to an airport is necessary, the pilot shall make the letdown in accordance with a standard/special instrument approach procedure for that airport or

b. An airport clearance limit at locations that are within/below/outside controlled airspace and without a standard/special instrument approach procedure. Such a clearance is NOT AUTHORIZATION for the pilot to descend under IFR conditions below the applicable minimum IFR altitude nor does it imply that ATC is exercising control over aircraft in Class G airspace, however it provides a means for the aircraft to proceed to destination airport, descend and land in accordance with applicable CFRs governing VFR flight operations. Also, this provides search and rescue protection until such time as the IFR flight plan is closed

(See INSTRUMENT APPROACH PROCEDURE.)

CRUISE CLIMB– A climb technique employed by aircraft usually at a constant power setting resulting in an increase of altitude as the aircraft weight decreases

CRUISING ALTITUDE– An altitude or flight level maintained during en route level flight. This is a constant altitude and should not be confused with a cruise clearance.

(See ALTITUDE.)

(See ICAO term CRUISING LEVEL.)

CRUISING LEVEL–

(See CRUISING ALTITUDE.)

CRUISING LEVEL ICAO – A level maintained during a significant portion of a flight.

CT MESSAGE– An EDCT time generated by the ATCSCC to regulate traffic at arrival airports. Normally, a CT message is automatically transferred from the traffic management system computer to the NAS en route computer and appears as an EDCT. In the event of a communication failure between the traffic management system computer and the NAS, the CT message can be manually entered by the TMC at the en route facility.

CTA–

(See CONTROLLED TIME OF ARRIVAL.)

(See ICAO term CONTROL AREA.)

CTAF–

(See COMMON TRAFFIC ADVISORY FREQUENCY.)

CTAS–

(See CENTER TRACON AUTOMATION SYSTEM.)

CTRD–

(See CERTIFIED TOWER RADAR DISPLAY.)

CURRENT FLIGHT PLAN ICAO – The flight plan including changes, if any, brought about by subsequent clearances.

CURRENT PLAN– The ATC clearance the aircraft has received and is expected to fly.

CVFP APPROACH–

(See CHARTED VISUAL FLIGHT PROCEDURE APPROACH.)

CWA–

(See CENTER WEATHER ADVISORY and WEATHER ADVISORY.)

D

D ATIS–

(See DIGITAL AUTOMATIC TERMINAL INFORMATION SERVICE.)

DA ICAO –

(See ICAO Term DECISION ALTITUDE/DECISION HEIGHT.)

DAIR–

(See DIRECT ALTITUDE AND IDENTITY READOUT.)

DANGER AREA ICAO – An airspace of defined dimensions within which activities dangerous to the flight of aircraft may exist at specified times

Note: The term “Danger Area” is not used in reference to areas within the United States or any of its possessions or territories.

DAS–

(See DELA ASSIGNMENT.)

DATA BLOCK–

(See ALPHANUMERIC DISPLAY.)

DEAD RECKONING– Dead reckoning as applied to flying is the navigation of an airplane solely by means of computations based on airspeed course heading and direction and speed groundspeed and elapsed time

DECISION ALTITUDE/DECISION HEIGHT ICAO – A specified altitude or height A/H in the precision approach at which a missed approach must be initiated if the required visual reference to continue the approach has not been established

Note 1: Decision altitude [DA] is referenced to mean sea level [MSL] and decision height [DH] is referenced to the threshold elevation.

Note 2: The required visual reference means that section of the visual aids or of the approach area which should have been in view for sufficient time for the pilot to have made an assessment of the aircraft position and rate of change of position, in relation to the desired flight path.

DECISION HEIGHT– With respect to the operation of aircraft means the height at which a decision must be made during an ILS MLS or PAR instrument

approach to either continue the approach or to execute a missed approach

(See ICAO term DECISION ALTITUDE/DECISION HEIGHT.)

DECODER– The device used to decipher signals received from ATCRBS transponders to effect their display as select codes

(See CODES.)

(See RADAR.)

DEFENSE AREA Any airspace of the contiguous United States that is not an ADI in which the control of aircraft is required for reasons of national security

DEFENSE VISUAL FLIGHT RULES– Rules applicable to flights within an ADI conducted under the visual flight rules in 14 CFR Part 91

(See AIR DEFENSE IDENTIFICATION ZONE.)

(Refer to 14 CFR Part 91.)

(Refer to 14 CFR Part 99.)

DELA ASSIGNMENT DAS – Delays are distributed to aircraft based on the traffic management program parameters The delay assignment is calculated in 15-minute increments and appears as a table in Traffic Flow Management System TFMS

DELA INDEFINITE REASON IF KNOWN EXPECT FURTHER CLEARANCE TIME – Used by ATC to inform a pilot when an accurate estimate of the delay time and the reason for the delay cannot immediately be determined e.g. a disabled aircraft on the runway terminal or center area saturation weather below landing minimums etc

(See EXPECT FURTHER CLEARANCE (TIME).)

DELA TIME– The amount of time that the arrival must lose to cross the meter fix at the assigned meter fix time This is the difference between ACLT and VTA

DEPARTURE CENTER– The ARTCC having jurisdiction for the airspace that generates a flight to the impacted airport

DEPARTURE CONTROL– A function of an approach control facility providing air traffic control service for departing IFR and under certain conditions VFR aircraft

(See APPROACH CONTROL FACILITY.)

(Refer to AIM.)

DEPARTURE SEQUENCING PROGRAM– A program designed to assist in achieving a specified interval over a common point for departures

DEPARTURE TIME– The time an aircraft becomes airborne

DESCEND VIA– An abbreviated ATC clearance that requires compliance with a published procedure lateral path and associated speed restrictions and provides a pilot discretion descent to comply with published altitude restrictions

DESCENT SPEED ADJUSTMENTS– Speed deceleration calculations made to determine an accurate VTA. These calculations start at the transition point and use arrival speed segments to the vertex

DESIRED COURSE–

- a. True– A predetermined desired course direction to be followed measured in degrees from true north
- b. Magnetic– A predetermined desired course direction to be followed measured in degrees from local magnetic north

DESIRED TRACK– The planned or intended track between two waypoints. It is measured in degrees from either magnetic or true north. The instantaneous angle may change from point to point along the great circle track between waypoints

DETRESFA DISTRESS PHASE ICAO – The code word used to designate an emergency phase wherein there is reasonable certainty that an aircraft and its occupants are threatened by grave and imminent danger or require immediate assistance

DEVIATIONS–

- a. A departure from a current clearance such as an off course maneuver to avoid weather or turbulence
- b. Where specifically authorized in the CFRs and requested by the pilot ATC may permit pilots to deviate from certain regulations

DH–

(See DECISION HEIGHT.)

DH ICAO –

(See ICAO Term DECISION ALTITUDE/DECISION HEIGHT.)

DIGITAL AUTOMATIC TERMINAL INFORMATION SERVICE D ATIS – The service provides

text messages to aircraft, airlines, and other users outside the standard reception range of conventional ATIS via landline and data link communications to the cockpit. Also, the service provides a computer-synthesized voice message that can be transmitted to all aircraft within range of existing transmitters. The Terminal Data Link System (TDLS) D ATIS application uses weather inputs from local automated weather sources or manually entered meteorological data together with preprogrammed menus to provide standard information to users. Airports with D ATIS capability are listed in the Airport/Facility Directory.

DIGITAL TARGET– A computer-generated symbol representing an aircraft's position based on a primary return or radar beacon reply shown on a digital display

DIGITAL TERMINAL AUTOMATION SYSTEM DTAS – A system where digital radar and beacon data is presented on digital displays and the operational program monitors the system performance on a real-time basis

DIGITIZED TARGET– A computer-generated indication shown on an analog radar display resulting from a primary radar return or a radar beacon reply

DIRECT– Straight line flight between two navigational aids, fixes, points, or any combination thereof. When used by pilots in describing off-airway routes, points defining direct route segments become compulsory reporting points unless the aircraft is under radar contact.

DIRECT ALTITUDE AND IDENTIFICATION READOUT– The DAIR System is a modification to the AN/TP-42 Interrogator System. The Navy has two adaptations of the DAIR System: Carrier Air Traffic Control Direct Altitude and Identification Readout System for Aircraft Carriers and Radar Air Traffic Control Facility Direct Altitude and Identity Readout System for land-based terminal operations. The DAIR detects tracks and predicts secondary radar aircraft targets. Targets are displayed by means of computer-generated symbols and alphanumeric characters depicting flight identification, altitude, ground speed, and flight plan data. The DAIR System is capable of interfacing with ARTCCs.

DIRECTLY BEHIND– An aircraft is considered to be operating directly behind when it is following the actual flight path of the lead aircraft over the surface

of the earth except when applying wake turbulence separation criteria

DISCRETE BEACON CODE–

(See DISCRETE CODE.)

DISCRETE CODE– As used in the Air Traffic Control Radar Beacon System ATCRBS any one of the 4096 selectable Mode 3/A aircraft transponder codes except those ending in zero zero e.g. discrete codes 0010 1201 2317 7777 nondiscrete codes 0100 1200 7700 Nondiscrete codes are normally reserved for radar facilities that are not equipped with discrete decoding capability and for other purposes such as emergencies 7700 VFR aircraft 1200 etc

(See RADAR.)

(Refer to AIM.)

DISCRETE FREQUENCY – A separate radio frequency for use in direct pilot controller communications in air traffic control which reduces frequency congestion by controlling the number of aircraft operating on a particular frequency at one time Discrete frequencies are normally designated for each control sector in en route/terminal ATC facilities Discrete frequencies are listed in the Airport/Facility Directory and the DOD FLIP IFR En Route Supplement

(See CONTROL SECTOR.)

DISPLACED THRESHOLD– A threshold that is located at a point on the runway other than the designated beginning of the runway

(See THRESHOLD.)

(Refer to AIM.)

DISTANCE MEASURING EQUIPMENT– Equipment airborne and ground used to measure in nautical miles the slant range distance of an aircraft from the DME navigational aid

(See MICROWAVE LANDING SYSTEM.)

(See TACAN.)

(See VORTAC.)

DISTRESS– A condition of being threatened by serious and/or imminent danger and of requiring immediate assistance

DIVE BRAKES–

(See SPEED BRAKES.)

DIVERSE VECTOR AREA– In a radar environment that area in which a prescribed departure route is not required as the only suitable route to avoid obstacles The area in which random radar vectors

below the MVA/MIA established in accordance with the TERPS criteria for diverse departures obstacles and terrain avoidance may be issued to departing aircraft

DIVERSION DVRSN – Flights that are required to land at other than their original destination for reasons beyond the control of the pilot/company e.g. periods of significant weather

DME–

(See DISTANCE MEASURING EQUIPMENT.)

DME FIX – A geographical position determined by reference to a navigational aid which provides distance and azimuth information It is defined by a specific distance in nautical miles and a radial azimuth or course i.e. localizer in degrees magnetic from that aid

(See DISTANCE MEASURING EQUIPMENT.)

(See FIX.)

(See MICROWAVE LANDING SYSTEM.)

DME SEPARATION– Spacing of aircraft in terms of distances nautical miles determined by reference to distance measuring equipment DME

(See DISTANCE MEASURING EQUIPMENT.)

DOD FLIP– Department of Defense Flight Information Publications used for flight planning en route and terminal operations FLIP is produced by the National Geospatial-Intelligence Agency NGA for worldwide use United States Government Flight Information Publications en route charts and instrument approach procedure charts are incorporated in DOD FLIP for use in the National Airspace System NAS

DOMESTIC AIRSPACE– Airspace which overlies the continental land mass of the United States plus Hawaii and U.S. possessions Domestic airspace extends to 12 miles offshore

DOWNBURST– A strong downdraft which induces an outburst of damaging winds on or near the ground Damaging winds either straight or curved are highly divergent The sizes of downbursts vary from 1/2 mile or less to more than 10 miles An intense downburst often causes widespread damage Damaging winds lasting 5 to 30 minutes could reach speeds as high as 120 knots

DOWNWIND LEG–

(See TRAFFIC PATTERN.)

DP–

(See INSTRUMENT DEPARTURE PROCEDURE.)

DRAG CHUTE– A parachute device installed on certain aircraft which is deployed on landing roll to assist in deceleration of the aircraft

DSP–
(See DEPARTURE SEQUENCING PROGRAM.)

DT–
(See DELAY TIME.)

DTAS–
(See DIGITAL TERMINAL AUTOMATION SYSTEM.)

DUE REGARD– A phase of flight wherein an aircraft commander of a State operated aircraft assumes responsibility to separate his/her aircraft from all other aircraft
(See also FAAO JO 7110.65, Para 1–2–1, WORD MEANINGS.)

DUTY RUNWAY –
(See RUNWAY IN USE/ACTIVE RUNWAY/DUTY RUNWAY.)

DVA–
(See DIVERSE VECTOR AREA.)

DVFR–
(See DEFENSE VISUAL FLIGHT RULES.)

DVFR FLIGHT PLAN– A flight plan filed for a VFR aircraft which intends to operate in airspace within which the ready identification location and control of aircraft are required in the interest of national security

DVRSN–
(See DIVERSION.)

DYNAMIC– Continuous review, evaluation, and change to meet demands

DYNAMIC RESTRICTIONS– Those restrictions imposed by the local facility on an as needed basis to manage unpredictable fluctuations in traffic demands

E

EAS–

(See EN ROUTE AUTOMATION SYSTEM.)

EDCT–

(See EXPECT DEPARTURE CLEARANCE TIME.)

EFC–

(See EXPECT FURTHER CLEARANCE (TIME).)

ELT–

(See EMERGENCY LOCATOR TRANSMITTER.)

EMERGENCY– A distress or an urgency condition

EMERGENCY LOCATOR TRANSMITTER– A radio transmitter attached to the aircraft structure which operates from its own power source on 121.5 MHz and 243.0 MHz. It aids in locating downed aircraft by radiating a downward sweeping audio tone 2.4 times per second. It is designed to function without human action after an accident.

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

ENMSAW–

(See EN ROUTE MINIMUM SAFE ALTITUDE WARNING.)

EN ROUTE AIR TRAFFIC CONTROL SERVICES– Air traffic control service provided aircraft on IFR flight plans generally by centers when these aircraft are operating between departure and destination terminal areas. When equipment capabilities and controller workload permit, certain advisory/assistance services may be provided to VFR aircraft.

(See AIR ROUTE TRAFFIC CONTROL CENTER.)

(Refer to AIM.)

EN ROUTE AUTOMATION SYSTEM EAS – The complex integrated environment consisting of situation display systems, surveillance systems and flight data processing, remote devices, decision support tools, and the related communications equipment that form the heart of the automated IFR air traffic control system. It interfaces with automated terminal systems and is used in the control of en route IFR aircraft.

(Refer to AIM.)

EN ROUTE CHARTS–

(See AERONAUTICAL CHART.)

EN ROUTE DESCENT– Descent from the en route cruising altitude which takes place along the route of flight.

EN ROUTE FLIGHT ADVISOR SERVICE– A service specifically designed to provide, upon pilot request, timely weather information pertinent to his/her type of flight, intended route of flight, and altitude. The FSSs providing this service are listed in the Airport/Facility Directory.

(See FLIGHT WATCH.)

(Refer to AIM.)

EN ROUTE HIGH ALTITUDE CHARTS–

(See AERONAUTICAL CHART.)

EN ROUTE LOW ALTITUDE CHARTS–

(See AERONAUTICAL CHART.)

EN ROUTE MINIMUM SAFE ALTITUDE WARNING– A function of the EAS that aids the controller by providing an alert when a tracked aircraft is below or predicted by the computer to go below a predetermined minimum IFR altitude. MIA.

EN ROUTE SPACING PROGRAM (ESP) – A program designed to assist the exit sector in achieving the required trail spacing.

EN ROUTE TRANSITION–

a. Conventional STARs/SIDs– The portion of a SID/STAR that connects to one or more en route airway/et route.

b. RNAV STARs/SIDs– The portion of a STAR preceding the common route or point, or for a SID the portion following that is coded for a specific en route fix, airway, or et route.

ESP–

(See EN ROUTE SPACING PROGRAM.)

ESTABLISHED–To be stable or fixed on a route, route segment, altitude, heading, etc.

ESTIMATED ELAPSED TIME (EET)– ICAO – The estimated time required to proceed from one significant point to another.

(See ICAO Term TOTAL ESTIMATED ELAPSED TIME.)

ESTIMATED OFF BLOCK TIME ICAO – The estimated time at which the aircraft will commence movement associated with departure

ESTIMATED POSITION ERROR EPE –
(See Required Navigation Performance)

ESTIMATED TIME OF ARRIVAL– The time the flight is estimated to arrive at the gate scheduled operators or the actual run way on times for nonscheduled operators

ESTIMATED TIME EN ROUTE– The estimated flying time from departure point to destination lift off to touchdown

ETA–
(See ESTIMATED TIME OF ARRIVAL.)

ETE–
(See ESTIMATED TIME EN ROUTE.)

EXECUTE MISSED APPROACH– Instructions issued to a pilot making an instrument approach which means continue inbound to the missed approach point and execute the missed approach procedure as described on the Instrument Approach Procedure Chart or as previously assigned by ATC. The pilot may climb immediately to the altitude specified in the missed approach procedure upon making a missed approach. No turns should be initiated prior to reaching the missed approach point. When conducting an ASR or PAR approach execute the assigned missed approach procedure immediately

upon receiving instructions to execute missed approach
(Refer to AIM.)

EXPECT (ALTITUDE) AT (TIME) or (FIX)– Used under certain conditions to provide a pilot with an altitude to be used in the event of a radio communications failure. It also provides altitude information to assist the pilot in planning
(Refer to AIM.)

EXPECT DEPARTURE CLEARANCE TIME
EDCT – The runway release time assigned to an aircraft in a traffic management program and shown on the flight progress strip as an EDCT
(See GROUND DELAY PROGRAM.)

EXPECT FURTHER CLEARANCE (TIME)– The time a pilot can expect to receive clearance beyond a clearance limit

EXPECT FURTHER CLEARANCE VIA (AIRWAYS, ROUTES OR FIXES)– Used to inform a pilot of the routing he/she can expect if any part of the route beyond a short range clearance limit differs from that filed

EXPEDITE– Used by ATC when prompt compliance is required to avoid the development of an imminent situation. Expedite climb/descent normally indicates to a pilot that the approximate best rate of climb/descent should be used without requiring an exceptional change in aircraft handling characteristics

F

FAF–

(See FINAL APPROACH FIX.)

FAST FILE– An FSS system whereby a pilot files a flight plan via telephone that is recorded and later transcribed for transmission to the appropriate air traffic facility Alaska only

FAWP– Final Approach Waypoint

FCLT–

(See FREEZE CALCULATED LANDING TIME.)

FEATHERED PROPELLER– A propeller whose blades have been rotated so that the leading and trailing edges are nearly parallel with the aircraft flight path to stop or minimize drag and engine rotation. Normally used to indicate shutdown of a reciprocating or turboprop engine due to malfunction

FEDERAL AIRWAYS–

(See LOW ALTITUDE AIRWAY STRUCTURE.)

FEEDER FIX – The fix depicted on Instrument Approach Procedure Charts which establishes the starting point of the feeder route

FEEDER ROUTE– A route depicted on instrument approach procedure charts to designate routes for aircraft to proceed from the en route structure to the initial approach fix IAF

(See INSTRUMENT APPROACH PROCEDURE.)

FERRY FLIGHT– A flight for the purpose of

- a. Returning an aircraft to base
- b. Delivering an aircraft from one location to another
- c. Moving an aircraft to and from a maintenance base – Ferry flights under certain conditions may be conducted under terms of a special flight permit

FIELD ELEVATION–

(See AIRPORT ELEVATION.)

FILED– Normally used in conjunction with flight plans meaning a flight plan has been submitted to ATC

FILED EN ROUTE DELAY – Any of the following preplanned delays at points/areas along the route of

flight which require special flight plan filing and handling techniques

a. Terminal Area Delay A delay within a terminal area for touch and go, low approach, or other terminal area activity

b. Special Use Airspace Delay A delay within a Military Operations Area, Restricted Area, Warning Area, or ATC Assigned Airspace

c. Aerial Refueling Delay A delay within an Aerial Refueling Track or Anchor

FILED FLIGHT PLAN– The flight plan as filed with an ATS unit by the pilot or his/her designated representative without any subsequent changes or clearances

FINAL– Commonly used to mean that an aircraft is on the final approach course or is aligned with a landing area

(See FINAL APPROACH COURSE.)

(See FINAL APPROACH-IFR.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

FINAL APPROACH ICAO – That part of an instrument approach procedure which commences at the specified final approach fix or point, or where such a fix or point is not specified

a. At the end of the last procedure turn, base turn, or inbound turn of a racetrack procedure, if specified, or

b. At the point of interception of the last track specified in the approach procedure and ends at a point in the vicinity of an aerodrome from which

1. A landing can be made, or
2. A missed approach procedure is initiated

FINAL APPROACH COURSE– A bearing/radial/track of an instrument approach leading to a runway or an extended runway centerline, all without regard to distance

FINAL APPROACH FIX – The fix from which the final approach IFR to an airport is executed and which identifies the beginning of the final approach segment. It is designated on Government charts by the Maltese Cross symbol for nonprecision approaches and the lightning bolt symbol for precision approaches, or when ATC directs a

lower than published glideslope/path intercept altitude it is the resultant actual point of the glideslope/path intercept

(See FINAL APPROACH POINT.)

(See GLIDESLOPE INTERCEPT ALTITUDE.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

FINAL APPROACH IFR– The flight path of an aircraft which is inbound to an airport on a final instrument approach course beginning at the final approach fix or point and extending to the airport or the point where a circle to land maneuver or a missed approach is executed

(See FINAL APPROACH COURSE.)

(See FINAL APPROACH FIX.)

(See FINAL APPROACH POINT.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

(See ICAO term FINAL APPROACH.)

FINAL APPROACH POINT– The point applicable only to a nonprecision approach with no depicted FAF such as an on airport VOR where the aircraft is established inbound on the final approach course from the procedure turn and where the final approach descent may be commenced. The FAP serves as the FAF and identifies the beginning of the final approach segment

(See FINAL APPROACH FIX.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

FINAL APPROACH SEGMENT–

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

FINAL APPROACH SEGMENT ICAO – That segment of an instrument approach procedure in which alignment and descent for landing are accomplished

FINAL CONTROLLER– The controller providing information and final approach guidance during PAR and ASR approaches utilizing radar equipment

(See RADAR APPROACH.)

FINAL GUARD SERVICE– A value added service provided in conjunction with LAA/RAA only during periods of significant and fast changing weather conditions that may affect landing and takeoff operations

FINAL MONITOR AID– A high resolution color display that is equipped with the controller alert system hardware/software which is used in the precision runway monitor PRM system. The display includes alert algorithms providing the target predictors, a color change alert when a target penetrates or is predicted to penetrate the no transgression zone, NT, a color change alert if the aircraft transponder becomes inoperative, synthesized voice alerts, digital mapping, and like features contained in the PRM system

(See RADAR APPROACH.)

FINAL MONITOR CONTROLLER– Air Traffic Control Specialist assigned to radar monitor the flight path of aircraft during simultaneous parallel and simultaneous close parallel ILS approach operations. Each runway is assigned a final monitor controller during simultaneous parallel and simultaneous close parallel ILS approaches. Final monitor controllers shall utilize the Precision Runway Monitor PRM system during simultaneous close parallel ILS approaches

FIR–

(See FLIGHT INFORMATION REGION.)

FIRST TIER CENTER– The ARTCC immediately adjacent to the impacted center

FIS-B–

(See FLIGHT INFORMATION SERVICE-BROADCAST.)

FI – A geographical position determined by visual reference to the surface, by reference to one or more radio NAVAIDs, by celestial plotting, or by another navigational device

FI BALANCING– A process whereby aircraft are evenly distributed over several available arrival fixes, reducing delays and controller workload

FLAG– A warning device incorporated in certain airborne navigation and flight instruments indicating that

a. Instruments are inoperative or otherwise not operating satisfactorily, or

b. Signal strength or quality of the received signal falls below acceptable values

FLAG ALARM–

(See FLAG.)

FLAMEOUT– An emergency condition caused by a loss of engine power

FLAMEOUT PATTERN– An approach normally conducted by a single engine military aircraft experiencing loss or anticipating loss of engine power or control. The standard overhead approach starts at a relatively high altitude over a runway high key, followed by a continuous 180 degree turn to a high side position low key, followed by a continuous 180 degree turn final. The standard straight in pattern starts at a point that results in a straight in approach with a high rate of descent to the runway. Flameout approaches terminate in the type approach requested by the pilot, normally fullstop.

FLIGHT CHECK– A call sign prefix used by FAA aircraft engaged in flight inspection/certification of navigational aids and flight procedures. The word recorded may be added as a suffix, e.g., Flight Check 320 recorded, to indicate that an automated flight inspection is in progress in terminal areas.

(See FLIGHT INSPECTION.)

(Refer to AIM.)

FLIGHT FOLLOWING–

(See TRAFFIC ADVISORIES.)

FLIGHT INFORMATION REGION– An airspace of defined dimensions within which Flight Information Service and Alerting Service are provided.

a. Flight Information Service– A service provided for the purpose of giving advice and information useful for the safe and efficient conduct of flights.

b. Alerting Service– A service provided to notify appropriate organizations regarding aircraft in need of search and rescue aid and to assist such organizations as required.

FLIGHT INFORMATION SERVICE– A service provided for the purpose of giving advice and information useful for the safe and efficient conduct of flights.

FLIGHT INFORMATION SERVICE–BROADCAST FIS-B– A ground broadcast service provided through the ADS-B Broadcast Services network over the UAT data link that operates on 978 MHz. The FIS-B system provides pilots and flight crews of properly equipped aircraft with a cockpit display of certain aviation weather and aeronautical information.

FLIGHT INSPECTION– Inflight investigation and evaluation of a navigational aid to determine whether it meets established tolerances.

(See FLIGHT CHECK.)

(See NAVIGATIONAL AID.)

FLIGHT LEVEL– A level of constant atmospheric pressure related to a reference datum of 29.92 inches of mercury. Each is stated in three digits that represent hundreds of feet. For example, flight level FL 250 represents a barometric altimeter indication of 25,000 feet. FL 255, an indication of 25,500 feet.

(See ICAO term FLIGHT LEVEL.)

FLIGHT LEVEL ICAO– A surface of constant atmospheric pressure which is related to a specific pressure datum, 1013.2 hPa (1013.2 mb), and is separated from other such surfaces by specific pressure intervals.

Note 1: A pressure type altimeter calibrated in accordance with the standard atmosphere:

- a.** When set to a QNH altimeter setting, will indicate altitude;
- b.** When set to a QFE altimeter setting, will indicate height above the QFE reference datum; and
- c.** When set to a pressure of 1013.2 hPa (1013.2 mb), may be used to indicate flight levels.

Note 2: The terms 'height' and 'altitude,' used in Note 1 above, indicate altimetric rather than geometric heights and altitudes.

FLIGHT LINE– A term used to describe the precise movement of a civil photogrammetric aircraft along a predetermined course at a predetermined altitude during the actual photographic run.

FLIGHT MANAGEMENT SYSTEMS– A computer system that uses a large data base to allocate routes to be preprogrammed and fed into the system by means of a data loader. The system is constantly updated with respect to position accuracy by reference to conventional navigation aids. The sophisticated program and its associated data base ensures that the most appropriate aids are automatically selected during the information update cycle.

FLIGHT MANAGEMENT SYSTEM PROCEDURE– An arrival, departure, or approach procedure developed for use by aircraft with a slant / E or slant / F equipment suffix.

FLIGHT PATH– A line, course, or track along which an aircraft is flying or intended to be flown

(See **COURSE**.)

(See **TRACK**.)

FLIGHT PLAN– Specified information relating to the intended flight of an aircraft that is filed orally or in writing with an FSS or an ATC facility

(See **FAST FILE**.)

(See **FILED**.)

(Refer to **AIM**.)

FLIGHT PLAN AREA (FPA) – The geographical area assigned to a flight service station (FSS) for the purpose of establishing primary responsibility for services that may include search and rescue for VFR aircraft, issuance of NOTAMs, pilot briefings, inflight services, broadcast services, emergency services, flight data processing, international operations, and aviation weather services. Large consolidated FSS facilities may combine FPAs into larger areas of responsibility (AOR).

(See **FLIGHT SERVICE STATION**.)

(See **TIE-IN FACILITY**.)

FLIGHT RECORDER– A general term applied to any instrument or device that records information about the performance of an aircraft in flight or about conditions encountered in flight. Flight recorders may make records of airspeed, outside air temperature, vertical acceleration, engine RPM, manifold pressure, and other pertinent variables for a given flight.

(See ICAO term **FLIGHT RECORDER**.)

FLIGHT RECORDER (ICAO) – Any type of recorder installed in the aircraft for the purpose of complementing accident/incident investigation.

Note: See Annex 6 Part I, for specifications relating to flight recorders.

FLIGHT SERVICE STATION (FSS) – An air traffic facility which provides pilot briefings, flight plan processing, en route radio communications, search and rescue services, and assistance to lost aircraft and aircraft in emergency situations. FSS also relays ATC clearances, processes Notices to Airmen, and broadcasts aviation weather and aeronautical information. In addition, at selected locations, FSS provides En Route Flight Advisory Service, Flight Watch, and

Airport Advisory Service (AAS), and takes airport weather observations.

(See **FLIGHT PLAN AREA**.)

(See **TIE-IN FACILITY**.)

FLIGHT STANDARDS DISTRICT OFFICE– An FAA field office serving an assigned geographical area and staffed with Flight Standards personnel who serve the aviation industry and the general public on matters relating to the certification and operation of air carrier and general aviation aircraft. Activities include general surveillance of operational safety, certification of airmen and aircraft, accident prevention, investigation, enforcement, etc.

FLIGHT TEST– A flight for the purpose of

a. Investigating the operation/flight characteristics of an aircraft or aircraft component

b. Evaluating an applicant for a pilot certificate or rating

FLIGHT VISIBILITY –

(See **VISIBILITY**.)

FLIGHT WATCH– A shortened term for use in air ground contacts to identify the flight service station providing En Route Flight Advisory Service, e.g., Oakland Flight Watch.

(See **EN ROUTE FLIGHT ADVISORY SERVICE**.)

FLIP–

(See **DOD FLIP**.)

FL HEADING DEGREES – Informs the pilot of the heading he/she should fly. The pilot may have to turn to, or continue on, a specific compass direction in order to comply with the instructions. The pilot is expected to turn in the shorter direction to the heading unless otherwise instructed by ATC.

FL BY WA POINT– A fly by waypoint requires the use of turn anticipation to avoid overshoot of the next flight segment.

FL OVER WA POINT– A fly over waypoint precludes any turn until the waypoint is overflown and is followed by an intercept maneuver of the next flight segment.

FL VISUAL TO AIRPORT–

(See **PUBLISHED INSTRUMENT APPROACH PROCEDURE VISUAL SEGMENT**.)

FMA–

(See **FINAL MONITOR AID**.)

FMS–

(See FLIGHT MANAGEMENT SYSTEM.)

FMSP–

(See FLIGHT MANAGEMENT SYSTEM PROCEDURE.)

FORMATION FLIGHT– More than one aircraft which by prior arrangement between the pilots operate as a single aircraft with regard to navigation and position reporting. Separation between aircraft within the formation is the responsibility of the flight leader and the pilots of the other aircraft in the flight. This includes transition periods when aircraft within the formation are maneuvering to attain separation from each other to effect individual control and during join up and breakaway.

a. A standard formation is one in which a proximity of no more than 1 mile laterally or longitudinally and within 100 feet vertically from the flight leader is maintained by each wingman.

b. Nonstandard formations are those operating under any of the following conditions:

1. When the flight leader has requested and ATC has approved other than standard formation dimensions.

2. When operating within an authorized altitude reservation (ALTRV) or under the provisions of a letter of agreement.

3. When the operations are conducted in airspace specifically designed for a special activity (See ALTITUDE RESERVATION.)
(Refer to 14 CFR Part 91.)

FRC–

(See REQUEST FULL ROUTE CLEARANCE.)

FREE E/FRO EN– Terms used in referring to arrivals which have been assigned ACLTs and to the lists in which they are displayed.

FREE E CALCULATED LANDING TIME– A dynamic parameter number of minutes prior to the meter fix calculated time of arrival for each aircraft when the TCLT is frozen and becomes an ACLT, i.e., the VTA is updated and consequently the TCLT is modified as appropriate until FCLT minutes prior to meter fix calculated time of arrival at which time updating is suspended and an ACLT and a frozen meter fix crossing time (MFT) is assigned.

FREE E HORI ON– The time or point at which an aircraft's STA becomes fixed and no longer fluctuates

with each radar update. This setting ensures a constant time for each aircraft necessary for the metering controller to plan his/her delay technique. This setting can be either in distance from the meter fix or a prescribed flying time to the meter fix.

FREE E SPEED PARAMETER– A speed adapted for each aircraft to determine fast and slow aircraft. Fast aircraft free e on parameter FCLT and slow aircraft free e on parameter MLDI.

FRICTION MEASUREMENT– A measurement of the friction characteristics of the runway pavement surface using continuous self-sterilizing friction measurement equipment in accordance with the specifications, procedures and schedules contained in AC 150/5320-12 Measurement Construction and Maintenance of Skid Resistant Airport Pavement Surfaces.

FSDO–

(See FLIGHT STANDARDS DISTRICT OFFICE.)

FSPD–

(See FREEZE SPEED PARAMETER.)

FSS–

(See FLIGHT SERVICE STATION.)

FUEL DUMPING– Airborne release of usable fuel. This does not include the dropping of fuel tanks.
(See JETTISONING OF EXTERNAL STORES.)

FUEL REMAINING– A phrase used by either pilots or controllers when relating to the fuel remaining on board until actual fuel exhaustion. When transmitting such information in response to either a controller question or pilot initiated cautionary advisory to air traffic control, pilots will state the APPROXIMATE NUMBER OF MINUTES the flight can continue with the fuel remaining. All reserve fuel SHOULD BE INCLUDED in the time stated, as should an allowance for established fuel gauge system error.

FUEL SIPHONING– Unintentional release of fuel caused by overflow, puncture, loose cap, etc.

FUEL VENTING–

(See FUEL SIPHONING.)

FUSED TARGET

(See DIGITAL TARGET)

FUSION STARS/CARTS the combination of all available surveillance sources: airport surveillance radar, ASR, air route surveillance radar, ARSR, ADS-B, etc., into the display of a single tracked

target for air traffic control separation services
FUSION is the equivalent of the current
single sensor radar display FUSION performance is
characteristic of a single sensor radar display system
Terminal areas use mono pulse secondary surveil
lance radar ASR 9 Mode S or ASR 11 MSSR

G

GATE HOLD PROCEDURES– Procedures at selected airports to hold aircraft at the gate or other ground location whenever departure delays exceed or are anticipated to exceed 15 minutes. The sequence for departure will be maintained in accordance with initial call up unless modified by flow control restrictions. Pilots should monitor the ground control/clearance delivery frequency for engine start/taxi advisories or newly proposed start/taxi time if the delay changes.

GBT–

(See **GROUND-BASED TRANSCEIVER**.)

GCA–

(See **GROUND CONTROLLED APPROACH**.)

GDP–

(See **GROUND DELAY PROGRAM**.)

GENERAL AVIATION– That portion of civil aviation which encompasses all facets of aviation except air carriers holding a certificate of public convenience and necessity from the Civil Aeronautics Board and large aircraft commercial operators.

(See **ICAO term GENERAL AVIATION**.)

GENERAL AVIATION **ICAO** – All civil aviation operations other than scheduled air services and nonscheduled air transport operations for remuneration or hire.

GEO MAP– The digitized map markings associated with the ASR 9 Radar System.

GLIDEPATH–

(See **GLIDESLOPE**.)

GLIDEPATH **ICAO** – A descent profile determined for vertical guidance during a final approach.

GLIDEPATH INTERCEPT ALTITUDE–

(See **GLIDESLOPE INTERCEPT ALTITUDE**.)

GLIDESLOPE– Provides vertical guidance for aircraft during approach and landing. The glideslope/glidepath is based on the following:

a. Electronic components emitting signals which provide vertical guidance by reference to airborne instruments during instrument approaches such as ILS/MLS or

b. Visual ground aids such as VASI which provide vertical guidance for a VFR approach or for the visual portion of an instrument approach and landing.

c. **PAR** Used by ATC to inform an aircraft making a PAR approach of its vertical position elevation relative to the descent profile.

(See **ICAO term GLIDEPATH**.)

GLIDESLOPE INTERCEPT ALTITUDE– The minimum altitude to intercept the glideslope/path on a precision approach. The intersection of the published intercept altitude with the glideslope/path designated on Government charts by the lightning bolt symbol is the precision FAF. However, when the approach chart shows an alternative lower glideslope intercept altitude and ATC directs a lower altitude, the resultant lower intercept position is then the FAF.

(See **FINAL APPROACH FIX**.)

(See **SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE**.)

GLOBAL NAVIGATION SATELLITE SYSTEM **GNSS** **ICAO** – GNSS refers collectively to the world wide positioning navigation and timing determination capability available from one or more satellite constellation in conjunction with a network of ground stations.

GLOBAL NAVIGATION SATELLITE SYSTEM MINIMUM EN ROUTE IFR ALTITUDE **GNSS** **MEA** – The minimum en route IFR altitude on a published ATS route or route segment which assures acceptable Global Navigation Satellite System reception and meets obstacle clearance requirements.

Refer to 14 CFR Part 91.

Refer to 14 CFR Part 95.

GLOBAL POSITIONING SYSTEM **GPS** – GPS refers to the world wide positioning navigation and timing determination capability available from the U.S. satellite constellation. The service provided by GPS for civil use is defined in the GPS Standard Positioning System Performance Standard. GPS is composed of space control and user elements.

GNSS **ICAO** –

(See **GLOBAL NAVIGATION SATELLITE SYSTEM**.)

GNSS MEA–

(See GLOBAL NAVIGATION SATELLITE SYSTEM MINIMUM EN ROUTE IFR ALTITUDE.)

GO AHEAD– Proceed with your message. Not to be used for any other purpose.

GO AROUND– Instructions for a pilot to abandon his/her approach to landing. Additional instructions may follow. Unless otherwise advised by ATC, a VFR aircraft or an aircraft conducting visual approach should overfly the runway while climbing to traffic pattern altitude and enter the traffic pattern via the crosswind leg. A pilot on an IFR flight plan making an instrument approach should execute the published missed approach procedure or proceed as instructed by ATC, e.g., Go around, additional instructions if required.

(See LOW APPROACH.)

(See MISSED APPROACH.)

GPD–

(See GRAPHIC PLAN DISPLAY.)

GPS–

(See GLOBAL POSITIONING SYSTEM.)

GRAPHIC PLAN DISPLAY – GPD – A view available with URET that provides a graphic display of aircraft traffic and notification of predicted conflicts. Graphic routes for Current Plans and Trial Plans are displayed upon controller request.

(See USER REQUEST EVALUATION TOOL.)

GROSS NAVIGATION ERROR – GNE – A lateral deviation from a cleared track, normally in excess of 25 Nautical Miles (NM). More stringent standards, for example, 10NM in some parts of the North Atlantic region, may be used in certain regions to support reductions in lateral separation.

GROUND-BASED TRANSCEIVER – GBT – The ground-based transmitter/receiver transceiver receives automatic dependent surveillance–broadcast messages which are forwarded to an air traffic control facility for processing and display with other radar targets on the plan position indicator radar display.

(See AUTOMATIC DEPENDENT SURVEILLANCE-BROADCAST.)

GROUND CLUTTER– A pattern produced on the radar scope by ground returns which may degrade other radar returns in the affected area. The effect of

ground clutter is minimized by the use of moving target indicator (MTI) circuits in the radar equipment resulting in a radar presentation which displays only targets which are in motion.

(See CLUTTER.)

GROUND COMMUNICATION OUTLET – GCO –

An unstaffed, remotely controlled ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four key clicks on the VHF radio to contact the appropriate ATC facility or six key clicks to contact the FSS. The GCO system is intended to be used only on the ground.

GROUND CONTROLLED APPROACH–

A radar approach system operated from the ground by air traffic control personnel transmitting instructions to the pilot by radio. The approach may be conducted with surveillance radar (ASR) only or with both surveillance and precision approach radar (PAR). Usage of the term GCA by pilots is discouraged except when referring to a GCA facility. Pilots should specifically request a PAR approach when a precision radar approach is desired or request an ASR or surveillance approach when a nonprecision radar approach is desired.

(See RADAR APPROACH.)

GROUND DELAY PROGRAM – GDP –

A traffic management process administered by the ATCSCC when aircraft are held on the ground. The purpose of the program is to support the TM mission and limit airborne holding. It is a flexible program and may be implemented in various forms depending upon the needs of the AT system. Ground delay programs provide for equitable assignment of delays to all system users.

GROUND SPEED– The speed of an aircraft relative to the surface of the earth.

GROUND STOP – GS – The GS is a process that requires aircraft that meet a specific criteria to remain on the ground. The criteria may be airport specific, airspace specific, or equipment specific, for example, all departures to San Francisco, or all departures entering the North Sector, or all Category I and II aircraft going to Charlotte. GSs normally occur with little or no warning.

GROUND VISIBILIT –
(See VISIBILITY.)

GS–
(See GROUND STOP.)

H

HAA–

(See HEIGHT ABOVE AIRPORT.)

HAL–

(See HEIGHT ABOVE LANDING.)

HANDOFF– An action taken to transfer the radar identification of an aircraft from one controller to another if the aircraft will enter the receiving controller's airspace and radio communications with the aircraft will be transferred

HAR–

(See HIGH ALTITUDE REDESIGN.)

HAT–

(See HEIGHT ABOVE TOUCHDOWN.)

HAVE NUMBERS– Used by pilots to inform ATC that they have received runway and altimeter information only

HAZARDOUS INFLIGHT WEATHER ADVISORY SERVICE– Continuous recorded hazardous inflight weather forecasts broadcasted to airborne pilots over selected VOR outlets defined as an HIWAS BROADCAST AREA

HAZARDOUS WEATHER INFORMATION– Summary of significant meteorological information SIGMET/WS convective significant meteorological information convective SIGMET/WST urgent pilot weather reports urgent PIREP/UUA center weather advisories CWA airmen's meteorological information AIRMET/WA and any other weather such as isolated thunderstorms that are rapidly developing and increasing in intensity or low ceilings and visibilities that are becoming widespread which is considered significant and are not included in a current hazardous weather advisory

HEAVY (AIRCRAFT)–

(See AIRCRAFT CLASSES.)

HEIGHT ABOVE AIRPORT– The height of the Minimum Descent Altitude above the published airport elevation. This is published in conjunction with circling minimums

(See MINIMUM DESCENT ALTITUDE.)

HEIGHT ABOVE LANDING– The height above a designated helicopter landing area used for helicopter instrument approach procedures

(Refer to 14 CFR Part 97.)

HEIGHT ABOVE TOUCHDOWN– The height of the Decision Height or Minimum Descent Altitude above the highest runway elevation in the touchdown zone. The first 3 000 feet of the runway HAT is published on instrument approach charts in conjunction with all straight in minimums

(See DECISION HEIGHT.)

(See MINIMUM DESCENT ALTITUDE.)

HELICOPTER– A heavier than air aircraft supported in flight chiefly by the reactions of the air on one or more power driven rotors on substantially vertical axes

HELIPAD– A small designated area usually with a prepared surface on a heliport airport landing/takeoff area apron/ramp or movement area used for takeoff landing or parking of helicopters

HELIPORT– An area of land water or structure used or intended to be used for the landing and takeoff of helicopters and includes its buildings and facilities if any

HELIPORT REFERENCE POINT (HRP) – The geographic center of a heliport

HERTZ – The standard radio equivalent of frequency in cycles per second of an electromagnetic wave. Kiloherz (kHz) is a frequency of one thousand cycles per second. Megahertz (MHz) is a frequency of one million cycles per second

HF–

(See HIGH FREQUENCY.)

HF COMMUNICATIONS–

(See HIGH FREQUENCY COMMUNICATIONS.)

HIGH ALTITUDE REDESIGN (HAR) – A level of non-restrictive routing (NRR) service for aircraft that have all waypoints associated with the HAR program in their flight management systems or RNAV equipment

HIGH FREQUENCY – The frequency band between 3 and 30 MHz

(See HIGH FREQUENCY COMMUNICATIONS.)

HIGH FREQUENCY COMMUNICATIONS– High radio frequencies HF between 3 and 30 MHz used for air to ground voice communication in overseas operations

HIGH SPEED EXIT–

(See HIGH SPEED TAXIWAY.)

HIGH SPEED TAXIWAY – A long radius taxiway designed and provided with lighting or marking to define the path of aircraft traveling at high speed up to 60 knots from the runway center to a point on the center of a taxiway. Also referred to as long radius exit or turn off taxiway. The high speed taxiway is designed to expedite aircraft turning off the runway after landing thus reducing runway occupancy time

HIGH SPEED TURNOFF–

(See HIGH SPEED TAXIWAY.)

HIWAS–

(See HAZARDOUS INFLIGHT WEATHER ADVISORY SERVICE.)

HIWAS AREA–

(See HAZARDOUS INFLIGHT WEATHER ADVISORY SERVICE.)

HIWAS BROADCAST AREA– A geographical area of responsibility including one or more HIWAS outlet areas assigned to a FSS for hazardous weather advisory broadcasting

HIWAS OUTLET AREA– An area defined as a 150 NM radius of a HIWAS outlet expanded as necessary to provide coverage

HOLD FOR RELEASE– Used by ATC to delay an aircraft for traffic management reasons i.e. weather traffic volume etc. Hold for release instructions including departure delay information are used to inform a pilot or a controller either directly or through an authorized relay that an IFR departure clearance is not valid until a release time or additional instructions have been received

(See ICAO term HOLDING POINT.)

HOLD IN LIEU OF PROCEDURE TURN– A hold in lieu of procedure turn shall be established over a final or intermediate fix when an approach can be made from a properly aligned holding pattern. The hold in lieu of procedure turn permits the pilot to align with the final or intermediate segment of the approach and/or descend in the holding pattern to an

altitude that will permit a normal descent to the final approach fix altitude. The hold in lieu of procedure turn is a required maneuver the same as a procedure turn unless the aircraft is being radar vectored to the final approach course when NoPT is shown on the approach chart or when the pilot requests or the controller advises the pilot to make a straight-in approach

HOLD PROCEDURE– A predetermined maneuver which keeps aircraft within a specified airspace while awaiting further clearance from air traffic control. Also used during ground operations to keep aircraft within a specified area or at a specified point while awaiting further clearance from air traffic control

(See HOLDING FIX.)

(Refer to AIM.)

HOLDING FIX – A specified fix identifiable to a pilot by NAVAIDs or visual reference to the ground used as a reference point in establishing and maintaining the position of an aircraft while holding

(See FIX.)

(See VISUAL HOLDING.)

(Refer to AIM.)

HOLDING POINT ICAO – A specified location identified by visual or other means in the vicinity of which the position of an aircraft in flight is maintained in accordance with air traffic control clearances

HOLDING PROCEDURE–

(See HOLD PROCEDURE.)

HOLD SHORT POINT– A point on the runway beyond which a landing aircraft with a LAHSO clearance is not authorized to proceed. This point may be located prior to an intersecting runway taxiway predetermined point or approach/departure flight path

HOLD SHORT POSITION LIGHTS– Flashing in pavement white lights located at specified hold short points

HOLD SHORT POSITION MARKING– The painted runway marking located at the hold short point on all LAHSO runways

HOLD SHORT POSITION SIGNS– Red and white holding position signs located alongside the hold short point

HOMING– Flight toward a NAVAID without correcting for wind by adjusting the aircraft heading to maintain a relative bearing of zero degrees

(See BEARING.)

(See ICAO term HOMING.)

HOMING ICAO – The procedure of using the direction finding equipment of one radio station with the emission of another radio station where at least one of the stations is mobile and whereby the mobile station proceeds continuously towards the other station

HOVER CHECK– Used to describe when a helicopter/VTOL aircraft requires a stabilized hover to conduct a performance/power check prior to hover taxi, air taxi or takeoff. Altitude of the hover will vary based on the purpose of the check

HOVER TAXI– Used to describe a helicopter/VTOL aircraft movement conducted above the surface and in ground effect at airspeeds less than approximately 20 knots. The actual height may vary and some helicopters may require hover taxi above 25 feet AGL to reduce ground effect turbulence or provide clearance for cargo slingloads

(See AIR TAXI.)

(See HOVER CHECK.)

(Refer to AIM.)

HOW DO YOU HEAR ME?– A question relating to the quality of the transmission or to determine how well the transmission is being received

H –

(See HERTZ.)

I

I SAY AGAIN– The message will be repeated

IAP–

(See INITIAL APPROACH FIX.)

IAP–

(See INSTRUMENT APPROACH PROCEDURE.)

IAWP– Initial Approach Waypoint

ICAO–

(See ICAO Term INTERNATIONAL CIVIL AVIATION ORGANIZATION.)

ICING– The accumulation of airframe ice

Types of icing are

a. Rime Ice– Rough milky opaque ice formed by the instantaneous freezing of small supercooled water droplets

b. Clear Ice– A glossy clear or translucent ice formed by the relatively slow freezing of large supercooled water droplets

c. Mixed– A mixture of clear ice and rime ice

Intensity of icing

a. Trace– Ice becomes perceptible Rate of accumulation is slightly greater than the rate of sublimation Deicing/anti icing equipment is not utilized unless encountered for an extended period of time over 1 hour

b. Light– The rate of accumulation may create a problem if flight is prolonged in this environment over 1 hour Occasional use of deicing/anti icing equipment removes/prevents accumulation It does not present a problem if the deicing/anti icing equipment is used

c. Moderate– The rate of accumulation is such that even short encounters become potentially hazardous and use of deicing/anti icing equipment or flight diversion is necessary

d. Severe– The rate of accumulation is such that deicing/anti icing equipment fails to reduce or control the hazard Immediate flight diversion is necessary

IDENT– A request for a pilot to activate the aircraft transponder identification feature This will help the

controller to confirm an aircraft identity or to identify an aircraft

(Refer to AIM.)

IDENT FEATURE– The special feature in the Air Traffic Control Radar Beacon System ATCRBS equipment It is used to immediately distinguish one displayed beacon target from other beacon targets

(See IDENT.)

IF–

(See INTERMEDIATE FIX.)

IFIM–

(See INTERNATIONAL FLIGHT INFORMATION MANUAL.)

IF NO TRANSMISSION RECEIVED FOR (TIME)– Used by ATC in radar approaches to prefix procedures which should be followed by the pilot in event of lost communications

(See LOST COMMUNICATIONS.)

IFR–

(See INSTRUMENT FLIGHT RULES.)

IFR AIRCRAFT– An aircraft conducting flight in accordance with instrument flight rules

IFR CONDITIONS– Weather conditions below the minimum for flight under visual flight rules

(See INSTRUMENT METEOROLOGICAL CONDITIONS.)

IFR DEPARTURE PROCEDURE–

(See IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES.)

(Refer to AIM.)

IFR FLIGHT–

(See IFR AIRCRAFT.)

IFR LANDING MINIMUMS–

(See LANDING MINIMUMS.)

IFR MILITARY TRAINING ROUTES (IR) – Routes used by the Department of Defense and associated Reserve and Air Guard units for the purpose of conducting low altitude navigation and tactical training in both IFR and VFR weather conditions below 10 000 feet MSL at airspeeds in excess of 250 knots IAS

IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES– Title 14 Code of Federal

Regulations Part 91 prescribes standard takeoff rules for certain civil users. At some airports, obstructions or other factors require the establishment of nonstandard takeoff minimums, departure procedures, or both to assist pilots in avoiding obstacles during climb to the minimum en route altitude. Those airports are listed in FAA/DOD Instrument Approach Procedures (IAPs) Charts under a section entitled "IFR Takeoff Minimums and Departure Procedures." The FAA/DOD IAP chart legend illustrates the symbol used to alert the pilot to nonstandard takeoff minimums and departure procedures. When departing IFR from such airports or from any airports where there are no departure procedures (DPs) or ATC facilities available, pilots should advise ATC of any departure limitations. Controllers may query a pilot to determine acceptable departure directions, turns, or headings after takeoff. Pilots should be familiar with the departure procedures and must assure that their aircraft can meet or exceed any specified climb gradients.

IF/IAPW– Intermediate Fix/Initial Approach Waypoint. The waypoint where the final approach course of a T approach meets the crossbar of the T. When designated in conjunction with a TAA, this waypoint will be used as an IAPW when approaching the airport from certain directions and as an IFWP when beginning the approach from another IAPW.

IFWP– Intermediate Fix Waypoint.

ILS–

(See INSTRUMENT LANDING SYSTEM.)

ILS CATEGORIES– 1. Category I. An ILS approach procedure which provides for approach to a height above touchdown of not less than 200 feet and with runway visual range of not less than 1,800 feet. – 2. Special Authorization Category I. An ILS approach procedure which provides for approach to a height above touchdown of not less than 150 feet and with runway visual range of not less than 1,400 feet. HUD to DH. 3. Category II. An ILS approach procedure which provides for approach to a height above touchdown of not less than 100 feet and with runway visual range of not less than 1,200 feet with autoland or HUD to touchdown and noted on authorization: RVR 1,000 feet. – 4. Special Authorization Category II with Reduced Lighting. An ILS approach procedure which provides for approach to a height above touchdown of not less

than 100 feet and with runway visual range of not less than 1,200 feet with autoland or HUD to touchdown and noted on authorization: no touchdown one and centerline lighting are required. – 5. Category III.

a. IIIA –An ILS approach procedure which provides for approach without a decision height minimum and with runway visual range of not less than 700 feet.

b. IIIB –An ILS approach procedure which provides for approach without a decision height minimum and with runway visual range of not less than 150 feet.

c. IIIC –An ILS approach procedure which provides for approach without a decision height minimum and without runway visual range minimum.

ILS PRM APPROACH– An instrument landing system (ILS) approach conducted to parallel runways whose extended centerlines are separated by less than 4,300 feet and at least 3,000 feet. Where closely spaced independent approaches are permitted. Also used in conjunction with an LDA PRM or RNAV (GPS) PRM approach to conduct Simultaneous Offset Instrument Approach (SOIA) operations. No Transgression (one) NT monitoring is required to conduct these approaches. When the runway spacing is less than 3,600 feet, the NT must be monitored by a Precision Runway Monitor (PRM) or other high update rate surveillance system.

(Refer to AIM.)

IM–

(See INNER MARKER.)

IMC–

(See INSTRUMENT METEOROLOGICAL CONDITIONS.)

IMMEDIATELY–Used by ATC or pilots when such action compliance is required to avoid an imminent situation.

INCERFA (Uncertainty Phase) (ICAO) – A situation wherein uncertainty exists as to the safety of an aircraft and its occupants.

INCREASE SPEED TO (SPEED)–

(See SPEED ADJUSTMENT.)

INERTIAL NAVIGATION SYSTEM– An RNAV system which is a form of self-contained navigation. (See Area Navigation/RNAV.)

INFLIGHT REFUELING–

(See AERIAL REFUELING.)

INFLIGHT WEATHER ADVISOR –

(See WEATHER ADVISORY.)

INFORMATION REQUEST– A request originated by an FSS for information concerning an overdue VFR aircraft

INITIAL APPROACH FIX – The fixes depicted on instrument approach procedure charts that identify the beginning of the initial approach segment s

(See FIX.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

INITIAL APPROACH SEGMENT–

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

INITIAL APPROACH SEGMENT ICAO – That segment of an instrument approach procedure between the initial approach fix and the intermediate approach fix or where applicable the final approach fix or point

INLAND NAVIGATION FACILITY – A navigation aid on a North American Route at which the common route and/or the noncommon route begins or ends

INNER MARKER– A marker beacon used with an ILS CAT II precision approach located between the middle marker and the end of the ILS runway transmitting a radiation pattern keyed at six dots per second and indicating to the pilot both aurally and visually that he/she is at the designated decision height DH normally 100 feet above the touchdown zone elevation on the ILS CAT II approach. It also marks progress during a CAT III approach

(See INSTRUMENT LANDING SYSTEM.)

(Refer to AIM.)

INNER MARKER BEACON–

(See INNER MARKER.)

INREQ–

(See INFORMATION REQUEST.)

INS–

(See INERTIAL NAVIGATION SYSTEM.)

INSTRUMENT APPROACH–

(See INSTRUMENT APPROACH PROCEDURE.)

INSTRUMENT APPROACH PROCEDURE– A series of predetermined maneuvers for the orderly transfer of an aircraft under instrument flight conditions from the beginning of the initial approach

to a landing or to a point from which a landing may be made visually. It is prescribed and approved for a specific airport by competent authority

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

a. U.S. civil standard instrument approach procedures are approved by the FAA as prescribed under 14 CFR Part 97 and are available for public use

b. U.S. military standard instrument approach procedures are approved and published by the Department of Defense

c. Special instrument approach procedures are approved by the FAA for individual operators but are not published in 14 CFR Part 97 for public use

(See ICAO term INSTRUMENT APPROACH PROCEDURE.)

INSTRUMENT APPROACH OPERATIONS

ICAO – An approach and landing using instruments for navigation guidance based on an instrument approach procedure. There are two methods for executing instrument approach operations

a. A two-dimensional 2D instrument approach operation using lateral navigation guidance only and

b. A three-dimensional 3D instrument approach operation using both lateral and vertical navigation guidance

Note: Lateral and vertical navigation guidance refers to the guidance provided either by:

a) a ground-based radio navigation aid; or

b) computer-generated navigation data from ground-based, space-based, self-contained navigation aids or a combination of these.

(See ICAO term INSTRUMENT APPROACH PROCEDURE.)

INSTRUMENT APPROACH PROCEDURE

ICAO – A series of predetermined maneuvers by reference to flight instruments with specified protection from obstacles from the initial approach fix or where applicable from the beginning of a defined arrival route to a point from which a landing can be completed and thereafter, if a landing is not completed, to a position at which holding or en route obstacle clearance criteria apply

(See ICAO term INSTRUMENT APPROACH OPERATIONS)

INSTRUMENT APPROACH PROCEDURES CHARTS–

(See AERONAUTICAL CHART.)

INSTRUMENT DEPARTURE PROCEDURE

DP – A preplanned instrument flight rule IFR departure procedure published for pilot use in graphic or textual format that provides obstruction clearance from the terminal area to the appropriate en route structure. There are two types of DP: Obstacle Departure Procedure (ODP) printed either textually or graphically, and Standard Instrument Departure (SID) which is always printed graphically.

(See IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES.)

(See OBSTACLE DEPARTURE PROCEDURES.)

(See STANDARD INSTRUMENT DEPARTURES.)

(Refer to AIM.)

INSTRUMENT DEPARTURE PROCEDURE DP CHARTS–

(See AERONAUTICAL CHART.)

INSTRUMENT FLIGHT RULES– Rules governing the procedures for conducting instrument flight. Also a term used by pilots and controllers to indicate type of flight plan.

(See INSTRUMENT METEOROLOGICAL CONDITIONS.)

(See VISUAL FLIGHT RULES.)

(See VISUAL METEOROLOGICAL CONDITIONS.)

(See ICAO term INSTRUMENT FLIGHT RULES.)

(Refer to AIM.)

INSTRUMENT FLIGHT RULES ICAO – A set of rules governing the conduct of flight under instrument meteorological conditions.

INSTRUMENT LANDING SYSTEM– A precision instrument approach system which normally consists of the following electronic components and visual aids:

a. Localizer

(See LOCALIZER.)

b. Glideslope

(See GLIDESLOPE.)

c. Outer Marker

(See OUTER MARKER.)

d. Middle Marker

(See MIDDLE MARKER.)

e. Approach Lights

(See AIRPORT LIGHTING.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

INSTRUMENT METEOROLOGICAL CONDITIONS– Meteorological conditions expressed in terms of visibility, distance from cloud, and ceiling less than the minima specified for visual meteorological conditions.

(See INSTRUMENT FLIGHT RULES.)

(See VISUAL FLIGHT RULES.)

(See VISUAL METEOROLOGICAL CONDITIONS.)

INSTRUMENT RUNWAY – A runway equipped with electronic and visual navigation aids for which a precision or nonprecision approach procedure having straight-in landing minimums has been approved.

(See ICAO term INSTRUMENT RUNWAY.)

INSTRUMENT RUNWAY ICAO – One of the following types of runways intended for the operation of aircraft using instrument approach procedures:

a. Nonprecision Approach Runway–An instrument runway served by visual aids and a nonvisual aid providing at least directional guidance adequate for a straight-in approach.

b. Precision Approach Runway Category I–An instrument runway served by ILS and visual aids intended for operations down to 60 m (200 feet) decision height and down to an RVR of the order of 800 m.

c. Precision Approach Runway Category II–An instrument runway served by ILS and visual aids intended for operations down to 30 m (100 feet) decision height and down to an RVR of the order of 400 m.

d. Precision Approach Runway Category III–An instrument runway served by ILS to and along the surface of the runway and:

1. Intended for operations down to an RVR of the order of 200 m, no decision height being applicable, using visual aids during the final phase of landing.

2. Intended for operations down to an RVR of the order of 50 m no decision height being applicable using visual aids for taxiing

3. Intended for operations without reliance on visual reference for landing or taxiing

Note 1: See Annex 10 Volume I, Part I, Chapter 3, for related ILS specifications.

Note 2: Visual aids need not necessarily be matched to the scale of nonvisual aids provided. The criterion for the selection of visual aids is the conditions in which operations are intended to be conducted.

INTEGRITY – The ability of a system to provide timely warnings to users when the system should not be used for navigation

INTERMEDIATE APPROACH SEGMENT–

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

INTERMEDIATE APPROACH SEGMENT

ICAO – That segment of an instrument approach procedure between either the intermediate approach fix and the final approach fix or point or between the end of a reversal race track or dead reckoning track procedure and the final approach fix or point as appropriate

INTERMEDIATE FIX – The fix that identifies the beginning of the intermediate approach segment of an instrument approach procedure. The fix is not normally identified on the instrument approach chart as an intermediate fix. IF

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

INTERMEDIATE LANDING– On the rare occasion that this option is requested it should be approved. The departure center however must advise the ATCSCC so that the appropriate delay is carried over and assigned at the intermediate airport. An intermediate landing airport within the arrival center will not be accepted without coordination with and the approval of the ATCSCC.

INTERNATIONAL AIRPORT– Relating to international flight it means

a. An airport of entry which has been designated by the Secretary of Treasury or Commissioner of Customs as an international airport for customs service

b. A landing rights airport at which specific permission to land must be obtained from customs authorities in advance of contemplated use

c. Airports designated under the Convention on International Civil Aviation as an airport for use by international commercial air transport and/or international general aviation

(See ICAO term INTERNATIONAL AIRPORT.)

(Refer to AIRPORT/FACILITY DIRECTORY.)

(Refer to IFIM.)

INTERNATIONAL AIRPORT ICAO – Any airport designated by the Contracting State in whose territory it is situated as an airport of entry and departure for international air traffic where the formalities incident to customs immigration public health animal and plant quarantine and similar procedures are carried out

INTERNATIONAL CIVIL AVIATION ORGANIZATION ICAO – A specialized agency of the United Nations whose objective is to develop the principles and techniques of international air navigation and to foster planning and development of international civil air transport

a. Regions include

1. African Indian Ocean Region
2. Caribbean Region
3. European Region
4. Middle East/Asia Region
5. North American Region
6. North Atlantic Region
7. Pacific Region
8. South American Region

INTERNATIONAL FLIGHT INFORMATION MANUAL– A publication designed primarily as a pilot's preflight planning guide for flights into foreign airspace and for flights returning to the U.S. from foreign locations

INTERROGATOR– The ground based surveillance radar beacon transmitter receiver which normally scans in synchronism with a primary radar transmitting discrete radio signals which repetitiously request all transponders on the mode being used to reply. The replies received are mixed with the primary radar returns and displayed on the same plan position indicator radar scope. Also applied to the airborne element of the TACAN/DME system

(See TRANSPONDER.)

(Refer to AIM.)

INTERSECTING RUNWAYS— Two or more runways which cross or meet within their lengths
(See **INTERSECTION**.)

INTERSECTION—

- a.** A point defined by any combination of courses radials or bearings of two or more navigational aids
- b.** Used to describe the point where two runways, a runway and a taxiway, or two taxiways cross or meet

INTERSECTION DEPARTURE— A departure from any runway intersection except the end of the runway
(See **INTERSECTION**.)

INTERSECTION TAKEOFF—
(See **INTERSECTION DEPARTURE**.)

IR—
(See **IFR MILITARY TRAINING ROUTES**.)

ISR Indicates the confidence level of the track requires 5NM separation 3NM separation 1 1/2NM separation and target resolution cannot be used

J

JAMMING– Electronic or mechanical interference which may disrupt the display of aircraft on radar or the transmission/reception of radio communications/navigation

JET BLAST– Jet engine exhaust thrust stream turbulence
(See **WAKE TURBULENCE**.)

JET ROUTE– A route designed to serve aircraft operations from 18 000 feet MSL up to and including flight level 450. The routes are referred to as J routes with numbering to identify the designated

route e.g. J105
(See **Class A AIRSPACE**.)
(Refer to 14 CFR Part 71.)

JET STREAM– A migrating stream of high speed winds present at high altitudes

JETTISONING OF EXTERNAL STORES– Airborne release of external stores e.g. tip tanks ordnance
(See **FUEL DUMPING**.)
(Refer to 14 CFR Part 91.)

JOINT USE RESTRICTED AREA–
(See **RESTRICTED AREA**.)

K

KNOWN TRAFFIC– With respect to ATC clearances means aircraft whose altitude position and intentions are known to ATC

L

LAA–

(See LOCAL AIRPORT ADVISORY.)

LAAS–

(See LOW ALTITUDE ALERT SYSTEM.)

LAHSO– An acronym for Land and Hold Short Operation. These operations include landing and holding short of an intersecting runway at a taxiway, a predetermined point, or an approach/departure flightpath.

LAHSO DR – Land and hold short operations on runways that are dry.

LAHSO WET– Land and hold short operations on runways that are wet but not contaminated.

LAND AND HOLD SHORT OPERATIONS– Operations which include simultaneous takeoffs and landings and/or simultaneous landings when a landing aircraft is able and is instructed by the controller to hold short of the intersecting runway/taxiway or designated hold short point. Pilots are expected to promptly inform the controller if the hold short clearance cannot be accepted.

(See PARALLEL RUNWAYS.)

(Refer to AIM.)

LANDING AREA– Any locality either on land or water or structures including airports/heliports and intermediate landing fields which is used or intended to be used for the landing and takeoff of aircraft. Whether or not facilities are provided for the shelter, servicing, or for receiving or discharging passengers or cargo.

(See ICAO term LANDING AREA.)

LANDING AREA ICAO – That part of a movement area intended for the landing or take off of aircraft.

LANDING DIRECTION INDICATOR– A device which visually indicates the direction in which landings and takeoffs should be made.

(See TETRAHEDRON.)

(Refer to AIM.)

LANDING DISTANCE AVAILABLE LDA – The runway length declared available and suitable for a landing airplane.

(See ICAO term LANDING DISTANCE AVAILABLE.)

LANDING DISTANCE AVAILABLE ICAO – The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

LANDING MINIMUMS– The minimum visibility prescribed for landing a civil aircraft while using an instrument approach procedure. The minimum applies with other limitations set forth in 14 CFR Part 91 with respect to the Minimum Descent Altitude (MDA) or Decision Height (DH) prescribed in the instrument approach procedures as follows:

a. Straight in landing minimums. A statement of MDA and visibility or DH and visibility required for a straight in landing on a specified runway or

b. Circling minimums. A statement of MDA and visibility required for the circle to land maneuver.

Note: Descent below the MDA or DH must meet the conditions stated in 14 CFR Section 91.175.

(See CIRCLE-TO-LAND MANEUVER.)

(See DECISION HEIGHT.)

(See INSTRUMENT APPROACH PROCEDURE.)

(See MINIMUM DESCENT ALTITUDE.)

(See STRAIGHT-IN LANDING.)

(See VISIBILITY.)

(Refer to 14 CFR Part 91.)

LANDING ROLL– The distance from the point of touchdown to the point where the aircraft can be brought to a stop or exit the runway.

LANDING SEQUENCE– The order in which aircraft are positioned for landing.

(See APPROACH SEQUENCE.)

LAST ASSIGNED ALTITUDE– The last altitude/flight level assigned by ATC and acknowledged by the pilot.

(See MAINTAIN.)

(Refer to 14 CFR Part 91.)

LATERAL NAVIGATION LNAV A function of area navigation (RNAV) equipment which calculates

displays and provides lateral guidance to a profile or path

LATERAL SEPARATION– The lateral spacing of aircraft at the same altitude by requiring operation on different routes or in different geographical locations
(See SEPARATION.)

LDA–

(See LOCALIZER TYPE DIRECTIONAL AID.)

(See LANDING DISTANCE AVAILABLE.)

(See ICAO Term LANDING DISTANCE AVAILABLE.)

LF–

(See LOW FREQUENCY.)

LIGHTED AIRPORT– An airport where runway and obstruction lighting is available

(See AIRPORT LIGHTING.)

(Refer to AIM.)

LIGHT GUN– A handheld directional light signaling device which emits a brilliant narrow beam of white green or red light as selected by the tower controller. The color and type of light transmitted can be used to approve or disapprove anticipated pilot actions where radio communication is not available. The light gun is used for controlling traffic operating in the vicinity of the airport and on the airport movement area

(Refer to AIM.)

LIGHT SPORT AIRCRAFT LSA– An FAA registered aircraft other than a helicopter or powered lift that meets certain weight and performance. Principally it is a single engine aircraft with a maximum of two seats and weighing no more than 1 430 pounds if intended for operation on water or 1 320 pounds if not. They must be of simple design, fixed landing gear, except if intended for operations on water or a glider, piston powered, nonpressurized, with a fixed or ground adjustable propeller. Performance is also limited to a maximum airspeed in level flight of not more than 120 knots CAS, have a maximum never exceed speed of not more than 120 knots CAS for a glider, and have a maximum stalling speed without the use of lift enhancing devices V_{S1} of not more than 45 knots CAS. They may be certificated as either Experimental LSA or as a Special LSA aircraft. A minimum of a sport pilot certificate is required to operate light sport aircraft. Refer to 14 CFR Part 1

11

LINE UP AND WAIT LUAW– Used by ATC to inform a pilot to taxi onto the departure runway to line up and wait. It is not authorization for takeoff. It is used when takeoff clearance cannot immediately be issued because of traffic or other reasons.

(See CLEARED FOR TAKEOFF.)

LOCAL AIRPORT ADVISOR LAA– A service provided by facilities which are located on the landing airport have a discrete ground-to-air communication frequency or the tower frequency when the tower is closed, automated weather reporting with voice broadcasting, and a continuous ASOS/AWSS/AWOS data display, other continuous direct reading instruments, or manual observations available to the specialist.

(See AIRPORT ADVISORY AREA.)

LOCAL TRAFFIC– Aircraft operating in the traffic pattern or within sight of the tower or aircraft known to be departing or arriving from flight in local practice areas, or aircraft executing practice instrument approaches at the airport.

(See TRAFFIC PATTERN.)

LOCALIZER– The component of an ILS which provides course guidance to the runway.

(See INSTRUMENT LANDING SYSTEM.)

(See ICAO term LOCALIZER COURSE.)

(Refer to AIM.)

LOCALIZER COURSE ICAO– The locus of points in any given horizontal plane at which the DDM difference in depth of modulation is zero.

LOCALIZER OFFSET– An angular offset of the localizer from the runway extended centerline in a direction away from the no transgression line NT that increases the normal operating line NO width. An offset requires a 50 foot increase in DH and is not authorized for CAT II and CAT III approaches.

LOCALIZER TYPE DIRECTIONAL AID– A NAVAID used for nonprecision instrument approaches with utility and accuracy comparable to a localizer but which is not a part of a complete ILS and is not aligned with the runway.

(Refer to AIM.)

LOCALIZER TYPE DIRECTIONAL AID LDA
PRECISION RUNWAY MONITOR PRM
APPROACH– An approach which includes a glideslope used in conjunction with an ILS PRM or RNAV GPS PRM approach to an adjacent runway to conduct Simultaneous Offset Instrument

Approaches SOIA to parallel run ways whose centerlines are separated by less than 3 000 feet and at least 750 feet NT monitoring is required to conduct these approaches When the approach course spacing is less than 3 600 feet at the Missed Approach Point MAP the use of a PRM or other high update rate surveillance system in order to conduct simultaneous independent approaches is required

(See SIMULTANEOUS OFFSET INSTRUMENT APPROACH (SOIA).)

(Refer to AIM.)

LOCALIZER USABLE DISTANCE– The maximum distance from the localizer transmitter at a specified altitude as verified by flight inspection at which reliable course information is continuously received

(Refer to AIM.)

LOCATOR ICAO – An LM/MF NDB used as an aid to final approach

Note: A locator usually has an average radius of rated coverage of between 18.5 and 46.3 km (10 and 25 NM).

LONG RANGE NAVIGATION–

(See LORAN.)

LONGITUDINAL SEPARATION– The longitudinal spacing of aircraft at the same altitude by a minimum distance expressed in units of time or miles

(See SEPARATION.)

(Refer to AIM.)

LORAN– An electronic navigational system by which hyperbolic lines of position are determined by measuring the difference in the time of reception of synchronized pulse signals from two fixed transmitters Loran A operates in the 1750 1950 kHz frequency band Loran C and D operate in the 100 110 kHz frequency band In 2010 the U S Coast Guard terminated all U S LORAN C transmissions

(Refer to AIM.)

LOST COMMUNICATIONS– Loss of the ability to communicate by radio Aircraft are sometimes

referred to as NORDO No Radio Standard pilot procedures are specified in 14 CFR Part 91 Radar controllers issue procedures for pilots to follow in the event of lost communications during a radar approach when weather reports indicate that an aircraft will likely encounter IFR weather conditions during the approach

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

LOW ALTITUDE AIRWAY STRUCTURE– The network of airways serving aircraft operations up to but not including 18 000 feet MSL

(See AIRWAY.)

(Refer to AIM.)

LOW ALTITUDE ALERT, CHECK YOUR ALTITUDE IMMEDIATELY–

(See SAFETY ALERT.)

LOW ALTITUDE ALERT SYSTEM– An automated function of the TP 42 that alerts the controller when a Mode C transponder equipped aircraft on an IFR flight plan is below a predetermined minimum safe altitude If requested by the pilot Low Altitude Alert System monitoring is also available to VFR Mode C transponder equipped aircraft

LOW APPROACH– An approach over an airport or runway following an instrument approach or a VFR approach including the go around maneuver where the pilot intentionally does not make contact with the runway

(Refer to AIM.)

LOW FREQUENCY – The frequency band between 30 and 300 kHz

(Refer to AIM.)

LPV– A type of approach with vertical guidance APV based on WAAS published on RNAV GPS approach charts This procedure takes advantage of the precise lateral guidance available from WAAS The minima is published as a decision altitude DA

LUAW–

(See LINE UP AND WAIT.)

M

MAA–

(See MAXIMUM AUTHORIZED ALTITUDE.)

MACH NUMBER– The ratio of true airspeed to the speed of sound e.g. MACH 82 MACH 1.6

(See AIRSPEED.)

MACH TECHNIQUE ICAO – Describes a control technique used by air traffic control whereby turbojet aircraft operating successively along suitable routes are cleared to maintain appropriate MACH numbers for a relevant portion of the en route phase of flight. The principle objective is to achieve improved utilization of the airspace and to ensure that separation between successive aircraft does not decrease below the established minima.

MAHWP– Missed Approach Holding Waypoint

MAINTAIN–

a. Concerning altitude/flight level the term means to remain at the altitude/flight level specified. The phrase climb and or descend and normally precedes maintain and the altitude assignment e.g. descend and maintain 5 000.

b. Concerning other ATC instructions the term is used in its literal sense e.g. maintain VFR.

MAINTENANCE PLANNING FRICTION LEVEL– The friction level specified in AC 150/5320-12 Measurement Construction and Maintenance of Skid Resistant Airport Pavement Surfaces which represents the friction value below

which the runway pavement surface remains acceptable for any category or class of aircraft operations but which is beginning to show signs of deterioration. This value will vary depending on the particular friction measurement equipment used.

MAKE SHORT APPROACH– Used by ATC to inform a pilot to alter his/her traffic pattern so as to make a short final approach.

(See TRAFFIC PATTERN.)

MAN PORTABLE AIR DEFENSE SYSTEMS

MANPADS – MANPADS are lightweight shoulder-launched missile systems used to bring down aircraft and create mass casualties. The potential for MANPADS use against airborne aircraft is real and

requires familiarity with the subject. Terrorists choose MANPADS because the weapons are low cost, highly mobile, require minimal set-up time, and are easy to use and maintain. Although the weapons have limited range and their accuracy is affected by poor visibility and adverse weather, they can be fired from anywhere on land or from boats where there is unrestricted visibility to the target.

MANDATORY ALTITUDE– An altitude depicted on an instrument Approach Procedure Chart requiring the aircraft to maintain altitude at the depicted value.

MANPADS–

(See MAN PORTABLE AIR DEFENSE SYSTEMS.)

MAP–

(See MISSED APPROACH POINT.)

MARKER BEACON– An electronic navigation facility transmitting a 75 MHz vertical fan or bone-shaped radiation pattern. Marker beacons are identified by their modulation frequency and keying code and when received by compatible airborne equipment indicate to the pilot both aurally and visually that he/she is passing over the facility.

(See INNER MARKER.)

(See MIDDLE MARKER.)

(See OUTER MARKER.)

(Refer to AIM.)

MARSA–

(See MILITARY AUTHORITY ASSUMES RESPONSIBILITY FOR SEPARATION OF AIRCRAFT.)

MAWP– Missed Approach Waypoint

MAXIMUM AUTHORIZED ALTITUDE– A published altitude representing the maximum usable altitude or flight level for an airspace structure or route segment. It is the highest altitude on a Federal airway or route, area navigation low or high route, or other direct route for which an MEA is designated in 14 CFR Part 95 at which adequate reception of navigation aid signals is assured.

MAYDAY– The international radiotelephony distress signal. When repeated three times, it indicates

imminent and grave danger and that immediate assistance is requested

(See PAN-PAN.)

(Refer to AIM.)

MCA–

(See MINIMUM CROSSING ALTITUDE.)

MDA–

(See MINIMUM DESCENT ALTITUDE.)

MEA–

(See MINIMUM EN ROUTE IFR ALTITUDE.)

MEARTS–

(See MICRO-EN ROUTE AUTOMATED RADAR TRACKING SYSTEM.)

METEOROLOGICAL IMPACT STATEMENT–

An unscheduled planning forecast describing conditions expected to begin within 4 to 12 hours

which may impact the flow of air traffic in a specific center's ARTCC area

METER FIX ARC– A semicircle equidistant from a meter fix usually in low altitude relatively close to the meter fix used to help CTAS/HOST calculate a meter time and determine appropriate sector meter list assignments for aircraft not on an established arrival route or assigned a meter fix

METER FIX TIME/SLOT TIME– A calculated time to depart the meter fix in order to cross the vertex at the ACLT. This time reflects descent speed adjustment and any applicable time that must be absorbed prior to crossing the meter fix

METER LIST–

See ARRIVAL SECTOR ADVISOR LIST

METER LIST DISPLAY INTERVAL– A dynamic parameter which controls the number of minutes prior to the flight plan calculated time of arrival at the meter fix for each aircraft at which time the TCLT is frozen and becomes an ACLT. i.e. the VTA is updated and consequently the TCLT modified as appropriate until frozen at which time updating is suspended and an ACLT is assigned. When frozen the flight entry is inserted into the arrival sector's meter list for display on the sector PVD/MDM. MLDI is used if filed true airspeed is less than or equal to free speed parameters FSPD

METERING– A method of time regulating arrival traffic flow into a terminal area so as not to exceed a predetermined terminal acceptance rate

METERING AIRPORTS– Airports adapted for metering and for which optimum flight paths are defined. A maximum of 15 airports may be adapted

METERING FIX – A fix along an established route from over which aircraft will be metered prior to entering terminal airspace. Normally this fix should be established at a distance from the airport which will facilitate a profile descent 10 000 feet above airport elevation MAA or above

METERING POSITION S – Adapted PVDs/MDMs and associated D positions eligible for display of a metering position list. A maximum of four PVDs/MDMs may be adapted

METERING POSITION LIST– An ordered list of data on arrivals for a selected metering airport displayed on a metering position PVD/MDM

MFT–

(See METER FIX TIME/SLOT TIME.)

MHA–

(See MINIMUM HOLDING ALTITUDE.)

MIA–

(See MINIMUM IFR ALTITUDES.)

MICROBURST– A small downburst with outbursts of damaging winds extending 2.5 miles or less. In spite of its small horizontal scale an intense microburst could induce wind speeds as high as 150 knots

(Refer to AIM.)

MICRO EN ROUTE AUTOMATED RADAR TRACKING SYSTEM MEARTS – An automated radar and radar beacon tracking system capable of employing both short range ASR and long range ARSR radars. This microcomputer driven system provides improved tracking, continuous data recording and use of full digital radar displays

MICROWAVE LANDING SYSTEM– A precision instrument approach system operating in the microwave spectrum which normally consists of the following components

- a. Altimeter Station
 - b. Elevation Station
 - c. Precision Distance Measuring Equipment
- (See MLS CATEGORIES.)

MID RVR–

(See VISIBILITY.)

MIDDLE COMPASS LOCATOR–

(See COMPASS LOCATOR.)

MIDDLE MARKER– A marker beacon that defines a point along the glideslope of an ILS normally located at or near the point of decision height ILS Category I. It is keyed to transmit alternate dots and dashes with the alternate dots and dashes keyed at the rate of 95 dot/dash combinations per minute on a 1300 Hz tone which is received aurally and visually by compatible airborne equipment.

(See INSTRUMENT LANDING SYSTEM.)

(See MARKER BEACON.)

(Refer to AIM.)

MILES IN TRAIL– A specified distance between aircraft normally in the same stratum associated with the same destination or route of flight.

MILITARY AUTHORITY ASSUMES RESPONSIBILITY FOR SEPARATION OF AIRCRAFT– A condition whereby the military services involved assume responsibility for separation between participating military aircraft in the ATC system. It is used only for required IFR operations which are specified in letters of agreement or other appropriate FAA or military documents.

MILITARY LANDING ZONE– A landing strip used exclusively by the military for training. A military landing zone does not carry a runway designation.

MILITARY OPERATIONS AREA–

(See SPECIAL USE AIRSPACE.)

MILITARY TRAINING ROUTES– Airspace of defined vertical and lateral dimensions established for the conduct of military flight training at airspeeds in excess of 250 knots IAS.

(See IFR MILITARY TRAINING ROUTES.)

(See VFR MILITARY TRAINING ROUTES.)

MINIMA–

(See MINIMUMS.)

MINIMUM CROSSING ALTITUDE– The lowest altitude at certain fixes at which an aircraft must cross when proceeding in the direction of a higher minimum en route IFR altitude (MEA).

(See MINIMUM EN ROUTE IFR ALTITUDE.)

MINIMUM DESCENT ALTITUDE– The lowest altitude expressed in feet above mean sea level to which descent is authorized on final approach or during circle to land maneuvering in execution of a

standard instrument approach procedure where no electronic glideslope is provided.

(See NONPRECISION APPROACH PROCEDURE.)

MINIMUM EN ROUTE IFR ALTITUDE (MEA) – The lowest published altitude between radio fixes which assures acceptable navigational signal coverage and meets obstacle clearance requirements between those fixes. The MEA prescribed for a Federal airway or segment thereof, area navigation low or high route, or other direct route applies to the entire width of the airway segment or route between the radio fixes defining the airway segment or route.

(Refer to 14 CFR Part 91.)

(Refer to 14 CFR Part 95.)

(Refer to AIM.)

MINIMUM FRICTION LEVEL– The friction level specified in AC 150/5320-12, Measurement Construction and Maintenance of Skid Resistant Airport Pavement Surfaces, that represents the minimum recommended wet pavement surface friction value for any turbojet aircraft engaged in LAHSO. This value will vary with the particular friction measurement equipment used.

MINIMUM FUEL– Indicates that an aircraft's fuel supply has reached a state where, upon reaching the destination, it can accept little or no delay. This is not an emergency situation but merely indicates an emergency situation is possible should any undue delay occur.

(Refer to AIM.)

MINIMUM HOLDING ALTITUDE– The lowest altitude prescribed for a holding pattern which assures navigational signal coverage, communications, and meets obstacle clearance requirements.

MINIMUM IFR ALTITUDES (MIA) – Minimum altitudes for IFR operations as prescribed in 14 CFR Part 91. These altitudes are published on aeronautical charts and prescribed in 14 CFR Part 95 for airways and routes, and in 14 CFR Part 97 for standard instrument approach procedures. If no applicable minimum altitude is prescribed in 14 CFR Part 95 or 14 CFR Part 97, the following minimum IFR altitude applies:

a. In designated mountainous areas, 2,000 feet above the highest obstacle within a horizontal distance of 4 nautical miles from the course to be flown or

b. Other than mountainous areas 1 000 feet above the highest obstacle within a horizontal distance of 4 nautical miles from the course to be flown or

c. As otherwise authorized by the Administrator or assigned by ATC

(See MINIMUM CROSSING ALTITUDE.)

(See MINIMUM EN ROUTE IFR ALTITUDE.)

(See MINIMUM OBSTRUCTION CLEARANCE ALTITUDE.)

(See MINIMUM SAFE ALTITUDE.)

(See MINIMUM VECTORING ALTITUDE.)

(Refer to 14 CFR Part 91.)

MINIMUM NAVIGATION PERFORMANCE SPECIFICATION—A set of standards which require aircraft to have a minimum navigation performance capability in order to operate in MNPS designated airspace. In addition, aircraft must be certified by their State of Registry for MNPS operation.

MINIMUM NAVIGATION PERFORMANCE SPECIFICATION AIRSPACE—Designated airspace in which MNPS procedures are applied between MNPS certified and equipped aircraft. Under certain conditions, non-MNPS aircraft can operate in MNPSA. However, standard oceanic separation minima is provided between the non-MNPS aircraft and other traffic. Currently, the only designated MNPSA is described as follows:

a. Between FL 285 and FL 420

b. Between latitudes 27°N and the North Pole

c. In the east, the eastern boundaries of the CTAs Santa Maria Oceanic, Shanick Oceanic, and Reykjavik

d. In the west, the western boundaries of CTAs Reykjavik and Gander Oceanic and New York Oceanic, excluding the area west of 60°W and south of 38°30'N

MINIMUM OBSTRUCTION CLEARANCE ALTITUDE (MOCA)—The lowest published altitude in effect between radio fixes on VOR airways off airway routes or route segments which meets obstacle clearance requirements for the entire route segment and which assures acceptable navigational signal coverage only within 25 statute (22 nautical) miles of a VOR.

(Refer to 14 CFR Part 91.)

(Refer to 14 CFR Part 95.)

MINIMUM RECEPTION ALTITUDE—The lowest altitude at which an intersection can be determined (Refer to 14 CFR Part 95.)

MINIMUM SAFE ALTITUDE—

a. The minimum altitude specified in 14 CFR Part 91 for various aircraft operations

b. Altitudes depicted on approach charts which provide at least 1 000 feet of obstacle clearance for emergency use within a specified distance from the navigation facility upon which a procedure is predicated. These altitudes will be identified as Minimum Sector Altitudes or Emergency Safe Altitudes and are established as follows:

1. Minimum Sector Altitudes—Altitudes depicted on approach charts which provide at least 1 000 feet of obstacle clearance within a 25-mile radius of the navigation facility upon which the procedure is predicated. Sectors depicted on approach charts must be at least 90 degrees in scope. These altitudes are for emergency use only and do not necessarily assure acceptable navigational signal coverage.

(See ICAO term Minimum Sector Altitude.)

2. Emergency Safe Altitudes—Altitudes depicted on approach charts which provide at least 1 000 feet of obstacle clearance in nonmountainous areas and 2 000 feet of obstacle clearance in designated mountainous areas within a 100-mile radius of the navigation facility upon which the procedure is predicated and normally used only in military procedures. These altitudes are identified on published procedures as Emergency Safe Altitudes.

MINIMUM SAFE ALTITUDE WARNING—A function of the ARTS III computer that aids the controller by alerting him/her when a tracked Mode C equipped aircraft is below or is predicted by the computer to go below a predetermined minimum safe altitude.

(Refer to AIM.)

MINIMUM SECTOR ALTITUDE (ICAO)—The lowest altitude which may be used under emergency conditions which will provide a minimum clearance of 300 m (1 000 feet) above all obstacles located in an area contained within a sector of a circle of 46 km (25 NM) radius centered on a radio aid to navigation.

MINIMUMS—Weather condition requirements established for a particular operation or type of

operation e.g. IFR takeoff or landing alternate airport for IFR flight plans VFR flight etc

(See IFR CONDITIONS.)

(See IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES.)

(See LANDING MINIMUMS.)

(See VFR CONDITIONS.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

MINIMUM VECTORING ALTITUDE (MVA) – The lowest MSL altitude at which an IFR aircraft will be vectored by a radar controller except as otherwise authorized for radar approaches, departures, and missed approaches. The altitude meets IFR obstacle clearance criteria. It may be lower than the published MEA along an airway or J route segment. It may be utilized for radar vectoring only upon the controller's determination that an adequate radar return is being received from the aircraft being controlled. Charts depicting minimum vectoring altitudes are normally available only to the controllers and not to pilots.

(Refer to AIM.)

MINUTES IN TRAIL– A specified interval between aircraft expressed in time. This method could more likely be utilized regardless of altitude.

MIS–

(See METEOROLOGICAL IMPACT STATEMENT.)

MISSED APPROACH–

a. A maneuver conducted by a pilot when an instrument approach cannot be completed to a landing. The route of flight and altitude are shown on instrument approach procedure charts. A pilot executing a missed approach prior to the Missed Approach Point (MAP) must continue along the final approach to the MAP.

b. A term used by the pilot to inform ATC that he/she is executing the missed approach.

c. At locations where ATC radar service is provided, the pilot should conform to radar vectors when provided by ATC in lieu of the published missed approach procedure.

(See MISSED APPROACH POINT.)

(Refer to AIM.)

MISSED APPROACH POINT– A point prescribed in each instrument approach procedure at which a missed approach procedure shall be executed if the required visual reference does not exist.

(See MISSED APPROACH.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

MISSED APPROACH PROCEDURE (ICAO) – The procedure to be followed if the approach cannot be continued.

MISSED APPROACH SEGMENT–

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

MLDI–

(See METER LIST DISPLAY INTERVAL.)

MLS–

(See MICROWAVE LANDING SYSTEM.)

MLS CATEGORIES–

a. **MLS Category I** An MLS approach procedure which provides for an approach to a height above touchdown of not less than 200 feet and a runway visual range of not less than 1,800 feet.

b. **MLS Category II** Undefined until data gathering/analysis completion.

c. **MLS Category III** Undefined until data gathering/analysis completion.

MM–

(See MIDDLE MARKER.)

MNPS–

(See MINIMUM NAVIGATION PERFORMANCE SPECIFICATION.)

MNPSA–

(See MINIMUM NAVIGATION PERFORMANCE–SPECIFICATION AIRSPACE.)

MOA–

(See MILITARY OPERATIONS AREA.)

MOCA–

(See MINIMUM OBSTRUCTION CLEARANCE ALTITUDE.)

MODE– The letter or number assigned to a specific pulse spacing of radio signals transmitted or received by ground interrogator or airborne transponder components of the Air Traffic Control Radar Beacon.

System ATCRBS Mode A military Mode 3 and Mode C altitude reporting are used in air traffic control

(See INTERROGATOR.)

(See RADAR.)

(See TRANSPONDER.)

(See ICAO term MODE.)

(Refer to AIM.)

MODE SSR MODE ICAO – The letter or number assigned to a specific pulse spacing of the interrogation signals transmitted by an interrogator. There are 4 modes A B C and D specified in Annex 10 corresponding to four different interrogation pulse spacings

MODE C INTRUDER ALERT– A function of certain air traffic control automated systems designed to alert radar controllers to existing or pending situations between a tracked target known IFR or VFR aircraft and an untracked target unknown IFR or VFR aircraft that requires immediate attention/action

(See CONFLICT ALERT.)

MONITOR– When used with communication transfer listen on a specific frequency and stand by for instructions. Under normal circumstances do not establish communications

MONITOR ALERT MA – A function of the TFMS that provides traffic management personnel with a tool for predicting potential capacity problems in individual operational sectors. The MA is an indication that traffic management personnel need to analyze a particular sector for actual activity and to determine the required actions if any needed to control the demand

MONITOR ALERT PARAMETER MAP – The number designated for use in monitor alert processing by the TFMS. The MAP is designated for each operational sector for increments of 15 minutes

MOSAIC/MULTI-SENSOR MODE– Accepts positional data from multiple radar or ADS-B sites. Targets are displayed from a single source within a

radar sort box according to the hierarchy of the sources assigned

MOVEMENT AREA– The runways taxiways and other areas of an airport/heliport which are utilized for taxiing/hover taxiing air taxiing takeoff and landing of aircraft exclusive of loading ramps and parking areas. At those airports/heliports with a tower specific approval for entry onto the movement area must be obtained from ATC

(See ICAO term MOVEMENT AREA.)

MOVEMENT AREA ICAO – That part of an aerodrome to be used for the takeoff landing and taxiing of aircraft consisting of the maneuvering area and the aprons

MOVING TARGET INDICATOR– An electronic device which will permit radar scope presentation only from targets which are in motion. A partial remedy for ground clutter

MRA–

(See MINIMUM RECEPTION ALTITUDE.)

MSA–

(See MINIMUM SAFE ALTITUDE.)

MSAW–

(See MINIMUM SAFE ALTITUDE WARNING.)

MTI–

(See MOVING TARGET INDICATOR.)

MTR–

(See MILITARY TRAINING ROUTES.)

MULTICOM– A mobile service not open to public correspondence used to provide communications essential to conduct the activities being performed by or directed from private aircraft

MULTIPLE RUNWAYS– The utilization of a dedicated arrival runway for departures and a dedicated departure runway for arrivals when feasible to reduce delays and enhance capacity

MVA–

(See MINIMUM VECTORING ALTITUDE.)

N

NAS–

(See NATIONAL AIRSPACE SYSTEM.)

NATIONAL AIRSPACE SYSTEM– The common network of U.S. airspace air navigation facilities, equipment and services, airports or landing areas, aeronautical charts, information and services, rules, regulations and procedures, technical information and manpower and material. Included are system components shared jointly with the military.

NATIONAL BEACON CODE ALLOCATION PLAN AIRSPACE– Airspace over United States territory located within the North American continent between Canada and Mexico, including adjacent territorial waters out to about boundaries of oceanic control areas, CTA /Flight Information Regions, FIR.

(See FLIGHT INFORMATION REGION.)

NATIONAL FLIGHT DATA CENTER– A facility in Washington, D.C., established by FAA to operate a central aeronautical information service for the collection, validation, and dissemination of aeronautical data in support of the activities of government, industry, and the aviation community. The information is published in the National Flight Data Digest.

(See NATIONAL FLIGHT DATA DIGEST.)

NATIONAL FLIGHT DATA DIGEST– A daily, except weekends and Federal holidays, publication of flight information appropriate to aeronautical charts, aeronautical publications, Notices to Airmen, or other media serving the purpose of providing operational flight data essential to safe and efficient aircraft operations.

NATIONAL SEARCH AND RESCUE PLAN– An interagency agreement which provides for the effective utilization of all available facilities in all types of search and rescue missions.

NAVAID–

(See NAVIGATIONAL AID.)

NAVAID CLASSES– VOR, VORTAC, and TACAN aids are classed according to their operational use. The three classes of NAVAIDs are:

- a. T– Terminal
- b. L– Low altitude

c. H– High altitude

Note: The normal service range for T, L, and H class aids is found in the AIM. Certain operational requirements make it necessary to use some of these aids at greater service ranges than specified. Extended range is made possible through flight inspection determinations. Some aids also have lesser service range due to location, terrain, frequency protection, etc. Restrictions to service range are listed in Airport/Facility Directory.

NAVIGABLE AIRSPACE– Airspace at and above the minimum flight altitudes prescribed in the CFRs, including airspace needed for safe takeoff and landing.

(Refer to 14 CFR Part 91.)

NAVIGATION REFERENCE SYSTEM (NRS) – The NRS is a system of waypoints developed for use within the United States for flight planning and navigation without reference to ground-based navigational aids. The NRS waypoints are located in a grid pattern along defined latitude and longitude lines. The initial use of the NRS will be in the high altitude environment in conjunction with the High Altitude Redesign initiative. The NRS waypoints are intended for use by aircraft capable of point-to-point navigation.

NAVIGATION SPECIFICATION (ICAO) – A set of aircraft and flight crew requirements needed to support performance-based navigation operations within a defined airspace. There are two kinds of navigation specifications:

a. RNP specification A navigation specification based on area navigation that includes the requirement for performance monitoring and alerting, designated by the prefix RNP, e.g., RNP 4, RNP APCH.

b. RNAV specification A navigation specification based on area navigation that does not include the requirement for performance monitoring and alerting, designated by the prefix RNAV, e.g., RNAV 5, RNAV 1.

Note: The Performance-based Navigation Manual (Doc 9613), Volume II contains detailed guidance on navigation specifications.

NAVIGATIONAL AID– Any visual or electronic device airborne or on the surface which provides point to point guidance information or position data to aircraft in flight

(See AIR NAVIGATION FACILITY.)

NBCAP AIRSPACE–

(See NATIONAL BEACON CODE ALLOCATION PLAN AIRSPACE.)

NDB–

(See NONDIRECTIONAL BEACON.)

NEGATIVE– No or permission not granted or that is not correct

NEGATIVE CONTACT– Used by pilots to inform ATC that

a. Previously issued traffic is not in sight. It may be followed by the pilot's request for the controller to provide assistance in avoiding the traffic

b. They were unable to contact ATC on a particular frequency

NFDC–

(See NATIONAL FLIGHT DATA CENTER.)

NFDD–

(See NATIONAL FLIGHT DATA DIGEST.)

NIGHT– The time between the end of evening civil twilight and the beginning of morning civil twilight as published in the Air Almanac converted to local time

(See ICAO term NIGHT.)

NIGHT ICAO – The hours between the end of evening civil twilight and the beginning of morning civil twilight or such other period between sunset and sunrise as may be specified by the appropriate authority

Note: Civil twilight ends in the evening when the center of the sun's disk is 6 degrees below the horizon and begins in the morning when the center of the sun's disk is 6 degrees below the horizon.

NO GYRO APPROACH– A radar approach/vector provided in case of a malfunctioning gyro compass or directional gyro. Instead of providing the pilot with headings to be flown, the controller observes the radar track and issues control instructions: turn right/left or stop turn as appropriate
(Refer to AIM.)

NO GYRO VECTOR–

(See NO GYRO APPROACH.)

NO TRANSGRESSION ZONE (NTZ)– The NTZ is a 2 000 foot wide zone located equidistant between parallel runway final approach courses in which flight is not allowed

NONAPPROACH CONTROL TOWER– Authorizes aircraft to land or takeoff at the airport controlled by the tower or to transit the Class D airspace. The primary function of a nonapproach control tower is the sequencing of aircraft in the traffic pattern and on the landing area. Nonapproach control towers also separate aircraft operating under instrument flight rules clearances from approach controls and centers. They provide ground control services to aircraft vehicles, personnel, and equipment on the airport movement area.

NONCOMMON ROUTE/PORTION– That segment of a North American Route between the inland navigation facility and a designated North American terminal

NONCOMPOSITE SEPARATION– Separation in accordance with minima other than the composite separation minimum specified for the area concerned

NONDIRECTIONAL BEACON– An L/MF or UHF radio beacon transmitting nondirectional signals whereby the pilot of an aircraft equipped with direction finding equipment can determine his/her bearing to or from the radio beacon and home on or track to or from the station. When the radio beacon is installed in conjunction with the Instrument Landing System marker, it is normally called a Compass Locator

(See AUTOMATIC DIRECTION FINDER.)

(See COMPASS LOCATOR.)

NONMOVEMENT AREAS– Taxiways and apron ramp areas not under the control of air traffic

NONPRECISION APPROACH–

(See NONPRECISION APPROACH PROCEDURE.)

NONPRECISION APPROACH PROCEDURE– A standard instrument approach procedure in which no electronic glideslope is provided, e.g., VOR, TACAN, NDB, LOC, ASR, LDA, or SDF approaches

NONRADAR– Precedes other terms and generally means without the use of radar, such as

a. Nonradar Approach. Used to describe instrument approaches for which course guidance on final

approach is not provided by ground based precision or surveillance radar. Radar vectors to the final approach course may or may not be provided by ATC. Examples of nonradar approaches are VOR, NDB, TACAN, and ILS/MLS approaches.

(See FINAL APPROACH COURSE.)

(See FINAL APPROACH-IFR.)

(See INSTRUMENT APPROACH PROCEDURE.)

(See RADAR APPROACH.)

b. Nonradar Approach Control. An ATC facility providing approach control service without the use of radar.

(See APPROACH CONTROL FACILITY.)

(See APPROACH CONTROL SERVICE.)

c. Nonradar Arrival. An aircraft arriving at an airport without radar service or at an airport served by a radar facility and radar contact has not been established or has been terminated due to a lack of radar service to the airport.

(See RADAR ARRIVAL.)

(See RADAR SERVICE.)

d. Nonradar Route. A flight path or route over which the pilot is performing his/her own navigation. The pilot may be receiving radar separation, radar monitoring, or other ATC services while on a nonradar route.

(See RADAR ROUTE.)

e. Nonradar Separation. The spacing of aircraft in accordance with established minima without the use of radar, e.g., vertical, lateral, or longitudinal separation.

(See RADAR SEPARATION.)

(See ICAO term NONRADAR SEPARATION.)

NONRADAR SEPARATION. ICAO – The separation used when aircraft position information is derived from sources other than radar.

NON-RESTRICTIVE ROUTING. NRR – Portions of a proposed route of flight where a user can flight plan the most advantageous flight path with no requirement to make reference to ground-based NAVAIDS.

NOPAC–

(See NORTH PACIFIC.)

NORDO. No Radio – Aircraft that cannot or do not communicate by radio when radio communication is required are referred to as NORDO.

(See LOST COMMUNICATIONS.)

NORMAL OPERATING ONE NO – The NO is the operating one within which aircraft flight remains during normal independent simultaneous parallel ILS approaches.

NORTH AMERICAN ROUTE– A numerically coded route preplanned over existing airway and route systems to and from specific coastal fixes serving the North Atlantic. North American Routes consist of the following:

a. Common Route/Portion. That segment of a North American Route between the inland navigation facility and the coastal fix.

b. Noncommon Route/Portion. That segment of a North American Route between the inland navigation facility and a designated North American terminal.

c. Inland Navigation Facility. A navigation aid on a North American Route at which the common route and/or the noncommon route begins or ends.

d. Coastal Fix. A navigation aid or intersection where an aircraft transitions between the domestic route structure and the oceanic route structure.

NORTH AMERICAN ROUTE PROGRAM (NRP) – The NRP is a set of rules and procedures which are designed to increase the flexibility of user flight planning within published guidelines.

NORTH MARK– A beacon data block sent by the host computer to be displayed by the ARTS on a 360 degree bearing at a locally selected radar azimuth and distance. The North Mark is used to ensure correct range/azimuth orientation during periods of CENRAP.

NORTH PACIFIC– An organized route system between the Alaskan west coast and Japan.

NOTAM–

(See NOTICE TO AIRMEN.)

NOTAM. ICAO – A notice containing information concerning the establishment, condition, or change in any aeronautical facility, service, procedure, or hazard the timely knowledge of which is essential to personnel concerned with flight operations.

a. I Distribution– Distribution by means of telecommunication.

b. II Distribution– Distribution by means other than telecommunications.

NOTICE TO AIRMEN– A notice containing information not known sufficiently in advance to be publicized by other means concerning the

establishment condition or change in any component facility service or procedure of or hazard in the National Airspace System the timely knowledge of which is essential to personnel concerned with flight operations

a. NOTAM D – A NOTAM given in addition to local dissemination distant dissemination beyond the area of responsibility of the Flight Service Station These NOTAMs will be stored and available until canceled

b. FDC NOTAM– A NOTAM regulatory in nature transmitted by USNOF and given system wide dissemination

(See ICAO term NOTAM.)

NOTICES TO AIRMEN PUBLICATION– A publication issued every 28 days designed primarily for the pilot which contains current NOTAM

information considered essential to the safety of flight as well as supplemental data to other aeronautical publications The contraction NTAP is used in NOTAM text

(See NOTICE TO AIRMEN.)

NRR–

(See NON-RESTRICTIVE ROUTING.)

NRS–

(See NAVIGATION REFERENCE SYSTEM.)

NTAP–

(See NOTICES TO AIRMEN PUBLICATION.)

NUMEROUS TARGETS VICINITY (LOCATION)– A traffic advisory issued by ATC to advise pilots that targets on the radar scope are too numerous to issue individually

(See TRAFFIC ADVISORIES.)

O

OBSTACLE– An existing object or object of natural growth or terrain at a fixed geographical location or which may be expected at a fixed location within a prescribed area with reference to which vertical clearance is or must be provided during flight operation

OBSTACLE DEPARTURE PROCEDURE (ODP) – A preplanned instrument flight rule (IFR) departure procedure printed for pilot use in textual or graphic form to provide obstruction clearance via the least onerous route from the terminal area to the appropriate en route structure. ODPs are recommended for obstruction clearance and may be flown without ATC clearance unless an alternate departure procedure (SID or radar vector) has been specifically assigned by ATC.

(See IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES.)

(See STANDARD INSTRUMENT DEPARTURES.)

(Refer to AIM.)

OBSTACLE FREE ZONE– The OFZ is a three dimensional volume of airspace which protects for the transition of aircraft to and from the runway. The OFZ clearing standard precludes taxiing and parked airplanes and object penetrations except for frangible NAVAID locations that are fixed by function. Additionally, vehicles, equipment and personnel may be authorized by air traffic control to enter the area using the provisions of FAAO JO 7110.65, Para 3–1–5, VEHICLES/EQUIPMENT/PERSONNEL ON RUNWAYS. The runway OFZ and when applicable the inner approach OFZ and the inner transitional OFZ comprise the OFZ.

a. Runway OFZ– The runway OFZ is a defined volume of airspace centered above the runway. The runway OFZ is the airspace above a surface whose elevation at any point is the same as the elevation of the nearest point on the runway centerline. The runway OFZ extends 200 feet beyond each end of the runway. The width is as follows:

1. For runways serving large airplanes the greater of

(a) 400 feet or

(b) 180 feet plus the wingspan of the most demanding airplane plus 20 feet per 1 000 feet of airport elevation

2. For runways serving only small airplanes

(a) 300 feet for precision instrument runways

(b) 250 feet for other runways serving small airplanes with approach speeds of 50 knots or more

(c) 120 feet for other runways serving small airplanes with approach speeds of less than 50 knots

b. Inner approach OFZ– The inner approach OFZ is a defined volume of airspace centered on the approach area. The inner approach OFZ applies only to runways with an approach lighting system. The inner approach OFZ begins 200 feet from the runway threshold at the same elevation as the runway threshold and extends 200 feet beyond the last light unit in the approach lighting system. The width of the inner approach OFZ is the same as the runway OFZ and rises at a slope of 50 horizontal to 1 vertical from the beginning.

c. Inner transitional OFZ– The inner transitional surface OFZ is a defined volume of airspace along the sides of the runway and inner approach OFZ and applies only to precision instrument runways. The inner transitional surface OFZ slopes 3 horizontal to 1 vertical out from the edges of the runway OFZ and inner approach OFZ to a height of 150 feet above the established airport elevation.

(Refer to AC 150/5300-13, Chapter 3.)

(Refer to FAAO JO 7110.65, Para 3–1–5, VEHICLES/EQUIPMENT/PERSONNEL ON RUNWAYS.)

OBSTRUCTION– Any object/obstacle exceeding the obstruction standards specified by 14 CFR Part 77 Subpart C.

OBSTRUCTION LIGHT– A light or one of a group of lights usually red or white frequently mounted on a surface structure or natural terrain to warn pilots of the presence of an obstruction.

OCEANIC AIRSPACE– Airspace over the oceans of the world considered international airspace where oceanic separation and procedures per the International Civil Aviation Organization are applied. Responsibility for the provisions of air traffic control

service in this airspace is delegated to various countries based generally upon geographic proximity and the availability of the required resources

OCEANIC DISPLAY AND PLANNING SYSTEM– An automated digital display system which provides flight data processing conflict probe and situation display for oceanic air traffic control

OCEANIC NAVIGATIONAL ERROR REPORT– A report filed when an aircraft exiting oceanic airspace has been observed by radar to be off course. ONER reporting parameters and procedures are contained in FAAO 7110.82 Monitoring of Navigational Performance In Oceanic Areas

OCEANIC PUBLISHED ROUTE– A route established in international airspace and charted or described in flight information publications such as Route Charts DOD Enroute Charts Chart Supplements NOTAMs and Track Messages

OCEANIC TRANSITION ROUTE– An ATS route established for the purpose of transitioning aircraft to/from an organized track system

ODAPS–

(See OCEANIC DISPLAY AND PLANNING SYSTEM.)

ODP–

(See OBSTACLE DEPARTURE PROCEDURE.)

OFF COURSE– A term used to describe a situation where an aircraft has reported a position fix or is observed on radar at a point not on the ATC approved route of flight

OFF ROUTE VECTOR– A vector by ATC which takes an aircraft off a previously assigned route. Altitudes assigned by ATC during such vectors provide required obstacle clearance

OFFSET PARALLEL RUNWAYS– Staggered runways having centerlines which are parallel

OFFSHORE/CONTROL AIRSPACE AREA– That portion of airspace between the U.S. 12 NM limit and the oceanic CTA/FIR boundary within which air traffic control is exercised. These areas are established to provide air traffic control services. Offshore/Control Airspace Areas may be classified as either Class A airspace or Class E airspace

OFT–

(See OUTER FIX TIME.)

OM–

(See OUTER MARKER.)

ON COURSE–

a. Used to indicate that an aircraft is established on the route centerline

b. Used by ATC to advise a pilot making a radar approach that his/her aircraft is lined up on the final approach course

(See ON-COURSE INDICATION.)

ON COURSE INDICATION– An indication on an instrument which provides the pilot a visual means of determining that the aircraft is located on the centerline of a given navigational track or an indication on a radar scope that an aircraft is on a given track

ONE MINUTE WEATHER– The most recent one minute updated weather broadcast received by a pilot from an uncontrolled airport ASOS/AWSS/AWOS

ONER–

(See OCEANIC NAVIGATIONAL ERROR REPORT.)

OPERATIONAL–

(See DUE REGARD.)

OPERATIONS SPECIFICATIONS ICAO – The authorizations, conditions and limitations associated with the air operator certificate and subject to the conditions in the operations manual

OPPOSITE DIRECTION AIRCRAFT– Aircraft are operating in opposite directions when

a. They are following the same track in reciprocal directions or

b. Their tracks are parallel and the aircraft are flying in reciprocal directions or

c. Their tracks intersect at an angle of more than 135°

OPTION APPROACH– An approach requested and conducted by a pilot which will result in either a touch and go missed approach, low approach stop and go or full stop landing

(See CLEARED FOR THE OPTION.)

(Refer to AIM.)

ORGANIZED TRACK SYSTEM– A series of ATS routes which are fixed and charted, i.e., CEP, NOPAC, or flexible and described by NOTAM, i.e., NAT TRACK MESSAGE

OROCA– An off route altitude which provides obstruction clearance with a 1 000 foot buffer in nonmountainous terrain areas and a 2 000 foot buffer in designated mountainous areas within the United States. This altitude may not provide signal coverage from ground based navigational aids, air traffic control radar, or communications coverage.

OTR–

(See OCEANIC TRANSITION ROUTE.)

OTS–

(See ORGANIZED TRACK SYSTEM.)

OUT– The conversation is ended and no response is expected.

OUTER AREA associated with Class C airspace – Nonregulatory airspace surrounding designated Class C airspace airports wherein ATC provides radar vectoring and sequencing on a full time basis for all IFR and participating VFR aircraft. The service provided in the outer area is called Class C service which includes IFR/IFR–standard IFR separation, IFR/VFR–traffic advisories and conflict resolution, and VFR/VFR–traffic advisories and, as appropriate, safety alerts. The normal radius will be 20 nautical miles with some variations based on site specific requirements. The outer area extends outward from the primary Class C airspace airport and extends from the lower limits of radar/radio coverage up to the ceiling of the approach control's delegated airspace, excluding the Class C charted area and other airspace as appropriate.

(See CONFLICT RESOLUTION.)

(See CONTROLLED AIRSPACE.)

OUTER COMPASS LOCATOR–

(See COMPASS LOCATOR.)

OUTER FIX – A general term used within ATC to describe fixes in the terminal area other than the final approach fix. Aircraft are normally cleared to these fixes by an Air Route Traffic Control Center or an Approach Control Facility. Aircraft are normally cleared from these fixes to the final approach fix or final approach course.

OR

OUTER FIX – An adapted fix along the converted route of flight prior to the meter fix for which crossing times are calculated and displayed in the metering position list.

OUTER FIX ARC– A semicircle, usually about a 50–70 mile radius from a meter fix, usually in high altitude, which is used by CTAS/HOST to calculate outer fix times and determine appropriate sector meter list assignments for aircraft on an established arrival route that will traverse the arc.

OUTER FIX TIME– A calculated time to depart the outer fix in order to cross the vertex at the ACLT. The time reflects descent speed adjustments and any applicable delay time that must be absorbed prior to crossing the meter fix.

OUTER MARKER– A marker beacon at or near the glideslope intercept altitude of an ILS approach. It is keyed to transmit two dashes per second on a 400 Hz tone, which is received aurally and visually by compatible airborne equipment. The OM is normally located four to seven miles from the runway threshold on the extended centerline of the runway.

(See INSTRUMENT LANDING SYSTEM.)

(See MARKER BEACON.)

(Refer to AIM.)

OVER– My transmission is ended. I expect a response.

OVERHEAD MANEUVER– A series of predetermined maneuvers prescribed for aircraft, often in formation, for entry into the visual flight rules (VFR) traffic pattern and to proceed to a landing. An overhead maneuver is not an instrument flight rules (IFR) approach procedure. An aircraft executing an overhead maneuver is considered VFR and the IFR flight plan is cancelled when the aircraft reaches the initial point on the initial approach portion of the maneuver. The pattern usually specifies the following:

- a. The radio contact required of the pilot
- b. The speed to be maintained
- c. An initial approach 3 to 5 miles in length
- d. An elliptical pattern consisting of two 180 degree turns
- e. A break point at which the first 180 degree turn is started
- f. The direction of turns
- g. Altitude at least 500 feet above the conventional pattern
- h. A Roll out on final approach not less than 1/4 mile from the landing threshold and not less than 300 feet above the ground

OVERLAPPING CENTER– The ARTCC facility that is responsible for arrival/departure operations at a specific terminal

P

P TIME–

(See PROPOSED DEPARTURE TIME.)

P ACP–

(See PREARRANGED COORDINATION PROCEDURES.)

PAN PAN– The international radio telephony urgency signal. When repeated three times, indicates uncertainty or alert followed by the nature of the urgency.

(See MAYDAY.)

(Refer to AIM.)

PAR–

(See PRECISION APPROACH RADAR.)

PAR ICAO –

(See ICAO Term PRECISION APPROACH RADAR.)

PARALLEL ILS APPROACHES– Approaches to parallel runways by IFR aircraft which when established inbound toward the airport on the adjacent final approach courses are radar separated by at least 2 miles.

(See FINAL APPROACH COURSE.)

(See SIMULTANEOUS ILS APPROACHES.)

PARALLEL MLS APPROACHES–

(See PARALLEL ILS APPROACHES.)

PARALLEL OFFSET ROUTE– A parallel track to the left or right of the designated or established airway/route. Normally associated with Area Navigation RNAV operations.

(See AREA NAVIGATION.)

PARALLEL RUNWAYS– Two or more runways at the same airport whose centerlines are parallel. In addition to runway number, parallel runways are designated as L (left) and R (right) or if three parallel runways exist L (left), C (center), and R (right).

PBCT–

(See PROPOSED BOUNDARY CROSSING TIME.)

PBN

(See ICAO Term PERFORMANCE-BASED NAVIGATION.)

PDC–

(See PRE-DEPARTURE CLEARANCE.)

PERFORMANCE-BASED NAVIGATION (PBN)

ICAO – Area navigation based on performance requirements for aircraft operating along an ATS route on an instrument approach procedure or in a designated airspace.

Note: Performance requirements are expressed in navigation specifications (RNAV specification, RNP specification) in terms of accuracy, integrity, continuity, availability, and functionality needed for the proposed operation in the context of a particular airspace concept.

PERMANENT ECHO– Radar signals reflected from fixed objects on the earth's surface, e.g., buildings, towers, terrain. Permanent echoes are distinguished from ground clutter by being definable locations rather than large areas. Under certain conditions they may be used to check radar alignment.

PHOTO RECONNAISSANCE– Military activity that requires locating individual photo targets and navigating to the targets at a preplanned angle and altitude. The activity normally requires a lateral route width of 16 NM and altitude range of 1 500 feet to 10 000 feet AGL.

PILOT BRIEFING– A service provided by the FSS to assist pilots in flight planning. Briefing items may include weather information, NOTAMS, military activities, flow control information, and other items as requested.

(Refer to AIM.)

PILOT IN COMMAND– The pilot responsible for the operation and safety of an aircraft during flight time.

(Refer to 14 CFR Part 91.)

PILOT WEATHER REPORT– A report of meteorological phenomena encountered by aircraft in flight.

(Refer to AIM.)

PILOT'S DISCRETION– When used in conjunction with altitude assignments, means that ATC has offered the pilot the option of starting climb or descent whenever he/she wishes and conducting the climb or descent at any rate he/she wishes. He/she may temporarily level off at any intermediate

altitude. However, once he/she has vacated an altitude, he/she may not return to that altitude.

PIREP–

(See PILOT WEATHER REPORT.)

PITCH POINT– A fix/waypoint that serves as a transition point from a departure procedure or the low altitude ground-based navigation structure into the high altitude waypoint system.

PLANS DISPLAY – A display available in URET that provides detailed flight plan and predicted conflict information in textual format for requested Current Plans and all Trial Plans.

(See USER REQUEST EVALUATION TOOL.)

POF –

(See PRECISION OBSTACLE FREE ZONE.)

POINT OUT–

(See RADAR POINT OUT.)

POINT-TO-POINT (PTP) – A level of NRR service for aircraft that is based on traditional waypoints in their FMSs or RNAV enroute page.

POLAR TRACK STRUCTURE– A system of organized routes between Iceland and Alaska which overlies Canadian MNPS Airspace.

POSITION REPORT– A report over a known location as transmitted by an aircraft to ATC.

(Refer to AIM.)

POSITION Symbol– A computer generated indication shown on a radar display to indicate the mode of tracking.

POSITIVE CONTROL– The separation of all air traffic within designated airspace by air traffic control.

PRACTICE INSTRUMENT APPROACH– An instrument approach procedure conducted by a VFR or an IFR aircraft for the purpose of pilot training or proficiency demonstrations.

PRE-DEPARTURE CLEARANCE– An application with the Terminal Data Link System (TDLS) that provides clearance information to subscribers through a service provider in text to the cockpit or gate printer.

PREARRANGED COORDINATION– A standardized procedure which permits an air traffic controller to enter the airspace assigned to another air traffic controller without verbal coordination. The procedures are defined in a facility directive which ensures standard separation between aircraft.

PREARRANGED COORDINATION PROCEDURES– A facility's standardized procedure that describes the process by which one controller shall allow an aircraft to penetrate or transit another controller's airspace in a manner that assures standard separation without individual coordination for each aircraft.

PRECIPITATION– Any or all forms of water particles (rain, sleet, hail, or snow) that fall from the atmosphere and reach the surface.

PRECIPITATION RADAR WEATHER DESCRIPTIONS – Existing radar systems cannot detect turbulence. However, there is a direct correlation between the degree of turbulence and other weather features associated with thunderstorms and the weather radar precipitation intensity. Controllers will issue where capable precipitation intensity as observed by radar when using weather and radar processor WARP or NAS ground based digital radars with weather capabilities. When precipitation intensity information is not available, the intensity will be described as UNKNOWN. When intensity levels can be determined, they shall be described as:

- a. LIGHT 30 dB
- b. MODERATE 30 to 40 dB
- c. HEAVY 40 to 50 dB
- d. EXTREME 50 dB

Refer to AC 00-45 Aviation Weather Services

PRECISION APPROACH–

(See PRECISION APPROACH PROCEDURE.)

PRECISION APPROACH PROCEDURE– A standard instrument approach procedure in which an electronic glideslope/glidepath is provided (e.g., ILS, MLS, and PAR).

(See INSTRUMENT LANDING SYSTEM.)

(See MICROWAVE LANDING SYSTEM.)

(See PRECISION APPROACH RADAR.)

PRECISION APPROACH RADAR– Radar equipment in some ATC facilities operated by the FAA and/or the military services at joint use civil/military locations and separate military installations to detect and display altitude, elevation, and range of aircraft on the final approach course to a runway. This equipment may be used to monitor certain nonradar approaches, but is primarily used to conduct a precision instrument approach (PAR). Herein the controller issues guidance instructions to the pilot based on the aircraft's position in relation to the final approach course, altitude, the glidepath, elevation, and the distance (range) from the touchdown point on the runway as displayed on the radar scope.

Note: The abbreviation "PAR" is also used to denote preferential arrival routes in ARTCC computers.

(See GLIDEPATH.)

(See PAR.)

(See PREFERENTIAL ROUTES.)

(See ICAO term PRECISION APPROACH RADAR.)

(Refer to AIM.)

PRECISION APPROACH RADAR (ICAO) – Primary radar equipment used to determine the position of an aircraft during final approach in terms of lateral and vertical deviations relative to a nominal approach path and in range relative to touchdown.

Note: Precision approach radars are designed to enable pilots of aircraft to be given guidance by radio communication during the final stages of the approach to land.

PRECISION OBSTACLE FREE ZONE (POFZ) – An 800 foot wide by 200 foot long area centered on the runway centerline and adjacent to the threshold designed to protect aircraft flying precision approaches from ground vehicles and other aircraft when ceiling is less than 250 feet or visibility is less than 3/4 statute mile or runway visual range below 4,000 feet.

PRECISION RUNWAY MONITOR (PRM) – Provides air traffic controllers monitoring the NT during simultaneous close parallel approaches with high precision secondary surveillance data. A PRM is required for simultaneous independent operations when runway centerlines or in the case of SOIA final approach courses are separated by less than 3,600 feet. High resolution color monitoring display (FMA) presents NT surveillance track data to

controllers along with detailed maps depicting approaches and no transgression zone.

(Refer to AIM.)

PREDICTIVE WIND SHEAR ALERT SYSTEM

PWS – A self-contained system used onboard some aircraft to alert the flight crew to the presence of a potential wind shear. PWS systems typically monitor 3 miles ahead and 25 degrees left and right of the aircraft's heading at or below 1,200 AGL. Departing flights may receive a wind shear alert after they start the takeoff roll and may elect to abort the takeoff. Aircraft on approach receiving an alert may elect to go around or perform a wind shear escape maneuver.

PREFERENTIAL ROUTES– Preferential routes

(PDRs, PARs, and PDARs) are adapted in ARTCC computers to accomplish inter/intrafacility controller coordination and to assure that flight data is posted at the proper control positions. Locations having a need for these specific inbound and outbound routes normally publish such routes in local facility bulletins, and their use by pilots minimizes flight plan route amendments. When the workload or traffic situation permits, controllers normally provide radar vectors or assign requested routes to minimize circuitous routing. Preferential routes are usually confined to one ARTCC's area and are referred to by the following names or acronyms:

a. Preferential Departure Route (PDR) A specific departure route from an airport or terminal area to an en route point where there is no further need for flow control. It may be included in an Instrument Departure Procedure (DP) or a Preferred IFR Route.

b. Preferential Arrival Route (PAR) A specific arrival route from an appropriate en route point to an airport or terminal area. It may be included in a Standard Terminal Arrival (STAR) or a Preferred IFR Route. The abbreviation PAR is used primarily within the ARTCC and should not be confused with the abbreviation for Precision Approach Radar.

c. Preferential Departure and Arrival Route (PDAR) A route between two terminals which are within or immediately adjacent to one ARTCC's area. PDARs are not synonymous with Preferred IFR Routes but may be listed as such as they do accomplish essentially the same purpose.

(See PREFERRED IFR ROUTES.)

PREFERRED IFR ROUTES– Routes established between busier airports to increase system efficiency and capacity. They normally extend through one or

more ARTCC areas and are designed to achieve balanced traffic flows among high density terminals. IFR clearances are issued on the basis of these routes except when severe weather avoidance procedures or other factors dictate otherwise. Preferred IFR Routes are listed in the Airport/Facility Directory. If a flight is planned to or from an area having such routes but the departure or arrival point is not listed in the Airport/Facility Directory, pilots may use that part of a Preferred IFR Route which is appropriate for the departure or arrival point that is listed. Preferred IFR Routes are correlated with DPs and STARs and may be defined by airways, set routes, direct routes, between NAVAIDs, Waypoints, NAVAID radials/DME, or any combinations thereof.

(See CENTER'S AREA.)

(See INSTRUMENT DEPARTURE PROCEDURE.)

(See PREFERENTIAL ROUTES.)

(See STANDARD TERMINAL ARRIVAL.)

(Refer to AIRPORT/FACILITY DIRECTORY.)

(Refer to NOTICES TO AIRMEN PUBLICATION.)

PRE FLIGHT PILOT BRIEFING–

(See PILOT BRIEFING.)

PREVAILING VISIBILITY –

(See VISIBILITY.)

PRIMARY RADAR TARGET– An analog or digital target, exclusive of a secondary radar target, presented on a radar display.

PRM–

(See ILS PRM APPROACH and PRECISION RUNWAY MONITOR.)

PROCEDURE TURN– The maneuver prescribed when it is necessary to reverse direction to establish an aircraft on the intermediate approach segment or final approach course. The outbound course, direction of turn, distance, within which the turn must be completed, and minimum altitude are specified in the procedure. However, unless otherwise restricted, the point at which the turn may be commenced and the type and rate of turn are left to the discretion of the pilot.

(See ICAO term PROCEDURE TURN.)

PROCEDURE TURN ICAO – A maneuver in which a turn is made away from a designated track followed by a turn in the opposite direction to permit

the aircraft to intercept and proceed along the reciprocal of the designated track.

Note 1: Procedure turns are designated “left” or “right” according to the direction of the initial turn.

Note 2: Procedure turns may be designated as being made either in level flight or while descending, according to the circumstances of each individual approach procedure.

PROCEDURE TURN INBOUND– That point of a procedure turn maneuver where course reversal has been completed and an aircraft is established inbound on the intermediate approach segment or final approach course. A report of procedure turn inbound is normally used by ATC as a position report for separation purposes.

(See FINAL APPROACH COURSE.)

(See PROCEDURE TURN.)

(See SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE.)

PROFILE DESCENT– An uninterrupted descent except where level flight is required for speed adjustment, e.g., 250 knots at 10 000 feet MSL, from cruising altitude/level to interception of a glideslope or to a minimum altitude specified for the initial or intermediate approach segment of a nonprecision instrument approach. The profile descent normally terminates at the approach gate or where the glideslope or other appropriate minimum altitude is intercepted.

PROGRESS REPORT–

(See POSITION REPORT.)

PROGRESSIVE TAXI– Precise taxi instructions given to a pilot unfamiliar with the airport or issued in stages as the aircraft proceeds along the taxi route.

PROHIBITED AREA–

(See SPECIAL USE AIRSPACE.)

(See ICAO term PROHIBITED AREA.)

PROHIBITED AREA ICAO – An airspace of defined dimensions above the land areas or territorial waters of a State within which the flight of aircraft is prohibited.

PROMINENT OBSTACLE – An obstacle that meets one or more of the following conditions:

a. An obstacle which stands out beyond the adjacent surface of surrounding terrain and immediately projects a noticeable hazard to aircraft in flight.

b. An obstacle not characterized as low and close in whose height is no less than 300 feet above the

departure end of takeoff run way DER elevation is within 10NM from the DER and that penetrates that airport/heliport's diverse departure obstacle clearance surface OCS

- c. An obstacle beyond 10NM from an airport/heliport that requires an obstacle departure procedure ODP to ensure obstacle avoidance
(See OBSTACLE.)
(See OBSTRUCTION.)

PROPOSED BOUNDARY CROSSING TIME– Each center has a PBCT parameter for each internal airport. Proposed internal flight plans are transmitted to the adjacent center if the flight time along the proposed route from the departure airport to the center boundary is less than or equal to the value of PBCT or if airport adaptation specifies transmission regardless of PBCT.

PROPOSED DEPARTURE TIME– The time that the aircraft expects to become airborne.

PROTECTED AIRSPACE– The airspace on either side of an oceanic route/track that is equal to one half the lateral separation minimum except where reduction of protected airspace has been authorized.

PROTECTED SEGMENT– The protected segment is a segment on the amended TFM route that is to be

inhibited from automatic adapted route alteration by ERAM.

PT–
(See PROCEDURE TURN.)

PTP–
(See POINT-TO-POINT.)

PTS–
(See POLAR TRACK STRUCTURE.)

PUBLISHED INSTRUMENT APPROACH PROCEDURE VISUAL SEGMENT– A segment on an IAP chart annotated as Fly Visual to Airport or Fly Visual. A dashed arrow will indicate the visual flight path on the profile and plan view with an associated note on the approximate heading and distance. The visual segment should be flown as a dead reckoning course while maintaining visual conditions.

PUBLISHED ROUTE– A route for which an IFR altitude has been established and published e.g. Federal Airways Jet Routes Area Navigation Routes Specified Direct Routes.

PWS–
(See PREDICTIVE WIND SHEAR ALERT SYSTEM.)

Q

Q ROUTE– Q is the designator assigned to published RNAV routes used by the United States

QNE– The barometric pressure used for the standard altimeter setting 29.92 inches Hg

QNH– The barometric pressure as reported by a particular station

QUADRANT– A quarter part of a circle centered on a NAVAID oriented clockwise from magnetic north

as follows NE quadrant 000-089 SE quadrant 090-179 SW quadrant 180-269 NW quadrant 270-359

QUEUING–

(See STAGING/QUEUING.)

QUICK LOOK– A feature of the EAS and ARTS which provides the controller the capability to display full data blocks of tracked aircraft from other control positions

R

RAA–

(See REMOTE AIRPORT ADVISORY.)

RADAR– A device which by measuring the time interval between transmission and reception of radio pulses and correlating the angular orientation of the radiated antenna beam or beams in azimuth and/or elevation provides information on range azimuth and/or elevation of objects in the path of the transmitted pulses

a. Primary Radar– A radar system in which a minute portion of a radio pulse transmitted from a site is reflected by an object and then received back at that site for processing and display at an air traffic control facility

b. Secondary Radar/Radar Beacon ATCRBS – A radar system in which the object to be detected is fitted with cooperative equipment in the form of a radio receiver/transmitter transponder Radar pulses transmitted from the searching transmitter/receiver interrogator site are received in the cooperative equipment and used to trigger a distinctive transmission from the transponder This reply transmission rather than a reflected signal is then received back at the transmitter/receiver site for processing and display at an air traffic control facility

(See INTERROGATOR.)

(See TRANSPONDER.)

(See ICAO term RADAR.)

(Refer to AIM.)

RADAR ICAO – A radio detection device which provides information on range azimuth and/or elevation of objects

a. Primary Radar– Radar system which uses reflected radio signals

b. Secondary Radar– Radar system wherein a radio signal transmitted from a radar station initiates the transmission of a radio signal from another station

RADAR ADVISOR – The provision of advice and information based on radar observations

(See ADVISORY SERVICE.)

RADAR ALTIMETER–

(See RADIO ALTIMETER.)

RADAR APPROACH– An instrument approach procedure which utilizes Precision Approach Radar PAR or Airport Surveillance Radar ASR

(See AIRPORT SURVEILLANCE RADAR.)

(See INSTRUMENT APPROACH PROCEDURE.)

(See PRECISION APPROACH RADAR.)

(See SURVEILLANCE APPROACH.)

(See ICAO term RADAR APPROACH.)

(Refer to AIM.)

RADAR APPROACH ICAO – An approach executed by an aircraft under the direction of a radar controller

RADAR APPROACH CONTROL FACILITY – A terminal ATC facility that uses radar and nonradar capabilities to provide approach control services to aircraft arriving departing or transiting airspace controlled by the facility

(See APPROACH CONTROL SERVICE.)

a. Provides radar ATC services to aircraft operating in the vicinity of one or more civil and/or military airports in a terminal area The facility may provide services of a ground controlled approach GCA i.e. ASR and PAR approaches A radar approach control facility may be operated by FAA USAF US Army USN USMC or jointly by FAA and a military service Specific facility nomenclatures are used for administrative purposes only and are related to the physical location of the facility and the operating service generally as follows

1. Army Radar Approach Control ARAC Army

2. Radar Air Traffic Control Facility RATCF Navy/FAA

3. Radar Approach Control RAPCON Air Force/FAA

4. Terminal Radar Approach Control TRACON FAA

5. Air Traffic Control Tower ATCT FAA
Only those towers delegated approach control authority

RADAR ARRIVAL– An aircraft arriving at an airport served by a radar facility and in radar contact with the facility

(See NONRADAR.)

RADAR BEACON–

(See RADAR.)

RADAR CLUTTER ICAO – The visual indication on a radar display of unwanted signals

RADAR CONTACT–

a. Used by ATC to inform an aircraft that it is identified on the radar display and radar flight following will be provided until radar identification is terminated. Radar service may also be provided within the limits of necessity and capability. When a pilot is informed of radar contact, he/she automatically discontinues reporting over compulsory reporting points.

(See RADAR CONTACT LOST.)

(See RADAR FLIGHT FOLLOWING.)

(See RADAR SERVICE.)

(See RADAR SERVICE TERMINATED.)

(Refer to AIM.)

b. The term used to inform the controller that the aircraft is identified and approval is granted for the aircraft to enter the receiving controller's airspace.

(See ICAO term RADAR CONTACT.)

RADAR CONTACT ICAO – The situation which exists when the radar blip or radar position symbol of a particular aircraft is seen and identified on a radar display.

RADAR CONTACT LOST– Used by ATC to inform a pilot that radar data used to determine the aircraft's position is no longer being received or is no longer reliable and radar service is no longer being provided. The loss may be attributed to several factors including the aircraft merging with either or ground clutter, the aircraft operating below radar line of sight coverage, the aircraft entering an area of poor radar return, failure of the aircraft transponder, or failure of the ground radar equipment.

(See CLUTTER.)

(See RADAR CONTACT.)

RADAR ENVIRONMENT– An area in which radar service may be provided.

(See ADDITIONAL SERVICES.)

(See RADAR CONTACT.)

(See RADAR SERVICE.)

(See TRAFFIC ADVISORIES.)

RADAR FLIGHT FOLLOWING– The observation of the progress of radar identified aircraft whose primary navigation is being provided by the pilot

herein the controller retains and correlates the aircraft identity with the appropriate target or target symbol displayed on the radar scope.

(See RADAR CONTACT.)

(See RADAR SERVICE.)

(Refer to AIM.)

RADAR IDENTIFICATION– The process of ascertaining that an observed radar target is the radar return from a particular aircraft.

(See RADAR CONTACT.)

(See RADAR SERVICE.)

(See ICAO term RADAR IDENTIFICATION.)

RADAR IDENTIFICATION ICAO – The process of correlating a particular radar blip or radar position symbol with a specific aircraft.

RADAR IDENTIFIED AIRCRAFT– An aircraft the position of which has been correlated with an observed target or symbol on the radar display.

(See RADAR CONTACT.)

(See RADAR CONTACT LOST.)

RADAR MONITORING–

(See RADAR SERVICE.)

RADAR NAVIGATIONAL GUIDANCE–

(See RADAR SERVICE.)

RADAR POINT OUT– An action taken by a controller to transfer the radar identification of an aircraft to another controller if the aircraft will or may enter the airspace or protected airspace of another controller and radio communications will not be transferred.

RADAR REQUIRED– A term displayed on charts and approach plates and included in FDC NOTAMs to alert pilots that segments of either an instrument approach procedure or a route are not navigable because of either the absence or unusability of a NAVAID. The pilot can expect to be provided radar navigational guidance while transiting segments labeled with this term.

(See RADAR ROUTE.)

(See RADAR SERVICE.)

RADAR ROUTE– A flight path or route over which an aircraft is vectored. Navigational guidance and altitude assignments are provided by ATC.

(See FLIGHT PATH.)

(See ROUTE.)

RADAR SEPARATION–

(See RADAR SERVICE.)

RADAR SERVICE– A term which encompasses one or more of the following services based on the use of radar which can be provided by a controller to a pilot of a radar identified aircraft

a. Radar Monitoring– The radar flight following of aircraft whose primary navigation is being performed by the pilot to observe and note deviations from its authorized flight path airway or route. When being applied specifically to radar monitoring of instrument approaches i.e. with precision approach radar PAR or radar monitoring of simultaneous ILS/MLS approaches it includes advice and instructions whenever an aircraft nears or exceeds the prescribed PAR safety limit or simultaneous ILS/MLS no transgression one

(See ADDITIONAL SERVICES.)

(See TRAFFIC ADVISORIES.)

b. Radar Navigational Guidance– Vectoring aircraft to provide course guidance

c. Radar Separation– Radar spacing of aircraft in accordance with established minima

(See ICAO term RADAR SERVICE.)

RADAR SERVICE ICAO – Term used to indicate a service provided directly by means of radar

a. Monitoring– The use of radar for the purpose of providing aircraft with information and advice relative to significant deviations from nominal flight path

b. Separation– The separation used when aircraft position information is derived from radar sources

RADAR SERVICE TERMINATED– Used by ATC to inform a pilot that he/she will no longer be provided any of the services that could be received while in radar contact. Radar service is automatically terminated and the pilot is not advised in the following cases

a. An aircraft cancels its IFR flight plan except within Class B airspace, Class C airspace, a TRSA or where Basic Radar service is provided

b. An aircraft conducting an instrument visual or contact approach has landed or has been instructed to change to advisory frequency

c. An arriving VFR aircraft receiving radar service to a tower controlled airport within Class B airspace, Class C airspace, a TRSA or where sequencing service is provided has landed or to all

other airports is instructed to change to tower or advisory frequency

d. An aircraft completes a radar approach

RADAR SURVEILLANCE– The radar observation of a given geographical area for the purpose of performing some radar function

RADAR TRAFFIC ADVISORIES– Advisories issued to alert pilots to known or observed radar traffic which may affect the intended route of flight of their aircraft

(See TRAFFIC ADVISORIES.)

RADAR TRAFFIC INFORMATION SERVICE–

(See TRAFFIC ADVISORIES.)

RADAR VECTORING ICAO – Provision of navigational guidance to aircraft in the form of specific headings based on the use of radar

RADIAL– A magnetic bearing extending from a VOR/VORTAC/TACAN navigation facility

RADIO–

a. A device used for communication

b. Used to refer to a flight service station e.g. Seattle Radio is used to call Seattle FSS

RADIO ALTIMETER– Aircraft equipment which makes use of the reflection of radio waves from the ground to determine the height of the aircraft above the surface

RADIO BEACON–

(See NONDIRECTIONAL BEACON.)

RADIO DETECTION AND RANGING–

(See RADAR.)

RADIO MAGNETIC INDICATOR– An aircraft navigational instrument coupled with a gyro compass or similar compass that indicates the direction of a selected NAVAID and indicates bearing with respect to the heading of the aircraft

RAIS–

(See REMOTE AIRPORT INFORMATION SERVICE.)

RAMP–

(See APRON.)

RANDOM ALTITUDE– An altitude inappropriate for direction of flight and/or not in accordance with FAAO JO 7110.65 Para 4-5-1 VERTICAL SEPARATION MINIMA

RANDOM ROUTE– Any route not established or charted/published or not otherwise available to all users

RC–

(See ROAD RECONNAISSANCE.)

RCAG–

(See REMOTE COMMUNICATIONS AIR/GROUND FACILITY.)

RCC–

(See RESCUE COORDINATION CENTER.)

RCO–

(See REMOTE COMMUNICATIONS OUTLET.)

RCR–

(See RUNWAY CONDITION READING.)

READ BACK– Repeat my message back to me

RECEIVER AUTONOMOUS INTEGRITY MONITORING RAIM – A technique whereby a civil GNSS receiver/processor determines the integrity of the GNSS navigation signals without reference to sensors or non DoD integrity systems other than the receiver itself. This determination is achieved by a consistency check among redundant pseudorange measurements

RECEIVING CONTROLLER– A controller/facility receiving control of an aircraft from another controller/facility

RECEIVING FACILITY –

(See RECEIVING CONTROLLER.)

RECONFORMANCE– The automated process of bringing an aircraft's Current Plan Trajectory into conformance with its track

REDUCE SPEED TO (SPEED)–

(See SPEED ADJUSTMENT.)

REIL–

(See RUNWAY END IDENTIFIER LIGHTS.)

RELEASE TIME– A departure time restriction issued to a pilot by ATC either directly or through an authorized relay when necessary to separate a departing aircraft from other traffic

(See ICAO term RELEASE TIME.)

RELEASE TIME ICAO – Time prior to which an aircraft should be given further clearance or prior to which it should not proceed in case of radio failure

REMOTE AIRPORT ADVISOR RAA – A remote service which may be provided by facilities

which are not located on the landing airport but have a discrete ground-to-air communication frequency or tower frequency when the tower is closed automated weather reporting with voice available to the pilot at the landing airport and a continuous ASOS/AWSS/AWOS data display other direct reading instruments or manual observation is available to the FSS specialist

REMOTE AIRPORT INFORMATION SERVICE

RAIS – A temporary service provided by facilities which are not located on the landing airport but have communication capability and automated weather reporting available to the pilot at the landing airport

REMOTE COMMUNICATIONS AIR/GROUND FACILITY – An unmanned VHF/UHF transmitter/receiver facility which is used to expand ARTCC air/ground communications coverage and to facilitate direct contact between pilots and controllers. RCAG facilities are sometimes not equipped with emergency frequencies 121.5 MHz and 243.0 MHz

(Refer to AIM.)

REMOTE COMMUNICATIONS OUTLET– An unmanned communications facility remotely controlled by air traffic personnel. RCOs serve FSSs. RTRs serve terminal ATC facilities. An RCO or RTR may be UHF or VHF and will extend the communication range of the air traffic facility. There are several classes of RCOs and RTRs. The class is determined by the number of transmitters or receivers. Classes A through G are used primarily for air/ground purposes. RCO and RTR class O facilities are nonprotected outlets subject to undetected and prolonged outages. RCO Os and RTR Os are established for the express purpose of providing ground to ground communications between air traffic control specialists and pilots located at a satellite airport for delivering en route clearances, issuing departure authorizations and acknowledging instrument flight rules cancellations or departure/landing times. As a secondary function, they may be used for advisory purposes whenever the aircraft is below the coverage of the primary air/ground frequency

REMOTE TRANSMITTER/RECEIVER–

(See REMOTE COMMUNICATIONS OUTLET.)

REPORT– Used to instruct pilots to advise ATC of specified information e.g. Report passing Hamilton VOR

REPORTING POINT– A geographical location in relation to which the position of an aircraft is reported

(See COMPULSORY REPORTING POINTS.)

(See ICAO term REPORTING POINT.)

(Refer to AIM.)

REPORTING POINT ICAO – A specified geographical location in relation to which the position of an aircraft can be reported

REQUEST FULL ROUTE CLEARANCE– Used by pilots to request that the entire route of flight be read verbatim in an ATC clearance. Such request should be made to preclude receiving an ATC clearance based on the original filed flight plan when a filed IFR flight plan has been revised by the pilot company or operations prior to departure

REQUIRED NAVIGATION PERFORMANCE RNP A statement of the navigational performance necessary for operation within a defined airspace. The following terms are commonly associated with RNP

a. Required Navigation Performance Level or Type RNP A value in nautical miles (NM) from the intended horizontal position within which an aircraft could be at least 95 percent of the total flying time

b. Required Navigation Performance RNP Airspace A generic term designating airspace route segments, operations or procedures where minimum required navigational performance RNP have been established

c. Actual Navigation Performance ANP A measure of the current estimated navigational performance. Also referred to as Estimated Position Error (EPE)

d. Estimated Position Error (EPE) A measure of the current estimated navigational performance. Also referred to as Actual Navigation Performance (ANP)

e. Lateral Navigation RNAV A function of area navigation RNAV equipment which calculates displays and provides lateral guidance to a profile or path

f. Vertical Navigation VNAV A function of area navigation RNAV equipment which calculates

displays and provides vertical guidance to a profile or path

RESCUE COORDINATION CENTER– A search and rescue (SAR) facility equipped and manned to coordinate and control SAR operations in an area designated by the SAR plan. The U.S. Coast Guard and the U.S. Air Force have responsibility for the operation of RCCs

(See ICAO term RESCUE CO-ORDINATION CENTRE.)

RESCUE CO-ORDINATION CENTRE ICAO – A unit responsible for promoting efficient organization of search and rescue service and for coordinating the conduct of search and rescue operations within a search and rescue region

RESOLUTION ADVISOR –A display indication given to the pilot by the traffic alert and collision avoidance systems (TCAS II) recommending a maneuver to increase vertical separation relative to an intruding aircraft. Positive, negative, and vertical speed limit (VSL) advisories constitute the resolution advisories. A resolution advisory is also classified as corrective or preventive

RESTRICTED AREA–

(See SPECIAL USE AIRSPACE.)

(See ICAO term RESTRICTED AREA.)

RESTRICTED AREA ICAO – An airspace of defined dimensions above the land areas or territorial waters of a State within which the flight of aircraft is restricted in accordance with certain specified conditions

RESUME NORMAL SPEED– Used by ATC to advise a pilot to resume an aircraft's normal operating speed. It is issued to terminate a speed adjustment where no published speed restrictions apply. It does not delete speed restrictions in published procedures of upcoming segments of flight. This does not relieve the pilot of those speed restrictions which are applicable to 14 CFR Section 91.117

RESUME OWN NAVIGATION– Used by ATC to advise a pilot to resume his/her own navigational responsibility. It is issued after completion of a radar vector or when radar contact is lost while the aircraft is being radar vectored

(See RADAR CONTACT LOST.)

(See RADAR SERVICE TERMINATED.)

RESUME PUBLISHED SPEED Used by ATC to advise a pilot to resume published speed restrictions

that are applicable to a SID STAR or other instrument procedure. It is issued to terminate a speed adjustment where speed restrictions are published on a charted procedure.

RMI–

(See RADIO MAGNETIC INDICATOR.)

RNAV–

(See AREA NAVIGATION (RNAV).)

RNAV APPROACH– An instrument approach procedure which relies on aircraft area navigation equipment for navigational guidance.

(See AREA NAVIGATION (RNAV).)

(See INSTRUMENT APPROACH PROCEDURE.)

ROAD RECONNAISSANCE– Military activity requiring navigation along roads, railroads, and rivers. Reconnaissance route/route segments are seldom along a straight line and normally require a lateral route width of 10 NM to 30 NM and an altitude range of 500 feet to 10 000 feet AGL.

ROGER– I have received all of your last transmission. It should not be used to answer a question requiring a yes or a no answer.

(See AFFIRMATIVE.)

(See NEGATIVE.)

ROLLOUT RVR–

(See VISIBILITY.)

ROUTE– A defined path consisting of one or more courses in a horizontal plane which aircraft traverse over the surface of the earth.

(See AIRWAY.)

(See JET ROUTE.)

(See PUBLISHED ROUTE.)

(See UNPUBLISHED ROUTE.)

ROUTE ACTION NOTIFICATION– URET notification that a PAR/PDR/PDAR has been applied to the flight plan.

See ATC PREFERRED ROUTE NOTIFICATION

(See USER REQUEST EVALUATION TOOL.)

ROUTE SEGMENT– As used in Air Traffic Control, a part of a route that can be defined by two

navigational fixes, two NAVAIDs, or a fix and a NAVAID.

(See FIX.)

(See ROUTE.)

(See ICAO term ROUTE SEGMENT.)

ROUTE SEGMENT ICAO – A portion of a route to be flown as defined by two consecutive significant points specified in a flight plan.

RSA–

(See RUNWAY SAFETY AREA.)

RTR–

(See REMOTE TRANSMITTER/RECEIVER.)

RUNWAY – A defined rectangular area on a land airport prepared for the landing and takeoff run of aircraft along its length. Runways are normally numbered in relation to their magnetic direction rounded off to the nearest 10 degrees, e.g., Runway 1, Runway 25.

(See PARALLEL RUNWAYS.)

(See ICAO term RUNWAY.)

RUNWAY ICAO – A defined rectangular area on a land aerodrome prepared for the landing and take off of aircraft.

RUNWAY CENTERLINE LIGHTING–

(See AIRPORT LIGHTING.)

RUNWAY CONDITION READING– Numerical decelerometer readings relayed by air traffic controllers at USAF and certain civil bases for use by the pilot in determining runway braking action. These readings are routinely relayed only to USAF and Air National Guard Aircraft.

(See BRAKING ACTION.)

RUNWAY END IDENTIFIER LIGHTS–

(See AIRPORT LIGHTING.)

RUNWAY GRADIENT– The average slope measured in percent between two ends or points on a runway. Runway gradient is depicted on Government aerodrome sketches when total runway gradient exceeds 0.3.

RUNWAY HEADING– The magnetic direction that corresponds with the runway centerline extended, not the painted runway number. When cleared to fly or maintain runway heading, pilots are expected to fly or maintain the heading that corresponds with the extended centerline of the departure runway. Drift correction shall not be applied, e.g., Runway 4, actual magnetic heading of the runway centerline 044, fly 044.

RUNWAY IN USE/ACTIVE RUNWAY /DUTY RUNWAY – Any runway or runways currently being used for takeoff or landing. When multiple runways are used, they are all considered active runways. In the metering sense, a selectable adapted item which specifies the landing runway configuration or direction of traffic flow. The adapted optimum flight plan from each transition fix to the vertex is determined by the runway configuration for arrival metering processing purposes.

RUNWAY LIGHTS–

(See AIRPORT LIGHTING.)

RUNWAY MARKINGS–

(See AIRPORT MARKING AIDS.)

RUNWAY OVERRUN– In military aviation exclusively, a stabilized or paved area beyond the end of a runway of the same width as the runway plus shoulders, centered on the extended runway centerline.

RUNWAY PROFILE DESCENT– An instrument flight rules (IFR) air traffic control arrival procedure to a runway published for pilot use in graphic and/or textual form and may be associated with a STAR. Runway Profile Descents provide routing and may depict crossing altitudes, speed restrictions, and headings to be flown from the en route structure to the point where the pilot will receive clearance for and execute an instrument approach procedure. A Runway Profile Descent may apply to more than one runway if so stated on the chart.

(Refer to AIM.)

RUNWAY SAFETY AREA– A defined surface surrounding the runway prepared or suitable for reducing the risk of damage to airplanes in the event of an undershoot, overshoot, or excursion from the runway. The dimensions of the RSA vary and can be determined by using the criteria contained within AC 150/5300-13, Airport Design, Chapter 3. Figure 3-1 in AC 150/5300-13 depicts the RSA. The design standards dictate that the RSA shall be:

- a.** Cleared, graded, and have no potentially hazardous ruts, humps, depressions, or other surface variations.
- b.** Drained by grading or storm sewers to prevent water accumulation.

- c.** Capable under dry conditions of supporting snow removal equipment, aircraft rescue and firefighting equipment, and the occasional passage of aircraft without causing structural damage to the aircraft, and

- d.** Free of objects except for objects that need to be located in the runway safety area because of their function. These objects shall be constructed on low impact resistant supports, frangible mounted structures to the lowest practical height with the frangible point no higher than 3 inches above grade.

(Refer to AC 150/5300-13, Airport Design, Chapter 3.)

RUNWAY TRANSITION–

- a.** Conventional STARs/SIDs. The portion of a STAR/SID that serves a particular runway or runways at an airport.

- b.** RNAV STARs/SIDs. Defines a path from the common route to the final point on a STAR. For a SID, the common route that serves a particular runway or runways at an airport.

RUNWAY USE PROGRAM– A noise abatement runway selection plan designed to enhance noise abatement efforts with regard to airport communities for arriving and departing aircraft. These plans are developed into runway use programs and apply to all turbojet aircraft 12,500 pounds or heavier; turbojet aircraft less than 12,500 pounds are included only if the airport proprietor determines that the aircraft creates a noise problem. Runway use programs are coordinated with FAA offices, and safety criteria used in these programs are developed by the Office of Flight Operations. Runway use programs are administered by the Air Traffic Service as Formal or Informal programs.

- a.** Formal Runway Use Program– An approved noise abatement program which is defined and acknowledged in a Letter of Understanding between Flight Operations, Air Traffic Service, the airport proprietor, and the users. Once established, participation in the program is mandatory for aircraft operators and pilots as provided for in 14 CFR Section 91.129.

- b.** Informal Runway Use Program– An approved noise abatement program which does not require a Letter of Understanding, and participation in the program is voluntary for aircraft operators/pilots.

RUNWAY VISIBILITY VALUE—
(See VISIBILITY.)

RUNWAY VISUAL RANGE—
(See VISIBILITY.)

S

SAA–

(See SPECIAL ACTIVITY AIRSPACE.)

SAFETY ALERT– A safety alert issued by ATC to aircraft under their control if ATC is aware the aircraft is at an altitude which in the controller's judgment places the aircraft in unsafe proximity to terrain obstructions or other aircraft. The controller may discontinue the issuance of further alerts if the pilot advises he/she is taking action to correct the situation or has the other aircraft in sight.

a. Terrain/Obstruction Alert– A safety alert issued by ATC to aircraft under their control if ATC is aware the aircraft is at an altitude which in the controller's judgment places the aircraft in unsafe proximity to terrain/obstructions e.g. Low Altitude Alert check your altitude immediately.

b. Aircraft Conflict Alert– A safety alert issued by ATC to aircraft under their control if ATC is aware of an aircraft that is not under their control at an altitude which in the controller's judgment places both aircraft in unsafe proximity to each other. With the alert, ATC will offer the pilot an alternate course of action when feasible e.g. Traffic Alert advise you turn right heading zero nine zero or climb to eight thousand immediately.

Note: The issuance of a safety alert is contingent upon the capability of the controller to have an awareness of an unsafe condition. The course of action provided will be predicated on other traffic under ATC control. Once the alert is issued, it is solely the pilot's prerogative to determine what course of action, if any, he/she will take.

SAFETY LOGIC SYSTEM– A software enhancement to ASDE-3 ASDE-2 and ASDE-3 that predicts the path of aircraft landing and/or departing and/or vehicular movements on runways. Visual and aural alarms are activated when the safety logic projects a potential collision. The Airport Movement Area Safety System (AMASS) is a safety logic system enhancement to the ASDE-3. The Safety Logic System for ASDE-2 and ASDE-3 is an integral part of the software program.

SAFETY LOGIC SYSTEM ALERTS–

a. ALERT– An actual situation involving two or more safety logic tracks aircraft/aircraft aircraft/vehicle

or aircraft/other tangible object that safety logic has predicted will result in an imminent collision based upon the current set of Safety Logic parameters.

b. FALSE ALERT–

1. Alerts generated by one or more false surface-radar targets that the system has interpreted as real tracks and placed into safety logic.

2. Alerts in which the safety logic software did not perform correctly based upon the design specifications and the current set of Safety Logic parameters.

3. The alert is generated by surface radar targets caused by moderate or greater precipitation.

c. NUISANCE ALERT– An alert in which one or more of the following is true:

1. The alert is generated by a known situation that is not considered an unsafe operation such as LAHSO or other approved operations.

2. The alert is generated by inaccurate secondary radar data received by the Safety Logic System.

3. One or more of the aircraft involved in the alert is not intending to use a runway for example helicopter pipeline patrol non-Mode C overflight etc.

d. VALID NON-ALERT– A situation in which the safety logic software correctly determines that an alert is not required based upon the design specifications and the current set of Safety Logic parameters.

e. INVALID NON-ALERT– A situation in which the safety logic software did not issue an alert when an alert was required based upon the design specifications.

SAIL BACK– A maneuver during high wind conditions usually with power off where float plane movement is controlled by water rudders/opening and closing cabin doors.

SAME DIRECTION AIRCRAFT– Aircraft are operating in the same direction when:

a. They are following the same track in the same direction or

b. Their tracks are parallel and the aircraft are flying in the same direction or

c. Their tracks intersect at an angle of less than 45 degrees.

SAR–

(See SEARCH AND RESCUE.)

SAY AGAIN– Used to request a repeat of the last transmission. Usually specifies transmission or portion thereof not understood or received. e.g. Say again all after ABRAM VOR.

SAY ALTITUDE– Used by ATC to ascertain an aircraft's specific altitude/flight level. When the aircraft is climbing or descending, the pilot should state the indicated altitude rounded to the nearest 100 feet.

SAY HEADING– Used by ATC to request an aircraft heading. The pilot should state the actual heading of the aircraft.

SCHEDULED TIME OF ARRIVAL (STA) – A STA is the desired time that an aircraft should cross a certain point (landing or metering fix). It takes other traffic and airspace configuration into account. A STA time shows the results of the TMA scheduler that has calculated an arrival time according to parameters such as optimized spacing, aircraft performance, and weather.

SDF–

(See SIMPLIFIED DIRECTIONAL FACILITY.)

SEA LANE– A designated portion of water outlined by visual surface markers for and intended to be used by aircraft designed to operate on water.

SEARCH AND RESCUE– A service which seeks missing aircraft and assists those found to be in need of assistance. It is a cooperative effort using the facilities and services of available Federal, state, and local agencies. The U.S. Coast Guard is responsible for coordination of search and rescue for the Maritime Region, and the U.S. Air Force is responsible for search and rescue for the Inland Region. Information pertinent to search and rescue should be passed through any air traffic facility or be transmitted directly to the Rescue Coordination Center by telephone.

(See FLIGHT SERVICE STATION.)

(See RESCUE COORDINATION CENTER.)

(Refer to AIM.)

SEARCH AND RESCUE FACILITY – A facility responsible for maintaining and operating a search and rescue (SAR) service to render aid to persons and property in distress. It is any SAR unit, station, NET, or other operational activity which can be usefully

employed during an SAR Mission. e.g. a Civil Air Patrol Wing, or a Coast Guard Station.

(See SEARCH AND RESCUE.)

SECNOT–

(See SECURITY NOTICE.)

SECONDARY RADAR TARGET– A target derived from a transponder return presented on a radar display.

SECTIONAL AERONAUTICAL CHARTS–

(See AERONAUTICAL CHART.)

SECTOR LIST DROP INTERVAL– A parameter number of minutes after the meter fix time when arrival aircraft will be deleted from the arrival sector list.

SECURITY NOTICE (SECNOT) – A SECNOT is a request originated by the Air Traffic Security Coordinator (ATSC) for an extensive communications search for aircraft involved or suspected of being involved in a security violation, or are considered a security risk. A SECNOT will include the aircraft identification, search area, and expiration time. The search area as defined by the ATSC could be a single airport, multiple airports, a radius of an airport or fix, or a route of flight. Once the expiration time has been reached, the SECNOT is considered to be cancelled.

SECURITY SERVICES AIRSPACE – Areas established through the regulatory process or by NOTAM issued by the Administrator under title 14 CFR sections 99.7, 91.141, and 91.139 which specify that ATC security services are required in the ADI or temporary flight rules areas.

SEE AND AVOID– When weather conditions permit, pilots operating IFR or VFR are required to observe and maneuver to avoid other aircraft. Right-of-way rules are contained in 14 CFR Part 91.

SEGMENTED CIRCLE– A system of visual indicators designed to provide traffic pattern information at airports without operating control towers.

(Refer to AIM.)

SEGMENTS OF AN INSTRUMENT APPROACH PROCEDURE– An instrument approach procedure may have as many as four separate segments depending on how the approach procedure is structured.

a. Initial Approach– The segment between the initial approach fix and the intermediate fix or the

point where the aircraft is established on the intermediate course or final approach course

(See ICAO term INITIAL APPROACH SEGMENT.)

b. Intermediate Approach– The segment between the intermediate fix or point and the final approach fix

(See ICAO term INTERMEDIATE APPROACH SEGMENT.)

c. Final Approach– The segment between the final approach fix or point and the runway airport or missed approach point

(See ICAO term FINAL APPROACH SEGMENT.)

d. Missed Approach– The segment between the missed approach point or the point of arrival at decision height and the missed approach fix at the prescribed altitude

(Refer to 14 CFR Part 97.)

(See ICAO term MISSED APPROACH PROCEDURE.)

SEPARATION– In air traffic control the spacing of aircraft to achieve their safe and orderly movement in flight and while landing and taking off

(See SEPARATION MINIMA.)

(See ICAO term SEPARATION.)

SEPARATION ICAO – Spacing between aircraft levels or tracks

SEPARATION MINIMA– The minimum longitudinal lateral or vertical distances by which aircraft are spaced through the application of air traffic control procedures

(See SEPARATION.)

SERVICE– A generic term that designates functions or assistance available from or rendered by air traffic control. For example, Class C service could denote the ATC services provided within a Class C airspace area

SEVERE WEATHER AVOIDANCE PLAN– An approved plan to minimize the effect of severe weather on traffic flows in impacted terminal and/or ARTCC areas. SWAP is normally implemented to provide the least disruption to the ATC system when flight through portions of airspace is difficult or impossible due to severe weather

SEVERE WEATHER FORECAST ALERTS– Preliminary messages issued in order to alert users that a Severe Weather Watch Bulletin (WW) is being issued. These messages define areas of possible severe thunderstorms or tornado activity. The messages are unscheduled and issued as required by the Storm Prediction Center (SPC) at Norman, Oklahoma

(See AIRMET.)

(See CONVECTIVE SIGMET.)

(See CWA.)

(See SIGMET.)

SFA–

(See SINGLE FREQUENCY APPROACH.)

SFO–

(See SIMULATED FLAMEOUT.)

SHF–

(See SUPER HIGH FREQUENCY.)

SHORT RANGE CLEARANCE– A clearance issued to a departing IFR flight which authorizes IFR flight to a specific fix short of the destination while air traffic control facilities are coordinating and obtaining the complete clearance

SHORT TAKEOFF AND LANDING AIRCRAFT– An aircraft which at some point within its approved operating weight is capable of operating from a runway in compliance with the applicable STOL characteristics, airworthiness, operations, noise, and pollution standards

(See VERTICAL TAKEOFF AND LANDING AIRCRAFT.)

SIAP–

(See STANDARD INSTRUMENT APPROACH PROCEDURE.)

SID–

(See STANDARD INSTRUMENT DEPARTURE.)

SIDESTEP MANEUVER– A visual maneuver accomplished by a pilot at the completion of an instrument approach to permit a straight-in landing on a parallel runway not more than 1,200 feet to either side of the runway to which the instrument approach was conducted

(Refer to AIM.)

SIGMET– A weather advisory issued concerning weather significant to the safety of all aircraft

SIGMET advisories cover severe and extreme turbulence severe icing and widespread dust or sandstorms that reduce visibility to less than 3 miles

(See AIRMET.)

(See AWW.)

(See CONVECTIVE SIGMET.)

(See CWA.)

(See ICAO term SIGMET INFORMATION.)

(Refer to AIM.)

SIGMET INFORMATION ICAO – Information issued by a meteorological watch office concerning the occurrence or expected occurrence of specified en route weather phenomena which may affect the safety of aircraft operations

SIGNIFICANT METEOROLOGICAL INFORMATION–

(See SIGMET.)

SIGNIFICANT POINT– A point whether a named intersection a NAVAID a fix derived from a NAVAID or geographical coordinate expressed in degrees of latitude and longitude which is established for the purpose of providing separation as a reporting point or to delineate a route of flight

SIMPLIFIED DIRECTIONAL FACILITY – A NAVAID used for nonprecision instrument approaches The final approach course is similar to that of an ILS localizer except that the SDF course may be offset from the runway generally not more than 3 degrees and the course may be wider than the localizer resulting in a lower degree of accuracy

(Refer to AIM.)

SIMULATED FLAMEOUT– A practice approach by a jet aircraft normally military at idle thrust to a runway The approach may start at a runway high key and may continue on a relatively high and wide downwind leg with a continuous turn to final It terminates in landing or low approach The purpose of this approach is to simulate a flameout

(See FLAMEOUT.)

SIMULTANEOUS ILS APPROACHES– An approach system permitting simultaneous ILS/MLS approaches to airports having parallel runways separated by at least 4 300 feet between centerlines Integral parts of a total system are ILS/MLS radar communications ATC procedures and appropriate airborne equipment

(See PARALLEL RUNWAYS.)

(Refer to AIM.)

SIMULTANEOUS MLS APPROACHES–

(See SIMULTANEOUS ILS APPROACHES.)

SIMULTANEOUS OFFSET INSTRUMENT APPROACH SOIA – An instrument landing system comprised of an ILS PRM or RNAV GPS PRM approach to one runway and an offset LDA PRM with glideslope or an RNAV GPS PRM approach utilizing vertical guidance to another parallel runway spaced less than 3 000 feet and at least 750 feet apart The approach courses converge by 2.5 to 3 degrees Closely spaced independent approach procedures apply up to the point where the approach course separation becomes 3 000 feet at the offset MAP From the offset MAP to the runway threshold visual separation by the aircraft conducting the offset LDA PRM or GPS PRM approach is utilized

(Refer to AIM)

SINGLE DIRECTION ROUTES– Preferred IFR Routes which are sometimes depicted on high altitude en route charts and which are normally flown in one direction only

(See PREFERRED IFR ROUTES.)

(Refer to AIRPORT/FACILITY DIRECTORY.)

SINGLE FREQUENCY APPROACH– A service provided under a letter of agreement to military single piloted turbojet aircraft which permits use of a single UHF frequency during approach for landing Pilots will not normally be required to change frequency from the beginning of the approach to touchdown except that pilots conducting an en route descent are required to change frequency when control is transferred from the air route traffic control center to the terminal facility The abbreviation SFA in the DOD FLIP IFR Supplement under Communications indicates this service is available at an aerodrome

SINGLE PILOTED AIRCRAFT– A military turbojet aircraft possessing one set of flight controls tandem cockpits or two sets of flight controls but operated by one pilot is considered single piloted by ATC when determining the appropriate air traffic service to be applied

(See SINGLE FREQUENCY APPROACH.)

SK SPOTTER– A pilot who has received specialized training in observing and reporting inflight weather phenomena

SLASH– A radar beacon reply displayed as an elongated target

SLDI–

(See SECTOR LIST DROP INTERVAL.)

SLOT TIME–

(See METER FIX TIME/SLOT TIME.)

SLOW TA I– To taxi a float plane at low power or low RPM

SN–

(See SYSTEM STRATEGIC NAVIGATION.)

SPEAK SLOWER– Used in verbal communications as a request to reduce speech rate

SPECIAL ACTIVIT AIRSPACE SAA – Any airspace with defined dimensions within the National Airspace System wherein limitations may be imposed upon aircraft operations. This airspace may be restricted areas, prohibited areas, military operations areas, air ATC assigned airspace, and any other designated airspace areas. The dimensions of this airspace are programmed into URET and can be designated as either active or inactive by screen entry. Aircraft trajectories are constantly tested against the dimensions of active areas and alerts issued to the applicable sectors when violations are predicted.

(See USER REQUEST EVALUATION TOOL.)

SPECIAL EMERGENC – A condition of air piracy or other hostile act by a person(s) aboard an aircraft which threatens the safety of the aircraft or its passengers

SPECIAL INSTRUMENT APPROACH PROCEDURE–

(See INSTRUMENT APPROACH PROCEDURE.)

SPECIAL USE AIRSPACE– Airspace of defined dimensions identified by an area on the surface of the earth wherein activities must be confined because of their nature and/or wherein limitations may be imposed upon aircraft operations that are not a part of those activities. Types of special use airspace are

a. Alert Area– Airspace which may contain a high volume of pilot training activities or an unusual type of aerial activity, neither of which is hazardous to aircraft. Alert Areas are depicted on aeronautical charts for the information of nonparticipating pilots. All activities within an Alert Area are conducted in accordance with Federal Aviation Regulations and pilots of participating aircraft as well as pilots transiting the area are equally responsible for collision avoidance.

b. Controlled Firing Area– Airspace wherein activities are conducted under conditions so controlled as to eliminate hazards to nonparticipating aircraft and to ensure the safety of persons and property on the ground.

c. Military Operations Area MOA – A MOA is airspace established outside of Class A airspace area to separate or segregate certain nonhazardous military activities from IFR traffic and to identify for VFR traffic where these activities are conducted.

(Refer to AIM.)

d. Prohibited Area– Airspace designated under 14 CFR Part 73 within which no person may operate an aircraft without the permission of the using agency.

(Refer to AIM.)

(Refer to En Route Charts.)

e. Restricted Area– Airspace designated under 14 CFR Part 73 within which the flight of aircraft while not wholly prohibited is subject to restriction. Most restricted areas are designated joint use and IFR/VFR operations in the area may be authorized by the controlling ATC facility when it is not being utilized by the using agency. Restricted areas are depicted on en route charts. Where joint use is authorized, the name of the ATC controlling facility is also shown.

(Refer to 14 CFR Part 73.)

(Refer to AIM.)

f. Warning Area– A warning area is airspace of defined dimensions extending from 3 nautical miles outward from the coast of the United States that contains activity that may be hazardous to nonparticipating aircraft. The purpose of such warning area is to warn nonparticipating pilots of the potential danger. A warning area may be located over domestic or international waters or both.

SPECIAL VFR CONDITIONS– Meteorological conditions that are less than those required for basic VFR flight in Class B, C, D, or E surface areas and in which some aircraft are permitted flight under visual flight rules.

(See SPECIAL VFR OPERATIONS.)

(Refer to 14 CFR Part 91.)

SPECIAL VFR FLIGHT ICAO – A VFR flight cleared by air traffic control to operate within Class B, C, D, and E surface areas in meteorological conditions below VMC.

SPECIAL VFR OPERATIONS– Aircraft operating in accordance with clearances within Class B, C, D, and E surface areas in weather conditions less than the basic VFR weather minima. Such operations must be requested by the pilot and approved by ATC.

(See SPECIAL VFR CONDITIONS.)

(See ICAO term SPECIAL VFR FLIGHT.)

SPEED–

(See AIRSPEED.)

(See GROUND SPEED.)

SPEED ADJUSTMENT– An ATC procedure used to request pilots to adjust aircraft speed to a specific value for the purpose of providing desired spacing. Pilots are expected to maintain a speed of plus or minus 10 knots or 0.02 Mach number of the specified speed. Examples of speed adjustments are:

- a. Increase/reduce speed to Mach point number
- b. Increase/reduce speed to speed in knots or Increase/reduce speed number of knots/knots

SPEED BRAKES– Moveable aerodynamic devices on aircraft that reduce airspeed during descent and landing.

SPEED SEGMENTS– Portions of the arrival route between the transition point and the vertex along the optimum flight path for high speeds and altitudes are specified. There is one set of arrival speed segments adapted from each transition point to each vertex. Each set may contain up to six segments.

SQUAWK (Mode, Code, Function)– Activate specific modes/codes/functions on the aircraft transponder, e.g., Squawk three/alpha to one zero five low.

(See TRANSPONDER.)

STA–

(See SCHEDULED TIME OF ARRIVAL.)

STAGING/QUEUEING– The placement, integration, and segregation of departure aircraft in designated movement areas of an airport by departure fix, EDCT, and/or restriction.

STAND BY– Means the controller or pilot must pause for a few seconds, usually to attend to other duties of a higher priority. Also means to wait as in stand by for clearance. The caller should reestablish contact if a delay is lengthy. Stand by is not an approval or denial.

STANDARD INSTRUMENT APPROACH PROCEDURE (SIAP) –

(See INSTRUMENT APPROACH PROCEDURE.)

STANDARD INSTRUMENT DEPARTURE (SID) – A preplanned instrument flight rule (IFR) air traffic control (ATC) departure procedure printed for pilot/controller use in graphic form to provide obstacle clearance and a transition from the terminal area to the appropriate en route structure. SIDs are primarily designed for system enhancement to expedite traffic flow and to reduce pilot/controller workload. ATC clearance must always be received prior to flying a SID.

(See IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES.)

(See OBSTACLE DEPARTURE PROCEDURE.)

(Refer to AIM.)

STANDARD RATE TURN– A turn of three degrees per second.

STANDARD TERMINAL ARRIVAL (STAR)– A preplanned instrument flight rule (IFR) air traffic control arrival procedure published for pilot use in graphic and/or textual form. STARS provide transition from the en route structure to an outer fix or an instrument approach fix/arrival waypoint in the terminal area.

STANDARD TERMINAL ARRIVAL CHARTS–

(See AERONAUTICAL CHART.)

STANDARD TERMINAL AUTOMATION REPLACEMENT SYSTEM STARS –

(See DTAS.)

STAR–

(See STANDARD TERMINAL ARRIVAL.)

STATE AIRCRAFT– Aircraft used in military, customs, and police service; in the exclusive service of any government or of any political subdivision thereof, including the government of any state, territory, or possession of the United States or the District of Columbia, but not including any government-owned aircraft engaged in carrying persons or property for commercial purposes.

STATIC RESTRICTIONS– Those restrictions that are usually not subject to change, fixed in place, and/or published.

STATIONARY RESERVATIONS– Altitude reservations which encompass activities in a fixed area. Stationary reservations may include activities

such as special tests of weapons systems or equipment certain U S Navy carrier fleet and anti submarine operations rocket missile and drone operations and certain aerial refueling or similar operations

STEP TAKEOFF– To taxi a float plane at full power or high RPM

STEP TURN– A maneuver used to put a float plane in a planing configuration prior to entering an active sea lane for takeoff The STEP TURN maneuver should only be used upon pilot request

STEPDOWN FIX – A fix permitting additional descent within a segment of an instrument approach procedure by identifying a point at which a controlling obstacle has been safely overflown

STEREO ROUTE– A routinely used route of flight established by users and ARTCCs identified by a coded name e g ALPHA 2 These routes minimize flight plan handling and communications

STOL AIRCRAFT–

(See SHORT TAKEOFF AND LANDING AIRCRAFT.)

STOP ALTITUDE SQUAWK– Used by ATC to inform an aircraft to turn off the automatic altitude reporting feature of its transponder It is issued when the verbally reported altitude varies 300 feet or more from the automatic altitude report

(See ALTITUDE READOUT.)

(See TRANSPONDER.)

STOP AND GO– A procedure wherein an aircraft will land make a complete stop on the runway and then commence a takeoff from that point

(See LOW APPROACH.)

(See OPTION APPROACH.)

STOP BURST–

(See STOP STREAM.)

STOP BUZZER–

(See STOP STREAM.)

STOP SQUAWK (Mode or Code)– Used by ATC to tell the pilot to turn specified functions of the aircraft transponder off

(See STOP ALTITUDE SQUAWK.)

(See TRANSPONDER.)

STOP STREAM– Used by ATC to request a pilot to suspend electronic attack activity

(See JAMMING.)

STOPOVER FLIGHT PLAN– A flight plan format which permits in a single submission the filing of a sequence of flight plans through interim full stop destinations to a final destination

STOPWAY – An area beyond the takeoff runway no less wide than the runway and centered upon the extended centerline of the runway able to support the airplane during an aborted takeoff without causing structural damage to the airplane and designated by the airport authorities for use in decelerating the airplane during an aborted takeoff

STRAIGHT IN APPROACH IFR– An instrument approach wherein final approach is begun without first having executed a procedure turn not necessarily completed with a straight in landing or made to straight in landing minimums

(See LANDING MINIMUMS.)

(See STRAIGHT-IN APPROACH VFR.)

(See STRAIGHT-IN LANDING.)

STRAIGHT IN APPROACH VFR– Entry into the traffic pattern by interception of the extended runway centerline final approach course without executing any other portion of the traffic pattern

(See TRAFFIC PATTERN.)

STRAIGHT IN LANDING– A landing made on a runway aligned within 30° of the final approach course following completion of an instrument approach

(See STRAIGHT-IN APPROACH IFR.)

STRAIGHT IN LANDING MINIMUMS–

(See LANDING MINIMUMS.)

STRAIGHT IN MINIMUMS–

(See STRAIGHT-IN LANDING MINIMUMS.)

STRATEGIC PLANNING– Planning whereby solutions are sought to resolve potential conflicts

SUBSTITUTE ROUTE– A route assigned to pilots when any part of an airway or route is unusable because of NAVAID status These routes consist of

a. Substitute routes which are shown on U S Government charts

b. Routes defined by ATC as specific NAVAID radials or courses

c. Routes defined by ATC as direct to or between NAVAIDs

SUNSET AND SUNRISE– The mean solar times of sunset and sunrise as published in the Nautical Almanac converted to local standard time for the locality concerned. Within Alaska, the end of evening civil twilight and the beginning of morning civil twilight as defined for each locality.

SUPER HIGH FREQUENCY – The frequency band between 3 and 30 gigahertz (GHz). The elevation and azimuth stations of the microwave landing system operate from 5031 MHz to 5091 MHz in this spectrum.

SUPPLEMENTAL WEATHER SERVICE LOCATION– Airport facilities staffed with contract personnel who take weather observations and provide current local weather to pilots via telephone or radio. All other services are provided by the parent FSS.

SUPPS– Refers to ICAO Document 7030 Regional Supplementary Procedures. SUPPS contain procedures for each ICAO Region which are unique to that Region and are not covered in the worldwide provisions identified in the ICAO Air Navigation Plan. Procedures contained in Chapter 8 are based in part on those published in SUPPS.

SURFACE AREA– The airspace contained by the lateral boundary of the Class B, C, D, or E airspace designated for an airport that begins at the surface and extends upward.

SURPIC– A description of surface vessels in the area of a Search and Rescue incident including their predicted positions and their characteristics.

(Refer to FAAO JO 7110.65, Para 10–6–4, INFLIGHT CONTINGENCIES.)

SURVEILLANCE APPROACH– An instrument approach wherein the air traffic controller issues instructions for pilot compliance based on aircraft position in relation to the final approach course, azimuth, and the distance range from the end of the runway as displayed on the controller's radar scope. The controller will provide recommended altitudes on final approach if requested by the pilot.

(Refer to AIM.)

SWAP–

(See SEVERE WEATHER AVOIDANCE PLAN.)

SWSL–

(See SUPPLEMENTAL WEATHER SERVICE LOCATION.)

SYSTEM STRATEGIC NAVIGATION– Military activity accomplished by navigating along a preplanned route using internal aircraft systems to maintain a desired track. This activity normally requires a lateral route width of 10 NM and altitude range of 1 000 feet to 6 000 feet AGL with some route segments that permit terrain following.

T

TACAN–

(See TACTICAL AIR NAVIGATION.)

TACAN ONL AIRCRAFT– An aircraft normally military possessing TACAN with DME but no VOR navigational system capability. Clearances must specify TACAN or VORTAC fixes and approaches.

TACTICAL AIR NAVIGATION– An ultra high frequency electronic rho theta air navigation aid which provides suitably equipped aircraft a continuous indication of bearing and distance to the TACAN station.

(See VORTAC.)

(Refer to AIM.)

TAILWIND– Any wind more than 90 degrees to the longitudinal axis of the runway. The magnetic direction of the runway shall be used as the basis for determining the longitudinal axis.

TAKEOFF AREA–

(See LANDING AREA.)

TAKEOFF DISTANCE AVAILABLE (TODA)– The takeoff run available plus the length of any remaining runway or clearway beyond the far end of the takeoff run available.

(See ICAO term TAKEOFF DISTANCE AVAILABLE.)

TAKEOFF DISTANCE AVAILABLE (ICAO)– The length of the takeoff run available plus the length of the clearway if provided.

TAKEOFF ROLL – The process whereby an aircraft is aligned with the runway centerline and the aircraft is moving with the intent to take off. For helicopters this pertains to the act of becoming airborne after departing a takeoff area.

TAKEOFF RUN AVAILABLE (TORA)– The runway length declared available and suitable for the ground run of an airplane taking off.

(See ICAO term TAKEOFF RUN AVAILABLE.)

TAKEOFF RUN AVAILABLE (ICAO)– The length of runway declared available and suitable for the ground run of an aeroplane take off.

TARGET– The indication shown on an analog display resulting from a primary radar return or a radar beacon reply.

(See ASSOCIATED.)

(See DIGITAL TARGET.)

(See DIGITIZED RADAR TARGET.)

(See FUSED TARGET.)

(See PRIMARY RADAR TARGET.)

(See RADAR.)

(See SECONDARY RADAR TARGET.)

(See TARGET SYMBOL.)

(See ICAO term TARGET.)

(See UNASSOCIATED.)

TARGET (ICAO) – In radar

a. Generally any discrete object which reflects or retransmits energy back to the radar equipment.

b. Specifically an object of radar search or surveillance.

TARGET RESOLUTION– A process to ensure that correlated radar targets do not touch. Target resolution must be applied as follows:

a. Between the edges of two primary targets or the edges of the ASR 9/11 primary target symbol.

b. Between the end of the beacon control slash and the edge of a primary target.

c. Between the ends of two beacon control slashes.

Note 1: Mandatory traffic advisories and safety alerts must be issued when this procedure is used.

Note 2: This procedure must not be used when utilizing mosaic radar systems or multi-sensor mode.

TARGET SYMBOL– A computer generated indication shown on a radar display resulting from a primary radar return or a radar beacon reply.

TARMAC DELA – The holding of an aircraft on the ground either before departure or after landing with no opportunity for its passengers to deplane.

TARMAC DELA AIRCRAFT– An aircraft whose pilot-in-command has requested to taxi to the ramp gate or alternate deplaning area to comply with the Three-hour Tarmac Rule.

TARMAC DELA REQUEST– A request by the pilot-in-command to taxi to the ramp gate or alternate deplaning location to comply with the Three-hour Tarmac Rule.

TAS–

(See TERMINAL AUTOMATION SYSTEMS.)

TAWS–

(See TERRAIN AWARENESS WARNING SYSTEM.)

TAI– The movement of an airplane under its own power on the surface of an airport 14 CFR Section 135.100 Note Also it describes the surface movement of helicopters equipped with heels

(See AIR TAXI.)

(See HOVER TAXI.)

(Refer to 14 CFR Section 135.100.)

(Refer to AIM.)

TAI PATTERNS– Patterns established to illustrate the desired flow of ground traffic for the different runways or airport areas available for use

TCAS–

(See TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM.)

TCH–

(See THRESHOLD CROSSING HEIGHT.)

TCLT–

(See TENTATIVE CALCULATED LANDING TIME.)

TDLS–

(See TERMINAL DATA LINK SYSTEM.)

TDZE–

(See TOUCHDOWN ZONE ELEVATION.)

TELEPHONE INFORMATION BRIEFING SERVICE– A continuous telephone recording of meteorological and/or aeronautical information

(Refer to AIM.)

TEMPORARY FLIGHT RESTRICTION TFR – A TFR is a regulatory action issued by the FAA via the U.S. NOTAM System under the authority of United States Code Title 49 TFRs are issued within the sovereign airspace of the United States and its territories to restrict certain aircraft from operating within a defined area on a temporary basis to protect persons or property in the air or on the ground While not all inclusive TFRs may be issued for disaster or hazard situations such as toxic gas leaks or spills fumes from flammable agents aircraft accident/incident sites aviation or ground resources engaged in wildfire suppression or aircraft relief activities

Following a disaster TFRs may also be issued in support of VIP movements for reasons of national security or when determined necessary for the management of air traffic in the vicinity of aerial demonstrations or major sporting events NAS users or other interested parties should contact a FSS for TFR information Additionally TFR information can be found in automated briefings NOTAM publications and on the internet at <http://www.faa.gov> The FAA also distributes TFR information to aviation user groups for further dissemination

TENTATIVE CALCULATED LANDING TIME– A projected time calculated for adapted vertex for each arrival aircraft based upon runway configuration airport acceptance rate airport arrival delay period and other metered arrival aircraft This time is either the VTA of the aircraft or the TCLT/ACLT of the previous aircraft plus the AAI whichever is later This time will be updated in response to an aircraft's progress and its current relationship to other arrivals

TERMINAL AREA– A general term used to describe airspace in which approach control service or airport traffic control service is provided

TERMINAL AREA FACILITY – A facility providing air traffic control service for arriving and departing IFR VFR Special VFR and on occasion en route aircraft

(See APPROACH CONTROL FACILITY.)

(See TOWER.)

TERMINAL AUTOMATION SYSTEMS TAS – TAS is used to identify the numerous automated tracking systems including ARTS IIE ARTS IIIA ARTS IIIE STARS and MEARTS

TERMINAL DATA LINK SYSTEM TDLS – A system that provides Digital Automatic Terminal Information Service D-ATIS both on a specified radio frequency and also for subscribers in a text message via data link to the cockpit or to a gate printer TDLS also provides Pre-departure Clearances PDC at selected airports to subscribers through a service provider in text to the cockpit or to a gate printer In addition TDLS will emulate the Flight Data Input/Output FDIO information within the control tower

TERMINAL RADAR SERVICE AREA– Airspace surrounding designated airports wherein ATC provides radar vectoring sequencing and separation on a full time basis for all IFR and participating VFR aircraft The AIM contains an explanation of TRSA

TRSA's are depicted on VFR aeronautical charts. Pilot participation is urged but is not mandatory.

TERMINAL VFR RADAR SERVICE– A national program instituted to extend the terminal radar services provided instrument flight rules (IFR) aircraft to visual flight rules (VFR) aircraft. The program is divided into four types of service referred to as basic radar service, terminal radar service area (TRSA) service, Class B service, and Class C service. The type of service provided at a particular location is contained in the Airport/Facility Directory.

a. Basic Radar Service– These services are provided for VFR aircraft by all commissioned terminal radar facilities. Basic radar service includes safety alerts, traffic advisories, limited radar vectoring when requested by the pilot, and sequencing at locations where procedures have been established for this purpose and/or when covered by a letter of agreement. The purpose of this service is to adjust the flow of arriving IFR and VFR aircraft into the traffic pattern in a safe and orderly manner and to provide traffic advisories to departing VFR aircraft.

b. TRSA Service– This service provides, in addition to basic radar service, sequencing of all IFR and participating VFR aircraft to the primary airport and separation between all participating VFR aircraft. The purpose of this service is to provide separation between all participating VFR aircraft and all IFR aircraft operating within the area defined as a TRSA.

c. Class C Service– This service provides, in addition to basic radar service, approved separation between IFR and VFR aircraft and sequencing of VFR aircraft and sequencing of VFR arrivals to the primary airport.

d. Class B Service– This service provides, in addition to basic radar service, approved separation of aircraft based on IFR, VFR, and/or sight and sequencing of VFR arrivals to the primary airports.
(See CONTROLLED AIRSPACE.)
(See TERMINAL RADAR SERVICE AREA.)
(Refer to AIM.)
(Refer to AIRPORT/FACILITY DIRECTORY.)

TERMINAL VORTICAL HIGH FREQUENCY OMNI DIRECTIONAL RANGE STATION– A very high frequency terminal omnirange station located on or near an airport and used as an approach aid.
(See NAVIGATIONAL AID.)
(See VOR.)

TERRAIN AWARENESS WARNING SYSTEM (TAWS) – An on-board terrain proximity alerting system providing the aircraft with altitude warnings to allow immediate pilot action.

TERRAIN FOLLOWING– The flight of a military aircraft maintaining a constant AGL altitude above the terrain or the highest obstruction. The altitude of the aircraft will constantly change with the varying terrain and/or obstruction.

TETRAHEDRON– A device normally located on uncontrolled airports and used as a landing direction indicator. The small end of a tetrahedron points in the direction of landing. At controlled airports, the tetrahedron, if installed, should be disregarded because tower instructions supersede the indicator.
(See SEGMENTED CIRCLE.)
(Refer to AIM.)

TF –
(See TERRAIN FOLLOWING.)

THAT IS CORRECT– The understanding you have is right.

THREE-HOUR TARMAC RULE– Rule that relates to Department of Transportation (DOT) requirements placed on airlines when tarmac delays are anticipated to reach 3 hours.

360 OVERHEAD–
(See OVERHEAD MANEUVER.)

THRESHOLD– The beginning of that portion of the runway usable for landing.
(See AIRPORT LIGHTING.)
(See DISPLACED THRESHOLD.)

THRESHOLD CROSSING HEIGHT– The theoretical height above the runway threshold at which the aircraft's glideslope antenna would be if the aircraft maintains the trajectory established by the mean ILS glideslope or MLS glidepath.
(See GLIDESLOPE.)
(See THRESHOLD.)

THRESHOLD LIGHTS–
(See AIRPORT LIGHTING.)

TIBS–
(See TELEPHONE INFORMATION BRIEFING SERVICE.)

TIE-IN FACILITY– The FSS primarily responsible for providing FSS services, including telecommunications services for landing facilities or

navigational aids located within the boundaries of a flight plan area (FPA). Three letter identifiers are assigned to each FSS/FPA and are annotated as tie in facilities in A/FDs, the Alaska Supplement, the Pacific Supplement, and FAA Order JO 7350.8 Location Identifiers. Large consolidated FSS facilities may have many tie in facilities or FSS sectors within one facility.

(See FLIGHT PLAN AREA.)

(See FLIGHT SERVICE STATION.)

TIME GROUP— Four digits representing the hour and minutes from the Coordinated Universal Time (UTC) clock. FAA uses UTC for all operations. The term **ULU** may be used to denote UTC. The word **local** or the time zone equivalent shall be used to denote local when local time is given during radio and telephone communications. When written, a time zone designator is used to indicate local time, e.g., 0205M Mountain. The local time may be based on the 24 hour clock system. The day begins at 0000 and ends at 2359.

TIS-B—

(See TRAFFIC INFORMATION SERVICE—BROADCAST.)

TMA—

(See TRAFFIC MANAGEMENT ADVISOR)

TMPA—

(See TRAFFIC MANAGEMENT PROGRAM ALERT.)

TMU—

(See TRAFFIC MANAGEMENT UNIT.)

TODA—

(See TAKEOFF DISTANCE AVAILABLE.)

(See ICAO term TAKEOFF DISTANCE AVAILABLE.)

TOI—

(See TRACK OF INTEREST.)

TOP ALTITUDE— In reference to SID published altitude restrictions, the charted “maintain” altitude contained in the procedure description or assigned by ATC.

TORA—

(See TAKEOFF RUN AVAILABLE.)

(See ICAO term TAKEOFF RUN AVAILABLE.)

TORCHING— The burning of fuel at the end of an exhaust pipe or stack of a reciprocating aircraft engine, the result of an excessive richness in the fuel/air mixture.

TOTAL ESTIMATED ELAPSED TIME— ICAO — For IFR flights, the estimated time required from take off to arrive over that designated point defined by reference to navigation aids from which it is intended that an instrument approach procedure will be commenced, or, if no navigation aid is associated with the destination aerodrome, to arrive over the destination aerodrome. For VFR flights, the estimated time required from take off to arrive over the destination aerodrome.

(See ICAO term ESTIMATED ELAPSED TIME.)

TOUCH AND GO— An operation by an aircraft that lands and departs on a runway without stopping or exiting the runway.

TOUCH AND GO LANDING—

(See TOUCH-AND-GO.)

TOUCHDOWN—

a. The point at which an aircraft first makes contact with the landing surface.

b. Concerning a precision radar approach (PAR), it is the point where the glide path intercepts the landing surface.

(See ICAO term TOUCHDOWN.)

TOUCHDOWN— ICAO — The point where the nominal glide path intercepts the runway.

Note: Touchdown as defined above is only a datum and is not necessarily the actual point at which the aircraft will touch the runway.

TOUCHDOWN RVR—

(See VISIBILITY.)

TOUCHDOWN ONE— The first 3 000 feet of the runway beginning at the threshold. The area is used for determination of Touchdown One Elevation in the development of straight in landing minimums for instrument approaches.

(See ICAO term TOUCHDOWN ZONE.)

TOUCHDOWN ONE— ICAO — The portion of a runway beyond the threshold where it is intended landing aircraft first contact the runway.

TOUCHDOWN ONE ELEVATION— The highest elevation in the first 3 000 feet of the landing surface. TD E is indicated on the instrument approach

procedure chart when straight in landing minimums are authorized

(See TOUCHDOWN ZONE.)

TOUCHDOWN ONE LIGHTING–

(See AIRPORT LIGHTING.)

TOWER– A terminal facility that uses air/ground communications visual signaling and other devices to provide ATC services to aircraft operating in the vicinity of an airport or on the movement area. Authorizes aircraft to land or takeoff at the airport controlled by the tower or to transit the Class D airspace area regardless of flight plan or weather conditions IFR or VFR. A tower may also provide approach control services radar or nonradar

(See AIRPORT TRAFFIC CONTROL SERVICE.)

(See APPROACH CONTROL FACILITY.)

(See APPROACH CONTROL SERVICE.)

(See MOVEMENT AREA.)

(See TOWER EN ROUTE CONTROL SERVICE.)

(See ICAO term AERODROME CONTROL TOWER.)

(Refer to AIM.)

TOWER EN ROUTE CONTROL SERVICE– The control of IFR en route traffic within delegated airspace between two or more adjacent approach control facilities. This service is designed to expedite traffic and reduce control and pilot communication requirements

TOWER TO TOWER–

(See TOWER EN ROUTE CONTROL SERVICE.)

TP 42– A numeric beacon decoder equipment/system. It is designed to be added to terminal radar systems for beacon decoding. It provides rapid target identification reinforcement of the primary radar target and altitude information from Mode C

(See AUTOMATED RADAR TERMINAL SYSTEMS.)

(See TRANSPONDER.)

TRACEABLE PRESSURE STANDARD– The facility station pressure instrument with certification/calibration traceable to the National Institute of Standards and Technology. Traceable pressure standards may be mercurial barometers, commissioned ASOS/AWSS or dual transducer AWOS or portable pressure standards or DASI

TRACK– The actual flight path of an aircraft over the surface of the earth

(See COURSE.)

(See FLIGHT PATH.)

(See ROUTE.)

(See ICAO term TRACK.)

TRACK ICAO – The projection on the earth's surface of the path of an aircraft. The direction of flight path at any point is usually expressed in degrees from North. True, Magnetic, or Grid

TRACK OF INTEREST TOI – Displayed data representing an airborne object that threatens or has the potential to threaten North America or National Security. Indicators may include, but are not limited to, noncompliance with air traffic control instructions or aviation regulations, extended loss of communications, unusual transmissions or unusual flight behavior, unauthorized intrusion into controlled airspace or an ADI, noncompliance with issued flight restrictions/security procedures, or unlawful interference with airborne flight crews up to and including hijack. In certain circumstances, an object may become a TOI based on specific and credible intelligence pertaining to that particular aircraft/object, its passengers, or its cargo

TRACK OF INTEREST RESOLUTION– A TOI will normally be considered resolved when the aircraft/object is no longer airborne, the aircraft complies with air traffic control instructions, aviation regulations, and/or issued flight restrictions/security procedures, radio contact is re-established and authorized control of the aircraft is verified, the aircraft is intercepted and intent is verified to be nonthreatening/nonhostile, TOI is identified based on specific and credible intelligence that is later determined to be invalid or unreliable, or displayed data is identified and characterized as invalid

TRAFFIC–

a. A term used by a controller to transfer radar identification of an aircraft to another controller for the purpose of coordinating separation action. Traffic is normally issued

1. In response to a handoff or point out
2. In anticipation of a handoff or point out, or
3. In conjunction with a request for control of an aircraft

b. A term used by ATC to refer to one or more aircraft

TRAFFIC ADVISORIES– Advisories issued to alert pilots to other known or observed air traffic which may be in such proximity to the position or intended route of flight of their aircraft to warrant their attention. Such advisories may be based on

- a. Visual observation
- b. Observation of radar identified and nonidentified aircraft targets on an ATC radar display or
- c. Verbal reports from pilots or other facilities

Note 1: The word “traffic” followed by additional information, if known, is used to provide such advisories; e.g., “Traffic, 2 o'clock, one zero miles, southbound, eight thousand.”

Note 2: Traffic advisory service will be provided to the extent possible depending on higher priority duties of the controller or other limitations; e.g., radar limitations, volume of traffic, frequency congestion, or controller workload. Radar/nonradar traffic advisories do not relieve the pilot of his/her responsibility to see and avoid other aircraft. Pilots are cautioned that there are many times when the controller is not able to give traffic advisories concerning all traffic in the aircraft's proximity; in other words, when a pilot requests or is receiving traffic advisories, he/she should not assume that all traffic will be issued.

(Refer to AIM.)

TRAFFIC ALERT (aircraft call sign), TURN (left/right) IMMEDIATELY, (climb/descend) AND MAINTAIN (altitude).

(See SAFETY ALERT.)

TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM– An airborne collision avoidance system based on radar beacon signals which operates independent of ground based equipment. TCAS I generates traffic advisories only. TCAS II generates traffic advisories and resolution collision avoidance advisories in the vertical plane.

TRAFFIC INFORMATION–

(See TRAFFIC ADVISORIES.)

TRAFFIC INFORMATION SERVICE–BROADCAST TIS-B – The broadcast of ATC derived traffic information to ADS-B equipped 1090ES or UAT aircraft. The source of this traffic information is derived from ground-based air traffic surveillance sensors typically from radar targets. TIS-B service will be available throughout the NAS where there are both adequate surveillance coverage radar and adequate broadcast coverage from

ADS-B ground stations. Loss of TIS-B will occur when an aircraft enters an area not covered by the GBT network. If this occurs in an area with adequate surveillance coverage, radar nearby aircraft that remain within the adequate broadcast coverage ADS-B area will view the first aircraft. TIS-B may continue when an aircraft enters an area with inadequate surveillance coverage, radar nearby aircraft that remain within the adequate broadcast coverage ADS-B area will not view the first aircraft.

TRAFFIC IN SIGHT– Used by pilots to inform a controller that previously issued traffic is in sight.

(See NEGATIVE CONTACT.)

(See TRAFFIC ADVISORIES.)

TRAFFIC MANAGEMENT ADVISOR TMA – A computerized tool which assists Traffic Management Coordinators to efficiently schedule arrival traffic to a metered airport by calculating meter fix times and delays then sending that information to the sector controllers.

TRAFFIC MANAGEMENT PROGRAM ALERT– A term used in a Notice to Airmen (NOTAM) issued in conjunction with a special traffic management program to alert pilots to the existence of the program and to refer them to either the Notices to Airmen publication or a special traffic management program advisory message for program details. The contraction TMPA is used in NOTAM text.

TRAFFIC MANAGEMENT UNIT– The entity in ARTCCs and designated terminals directly involved in the active management of facility traffic. Usually under the direct supervision of an assistant manager for traffic management.

TRAFFIC NO FACTOR– Indicates that the traffic described in a previously issued traffic advisory is no factor.

TRAFFIC NO LONGER OBSERVED– Indicates that the traffic described in a previously issued traffic advisory is no longer depicted on radar but may still be a factor.

TRAFFIC PATTERN– The traffic flow that is prescribed for aircraft landing at, taxiing on, or taking off from an airport. The components of a typical traffic pattern are upwind leg, crosswind leg, downwind leg, base leg, and final approach.

- a. Upwind Leg– A flight path parallel to the landing runway in the direction of landing.

b. Crosswind Leg– A flight path at right angles to the landing runway off its upwind end

c. Downwind Leg– A flight path parallel to the landing runway in the direction opposite to landing. The downwind leg normally extends between the crosswind leg and the base leg

d. Base Leg– A flight path at right angles to the landing runway off its approach end. The base leg normally extends from the downwind leg to the intersection of the extended runway centerline

e. Final Approach– A flight path in the direction of landing along the extended runway centerline. The final approach normally extends from the base leg to the runway. An aircraft making a straight-in approach VFR is also considered to be on final approach

(See STRAIGHT-IN APPROACH VFR.)

(See TAXI PATTERNS.)

(See ICAO term AERODROME TRAFFIC CIRCUIT.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

TRAFFIC SITUATION DISPLAY– TSD – TSD is a computer system that receives radar track data from all 20 CONUS ARTCCs organizes this data into a mosaic display and presents it on a computer screen. The display allows the traffic management coordinator multiple methods of selection and highlighting of individual aircraft or groups of aircraft. The user has the option of superimposing these aircraft positions over any number of background displays. These background options include ARTCC boundaries, any stratum of en route sector boundaries, fixes, airways, military and other special use airspace, airports, and geopolitical boundaries. By using the TSD, a coordinator can monitor any number of traffic situations or the entire system-wide traffic flows

TRAJECTORY – A URET representation of the path an aircraft is predicted to fly based upon a Current Plan or Trial Plan

(See USER REQUEST EVALUATION TOOL.)

TRAJECTORY MODELING– The automated process of calculating a trajectory

TRANSCRIBED WEATHER BROADCAST– A continuous recording of meteorological and aeronautical information that is broadcast on L/MF and VOR facilities for pilots. Provided only in Alaska

(Refer to AIM.)

TRANSFER OF CONTROL– That action whereby the responsibility for the separation of an aircraft is transferred from one controller to another

(See ICAO term TRANSFER OF CONTROL.)

TRANSFER OF CONTROL ICAO – Transfer of responsibility for providing air traffic control service

TRANSFERRING CONTROLLER– A controller/facility transferring control of an aircraft to another controller/facility

(See ICAO term TRANSFERRING UNIT/CONTROLLER.)

TRANSFERRING FACILITY –

(See TRANSFERRING CONTROLLER.)

TRANSFERRING UNIT/CONTROLLER ICAO – Air traffic control unit/air traffic controller in the process of transferring the responsibility for providing air traffic control service to an aircraft to the next air traffic control unit/air traffic controller along the route of flight

Note: See definition of accepting unit/controller.

TRANSITION–

a. The general term that describes the change from one phase of flight or flight condition to another. e.g. transition from en route flight to the approach or transition from instrument flight to visual flight

b. A published procedure. DP Transition used to connect the basic DP to one of several en route airways/en route routes or a published procedure. STAR Transition used to connect one of several en route airways/en route routes to the basic STAR

(Refer to DP/STAR Charts.)

TRANSITION POINT– A point at an adapted number of miles from the vertex at which an arrival aircraft could normally commence descent from its en route altitude. This is the first fix adapted on the arrival speed segments

TRANSITION WAYPOINT– The waypoint that defines the beginning of a runway or en route transition on an RNAV SID or STAR

TRANSITIONAL AIRSPACE– That portion of controlled airspace wherein aircraft change from one phase of flight or flight condition to another

TRANSMISSOMETER– An apparatus used to determine visibility by measuring the transmission of light through the atmosphere. It is the measurement

source for determining runway visual range (RVR) and runway visibility value (RVV)

(See VISIBILITY.)

TRANSMITTING IN THE BLIND– A transmission from one station to other stations in circumstances where two-way communication cannot be established but where it is believed that the called stations may be able to receive the transmission

TRANSPONDER– The airborne radar beacon receiver/transmitter portion of the Air Traffic Control Radar Beacon System (ATCRBS) which automatically receives radio signals from interrogators on the ground and selectively replies with a specific reply pulse or pulse group only to those interrogations being received on the mode to which it is set to respond

(See INTERROGATOR.)

(See ICAO term TRANSPONDER.)

(Refer to AIM.)

TRANSPONDER (ICAO) – A receiver/transmitter which will generate a reply signal upon proper interrogation the interrogation and reply being on different frequencies

TRANSPONDER CODES–

(See CODES.)

TRANSPONDER OBSERVED – Phraseology used to inform a VFR pilot the aircraft's assigned beacon

code and position have been observed. Specifically, this term conveys to a VFR pilot the transponder reply has been observed and its position correlated for transit through the designated area

TRIAL PLAN– A proposed amendment which utilizes automation to analyze and display potential conflicts along the predicted trajectory of the selected aircraft

TRSA–

(See TERMINAL RADAR SERVICE AREA.)

TSD–

(See TRAFFIC SITUATION DISPLAY.)

TURBOJET AIRCRAFT– An aircraft having a jet engine in which the energy of the jet operates a turbine which in turn operates the air compressor

TURBOPROP AIRCRAFT– An aircraft having a jet engine in which the energy of the jet operates a turbine which drives the propeller

TURN ANTICIPATION– maneuver anticipation

TVOR–

(See TERMINAL-VERY HIGH FREQUENCY OMNIDIRECTIONAL RANGE STATION.)

TWEB–

(See TRANSCRIBED WEATHER BROADCAST.)

TWO-WAY RADIO COMMUNICATIONS FAILURE–

(See LOST COMMUNICATIONS.)

U

UHF–

(See ULTRAHIGH FREQUENCY.)

ULTRAHIGH FREQUENCY – The frequency band between 300 and 3 000 MHz. The band of radio frequencies used for military air/ground voice communications. In some instances this may go as low as 225 MHz and still be referred to as UHF.

ULTRALIGHT VEHICLE– A single occupant aeronautical vehicle operated for sport or recreational purposes which does not require FAA registration, an airworthiness certificate, nor pilot certification. Operation of an ultralight vehicle in certain airspace requires authorization from ATC.

(Refer to 14 CFR Part 103.)

UNABLE– Indicates inability to comply with a specific instruction, request, or clearance.

UNASSOCIATED– A radar target that does not display a data block with flight identification and altitude information.

(See ASSOCIATED.)

UNDER THE HOOD– Indicates that the pilot is using a hood to restrict visibility outside the cockpit while simulating instrument flight. An appropriately rated pilot is required in the other control seat while this operation is being conducted.

(Refer to 14 CFR Part 91.)

UNFROZEN– The Scheduled Time of Arrival (STA) tags which are still being rescheduled by traffic management advisor (TMA) calculations. The aircraft will remain unfrozen until the time the corresponding estimated time of arrival (ETA) tag passes the preset freeze horizon for that aircraft's stream class. At this point the automatic rescheduling will stop and the STA becomes frozen.

UNICOM– A nongovernment communication facility which may provide airport information at certain

airports. Locations and frequencies of UNICOMs are shown on aeronautical charts and publications.

(See AIRPORT/FACILITY DIRECTORY.)

(Refer to AIM.)

UNPUBLISHED ROUTE– A route for which no minimum altitude is published or charted for pilot use. It may include a direct route between NAVAIDs, a radial, a radar vector, or a final approach course beyond the segments of an instrument approach procedure.

(See PUBLISHED ROUTE.)

(See ROUTE.)

UNRELIABLE GPS/WAAS – An advisory to pilots indicating the expected level of service of the GPS and/or WAAS may not be available. Pilots must then determine the adequacy of the signal for desired use.

UPWIND LEG–

(See TRAFFIC PATTERN.)

URET–

(See USER REQUEST EVALUATION TOOL.)

URGENT – A condition of being concerned about safety and of requiring timely but not immediate assistance, a potential distress condition.

(See ICAO term URGENCY.)

URGENT ICAO – A condition concerning the safety of an aircraft or other vehicle, or of person on board or in sight, but which does not require immediate assistance.

USAFIB–

(See ARMY AVIATION FLIGHT INFORMATION BULLETIN.)

USER REQUEST EVALUATION TOOL (URET) – User Request Evaluation Tool is an automated tool provided at each Radar Associate position in selected En Route facilities. This tool utilizes flight and radar data to determine present and future trajectories for all active and proposed aircraft and provides enhanced automated flight data management.

V

VASI–

(See VISUAL APPROACH SLOPE INDICATOR.)

VCOA–

(See VISUAL CLIMB OVER AIRPORT.)

VDP–

(See VISUAL DESCENT POINT.)

VECTOR– A heading issued to an aircraft to provide navigational guidance by radar

(See ICAO term RADAR VECTORING.)

VERIFY– Request confirmation of information
e.g. verify assigned altitude

VERIFY SPECIFIC DIRECTION OF TAKEOFF (OR TURNS AFTER TAKEOFF)– Used by ATC to ascertain an aircraft's direction of takeoff and/or direction of turn after takeoff. It is normally used for IFR departures from an airport not having a control tower. When direct communication with the pilot is not possible, the request and information may be relayed through an FSS dispatcher or by other means.

(See IFR TAKEOFF MINIMUMS AND DEPARTURE PROCEDURES.)

VERTE – The last fix adapted on the arrival speed segments. Normally, it will be the outer marker of the runway in use. However, it may be the actual threshold or other suitable common point on the approach path for the particular runway configuration.

VERTE TIME OF ARRIVAL– A calculated time of aircraft arrival over the adapted vertex for the runway configuration in use. The time is calculated via the optimum flight path using adapted speed segments.

VERTICAL NAVIGATION VNAV A function of area navigation RNAV equipment which calculates displays and provides vertical guidance to a profile or path.

VERTICAL SEPARATION– Separation between aircraft expressed in units of vertical distance

(See SEPARATION.)

VERTICAL TAKEOFF AND LANDING AIRCRAFT– Aircraft capable of vertical climbs and/or

descents and of using very short runways or small areas for takeoff and landings. These aircraft include but are not limited to helicopters.

(See SHORT TAKEOFF AND LANDING AIRCRAFT.)

VER HIGH FREQUENCY – The frequency band between 30 and 300 MHz. Portions of this band 108 to 118 MHz are used for certain NAVAIDs. 118 to 136 MHz are used for civil air/ground voice communications. Other frequencies in this band are used for purposes not related to air traffic control.

VER HIGH FREQUENCY OMNIDIRECTIONAL RANGE STATION–

(See VOR.)

VER LOW FREQUENCY – The frequency band between 3 and 30 kHz.

VFR–

(See VISUAL FLIGHT RULES.)

VFR AIRCRAFT– An aircraft conducting flight in accordance with visual flight rules.

(See VISUAL FLIGHT RULES.)

VFR CONDITIONS– Weather conditions equal to or better than the minimum for flight under visual flight rules. The term may be used as an ATC clearance/instruction only when:

a. An IFR aircraft requests a climb/descent in VFR conditions.

b. The clearance will result in noise abatement benefits where part of the IFR departure route does not conform to an FAA approved noise abatement route or altitude.

c. A pilot has requested a practice instrument approach and is not on an IFR flight plan.

Note: All pilots receiving this authorization must comply with the VFR visibility and distance from cloud criteria in 14 CFR Part 91. Use of the term does not relieve controllers of their responsibility to separate aircraft in Class B and Class C airspace or TRSAs as required by FAAO JO 7110.65. When used as an ATC clearance/instruction, the term may be abbreviated "VFR;" e.g., "MAINTAIN VFR," "CLIMB/DESCEND VFR," etc.

VFR FLIGHT–

(See VFR AIRCRAFT.)

VFR MILITARY TRAINING ROUTES– Routes used by the Department of Defense and associated Reserve and Air Guard units for the purpose of conducting low altitude navigation and tactical training under VFR below 10 000 feet MSL at airspeeds in excess of 250 knots IAS

VFR NOT RECOMMENDED– An advisory provided by a flight service station to a pilot during a preflight or enroute weather briefing that flight under visual flight rules is not recommended. To be given when the current and/or forecast weather conditions are at or below VFR minimums. It does not abrogate the pilot's authority to make his/her own decision.

VFR-ON-TOP– ATC authorization for an IFR aircraft to operate in VFR conditions at any appropriate VFR altitude as specified in 14 CFR and as restricted by ATC. A pilot receiving this authorization must comply with the VFR visibility distance from cloud criteria and the minimum IFR altitudes specified in 14 CFR Part 91. The use of this term does not relieve controllers of their responsibility to separate aircraft in Class B and Class C airspace or TRSAs as required by FAAO JO 7110.65.

VFR TERMINAL AREA CHARTS–
(See AERONAUTICAL CHART.)

VFR WAYPOINT–
(See WAYPOINT.)

VHF–
(See VERY HIGH FREQUENCY.)

VHF OMNIDIRECTIONAL RANGE/TACTICAL AIR NAVIGATION–
(See VORTAC.)

VIDEO MAP– An electronically displayed map on the radar display that may depict data such as airports, heliports, runway centerline extensions, hospital emergency landing areas, NAVAIDs, and fixes, reporting points, airway/route centerlines, boundaries, handoff points, special use tracks, obstructions, prominent geographic features, map alignment indicators, range accuracy marks, minimum vectoring altitudes.

VISIBILITY – The ability as determined by atmospheric conditions and expressed in units of

distance to see and identify prominent unlighted objects by day and prominent lighted objects by night. Visibility is reported as statute miles, hundreds of feet, or meters.

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

a. Flight Visibility– The average forward horizontal distance from the cockpit of an aircraft in flight at which prominent unlighted objects may be seen and identified by day and prominent lighted objects may be seen and identified by night.

b. Ground Visibility– Prevailing horizontal visibility near the earth's surface as reported by the United States National Weather Service or an accredited observer.

c. Prevailing Visibility– The greatest horizontal visibility equalled or exceeded throughout at least half the horizontal circle which need not necessarily be continuous.

d. Runway Visibility Value (RVV) – The visibility determined for a particular runway by a transmissometer. A meter provides a continuous indication of the visibility reported in miles or fractions of miles for the runway. RVV is used in lieu of prevailing visibility in determining minimums for a particular runway.

e. Runway Visual Range (RVR) – An instrumentally derived value based on standard calibrations that represents the horizontal distance a pilot will see down the runway from the approach end. It is based on the sighting of either high intensity runway lights or on the visual contrast of other targets whichever yields the greater visual range. RVR, in contrast to prevailing or runway visibility, is based on what a pilot in a moving aircraft should see looking down the runway. RVR is horizontal visual range, not slant visual range. It is based on the measurement of a transmissometer made near the touchdown point of the instrument runway and is reported in hundreds of feet. RVR is used in lieu of RVV and/or prevailing visibility in determining minimums for a particular runway.

1. Touchdown RVR– The RVR visibility readout values obtained from RVR equipment serving the runway touchdown zone.

2. Mid RVR– The RVR readout values obtained from RVR equipment located midfield of the runway.

3. Rollout RVR– The RVR readout values obtained from RVR equipment located nearest the rollout end of the runway

(See ICAO term FLIGHT VISIBILITY.)

(See ICAO term GROUND VISIBILITY.)

(See ICAO term RUNWAY VISUAL RANGE.)

(See ICAO term VISIBILITY.)

VISIBILITY ICAO – The ability as determined by atmospheric conditions and expressed in units of distance to see and identify prominent unlighted objects by day and prominent lighted objects by night

a. Flight Visibility–The visibility forward from the cockpit of an aircraft in flight

b. Ground Visibility–The visibility at an aerodrome as reported by an accredited observer

c. Runway Visual Range (RVR) –The range over which the pilot of an aircraft on the centerline of a runway can see the runway surface markings or the lights delineating the runway or identifying its centerline

VISUAL APPROACH– An approach conducted on an instrument flight rules (IFR) flight plan which authorizes the pilot to proceed visually and clear of clouds to the airport. The pilot must at all times have either the airport or the preceding aircraft in sight. This approach must be authorized and under the control of the appropriate air traffic control facility. Reported weather at the airport must be ceiling at or above 1 000 feet and visibility of 3 miles or greater
(See ICAO term VISUAL APPROACH.)

VISUAL APPROACH ICAO – An approach by an IFR flight when either part or all of an instrument approach procedure is not completed and the approach is executed in visual reference to terrain

VISUAL APPROACH SLOPE INDICATOR–
(See AIRPORT LIGHTING.)

VISUAL CLIMB OVER AIRPORT (VCOA) – A departure option for an IFR aircraft operating in visual meteorological conditions equal to or greater than the specified visibility and ceiling to visually conduct climbing turns over the airport to the published climb-to altitude from which to proceed with the instrument portion of the departure. VCOA

procedures are developed to avoid obstacles greater than 3 statute miles from the departure end of the runway as an alternative to complying with climb gradients greater than 200 feet per nautical mile. These procedures are published in the Take-Off Minimums and Obstacle Departure Procedures section of the Terminal Procedures Publications
(See AIM.)

VISUAL DESCENT POINT– A defined point on the final approach course of a nonprecision straight in approach procedure from which normal descent from the MDA to the runway touchdown point may be commenced provided the approach threshold of that runway or approach lights or other markings identifiable with the approach end of that runway are clearly visible to the pilot

VISUAL FLIGHT RULES– Rules that govern the procedures for conducting flight under visual conditions. The term VFR is also used in the United States to indicate weather conditions that are equal to or greater than minimum VFR requirements. In addition, it is used by pilots and controllers to indicate type of flight plan

(See INSTRUMENT FLIGHT RULES.)

(See INSTRUMENT METEOROLOGICAL CONDITIONS.)

(See VISUAL METEOROLOGICAL CONDITIONS.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

VISUAL HOLDING– The holding of aircraft at selected prominent geographical fixes which can be easily recognized from the air
(See HOLDING FIX.)

VISUAL METEOROLOGICAL CONDITIONS– Meteorological conditions expressed in terms of visibility, distance from cloud, and ceiling equal to or better than specified minima

(See INSTRUMENT FLIGHT RULES.)

(See INSTRUMENT METEOROLOGICAL CONDITIONS.)

(See VISUAL FLIGHT RULES.)

VISUAL SEGMENT–

(See PUBLISHED INSTRUMENT APPROACH PROCEDURE VISUAL SEGMENT.)

VISUAL SEPARATION– A means employed by ATC to separate aircraft in terminal areas and en route airspace in the NAS. There are two ways to effect this separation:

a. The tower controller sees the aircraft involved and issues instructions as necessary to ensure that the aircraft avoid each other.

b. A pilot sees the other aircraft involved and upon instructions from the controller provides his/her own separation by maneuvering his/her aircraft as necessary to avoid it. This may involve following another aircraft or keeping it in sight until it is no longer a factor.

(See SEE AND AVOID.)

(Refer to 14 CFR Part 91.)

VLF–

(See VERY LOW FREQUENCY.)

VMC–

(See VISUAL METEOROLOGICAL CONDITIONS.)

VOICE SWITCHING AND CONTROL SYSTEM–

The VSCS is a computer controlled switching system that provides air traffic controllers with all voice circuits air to ground and ground to ground necessary for air traffic control.

(See VOICE SWITCHING AND CONTROL SYSTEM.)

(Refer to AIM.)

VOR– A ground based electronic navigation aid transmitting very high frequency navigation signals 360 degrees in azimuth oriented from magnetic north. Used as the basis for navigation in the National Airspace System. The VOR periodically identifies itself by Morse Code and may have an additional voice identification feature. Voice features may be used by ATC or FSS for transmitting instructions/information to pilots.

(See NAVIGATIONAL AID.)

(Refer to AIM.)

VOR TEST SIGNAL–

(See VOT.)

VORTAC– A navigation aid providing VOR azimuth, TACAN azimuth and TACAN distance measuring equipment (DME) at one site.

(See DISTANCE MEASURING EQUIPMENT.)

(See NAVIGATIONAL AID.)

(See TACAN.)

(See VOR.)

(Refer to AIM.)

VORTICES– Circular patterns of air created by the movement of an airfoil through the air when generating lift. As an airfoil moves through the atmosphere in sustained flight, an area of low pressure is created above it. The air flowing from the high pressure area to the low pressure area around and about the tips of the airfoil tends to roll up into two rapidly rotating vortices, cylindrical in shape. These vortices are the most predominant parts of aircraft wake turbulence and their rotational force is dependent upon the wing loading, gross weight and speed of the generating aircraft. The vortices from medium to heavy aircraft can be of extremely high velocity and hazardous to smaller aircraft.

(See AIRCRAFT CLASSES.)

(See WAKE TURBULENCE.)

(Refer to AIM.)

VOT– A ground facility which emits a test signal to check VOR receiver accuracy. Some VOTs are available to the user while airborne and others are limited to ground use only.

(See AIRPORT/FACILITY DIRECTORY.)

(Refer to 14 CFR Part 91.)

(Refer to AIM.)

VR–

(See VFR MILITARY TRAINING ROUTES.)

VSCS–

(See VOICE SWITCHING AND CONTROL SYSTEM.)

VTA–

(See VERTEX TIME OF ARRIVAL.)

VTOL AIRCRAFT–

(See VERTICAL TAKEOFF AND LANDING AIRCRAFT.)

W

WA–

(See AIRMET.)

(See WEATHER ADVISORY.)

WAAS–

(See WIDE-AREA AUGMENTATION SYSTEM.)

WAKE TURBULENCE– Phenomena resulting from the passage of an aircraft through the atmosphere. The term includes vortices, thrust stream turbulence, jet blast, jet wash, propeller wash, and rotor wash, both on the ground and in the air.

(See AIRCRAFT CLASSES.)

(See JET BLAST.)

(See VORTICES.)

(Refer to AIM.)

WARNING AREA–

(See SPECIAL USE AIRSPACE.)

WA POINT– A predetermined geographical position used for route/instrument approach definition, progress reports, published VFR routes, visual reporting points, or points for transitioning and/or circumnavigating controlled and/or special use airspace that is defined relative to a VORTAC station or in terms of latitude/longitude coordinates.

WEATHER ADVISOR – In aviation weather forecast practice, an expression of hazardous weather conditions not predicted in the area forecast, as they affect the operation of air traffic and as prepared by the NWS.

(See AIRMET.)

(See SIGMET.)

WHEN ABLE–

a. In conjunction with ATC instructions, gives the pilot the latitude to delay compliance until a condition or event has been reconciled. Unlike pilot discretion, when instructions are prefaced "when able," the pilot is expected to seek the first opportunity to comply.

b. In conjunction with a weather deviation clearance, requires the pilot to determine when he/she is clear of weather, then execute ATC instructions.

c. Once a maneuver has been initiated, the pilot is expected to continue until the specifications of the

instructions have been met. When able, should not be used when expeditious compliance is required.

WIDE AREA AUGMENTATION SYSTEM

WAAS – The WAAS is a satellite navigation system consisting of the equipment and software which augments the GPS Standard Positioning Service (SPS). The WAAS provides enhanced integrity, accuracy, availability, and continuity over and above GPS SPS. The differential correction function provides improved accuracy required for precision approach.

WILCO– I have received your message, understand it, and will comply with it.

WIND GRID DISPLAY – A display that presents the latest forecasted wind data overlaid on a map of the ARTCC area. Wind data is automatically entered and updated periodically by transmissions from the National Weather Service. Winds at specific altitudes, along with temperatures and air pressure, can be viewed.

WIND SHEAR– A change in wind speed and/or wind direction in a short distance, resulting in a tearing or shearing effect. It can exist in a horizontal or vertical direction and occasionally in both.

WIND SHEAR ESCAPE – An unplanned abortive maneuver initiated by the pilot in command (PIC) as a result of onboard cockpit systems. Wind shear escapes are characterized by maximum thrust climbs in the low altitude terminal environment until wind shear conditions are no longer detected.

WING TIP VORTICES–

(See VORTICES.)

WORDS TWICE–

a. As a request. Communication is difficult. Please say every phrase twice.

b. As information. Since communications are difficult, every phrase in this message will be spoken twice.

WORLD AERONAUTICAL CHARTS–

(See AERONAUTICAL CHART.)

WS–

(See SIGMET.)

(See WEATHER ADVISORY.)

WST-

(See CONVECTIVE SIGMET.)

(See WEATHER ADVISORY.)

INDEX

[References are to page numbers]

A

- Accident Aircraft Reporting 7-6-1
- Accident Cause Factors 7-5-1
- Adherence to Clearance 4-4-5
- ADI *See* Air Defense Identification ones
- ADS-B *See* Automatic Dependent Broadcast Services
- ADS-R *See* Automatic Dependent Surveillance-Rebroadcast
- Advisories
 - Braking Action 4-3-11
 - Inflight Aviation Weather 7-1-8
 - Minimum Fuel 5-5-7
 - Runway Friction 4-3-11
 - Traffic 5-5-4
- Aerobatic Flight 8-1-8
- Aerodrome Forecast TAF 7-1-69 7-1-70 7-1-71
- Aeronautical
 - Charts 9-1-1
 - Publications 9-1-1
- Aeronautical Light Beacons 2-2-1
- AFIS *See* Automatic Flight Information Service
- AHRS *See* Attitude Heading Reference System
- Air Ambulance Flights 4-2-4
- Air Defense Identification one Land-Based 5-6-1
- Air Defense Identification ones 5-6-1 5-6-9
- Air Route Surveillance Radar 4-5-7
- Air Route Traffic Control Centers 4-1-1
- Air Traffic Control
 - Aircraft Separation 4-4-1
 - Clearances 4-4-1
 - Pilot Services 4-1-1
 - Air Route Traffic Control Centers 4-1-1
 - Airport Reservations 4-1-21
 - Approach Control Service Arriving VFR Aircraft 4-1-2
 - Automatic Terminal Information Service 4-1-7
 - Communications Release of IFR Aircraft Airports without Operating Control Tower 4-1-1
 - Control Towers 4-1-1
 - Flight Service Stations 4-1-1
 - Ground Vehicle Operations 4-1-6
 - Hazardous Area Reporting Service 4-1-18
 - IFR Approaches 4-1-6
 - Operation Raincheck 4-1-2
 - Operation Take-off 4-1-2
 - Radar Assistance to VFR Aircraft 4-1-11
 - Radar Traffic Information Service 4-1-8
 - Recording and Monitoring 4-1-1
 - Safety Alert 4-1-10
 - Terminal Radar Services for VFR Aircraft 4-1-12
 - Tower En Route Control 4-1-14
 - Traffic Advisory Practices Airports Without Operating Control Towers 4-1-2
 - Transponder Operation 4-1-15
 - Unicom Use for ATC Purposes 4-1-7
 - Unicom/Multicom 4-1-6
- Air Traffic Control Radar Beacon System 4-1-15 4-5-2
- Aircraft
 - Arresting Devices 2-3-30
 - Call Signs 4-2-3
 - Lights Use in Airport Operations 4-3-23
 - Unmanned 7-5-2
 - VFR Emergency Radar Service 6-2-1
- Aircraft Conflict Alert 4-1-11
- Airport
 - Aids Marking 2-3-1
 - Holding Position 2-3-12
 - Pavement 2-3-1
 - Holding Position 2-3-1
 - Other 2-3-1
 - Runway 2-3-1
 - Taxiway 2-3-1
 - Airport Advisory/Information Services 3-5-1
 - Lighting Aids 2-1-1
 - Local Airport Advisory LAA 4-1-3
 - Operations 4-3-1
 - Communications 4-3-16
 - Exiting the Runway After Landing 4-3-21
 - Flight Check Aircraft In Terminal Areas 4-3-24
 - Flight Inspection 4-3-24
 - Gate Holding Departure Delays 4-3-17
 - Intersection Takeoffs 4-3-12
 - Low Approach 4-3-15
 - Low Level Wind Shear/Microburst Detection Systems 4-3-11
 - Option Approach 4-3-23
 - Signals Hand 4-3-24
 - Taxi During Low Visibility 4-3-20
 - Traffic Control Light Signals 4-3-15
 - Traffic Patterns 4-3-1 4-3-2
 - Use of Aircraft Lights 4-3-23

[References are to page numbers]

- Use of Run ways 4-3-6
- VFR Flights in Terminal Areas 4-3-17
- VFR Helicopter at Controlled Airports 4-3-17
 - With Operating Control Tower 4-3-1
 - Without Operating Control Tower 4-3-5
- Remote Airport Advisory RAA 3-5-1 4-1-4
- Remote Airport Information Service RAIS 3-5-1 4-1-4
- Signs 2-3-1 2-3-19
 - Destination 2-3-28
 - Direction 2-3-25
 - Information 2-3-29
 - Location 2-3-23
 - Mandatory Instruction 2-3-20
 - Run way Distance Remaining 2-3-29
- Airport Reservations 4-1-21
- Airport Surface Detection Equipment – Model 4-5-7
- Airport Surveillance Radar 4-5-7
- Airspace 3-1-1
 - Basic VFR Weather Minimums 3-1-1
 - Class D 3-2-8
 - Class E 3-2-9
 - Class G 3-3-1
 - Controlled 3-2-1
 - Advisories Traffic 3-2-1
 - Alerts Safety 3-2-1
 - Class A 3-2-2
 - Class B 3-2-2
 - Class C 3-2-4
 - IFR Requirements 3-2-1
 - IFR Separation 3-2-1
 - Parachute Jumps 3-2-2
 - Ultralight Vehicles 3-2-2
 - Unmanned Free Balloons 3-2-2
 - VFR Requirements 3-2-1
 - Flight Levels 3-1-2
 - General Dimensions Segments 3-1-1
 - Military Training Routes 3-5-1
 - Other Areas 3-5-1
 - Parachute Jumping 3-5-5
 - Special Use 3-4-1
 - Temporary Flight Restrictions 3-5-2
 - Terminal Radar Service Areas 3-5-9
 - VFR Cruising Altitudes 3-1-2
 - VFR Routes Published 3-5-5
 - Class B Airspace VFR Transition Routes 3-5-7
 - VFR Corridors 3-5-7
 - VFR Fly ways 3-5-5
- Air way 5-3-5
- Air ways Course Changes 5-3-7
- Alcohol 8-1-1
- Alert Safety 4-1-10 5-5-3
- Alert Areas 3-4-2
- Alignment of Elements Approach Slope Indicator 2-1-5
- Alphabet Phonetic 4-2-5
- ALS See Approach Light Systems
- Altimeter
 - Density Altitude 7-5-4
 - Errors 7-2-3
 - Setting 7-2-1
 - High Barometric Pressure 7-2-4
 - Low Barometric Pressure 7-2-4
- Altitude
 - Automatic Reporting 4-1-15
 - Effects 8-1-3
 - Hypoxia 8-1-3
 - High Altitude Destinations 5-1-27
 - Mandatory 5-4-7
 - Maximum 5-4-7
 - Minimum 5-4-7
- Ambulance Air 4-2-4
- Amended Clearances 4-4-2
- Approach
 - Advance Information Instrument Approach 5-4-4
 - Approach Control 5-4-3
 - Clearance 5-4-26
 - Contact 5-4-63 5-5-2
 - Instrument 5-5-2
 - Instrument Approach Procedure Charts 5-4-5
 - Instrument Approach Procedures 5-4-28
 - Low 4-3-15
 - Minimums 5-4-53
 - Missed 5-4-56 5-5-2
 - No-Gyro 5-4-37
 - Option 4-3-23
 - Overhead Approach Maneuver 5-4-63
 - Precision 5-4-36
 - Surveillance 5-4-36
 - Visual 5-4-61 5-5-5
- Approach Control Service VFR Arriving Aircraft 4-1-2
- Approach Light Systems 2-1-1
- Approaches
 - IFR 4-1-6
 - Parallel Run ways ILS/MLS 5-4-38
 - Radar 5-4-36

[References are to page numbers]

Timed 5-4-33

Area Navigation RNAV 1-2-1 5-1-14 5-3-6
5-5-7

Area Navigation RNAV Routes 5-3-6

ARFF Aircraft Rescue and Fire Fighting Emergency
Hand Signals 6-5-1

ARFF Aircraft Rescue and Fire Fighting Radio Call
Sign 6-5-1

Arresting Devices Aircraft 2-3-30

ARSR *See* Air Route Surveillance Radar

ARTCC *See* Air Route Traffic Control Centers

ASDE- *See* Airport Surface Detection
Equipment-Model

Ash Volcanic 7-5-7

ASOS *See* Automated Surface Observing System

ASR *See* Airport Surveillance Radar Surveillance
Approach

ATCRBS *See* Air Traffic Control Radar Beacon
System

ATCT *See* Control Towers

ATIS *See* Automatic Terminal Information Service

Attitude Heading Reference System AHRS 1-1-17

Authority Statutory 1-1-1

Automated Surface Observing System ASOS 4-3-28
7-1-29

Automated Weather Observing System AWOS
4-3-28 7-1-26

Automated Weather Sensor System AWSS 4-3-28

Automated Weather Sensor System AWSS 7-1-29

Automatic Altitude Reporting 4-1-15

Automatic Dependent Surveillance-Broadcast Services
4-5-14

Automatic Dependent Surveillance-Rebroadcast
4-5-20

Automatic Flight Information Service AFIS - Alaska
FSSs Only 4-1-8

Automatic Terminal Information Service 4-1-7

AWOS *See* Automated Weather Observing System

B

Balloons Unmanned 7-5-2
Free 3-2-2

Beacon

Aeronautical Light 2-2-1

Code 2-2-1

Marker 1-1-9

Nondirectional Radio 1-1-1

Beacons Airport/Heliport 2-1-14

Bird

Bird Strike

Reduction 7-4-1

Reporting 7-4-1

Habits 7-4-1

Migratory 7-4-1

Bird/Other Wildlife Strike Reporting Form *See*
Appendix 1

Block Island Reporting Service 4-1-19

Braking Action Advisories 4-3-11

Braking Action Reports 4-3-11

Briefing Preflight 7-1-5

C

Call Signs

Aircraft 4-2-3

Ground Station 4-2-4

Cape Code Radar Overwater Flight Following 4-1-19

Carbon Monoxide Poisoning 8-1-5

CAT *See* Clear Air Turbulence

CDR *See* Coded Departure Route

Changeover Points 5-3-8

Charted Visual Flight Procedures 5-4-62

Charts Aeronautical 9-1-1

Class A Airspace 3-2-2

Definition 3-2-2

Operating Rules 3-2-2

Pilot/Equipment Requirements 3-2-2

Class B Airspace 3-2-2

ATC Clearances 3-2-3

Definition 3-2-2

Flight Procedures 3-2-3

Mode C Veil 3-2-3

Operating Rules 3-2-2

[References are to page numbers]

- Pilot/E uipment Re uirements VFR Operations 3-2-2
- Proximity Operations 3-2-4
- Separation 3-2-3
- VFR Transition Routes 3-5-7
- Class C Airspace 3-2-4
 - Air Traffic Services 3-2-5
 - Aircraft Separation 3-2-5
 - Definition 3-2-4
 - Operating Rules 3-2-4
 - Outer Area 3-2-5
 - Pilot/E uipment Re uirements 3-2-4
 - Secondary Airports 3-2-6
- Class D Airspace 3-2-8
 - Definition 3-2-8
 - Operating Rules 3-2-8
 - Pilot/E uipment Re uirements 3-2-8
 - Separation for VFR Aircraft 3-2-8
- Class E Airspace 3-2-9
 - Definition 3-2-9
 - Operating Rules 3-2-9
 - Pilot/E uipment Re uirements 3-2-9
 - Separation for VFR Aircraft 3-2-9
 - Types 3-2-9
 - Vertical Limits 3-2-9
- Class G Airspace 3-3-1
 - IFR Re uirements 3-3-1
 - VFR Re uirements 3-3-1
- Clear Air Turbulence 7-1-48
- Clearance
 - Abbreviated IFR Departure 5-2-2
 - Adherence 4-4-5
 - Air Traffic 5-5-1
 - Air Traffic Control 4-4-1
 - Amended 4-4-2
 - Approach 5-4-26
 - IFR VFR-on-Top 4-4-4
 - IFR Flights 4-4-5
 - Issuance Pilot Responsibility 4-4-4
 - Items 4-4-1
 - Altitude Data 4-4-2
 - Clearance Limit 4-4-1
 - Departure Procedure 4-4-1
 - Holding Instructions 4-4-2
 - Route of Flight 4-4-1
 - Pre-Taxi 5-2-1
 - Prefix 4-4-1
 - Taxi 5-2-1
 - VFR Flights 4-4-5
 - Void Times 5-2-4
- Clearances Special VFR Clearances 4-4-3
- Clearing Procedures Visual 4-4-10
- Coded Depature Route 4-4-3
- Collision Avoidance Judgment 8-1-8
- Communication Radio
 - Contact Reestablishing 6-4-2
 - T o- ay Failure 6-4-1
 - IFR Conditions 6-4-1
 - Transponder Usage 6-4-2
 - VFR Conditions 6-4-1
- Communications
 - ARTCC 5-3-1
 - Additional Reports 5-3-4
 - Position Reporting 5-3-3
 - Distress 6-3-1
 - Radio 4-2-1
 - Phonetic Alphabet 4-2-5
 - Release 4-1-1
 - Urgency 6-3-1
- Conflict Alert Aircraft 4-1-11
- Contact Approach 5-4-63
- Contact Procedures 4-2-1
 - Initial Contact 4-2-1
- Control of Lighting Systems 2-1-11
- Control To ers 4-1-1
- Controlled Firing Areas 3-4-2
- Controller Responsibility 5-3-8 5-4-62 5-5-1
- COP See Changeover Points
- CORONA 7-5-9
- Course Lights 2-2-1
- CVFP See Charted Visual Flight Procedures

D

- Decompression Sickness 8-1-4
- Density Altitude Effects 7-5-4
- Departure Restrictions 5-2-4
- Departure Control 5-2-5
- Departures Instrument 5-5-6
- Direct User Access Terminal System 7-1-3
- Discrete Emergency Fre uency 6-5-1
- Distance Measuring E uipment 1-1-3 1-1-9 5-3-12
- Distress 6-3-1

[References are to page numbers]

Ditching Procedures 6-3-3

DME *See* Distance Measuring Equipment

Doppler Radar 1-1-18

DUATS *See* Direct User Access System

E

Ear Block 8-1-4

EFAS *See* En Route Flight Advisory Service

EFVS *See* Enhanced Flight Vision Systems

ELT *See* Emergency Locator Transmitters

Emergency 6-1-1

Air Piracy 6-3-6

Airborne Aircraft Inspection 7-5-8

Aircraft Overdue 6-2-5

Body Signals 6-2-6

Ditching Procedures 6-3-3

Explosives Detection FAA K-9 Team Program 6-2-3

Fuel Dumping 6-3-7

Inflight Monitoring and Reporting 6-2-3

Intercept and Escort 6-2-1

Locator Transmitters 6-2-2

Obtaining Assistance 6-3-2

Pilot Authority 6-1-1

Pilot Responsibility 6-1-1

Request Assistance Immediately 6-1-1

Search and Rescue 6-2-4

Services 6-2-1

Radar Service for VFR Aircraft in Difficulty 6-2-1

Survival Equipment 6-2-6

Transponder Operation 6-2-1

VFR Search and Rescue Protection 6-2-5

Emergency Locator Transmitter 6-2-2

En Route Flight Advisory Service 7-1-7

Enhanced Flight Vision Systems 5-4-59

Escort 6-2-1

Explosives FAA K-9 Detection Team Program 6-2-3

F

FAROS *See* Final Approach Runway Occupancy Signal FAROS

Final Approach Runway Occupancy Signal FAROS 2-1-9

Final Guard 3-5-1

FIS-B *See* Flight Information Service-Broadcast

Fitness Flight

Alcohol 8-1-1

Emotion 8-1-2

Fatigue 8-1-2

Hypoxia 8-1-3

Stress 8-1-2

Flight

Aerobatic 8-1-8

Fitness 8-1-1

Illusions 8-1-5

Over National Forests 7-4-1

Over National Parks 7-4-1

Over National Refuges 7-4-1

Safety Meteorology 7-1-1

Vision 8-1-6

Flight Check Aircraft 4-3-24

Flight Information Service-Broadcast 4-5-18

Flight Information Services 7-1-22

Flight Inspections Aircraft 4-3-24

Flight Management System 1-2-3 5-1-12

Flight Plan

Change 5-1-30

Proposed Departure Time 5-1-30

Closing

DVFR 5-1-30

VFR 5-1-30

Composite VFR/IFR 5-1-11

DVFR Flights 5-1-10

Explanation of IFR 5-1-15

Explanation of VFR 5-1-9

Form 7233-1 5-1-9 5-1-16

IFR Canceling 5-1-30

IFR Flights Domestic 5-1-11

VFR Flights 5-1-7

Flight Restrictions Temporary 3-5-2

Flight Service Stations 4-1-1

Flights Outside the United States 5-1-28

Fly Visual to Airport 5-4-20

Flying Mountain 7-5-3

FMS *See* Flight Management System

Forms

Bird Strike Incident/Ingestion Report Appendix 1-1

Volcanic Activity Reporting Form Appendix 2-1

[References are to page numbers]

Frequency Instrument Landing System 1-1-10

FSS *See* Flight Service Stations

Fuel Dumping 6-3-7

G

Gate Holding 4-3-17

GBAS *See* Ground Based Augmentation System

Glideslope Visual Indicators 2-1-1

Global Navigation Satellite System 1-1-17 1-1-36
5-1-12

Global Positioning System 1-1-18

Database 1-1-25

Equipment 1-1-25

GPS Approach Procedures 1-1-25

GNSS *See* Global Navigation Satellite System

GPS *See* Global Positioning System

GPS Approach Procedures 1-1-25

Ground Based Augmentation System GBAS 1-1-37

Ground Based Augmentation System GBAS Landing
System GLS 1-1-36

Ground Station Call Signs 4-2-4

Ground Vehicle Operations 4-1-6

Gulf of Mexico Grid System 10-1-6

H

Half-Way Signs 7-5-5

Hand Signals 4-3-24

Har-ard

Antenna Tower 7-5-1

Bird 7-4-1

Flight

Obstructions to Flight 7-5-1

Potential 7-5-1

VFR in Congested Areas 7-5-1

Ground Icing Conditions 7-5-12

Mountain Flying 7-5-3

Overhead Wires 7-5-2

Thermal Plumes 7-5-13

Unmanned Balloons 7-5-2

Volcanic Ash 7-5-7

Har-ardous Area Reporting Service 4-1-18

HDTA *See* High Density Traffic Airports

Helicopter

IFR Operations 10-1-1

Landing Area Markings 2-3-19

VFR Operations at Controlled Airports 4-3-17

Special Operations 10-2-1

Wake Turbulence 7-3-6

High Density Traffic Airports 4-1-21

Hold For Release 5-2-4

Holding 5-3-8

Holding Position Markings 2-3-1 2-3-12

for Instrument Landing Systems 2-3-12

for Taxi-ay/Taxi-ay Intersections 2-3-12

Holding Position Signs Surface Painted 2-3-12

Hypoxia 8-1-3

I

Icing Terms 7-1-45

IFR 4-4-4

Operations To High Altitude Destinations 5-1-27

Procedures Use When Operating VFR 5-1-2

IFR

Approaches 4-1-6

Military Training Routes 3-5-2

Separation Standards 4-4-7

ILS *See* Instrument Landing System

In-Run-ay Lighting 2-1-6

Taxi-ay Centerline Lead-off Lights 2-1-6

Taxi-ay Centerline Lead-On Lights 2-1-6

Touchdown One Lighting 2-1-6

Incident Aircraft Reporting 7-6-1

Inertial Navigation System 1-1-17

Inertial Reference Unit IRU 1-1-17 5-1-12

Initial Contact 4-2-1

INS *See* Internal Navigation System

Instrument Departure Procedures DP 5-2-5

[References are to page numbers]

Instrument Landing System 1-1-7
 Category 1-1-10
 Compass Locator 1-1-10
 Course Distortion 1-1-11
 Distance Measuring Equipment 1-1-9
 Frequency 1-1-10
 Glide Path 1-1-9
 Glide Slope 1-1-9
 Critical Area 1-1-11
 Holding Position Markings 2-3-12
 Inoperative Components 1-1-11
 Localizer 1-1-8
 Critical Area 1-1-11
 Locators Compass 1-1-7
 Marker Beacon 1-1-9
 Minimums 1-1-10
 Instrument Meteorological Conditions IMC 5-2-6
 Integrated Terminal Weather System 4-3-11
 Intercept 6-2-1
 Interception
 Procedures 5-6-2
 Signals 5-6-7
 Interchange Aircraft 4-2-4
 International Flight Plan IFR Domestic International
 5-1-17
 International Flight Plan FAA Form 7233-4 – IFR
 Flights For Domestic or International Flights
 5-1-17
 Intersection Takeoffs 4-3-12
 IR See IFR Military Training Routes
 IRU See Inertial Reference Unit
 ITWS See Integrated Terminal Weather System

K

K-9 Explosives Detection Team 6-2-3

L

LAHSO See Land and Hold Short Operations
 Land and Hold Short Lights 2-1-6
 Land and Hold Short Operations LAHSO 4-3-13
 Landing

Minimums 5-4-53
 Priority 5-4-63
 Laser Operations 7-5-10
 Law Enforcement Operations
 Civil 5-6-6
 Military 5-6-6
 LDA See Localizer-Type Directional Aid
 Leased Aircraft 4-2-4
 Lifeguard 4-2-4
 Light Signals Traffic Control 4-3-15
 Lighting
 Aeronautical Light Beacons 2-2-1
 Aids
 Airport 2-1-1
 Approach Light Systems 2-1-1
 Control of Lighting Systems 2-1-11
 In-Runway Lighting 2-1-6
 Pilot Control of Airport Lighting 2-1-11
 Runway End Identifier Lights 2-1-6
 Taxiway Lights 2-1-15
 Airport/Heliport Beacons 2-1-14
 Airport Radio Control 4-1-6
 Code Beacon 2-2-1
 Course 2-2-1
 Navigation 2-2-1
 Obstruction 2-2-1
 Line Up and Wait 5-2-1
 LLWAS See Low Level Wind Shear Alert System
 Local Airport Advisory LAA 3-5-1 4-1-3
 Local Flow Traffic Management Program 5-4-3
 Localizer Performance with Vertical Guidance 1-1-32
 Localizer-Type Directional Aid 1-1-8
 Locator Compass 1-1-10
 Long Island Sound Reporting Service 4-1-18
 Long Range Navigation 1-1-17
 LORAN See Long Range Navigation
 Low Approach 4-3-15
 Low Level Wind Shear Alert System LLWAS
 4-3-11 7-1-52
 Low Level Wind Shear/Microburst Detection Systems
 4-3-11
 LPV See Localizer Performance with Vertical Guidance
 LUAW See Line Up and Wait

[References are to page numbers]

M

Magnetic Variation 1-1-28

MA DA 6-3-1

Medical

Carbon Monoxide Poisoning 8-1-5

Decompression Sickness 8-1-4

Facts Pilots 8-1-1

Flight Ear Block 8-1-4

Illness 8-1-1

Medication 8-1-1

Sinus Block 8-1-4

Meteorology 7-1-1

ATC InFlight Weather Avoidance 7-1-38

Automated Surface Observing System 7-1-29

Categorical Outlooks 7-1-18

Clear Air Turbulence 7-1-48

Cloud Heights Reporting 7-1-42

Direct User Access Terminal System 7-1-3

Dri le Intensity 7-1-43

En Route Flight Advisory Service 7-1-7

FAA Weather Services 7-1-1

ICAO Weather Formats 7-1-63

Icing Airframe 7-1-44

Inflight Aviation Weather Advisories 7-1-8

Inflight Weather Broadcasts 7-1-19

Microbursts 7-1-48

National Weather Service Aviation Products 7-1-1

Pilot Weather Reports 7-1-43

Precipitation Intensity 7-1-42

Preflight Briefing 7-1-5

Run ay Visual Range 7-1-40

Telephone Information Briefing Service 7-1-19

Thunderstorms 7-1-58

Flying 7-1-59

Transcribed Weather Broadcast 7-1-19

Turbulence 7-1-47

Visibility Reporting 7-1-42

Weather Radar Services 7-1-34

Weather Observing Programs 7-1-26

Wind Shear 7-1-48

Micro ave Landing System 1-1-14

Approach A imuth Guidance 1-1-14

Data Communications 1-1-15

Elevation Guidance 1-1-15

Operational Flexibility 1-1-16

Range Guidance 1-1-15

Military NOTAMs 5-1-3

Military Operations Areas 3-4-2

Military Training Routes 3-5-1

IFR 3-5-2

VFR 3-5-2

Minimum Fuel Advisory 5-5-7

Minimum Safe Altitudes 5-4-7

Minimum Turning Altitude MTA 5-3-8

Minimum Vectoring Altitudes 5-4-19

Minimums

Approach 5-4-53

Instrument Landing Systems 1-1-10

Landing 5-4-53

Missed Approach 5-4-56

MLS *See* Micro ave Landing System

MOA *See* Military Operations Areas

Mode C 4-1-15

Mountain Flying 7-5-3

Mountain Wave 7-5-4

Mountainous Areas 5-6-9

MSA *See* Minimum Safe Altitudes

MTA *See* Minimum Turning Altitude MTA

Multicom 4-1-6

MVA *See* Minimum Vectoring Altitudes

N

National Forests 7-4-1

National Geospatial-Intelligence Agency NSA
5-4-7

National Parks 7-4-1

National Refuges 7-4-1

National Security Areas 3-4-2

National Weather Service Aviation Products 7-1-1

NAVAID

Identifier Removal During Maintenance 1-1-16

Maintenance 1-1-16

Performance User Report 1-1-17

Service Volumes 1-1-4

ith Voice 1-1-17

Navigation Aids 1-1-1

Nondirectional Radio Beacon 1-1-1

Radio VHF Omni-directional Range 1-1-1

Navigation Reference System NRS 5-1-15

[References are to page numbers]

Navigational

Aids Radio

- Distance Measuring Equipment 1-1-3
- Doppler Radar 1-1-18
- Identifier Removal During Maintenance 1-1-16
- Instrument Landing System 1-1-7
- Localizer-Type Directional Aid 1-1-8
- Long Range Navigation 1-1-17
- Micro Wave Landing System 1-1-14
- Navaid Service Volumes 1-1-4
- NAVAIDs with Voice 1-1-17
- Performance User Report 1-1-17
- Simplified Directional Facility 1-1-12
- Tactical Air Navigation 1-1-3
- VHF Omni-directional Range/Tactical Air Navigation 1-1-3
- Inertial Navigation System 1-1-17

NDB *See* Nondirectional Radio Beacon

Near Midair Collision 7-6-2

NGA *See* National Geospatial-Intelligence Agency

NMAC *See* Near Midair Collision

Nondirectional Radio Beacon 1-1-1

Nonmovement Area Boundary Markings 2-3-18

NOTAM *See* Notice to Airmen

Notice to Airmen 5-1-2

FDC NOTAM 5-1-3

NOTAM Contractions 5-1-6

NOTAM D 5-1-3

Notice to Airmen System 5-1-2

Notices to Airmen Publication NTAP 5-1-3

O

Obstacle Departure Procedures 5-2-5

Obstruction Alert 4-1-10

Operation Raincheck 4-1-2

Operation Take-off 4-1-2

Operational Information System OIS 5-1-10

Option Approach 4-3-23

P

P-static 7-5-9

PAN-PAN 6-3-1

PAPI *See* Precision Approach Path Indicator

PAR *See* Precision Approach Precision Approach Radar

Parachute Jumps 3-2-2 3-5-5

Phonetic Alphabet 4-2-5

Pilot

Authority 6-1-1

Responsibility 4-1-14 4-4-1 4-4-4 5-4-62
5-5-1 6-1-1 7-3-6

Pilot Control of Airport Lighting 2-1-11

Pilot Visits to Air Traffic Facilities 4-1-1

Pilot Weather Reports 7-1-43

Piracy Air Emergency 6-3-6

PIREPs *See* Pilot Weather Reports

Pointer NOTAMs 5-1-3

Position Reporting 5-3-3

Pre-departure Clearance Procedures 5-2-1

Precipitation Static 7-5-9

Precision Approach 5-4-36

Precision Approach Path Indicator 2-1-4

Precision Approach Radar 4-5-7

Precision Approach Systems 1-1-36

Preflight Preparation 5-1-1

Priority Landing 5-4-63

Procedure Turn 5-4-30

Limitations 5-4-33

Procedures

Arrival 5-4-1

En Route 5-3-1

Instrument Approach 5-4-28

Interception 5-6-2

Prohibited Areas 3-4-1

Publications Aeronautical 9-1-1

Published Instrument Approach Procedure Visual Segment 5-4-20

Pulsating Visual Approach Slope Indicator 2-1-5

R

Radar

Air Traffic Control Radar Beacon System 4-5-2

Airport Route Surveillance Radar 4-5-7

Airport Surveillance Radar 4-5-7

[References are to page numbers]

- Approach Control 5-4-3
- Approaches 5-4-36
- Capabilities 4-5-1
- Doppler 1-1-18
- Limitations 4-5-1
- Monitoring of Instrument Approaches 5-4-37
- Precision Approach 4-5-7
- Precision Approach Radar 4-5-7
- Surveillance 4-5-7
- Vector 5-5-3
- Radar Assistance to VFR Aircraft 4-1-11
- Radar Beacon Phraseology 4-1-17
- Radar Sequencing and Separation VFR Aircraft TRSA 4-1-13
- Radar Traffic Information Service 4-1-8
- Radio Communications 4-2-1
 - Altitudes 4-2-6
 - Contact Procedures 4-2-1
 - Directions 4-2-6
 - Inoperative Transmitter 4-2-7
 - Phonetic Alphabet 4-2-5
 - Receiver Inoperative 4-2-7
 - Speeds 4-2-6
 - Student Pilots 4-2-4
 - Technique 4-2-1
 - Time 4-2-6
 - Transmitter and Receiver Inoperative 4-2-7
 - VFR Flights 4-2-8
- RCLS *See* Runway Centerline Lighting
- Receiver VOR Check 1-1-2
- REIL *See* Runway End Identifier Lights
- REL *See* Runway Entrance Lights
- Release Time 5-2-4
- Remote Airport Advisory RAA 3-5-1 4-1-4
- Remote Airport Information Service RAIS 3-5-1 4-1-4
- Required Navigation Performance RNP 1-2-1 5-4-24
- Required Navigation Performance RNP Operations 5-1-30 5-5-7
- Rescue Coordination Center
 - Air Force 6-2-5
 - Alaska 6-2-5
 - Coast Guard 6-2-4
 - Joint Rescue Helicopter 6-2-5
- Reservations Airport 4-1-21
- Responsibility
 - Controller 5-3-8 5-4-62 5-5-1
 - Pilot 4-1-14 4-4-1 4-4-4 5-4-62 5-5-1 6-1-1 7-3-6
- Restricted Areas 3-4-1
- Restrictions
 - Departure 5-2-4
 - Flight Temporary 3-5-2
- RIL *See* Runway Intersection Lights RIL
- RNAV *See* Area Navigation
- RNP *See* Required Navigation Performance
- Route
 - Coded Departure Route 4-4-3
 - Course Changes 5-3-7
- Route System 5-3-5
- Runway
 - Friction Reports 4-3-11
 - Aiming Point Markings 2-3-2
 - Centerline Markings 2-3-2
 - Closed
 - Lighting 2-3-18
 - Marking 2-3-18
 - Demarcation Bar 2-3-4
 - Designators 2-3-2
 - Friction Advisories 4-3-11
 - Holding Position Markings 2-3-12
 - Markings 2-3-1
 - Separation 4-4-9
 - Shoulder Markings 2-3-3
 - Side Stripe Markings 2-3-3
 - Signs Distance Remaining 2-3-29
 - Threshold Bar 2-3-4
 - Threshold Markings 2-3-3
 - Touchdown Line Markers 2-3-2
- Runway
 - Edge Light Systems 2-1-6
 - End Identifier Lights 2-1-6
 - Entrance Lights 2-1-7
 - Centerline Lighting System 2-1-6
 - Status Light RWISL System 2-1-7 2-1-8
- Runway Intersection Lights RIL 2-1-9
- RWISL System Runway Status Light RWISL System
 - See* Runway Status Light RWISL System
- Runway Visual Range 7-1-40
- Runways Use 4-3-6
- RVR *See* Runway Visual Range

[References are to page numbers]**S****Safety**

Alert 5-5-3

Alerts 3-2-1

Aircraft Conflict 3-2-1

Mode C Intruder 3-2-1

Terrain/Obstruction 3-2-1

Aviation Reporting 7-6-1

Seaplane 7-5-6

Safety Alert 4-1-10

Aircraft Conflict Alert 4-1-11

Obstruction Alert 4-1-10

Terrain Alert 4-1-10

SAR *See* Search and RescueSCAT-I DGPS *See* Special Category I Differential GPS

Scuba Diving Decompression Sickness 8-1-4

SDF *See* Simplified Directional Facility

Seaplane Safety 7-5-6

Search and Rescue 6-2-1 6-2-4

Security National 5-6-1

Security Identification Display Area 2-3-31

See and Avoid 5-5-4

Separation

IFR Standards 4-4-7

Run way 4-4-9

Visual 4-4-10 5-5-5

Wake Turbulence 7-3-7

Se uenced flashing lights SFL 2-1-11

SFL *See* Se uenced flashing lightsSIDA *See* Security Identifications Display Area

Side-Step Maneuver 5-4-53

Signs

Airport 2-3-1

Half-Way 7-5-5

Simplified Directional Facility 1-1-12

Sinus Block 8-1-4

Special Category I Differential GPS SCAT-I DGPS 1-1-37

Special Instrument Approach Procedures 1-1-36 5-4-29

Special Traffic Management Programs 4-1-21

Special Use Airspace 3-4-1

Alert Areas 3-4-2

Controlled Firing Areas 3-4-2

Military Operations Areas 3-4-2

Prohibited Areas 3-4-1

Restricted Areas 3-4-1

Warning Areas 3-4-1

Special Use Airspace SUA NOTAMs 5-1-3

Special VFR Clearances 4-4-3

Speed Adjustments 4-4-7 5-5-4

Standard Instrument Departures 5-2-5

Standard Terminal Arrival 5-4-1

STAR *See* Standard Terminal Arrival

Surface Painted Holding Position Signs 2-3-12

Surveillance Approach 5-4-36

Surveillance Radar 4-5-7

Surveillance Systems 4-5-1

TTACAN *See* Tactical Air Navigation

Tactical Air Navigation 1-1-3

TAF *See* Aerodrome Forecast

Takeoff Hold Lights THL 2-1-8

Takeoffs Intersection 4-3-12

Taxi

Clearance 5-2-1

During Low Visibility 4-3-20

Taxi way

Centerline Markings 2-3-7

Closed

Lighting 2-3-18

Marking 2-3-18

Edge Markings 2-3-7

Geographic Position Markings 2-3-10

Holding Position Markings 2-3-12

Markings 2-3-1 2-3-7

Shoulder Markings 2-3-7

Surface Painted Direction Signs 2-3-10

Surface Painted Location Signs 2-3-10

Taxi way Centerline Lead-Off Lights 2-1-6

Taxi way Lights 2-1-15

Centerline 2-1-15

Clearance Bar 2-1-15

Edge 2-1-15

[References are to page numbers]

Runway Guard 2-1-15
 Stop Bar 2-1-15
 TCAS *See* Traffic Alert and Collision Avoidance System
 TDWR *See* Terminal Doppler Weather Radar
 TD L *See* Touchdown Lights
 TEC *See* Tower En Route Control
 Telephone Information Briefing Service 7-1-19
 Temporary Flight Restrictions 3-5-2
 Terminal Arrival Area TAA 5-4-8
 Terminal Doppler Weather Radar TDWR 4-3-11
 7-1-53
 Terminal Radar Service Areas 3-5-9
 Terminal Radar Services for VFR Aircraft 4-1-12
 Terminal Weather Information For Pilots System
 TWIP 7-1-58
 Terrain Alert 4-1-10
 THL *See* Takeoff Hold Lights
 TIBS *See* Telephone Information Briefing Service
 Time
 Clearance Void 5-2-4
 Release 5-2-4
 TIS *See* Traffic Information Service
 TIS-B *See* Traffic Information Service-Broadcast
 TLS *See* Transponder Landing System
 Touchdown Lights TD L 2-1-6
 Tower Antenna 7-5-1
 Tower En Route Control 4-1-14
 Traffic
 Advisories 5-5-4
 Local Flow Traffic Management Program 5-4-3
 Traffic Advisory Practices Airports Without Operating
 Control Towers 4-1-2
 Traffic Alert and Collision Avoidance System 4-4-11
 Traffic Control Light Signals 4-3-15
 Traffic Information Service 4-5-8
 Traffic Information Service TIS 4-4-11
 Traffic Information Service-Broadcast 4-5-17
 Traffic Patterns 4-3-2
 Transcribed Weather Broadcast 7-1-19
 Transponder Landing System TLS 1-1-36

Transponder Operation 4-1-15
 Automatic Altitude Reporting 4-1-15
 Code Changes 4-1-16
 Emergency 6-2-1
 Ident Feature 4-1-16
 Mode C 4-1-15
 Under Visual Flight Rules 4-1-17
 VFR 4-1-17
 Tri-Color Visual Approach Slope Indicator 2-1-4
 TRSA *See* Terminal Radar Service Areas
 Turbulence Wake 7-3-1
 Air Traffic Separation 7-3-7
 Helicopters 7-3-6
 Pilot Responsibility 7-3-6
 Vortex Behavior 7-3-2
 Vortex Generation 7-3-1
 Vortex Strength 7-3-1
 TWEB *See* Transcribed Weather Broadcast
 TWIP *See* Terminal Weather Information For Pilots System

U

Ultralight Vehicles 3-2-2
 Unicom 4-1-6
 Unidentified Flying Object UFO Reports 7-6-3
 Unmanned Aircraft 7-5-2
 Urgency 6-3-1

V

VASI *See* Visual Approach Slope Indicator
 VCOA *See* Visual Climb Over the Airport
 VDP *See* Visual Descent Points
 Vector Radar 5-5-3
 Vehicle Roadway Markings 2-3-16
 Vertical Navigation 5-1-12
 VFR Corridors 3-5-7
 VFR Flights in Terminal Areas 4-3-17
 VFR Flyways 3-5-5
 VFR Military Training Routes 3-5-2
 VFR Transition Routes 3-5-7

[References are to page numbers]

VFR-on-Top 5-5-6

VHF Omni-directional Range 1-1-1

VHF Omni-directional Range/Tactical Air Navigation
1-1-3

Visual

Approach 5-4-61 5-5-5

Clearing Procedures 4-4-10

Glideslope Indicators 2-1-1

Separation 4-4-10 5-5-5

Visual Approach Slope Indicator 2-1-1

Visual Climb Over the Airport VCOA 5-2-8

Visual Descent Points 5-4-19

Visual Meteorological Conditions VMC 5-2-6

Visual Segment 5-4-20

VNAV *See* Vertical Navigation

Void Times Clearance 5-2-4

Volcanic Ash 7-5-7

Volcanic Activity Reporting Forms *See* Appendix 2VOR *See also* VHF Omni-directional Range
Receiver Check 1-1-2

VOR Receiver Checkpoint Markings 2-3-16

VORTAC *See* VHF Omni-directional Range/Tactical
Air NavigationVR *See* VFR Military Training Routes**W**

Waivers 4-1-23

Wake Turbulence 7-3-1

Warning Areas 3-4-1

Weather

Deviations in Oceanic Controlled Airspace 7-1-39

ICAO Weather Formats 7-1-63

Weather System Processor WSP 4-1-23 4-3-11
7-1-54WSP *See* Weather System Processor

U.S. Department
Of Transportation

**Federal Aviation
Administration**

800 Independence Ave., S.W.
Washington, D.C. 20591

FORWARDING SERVICE REQUESTED

Official Business
Penalty for Private Use \$300

